

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333176-927

Luminaire Tested: **S125DIP-S610D590U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333176-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIP-S610D590U927-4F0-1E-UDD-F1  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 590 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3601.4 lumens  
Efficiency: N/A  
Efficacy: 109.8 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 32.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333176-927

CATALOG NUMBER: S125DIP-S610D590U927-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

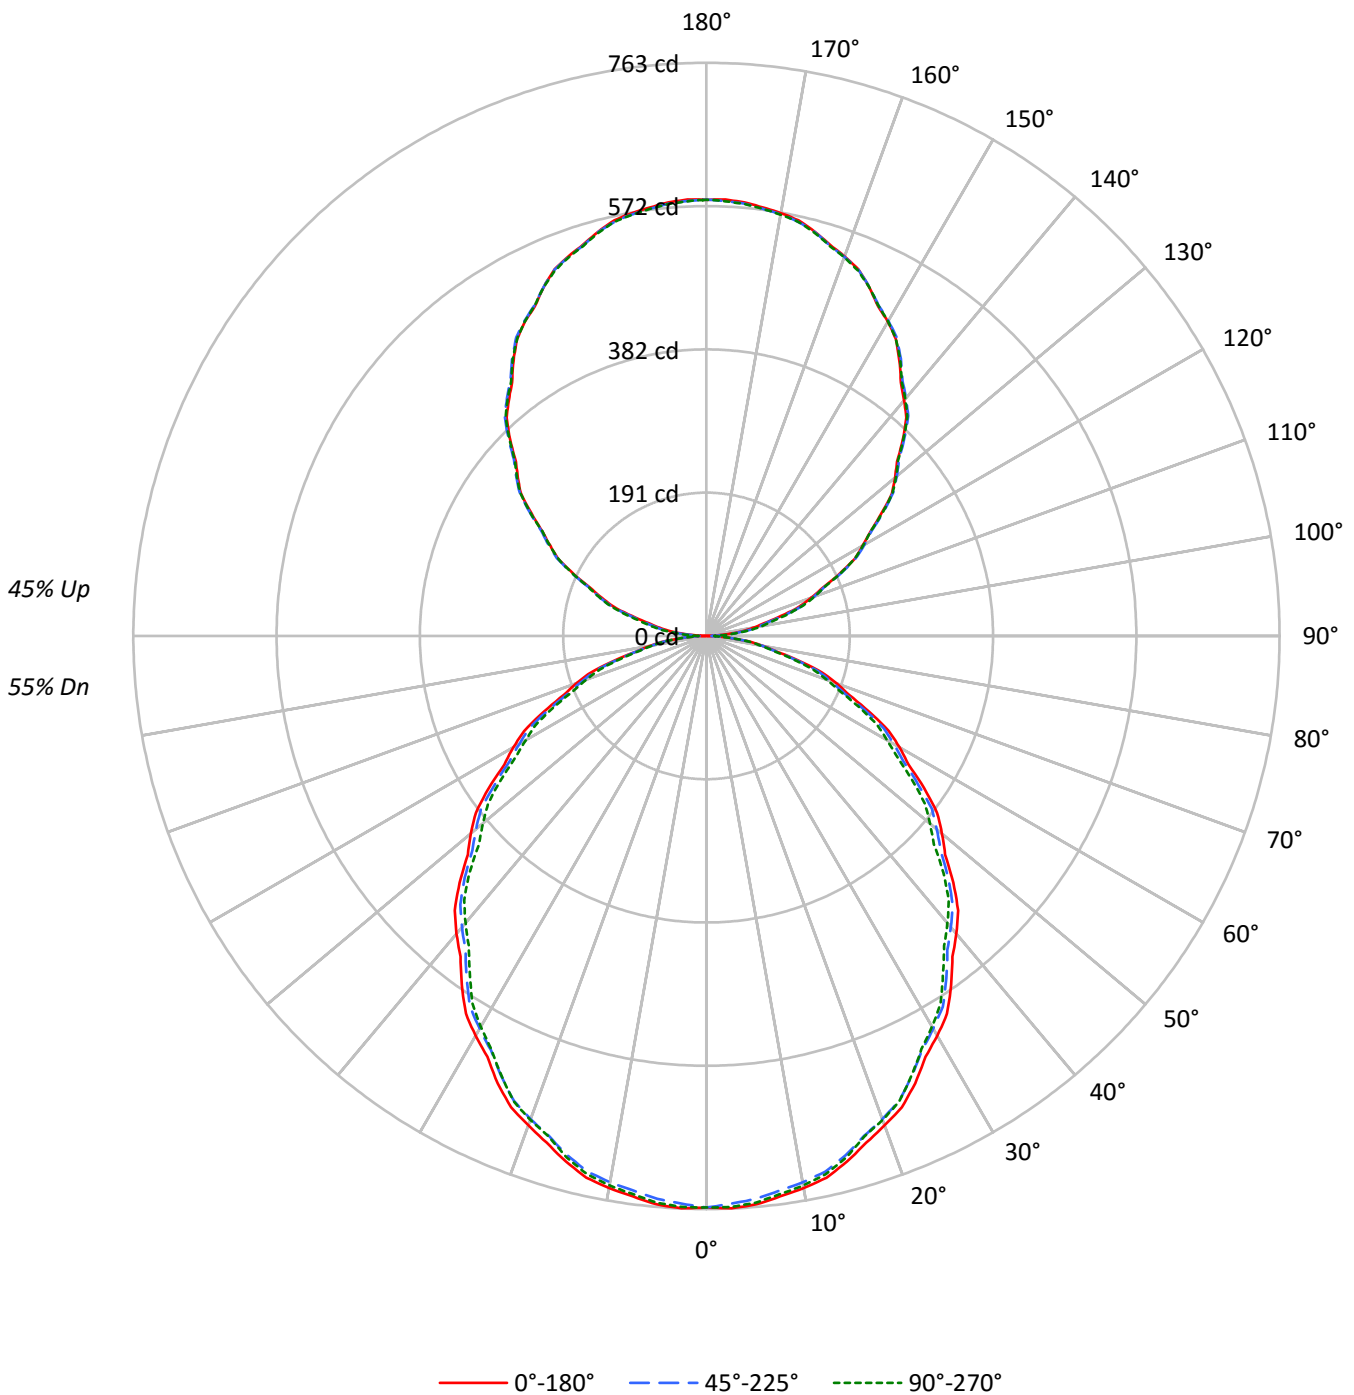



TEST NUMBER: P333176-927

CATALOG NUMBER: S125DIP-S610D590U927-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	94	90	87	92	88	84	81	75	73	71	64	62	61	54	52	51	46
2	90	82	76	71	83	77	71	67	66	62	58	56	53	51	47	45	43	39
3	82	72	65	59	76	68	61	56	58	53	49	50	46	43	42	39	37	33
4	75	64	56	50	69	60	53	47	52	46	42	44	40	37	37	34	32	28
5	69	57	49	43	64	53	46	41	46	41	36	40	35	32	34	30	27	24
6	64	51	43	37	59	48	41	35	42	36	31	36	31	28	30	27	24	21
7	59	46	38	33	54	43	36	31	38	32	28	33	28	25	28	24	21	19
8	55	42	34	29	51	39	32	27	35	29	25	30	25	22	26	22	19	17
9	51	38	31	26	47	36	29	25	32	26	22	28	23	20	24	20	17	15
10	47	35	28	23	44	33	27	22	29	24	20	25	21	18	22	18	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	4914	4914	4914
5°	4924	4877	4909
10°	4894	4844	4871
15°	4841	4785	4805
20°	4766	4704	4712
25°	4684	4606	4603
30°	4583	4502	4480
35°	4475	4389	4328
40°	4364	4268	4207
45°	4244	4156	4074
50°	4112	4022	3900
55°	3985	3869	3762
60°	3834	3716	3584
65°	3651	3533	3412
70°	3478	3320	3206
75°	3169	3064	2959
80°	2819	2775	2708
85°	2453	2497	2364



TEST NUMBER: P333176-927

CATALOG NUMBER: S125DIP-S610D590U927-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	71.7	2.0
10°-20°	202.6	5.6
20°-30°	299.2	8.3
30°-40°	349.1	9.7
40°-50°	350.6	9.7
50°-60°	307.8	8.5
60°-70°	229.3	6.4
70°-80°	131.1	3.6
80°-90°	39.4	1.1
90°-100°	38.9	1.1
100°-110°	114.9	3.2
110°-120°	194.5	5.4
120°-130°	256.0	7.1
130°-140°	286.9	8.0
140°-150°	281.2	7.8
150°-160°	236.2	6.6
160°-170°	157.0	4.4
170°-180°	54.9	1.5
0°-30°	573.6	15.9
0°-40°	922.7	25.6
0°-60°	1581.1	43.9
0°-90°	1981.0	55.0
90°-120°	348.3	9.7
90°-150°	1172.4	32.6
90°-180°	1620.0	45.0
0°-180°	3601.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	761	761	761	761	761	
5°	760	758	752	757	757	72
15°	724	722	716	719	719	204
25°	657	654	646	648	646	302
35°	568	565	557	554	549	355
45°	465	462	455	448	446	358
55°	354	352	344	338	334	316
65°	239	237	231	226	223	237
75°	127	126	123	121	119	135
85°	33	34	34	33	32	37
90°	0	4	7	10	11	3
95°	29	30	35	38	39	31
105°	103	105	108	111	112	110
115°	195	197	198	197	197	193
125°	284	287	287	287	286	254
135°	370	372	373	373	371	285
145°	448	450	451	451	450	280
155°	512	512	513	514	512	236
165°	557	556	557	558	556	157
175°	579	578	578	580	577	55
180°	581	581	581	581	581	



TEST NUMBER: P333176-927

CATALOG NUMBER: S125DIP-S610D590U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	760.8	760.8	760.8	760.8	760.8	760.8	760.8	760.8	760.8	760.8	760.8
2.5°	762.7	762.4	762.1	761.8	761.4	760.7	759.7	758.6	757.6	756.5	757.6
5°	759.6	759.3	759.1	758.8	758.5	757.7	756.4	755.0	753.7	752.3	753.6
7.5°	752.6	752.3	752.1	751.8	751.5	750.7	749.2	747.7	746.2	744.8	745.9
10°	746.3	746.1	745.8	745.5	745.3	744.4	742.9	741.5	740.0	738.6	739.6
12.5°	738.6	738.2	737.7	737.2	736.7	735.8	734.4	733.1	731.7	730.3	731.2
15°	724.1	723.7	723.3	722.9	722.5	721.5	720.1	718.6	717.1	715.7	716.3
17.5°	707.3	706.8	706.2	705.6	705.0	703.9	702.4	700.8	699.3	697.8	698.6
20°	693.4	693.1	692.8	692.6	692.3	691.3	689.6	687.9	686.1	684.4	685.3
22.5°	679.4	678.9	678.4	677.9	677.5	676.4	674.8	673.2	671.5	669.9	670.5
25°	657.3	656.6	655.9	655.3	654.6	653.4	651.6	649.9	648.2	646.4	646.7
27.5°	631.4	631.0	630.6	630.2	629.8	628.7	626.9	625.1	623.3	621.5	621.5
30°	614.5	614.1	613.7	613.3	612.9	611.7	609.7	607.7	605.7	603.7	603.4
32.5°	596.2	595.6	595.0	594.4	593.7	592.6	590.8	589.0	587.2	585.4	584.9
35°	567.6	567.0	566.5	566.0	565.5	564.3	562.4	560.5	558.6	556.7	556.1
37.5°	537.8	537.2	536.5	535.8	535.2	533.9	532.2	530.4	528.6	526.9	525.9
40°	517.6	517.0	516.3	515.6	514.9	513.7	511.8	509.9	508.0	506.2	505.0
42.5°	496.0	495.4	494.8	494.2	493.7	492.5	490.6	488.8	486.9	485.0	483.9
45°	464.7	464.1	463.6	463.0	462.6	461.4	459.9	458.3	456.6	455.0	453.4
47.5°	430.9	430.9	431.0	431.0	431.0	430.1	428.2	426.3	424.4	422.4	420.8
50°	409.3	408.8	408.4	408.1	407.7	406.7	405.0	403.5	401.9	400.3	398.5
52.5°	387.1	386.8	386.6	386.3	386.0	384.9	383.3	381.5	379.9	378.1	376.6
55°	353.9	353.5	353.1	352.7	352.3	351.2	349.3	347.5	345.5	343.6	342.5
57.5°	318.9	318.7	318.5	318.2	318.1	317.1	315.5	313.9	312.4	310.9	309.3
60°	296.8	296.2	295.6	295.1	294.6	293.6	292.2	290.7	289.1	287.7	286.4
62.5°	273.6	273.2	272.7	272.4	271.9	271.1	269.8	268.5	267.3	266.0	264.6
65°	238.9	238.7	238.4	238.1	237.9	237.0	235.5	234.1	232.6	231.2	229.9
67.5°	205.3	204.8	204.2	203.7	203.1	202.3	201.2	200.1	199.0	197.9	196.9
70°	184.2	183.5	182.8	182.2	181.5	180.5	179.4	178.2	177.0	175.8	174.9
72.5°	161.1	160.6	160.2	159.7	159.2	158.6	157.9	157.1	156.3	155.5	154.6
75°	127.0	126.7	126.4	126.2	126.0	125.5	124.8	124.1	123.4	122.8	122.4
77.5°	95.6	95.5	95.4	95.2	95.1	94.9	94.5	94.2	93.8	93.4	93.2
80°	75.8	75.8	75.8	75.8	75.8	75.7	75.4	75.2	74.9	74.6	74.5
82.5°	58.5	58.3	58.1	57.8	57.7	57.5	57.4	57.4	57.4	57.3	57.0
85°	33.1	33.3	33.4	33.5	33.7	33.7	33.7	33.7	33.7	33.7	33.6
87.5°	13.1	13.2	13.4	13.5	13.7	13.9	13.9	13.9	13.9	13.9	14.1
90°	0.5	1.3	2.1	2.9	3.6	4.4	5.1	5.9	6.5	7.2	7.8
92.5°	10.9	11.5	12.0	12.6	13.2	13.9	14.7	15.6	16.5	17.3	18.0
95°	29.4	29.5	29.8	29.9	30.2	30.8	31.8	32.8	33.8	34.8	35.5
97.5°	48.8	48.9	49.0	49.0	49.1	49.8	51.3	52.6	54.0	55.4	56.1
100°	63.3	63.3	63.3	63.3	63.3	63.9	65.2	66.5	67.8	69.2	70.0
102.5°	78.8	79.2	79.6	80.0	80.4	81.0	81.6	82.3	82.9	83.6	84.6
105°	103.1	103.5	104.0	104.6	105.0	105.6	106.2	106.8	107.4	108.0	108.6
107.5°	129.8	130.3	130.8	131.3	131.8	132.3	132.8	133.2	133.6	134.1	134.4
110°	148.2	148.7	149.2	149.7	150.3	150.7	150.9	151.2	151.5	151.9	152.2



TEST NUMBER: P333176-927

CATALOG NUMBER: S125DIP-S610D590U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	167.0	167.3	167.5	167.8	168.1	168.4	168.8	169.1	169.5	169.9	170.1
115°	194.8	195.2	195.6	196.0	196.4	196.7	196.9	197.1	197.3	197.5	197.4
117.5°	222.6	222.8	223.0	223.2	223.3	223.6	223.7	223.9	224.0	224.3	224.3
120°	240.0	240.5	241.0	241.5	242.0	242.2	242.4	242.5	242.6	242.6	242.6
122.5°	258.8	259.0	259.1	259.3	259.5	259.7	260.0	260.2	260.5	260.8	260.7
125°	284.2	284.9	285.4	286.1	286.7	287.0	287.1	287.2	287.3	287.4	287.2
127.5°	311.4	311.7	312.0	312.4	312.8	313.0	313.1	313.2	313.3	313.5	313.4
130°	327.6	328.1	328.7	329.2	329.6	330.0	330.2	330.4	330.6	330.8	330.7
132.5°	343.9	344.8	345.5	346.3	347.2	347.6	347.5	347.5	347.5	347.5	347.4
135°	369.6	370.3	370.9	371.5	372.1	372.4	372.6	372.6	372.7	372.8	372.8
137.5°	393.9	394.5	395.1	395.6	396.2	396.6	396.9	397.0	397.3	397.5	397.6
140°	409.4	410.0	410.4	410.9	411.5	411.9	412.2	412.5	412.7	413.0	413.3
142.5°	425.0	425.4	425.8	426.3	426.7	427.1	427.5	427.9	428.3	428.6	428.7
145°	447.8	448.2	448.7	449.1	449.5	449.8	450.1	450.4	450.8	451.0	451.0
147.5°	469.0	469.2	469.4	469.7	469.9	470.1	470.3	470.6	470.9	471.1	471.3
150°	483.1	483.0	482.9	482.8	482.7	482.8	483.2	483.6	484.0	484.4	484.4
152.5°	494.6	494.8	495.0	495.1	495.2	495.4	495.5	495.7	495.8	496.1	496.3
155°	512.5	512.5	512.5	512.5	512.5	512.5	512.6	512.7	512.9	512.9	513.3
157.5°	528.4	528.1	527.9	527.8	527.5	527.4	527.5	527.7	527.8	527.8	528.2
160°	537.8	537.5	537.2	536.9	536.5	536.5	536.5	536.7	536.8	536.9	537.3
162.5°	546.1	545.9	545.7	545.4	545.2	545.1	545.1	545.2	545.2	545.2	545.7
165°	557.2	557.0	556.8	556.6	556.4	556.3	556.4	556.6	556.7	556.7	557.1
167.5°	566.6	566.3	565.8	565.4	565.0	564.8	564.8	564.8	564.8	564.8	565.4
170°	571.6	571.2	570.8	570.5	570.1	569.9	569.9	569.9	569.9	569.9	570.5
172.5°	575.3	574.9	574.5	574.1	573.7	573.5	573.5	573.5	573.5	573.5	574.1
175°	579.3	578.9	578.5	578.1	577.7	577.6	577.6	577.6	577.6	577.6	578.1
177.5°	581.5	581.1	580.8	580.5	580.1	580.0	579.9	579.8	579.7	579.6	580.1
180°	580.7	580.7	580.7	580.7	580.7	580.7	580.7	580.7	580.7	580.7	580.7



TEST NUMBER: P333176-927

CATALOG NUMBER: S125DIP-S610D590U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	760.8	760.8	760.8	760.8	760.8	760.8	760.8	760.8
2.5°	758.6	759.7	760.7	761.2	761.1	761.0	760.9	760.8
5°	754.8	756.0	757.2	757.7	757.6	757.5	757.3	757.2
7.5°	747.1	748.3	749.5	750.0	749.9	749.7	749.6	749.5
10°	740.7	741.7	742.8	743.3	743.1	743.0	742.8	742.8
12.5°	732.1	732.9	733.7	734.2	734.1	734.1	734.1	734.0
15°	717.0	717.6	718.4	718.7	718.7	718.7	718.7	718.7
17.5°	699.5	700.3	701.2	701.2	700.5	699.9	699.3	698.5
20°	686.2	687.1	688.1	688.2	687.5	686.9	686.2	685.6
22.5°	671.1	671.8	672.4	672.5	672.0	671.5	671.1	670.7
25°	647.0	647.2	647.5	647.5	647.1	646.7	646.3	645.9
27.5°	621.6	621.7	621.7	621.5	621.2	620.8	620.4	620.0
30°	603.2	602.9	602.6	602.3	601.9	601.5	601.1	600.7
32.5°	584.5	583.9	583.4	582.9	582.2	581.5	580.7	580.0
35°	555.4	554.8	554.1	553.2	552.2	551.0	550.0	548.9
37.5°	524.9	523.9	522.9	522.1	521.5	520.9	520.3	519.7
40°	503.7	502.6	501.4	500.6	500.2	499.8	499.4	499.0
42.5°	482.8	481.7	480.6	479.7	479.1	478.6	477.9	477.3
45°	451.8	450.2	448.6	447.6	447.2	446.8	446.4	446.0
47.5°	419.1	417.5	415.9	414.6	413.7	412.7	411.8	410.8
50°	396.8	395.1	393.3	392.0	391.0	390.1	389.1	388.2
52.5°	375.0	373.5	372.0	370.7	369.7	368.6	367.6	366.5
55°	341.3	340.1	338.9	337.8	336.8	335.9	335.0	334.1
57.5°	307.7	306.2	304.6	303.6	303.1	302.5	302.1	301.6
60°	285.0	283.7	282.3	281.2	280.3	279.3	278.4	277.5
62.5°	263.2	261.7	260.2	259.2	258.5	257.7	257.0	256.3
65°	228.7	227.5	226.3	225.5	224.9	224.3	223.9	223.3
67.5°	195.9	194.9	193.8	193.1	192.8	192.5	192.2	191.9
70°	174.1	173.3	172.5	171.9	171.3	170.8	170.2	169.8
72.5°	153.7	152.8	151.9	151.1	150.6	150.1	149.6	149.0
75°	122.0	121.6	121.2	120.7	120.2	119.6	119.1	118.6
77.5°	92.9	92.7	92.4	92.1	91.7	91.4	91.0	90.6
80°	74.4	74.2	74.1	73.9	73.6	73.4	73.1	72.8
82.5°	56.8	56.6	56.3	56.2	56.2	56.1	56.0	56.0
85°	33.4	33.3	33.2	33.0	32.7	32.4	32.2	31.9
87.5°	14.2	14.3	14.3	14.3	14.2	14.0	13.9	13.7
90°	8.2	8.7	9.3	9.7	10.0	10.2	10.5	10.9
92.5°	18.7	19.3	20.0	20.4	20.7	20.9	21.1	21.3
95°	36.2	36.9	37.6	38.0	38.3	38.5	38.7	38.9
97.5°	56.7	57.4	58.1	58.5	58.5	58.7	58.8	58.9
100°	71.0	71.9	72.7	73.3	73.5	73.8	73.9	74.1
102.5°	85.6	86.6	87.5	88.2	88.5	88.7	89.0	89.3
105°	109.2	109.8	110.4	110.9	111.1	111.5	111.8	112.1
107.5°	134.8	135.1	135.3	135.5	135.5	135.5	135.4	135.4
110°	152.4	152.7	153.0	153.1	153.0	153.0	152.8	152.7





TEST NUMBER: P333176-927

CATALOG NUMBER: S125DIP-S610D590U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	170.2	170.3	170.5	170.5	170.3	170.1	169.9	169.8
115°	197.3	197.2	197.1	197.0	196.9	196.8	196.7	196.6
117.5°	224.4	224.5	224.6	224.4	224.0	223.6	223.2	222.8
120°	242.6	242.6	242.6	242.5	242.1	241.7	241.3	240.9
122.5°	260.6	260.5	260.5	260.2	259.9	259.6	259.3	259.0
125°	287.0	286.8	286.6	286.5	286.4	286.3	286.1	286.1
127.5°	313.2	313.1	313.1	312.9	312.7	312.5	312.3	312.1
130°	330.6	330.5	330.4	330.3	330.0	329.9	329.6	329.5
132.5°	347.2	347.1	347.1	346.8	346.6	346.3	346.0	345.7
135°	372.8	372.8	372.8	372.6	372.2	371.9	371.5	371.1
137.5°	397.8	397.8	398.0	397.8	397.3	396.8	396.3	395.8
140°	413.4	413.7	413.8	413.7	413.2	412.7	412.2	411.7
142.5°	428.8	429.0	429.0	428.9	428.4	427.9	427.4	426.9
145°	451.0	451.0	451.0	450.8	450.6	450.3	450.0	449.6
147.5°	471.6	471.8	472.1	471.8	471.1	470.5	469.8	469.1
150°	484.4	484.4	484.4	484.3	484.2	483.9	483.8	483.5
152.5°	496.5	496.8	497.0	496.9	496.5	496.2	495.8	495.5
155°	513.7	514.1	514.5	514.5	514.0	513.5	512.9	512.5
157.5°	528.6	529.0	529.4	529.3	528.6	528.0	527.4	526.6
160°	537.7	538.1	538.4	538.4	538.0	537.4	536.9	536.5
162.5°	546.1	546.6	547.2	547.1	546.5	545.9	545.3	544.7
165°	557.5	557.9	558.4	558.3	557.7	557.1	556.4	555.9
167.5°	566.0	566.6	567.2	567.2	566.6	565.9	565.3	564.7
170°	571.1	571.6	572.3	572.2	571.6	570.8	570.1	569.4
172.5°	574.7	575.3	575.9	575.9	575.3	574.6	574.0	573.4
175°	578.8	579.3	580.0	579.9	579.2	578.5	577.8	577.1
177.5°	580.6	581.1	581.5	581.5	581.0	580.4	579.8	579.2
180°	580.7	580.7	580.7	580.7	580.7	580.7	580.7	580.7

(END OF REPORT)