

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333242-927

Luminaire Tested: **S125DIP-S850D1205U927-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333242-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S850D1205U927-4F0-1E-UDD-A1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6038.1 lumens
Efficiency: N/A
Efficacy: 106.1 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

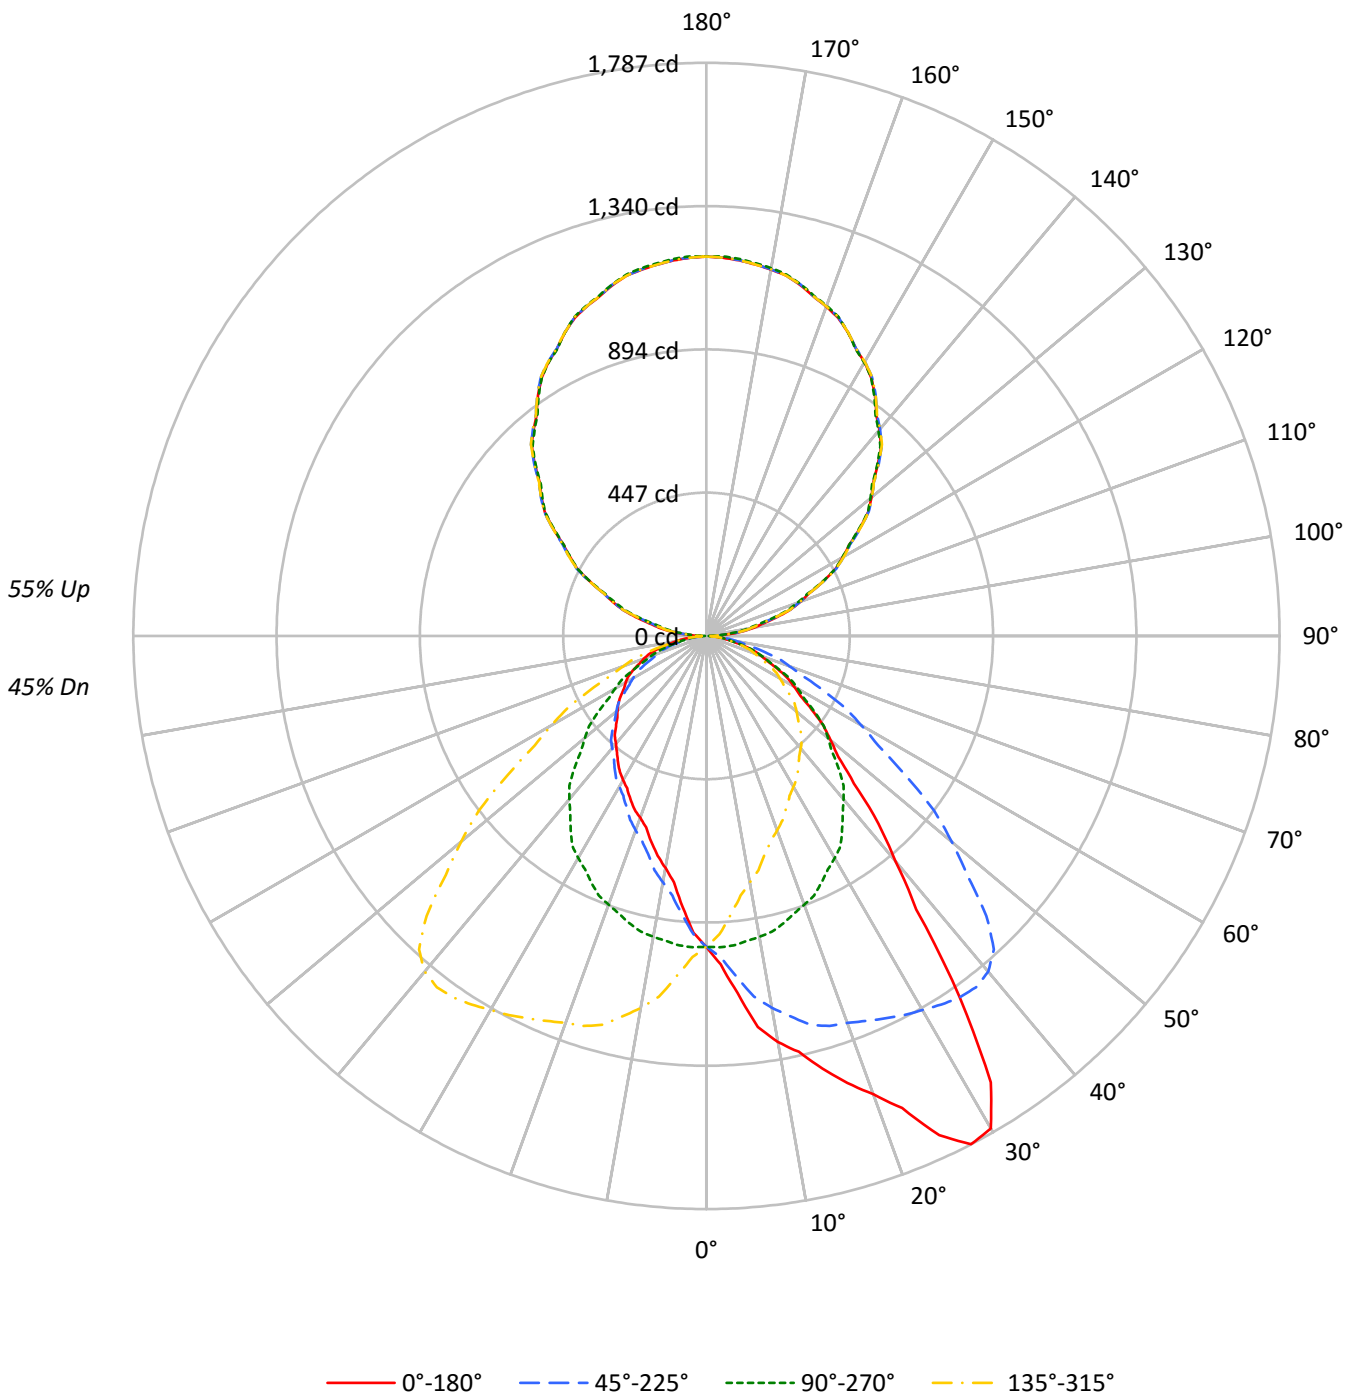



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	45
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	46	45	44	39
2	88	81	75	70	81	75	70	65	62	59	55	51	49	46	41	39	37	33
3	81	71	64	59	74	66	60	55	55	51	47	45	42	39	36	34	32	28
4	74	63	56	50	68	58	52	46	49	44	40	41	37	34	33	30	28	24
5	68	56	48	43	62	52	45	40	44	39	35	36	32	29	29	26	24	21
6	62	51	43	37	57	47	40	35	40	34	30	33	29	26	27	24	21	18
7	58	46	38	32	53	42	35	30	36	30	26	30	26	23	24	21	19	16
8	54	41	34	29	49	38	32	27	33	27	24	27	23	20	22	19	17	15
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15	13
10	47	35	27	23	43	32	26	21	28	22	19	23	19	16	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	6259	6259	6259	6259
5°	7248	6280	5499	6280
10°	8433	6248	4818	6248
15°	9335	6202	4444	6202
20°	10449	6129	4144	6129
25°	12241	6047	3998	6047
30°	13221	5967	3871	5967
35°	10871	5815	3788	5815
40°	7727	5604	3697	5604
45°	5936	5320	3644	5320
50°	5067	4967	3636	4967
55°	4512	4622	3668	4622
60°	4070	4246	3761	4246
65°	3759	3865	3859	3865
70°	3418	3473	3914	3473
75°	3019	3059	3880	3059
80°	2540	2492	3552	2492
85°	2016	1793	2868	1793



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	93.3	1.5
10°-20°	277.8	4.6
20°-30°	451.1	7.5
30°-40°	550.2	9.1
40°-50°	500.5	8.3
50°-60°	398.7	6.6
60°-70°	277.7	4.6
70°-80°	148.1	2.5
80°-90°	40.0	0.7
90°-100°	79.2	1.3
100°-110°	234.0	3.9
110°-120°	396.3	6.6
120°-130°	521.5	8.6
130°-140°	584.4	9.7
140°-150°	572.7	9.5
150°-160°	481.1	8.0
160°-170°	319.8	5.3
170°-180°	111.9	1.9
0°-30°	822.1	13.6
0°-40°	1372.3	22.7
0°-60°	2271.6	37.6
0°-90°	2737.3	45.3
90°-120°	709.5	11.7
90°-150°	2388.1	39.6
90°-180°	3301.0	54.7
0°-180°	6038.1	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	969	969	969	969	969	
5°	1118	969	848	969	1118	113
15°	1396	928	665	928	1396	400
25°	1718	849	561	849	1718	785
35°	1379	738	480	738	1379	844
45°	650	582	399	582	650	520
55°	401	410	326	410	401	361
65°	246	253	252	253	246	244
75°	121	123	156	123	121	130
85°	27	24	39	24	27	32
90°	22	1	22	1	22	14
95°	79	60	79	60	79	81
105°	228	210	228	210	228	242
115°	400	397	400	397	400	396
125°	583	579	583	579	583	520
135°	756	753	756	753	756	583
145°	916	912	916	912	916	572
155°	1044	1044	1044	1044	1044	480
165°	1132	1135	1132	1135	1132	319
175°	1176	1180	1176	1180	1176	112
180°	1183	1183	1183	1183	1183	



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2
2.5°	1025.1	1023.7	1022.5	1019.8	1021.8	1016.2	1013.5	1008.9	1003.4	1001.4	999.1
5°	1118.0	1120.1	1122.1	1113.5	1114.4	1108.6	1095.4	1084.7	1076.1	1065.0	1057.2
7.5°	1229.9	1225.0	1224.6	1219.1	1209.4	1201.7	1187.9	1170.3	1153.3	1133.9	1117.8
10°	1285.9	1286.3	1282.5	1276.0	1265.7	1258.3	1240.2	1222.9	1202.0	1177.3	1159.6
12.5°	1328.0	1329.7	1325.0	1316.1	1311.1	1294.5	1280.3	1259.8	1234.9	1215.1	1188.2
15°	1396.1	1391.5	1388.3	1377.2	1368.6	1351.3	1328.6	1307.3	1280.1	1255.0	1229.9
17.5°	1461.7	1465.4	1459.2	1449.1	1422.3	1402.1	1371.7	1342.4	1308.7	1275.0	1245.1
20°	1520.4	1523.6	1514.2	1496.5	1464.4	1444.2	1404.3	1366.5	1327.4	1284.2	1251.3
22.5°	1593.4	1590.8	1578.0	1551.1	1523.3	1486.1	1442.8	1396.8	1347.8	1299.0	1255.3
25°	1717.8	1700.5	1692.7	1659.4	1622.8	1568.0	1508.8	1441.4	1380.5	1315.9	1260.0
27.5°	1786.7	1781.3	1772.6	1749.4	1710.9	1652.4	1582.5	1500.3	1414.4	1332.9	1259.7
30°	1772.9	1773.7	1774.6	1767.1	1742.5	1698.4	1629.0	1540.5	1438.4	1346.7	1262.0
32.5°	1650.5	1665.5	1679.7	1696.7	1703.6	1695.2	1651.6	1571.8	1466.8	1362.6	1260.7
35°	1378.8	1383.4	1429.8	1475.9	1538.4	1587.0	1619.5	1584.1	1495.6	1375.9	1259.1
37.5°	1075.1	1097.3	1129.5	1181.5	1271.8	1352.6	1456.5	1504.3	1475.8	1380.3	1256.2
40°	916.5	937.1	958.0	1011.1	1087.2	1185.1	1303.1	1403.9	1427.4	1366.5	1246.3
42.5°	794.1	810.3	833.6	873.5	937.2	1023.8	1136.6	1268.4	1349.4	1326.4	1225.7
45°	649.9	660.2	678.3	710.0	756.1	823.9	923.4	1067.5	1192.9	1234.5	1176.5
47.5°	556.3	556.2	570.3	592.2	625.4	683.1	756.7	869.5	1003.5	1102.6	1098.0
50°	504.3	502.2	513.3	532.3	558.6	596.8	667.2	757.2	886.1	998.3	1029.6
52.5°	459.5	459.8	466.6	480.6	502.6	535.4	587.9	669.1	779.1	894.4	953.2
55°	400.7	399.0	406.8	416.3	432.3	453.7	491.5	553.7	642.9	756.5	833.0
57.5°	346.7	351.2	354.3	360.9	374.2	388.6	420.5	466.0	536.9	634.3	715.2
60°	315.1	319.6	322.1	328.7	339.4	351.7	376.4	413.4	473.0	557.0	637.2
62.5°	286.8	290.3	291.1	297.1	305.8	317.8	337.2	368.3	415.4	488.9	567.4
65°	246.0	246.0	247.6	253.8	257.9	268.6	283.4	306.0	343.9	401.1	468.1
67.5°	206.7	208.7	208.2	211.0	214.8	223.0	233.6	252.3	280.4	322.1	375.7
70°	181.0	182.6	182.2	184.3	188.4	193.8	202.4	220.1	240.2	276.0	322.1
72.5°	158.0	158.6	157.6	160.3	162.7	167.4	177.1	186.5	205.3	235.5	273.4
75°	121.0	121.8	122.6	124.2	126.7	129.1	134.1	143.5	155.9	178.6	202.8
77.5°	90.6	89.1	91.1	90.9	92.2	94.1	98.5	103.5	113.6	127.9	146.7
80°	68.3	68.7	68.7	69.1	71.1	72.4	76.1	79.8	87.6	98.3	111.5
82.5°	49.8	50.9	50.3	51.0	52.8	53.6	55.7	58.7	63.3	71.7	81.2
85°	27.2	25.1	25.9	26.8	26.8	27.2	28.8	30.0	32.5	35.8	39.5
87.5°	12.3	12.8	13.1	12.9	13.2	13.0	14.1	13.9	14.7	15.4	16.5
90°	22.1	21.5	20.8	20.3	19.6	18.9	17.8	16.8	15.8	14.7	13.3
92.5°	43.4	43.0	42.5	42.1	41.7	40.7	39.4	38.0	36.7	35.3	33.6
95°	79.1	78.7	78.3	78.0	77.6	76.6	75.2	73.8	72.3	70.9	68.8
97.5°	120.0	119.8	119.5	119.3	119.1	118.3	116.9	115.6	114.2	112.9	110.0
100°	151.0	150.6	150.1	149.7	149.3	148.2	146.4	144.5	142.7	140.9	138.2
102.5°	181.9	181.3	180.8	180.2	179.6	178.3	176.3	174.3	172.3	170.3	169.0
105°	228.3	227.7	227.0	226.5	225.9	224.9	223.7	222.4	221.3	220.0	218.8
107.5°	275.8	275.8	275.9	275.9	276.0	275.7	275.0	274.4	273.9	273.2	272.3
110°	311.2	311.3	311.6	311.7	312.0	311.7	311.2	310.5	309.9	309.3	308.7



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	345.8	346.1	346.5	346.9	347.2	347.3	347.0	346.7	346.4	346.1	345.3
115°	400.4	400.6	400.8	401.1	401.2	401.5	401.6	401.9	402.1	402.3	401.9
117.5°	453.8	454.6	455.5	456.3	457.1	457.4	457.2	457.1	456.9	456.8	456.4
120°	490.7	491.5	492.3	493.1	493.9	494.3	494.3	494.3	494.3	494.3	494.2
122.5°	527.5	528.1	528.8	529.4	530.1	530.5	530.7	530.8	531.0	531.2	530.6
125°	582.7	582.9	583.1	583.4	583.5	583.8	584.2	584.6	585.0	585.5	585.3
127.5°	635.7	636.1	636.5	637.0	637.4	637.7	637.9	638.1	638.3	638.5	638.3
130°	671.1	671.5	671.9	672.3	672.7	673.0	673.2	673.4	673.7	673.8	673.4
132.5°	704.3	704.8	705.4	705.9	706.5	706.9	707.1	707.3	707.5	707.7	707.8
135°	755.7	756.6	757.4	758.2	759.1	759.5	759.5	759.5	759.5	759.5	759.2
137.5°	806.2	807.2	808.3	809.3	810.3	810.7	810.5	810.2	809.9	809.7	809.3
140°	838.6	839.6	840.7	841.7	842.7	843.0	842.6	842.2	841.8	841.4	840.7
142.5°	869.6	870.6	871.6	872.6	873.6	874.0	873.8	873.5	873.3	873.1	872.3
145°	915.9	916.6	917.2	917.8	918.4	918.7	918.7	918.7	918.7	918.7	918.1
147.5°	955.5	957.0	958.3	959.7	961.1	961.6	961.1	960.6	960.0	959.6	959.1
150°	985.0	985.4	985.8	986.2	986.7	986.8	986.8	986.8	986.8	986.8	986.0
152.5°	1009.3	1010.0	1010.7	1011.5	1012.3	1012.3	1011.9	1011.4	1010.9	1010.4	1010.1
155°	1043.9	1045.0	1045.9	1046.9	1048.0	1048.1	1047.3	1046.5	1045.7	1044.8	1044.7
157.5°	1072.9	1074.2	1075.5	1076.9	1078.2	1078.5	1077.7	1076.8	1076.0	1075.2	1075.0
160°	1092.7	1093.7	1094.7	1095.7	1096.8	1096.9	1096.1	1095.3	1094.4	1093.6	1093.4
162.5°	1109.6	1110.8	1112.0	1113.2	1114.4	1114.5	1113.5	1112.5	1111.5	1110.6	1110.5
165°	1132.3	1133.5	1134.7	1136.0	1137.2	1137.4	1136.5	1135.8	1135.0	1134.1	1133.9
167.5°	1150.3	1151.6	1152.9	1154.1	1155.4	1155.4	1154.2	1152.9	1151.8	1150.5	1150.5
170°	1159.9	1161.3	1162.8	1164.2	1165.6	1165.7	1164.5	1163.2	1162.1	1160.8	1160.8
172.5°	1168.0	1169.3	1170.5	1171.8	1173.1	1173.1	1171.9	1170.6	1169.4	1168.2	1168.2
175°	1175.5	1176.9	1178.5	1179.9	1181.3	1181.4	1180.1	1178.9	1177.7	1176.5	1176.5
177.5°	1180.0	1181.1	1182.3	1183.4	1184.6	1184.6	1183.7	1182.6	1181.7	1180.7	1180.8
180°	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2
2.5°	997.1	994.8	992.1	987.5	982.0	979.0	974.4	971.5	965.5	960.6	955.3
5°	1047.7	1037.0	1027.1	1014.4	1000.4	991.3	980.6	968.7	956.4	943.6	929.6
7.5°	1100.1	1081.2	1060.6	1038.5	1016.8	997.0	977.9	959.3	941.8	920.8	902.9
10°	1135.3	1111.4	1085.9	1055.9	1026.7	1001.2	975.3	952.7	929.6	905.0	883.1
12.5°	1170.5	1138.8	1102.7	1069.8	1034.6	1003.9	973.4	944.4	915.5	888.2	862.8
15°	1195.4	1167.4	1134.1	1087.2	1047.7	1005.4	965.0	927.6	892.6	862.2	830.1
17.5°	1211.7	1175.7	1140.0	1095.0	1043.1	995.8	950.1	907.3	867.8	829.3	798.4
20°	1214.7	1177.7	1140.3	1096.2	1043.1	988.9	943.3	891.8	849.5	809.5	771.7
22.5°	1213.7	1171.8	1131.0	1085.7	1034.0	984.0	928.8	876.3	830.4	791.1	751.6
25°	1204.4	1159.6	1108.6	1063.0	1011.9	958.9	902.9	848.6	801.7	756.9	717.8
27.5°	1196.7	1138.5	1080.8	1027.5	978.3	929.6	876.1	820.5	768.5	723.0	686.2
30°	1187.2	1123.4	1058.4	1002.8	952.3	905.0	854.4	800.1	745.8	701.3	661.9
32.5°	1178.6	1104.3	1035.7	975.3	921.6	875.7	829.0	777.4	724.1	679.0	639.4
35°	1162.1	1076.1	997.5	929.2	872.0	824.7	785.7	737.5	688.6	645.0	607.1
37.5°	1141.1	1039.0	954.7	883.1	820.5	770.6	734.3	697.3	650.3	608.3	574.1
40°	1124.6	1012.7	923.4	850.2	785.3	733.4	699.7	664.7	625.7	586.6	550.4
42.5°	1103.9	989.0	891.9	813.1	748.7	698.2	662.8	633.1	598.7	562.2	528.6
45°	1065.8	946.1	840.8	756.1	691.0	641.3	604.7	582.5	556.6	522.0	493.6
47.5°	1009.8	894.5	785.6	698.2	631.1	584.9	550.6	529.3	511.0	485.4	459.6
50°	960.0	856.0	745.8	658.9	591.9	545.4	513.8	494.4	478.8	459.1	437.3
52.5°	904.4	807.6	706.6	620.8	554.4	508.6	477.6	460.6	447.6	433.4	411.9
55°	816.1	733.9	640.1	558.6	497.3	452.5	425.3	410.5	399.8	389.1	376.0
57.5°	718.7	654.4	571.3	496.9	440.5	399.7	374.3	359.9	351.6	346.1	338.3
60°	650.3	595.2	523.6	455.7	400.7	364.5	339.8	328.7	321.7	317.1	311.4
62.5°	586.8	541.6	475.2	413.3	365.1	330.9	308.9	298.1	291.4	289.1	284.4
65°	493.2	458.3	403.5	352.1	311.0	281.8	263.2	252.9	248.8	246.4	246.8
67.5°	401.0	379.7	335.7	291.9	259.0	234.6	219.8	211.8	209.8	206.5	206.4
70°	344.7	328.7	291.7	253.4	224.2	205.3	192.1	183.9	181.8	180.1	179.7
72.5°	295.0	281.0	248.8	218.2	191.9	175.3	164.5	159.5	156.1	155.2	155.1
75°	221.7	213.9	188.4	164.1	146.0	134.5	127.1	122.6	120.1	119.7	120.1
77.5°	157.6	150.8	134.6	117.4	106.0	97.3	91.0	89.4	86.7	86.7	86.3
80°	118.4	113.9	103.7	90.1	80.6	73.2	69.9	67.0	66.2	65.0	66.2
82.5°	85.9	81.0	74.1	65.4	57.6	53.2	49.8	49.0	48.5	47.8	48.2
85°	42.4	42.8	38.7	32.1	28.8	26.3	24.2	24.2	23.8	23.4	23.8
87.5°	16.9	15.9	14.3	13.0	11.0	9.7	9.0	9.0	8.4	8.4	9.0
90°	11.9	10.5	9.0	7.4	5.9	4.2	2.5	1.0	2.5	4.2	5.9
92.5°	31.8	30.1	28.3	26.9	25.7	24.6	23.4	22.3	23.4	24.6	25.7
95°	66.8	64.7	62.7	61.5	61.1	60.7	60.2	59.8	60.2	60.7	61.1
97.5°	107.2	104.4	101.6	100.1	99.9	99.7	99.6	99.4	99.6	99.7	99.9
100°	135.5	132.8	130.2	128.9	128.9	128.9	128.9	128.9	128.9	128.9	128.9
102.5°	167.6	166.3	164.9	163.8	163.0	162.2	161.4	160.6	161.4	162.2	163.0
105°	217.5	216.3	215.1	214.0	212.9	211.9	210.9	209.8	210.9	211.9	212.9
107.5°	271.3	270.4	269.4	268.5	267.4	266.4	265.4	264.4	265.4	266.4	267.4
110°	308.1	307.4	306.8	306.0	305.0	304.0	302.9	302.0	302.9	304.0	305.0



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	344.6	343.8	343.0	342.4	341.8	341.3	340.8	340.2	340.8	341.3	341.8
115°	401.5	401.1	400.6	400.1	399.2	398.4	397.6	396.7	397.6	398.4	399.2
117.5°	456.1	455.7	455.3	455.0	454.6	454.2	453.8	453.4	453.8	454.2	454.6
120°	493.9	493.7	493.5	492.9	491.9	490.8	489.8	488.8	489.8	490.8	491.9
122.5°	530.1	529.6	529.0	528.5	528.2	527.8	527.5	527.1	527.5	527.8	528.2
125°	585.0	584.9	584.6	583.9	582.7	581.5	580.3	579.0	580.3	581.5	582.7
127.5°	638.0	637.8	637.5	637.1	636.4	635.6	634.9	634.3	634.9	635.6	636.4
130°	673.0	672.6	672.2	671.5	670.5	669.5	668.4	667.4	668.4	669.5	670.5
132.5°	707.9	708.0	708.1	707.3	705.6	703.9	702.2	700.5	702.2	703.9	705.6
135°	759.1	758.8	758.7	758.0	756.7	755.5	754.2	753.0	754.2	755.5	756.7
137.5°	808.8	808.3	807.9	807.1	805.9	804.7	803.5	802.3	803.5	804.7	805.9
140°	840.2	839.6	838.9	838.1	837.1	836.1	835.0	834.0	835.0	836.1	837.1
142.5°	871.5	870.7	870.0	869.1	868.2	867.4	866.6	865.7	866.6	867.4	868.2
145°	917.5	916.9	916.2	915.5	914.7	913.9	913.1	912.3	913.1	913.9	914.7
147.5°	958.6	958.1	957.6	957.1	956.7	956.2	955.8	955.4	955.8	956.2	956.7
150°	985.2	984.4	983.6	983.3	983.5	983.7	983.9	984.0	983.9	983.7	983.5
152.5°	1009.7	1009.4	1009.1	1008.8	1008.5	1008.2	1007.9	1007.7	1007.9	1008.2	1008.5
155°	1044.4	1044.3	1044.0	1043.9	1043.9	1043.9	1043.9	1043.9	1043.9	1043.9	1043.9
157.5°	1074.8	1074.6	1074.4	1074.5	1075.0	1075.4	1075.9	1076.3	1075.9	1075.4	1075.0
160°	1093.2	1093.0	1092.8	1093.0	1093.6	1094.2	1094.9	1095.4	1094.9	1094.2	1093.6
162.5°	1110.5	1110.4	1110.4	1110.6	1111.0	1111.5	1112.0	1112.4	1112.0	1111.5	1111.0
165°	1133.7	1133.5	1133.3	1133.4	1133.9	1134.2	1134.6	1135.0	1134.6	1134.2	1133.9
167.5°	1150.5	1150.5	1150.5	1150.9	1151.8	1152.5	1153.3	1154.2	1153.3	1152.5	1151.8
170°	1160.8	1160.8	1160.8	1161.3	1162.1	1162.8	1163.7	1164.5	1163.7	1162.8	1162.1
172.5°	1168.2	1168.2	1168.2	1168.6	1169.4	1170.2	1171.1	1171.9	1171.1	1170.2	1169.4
175°	1176.5	1176.5	1176.5	1176.9	1177.7	1178.5	1179.3	1180.1	1179.3	1178.5	1177.7
177.5°	1181.1	1181.2	1181.4	1181.8	1182.4	1183.0	1183.8	1184.4	1183.8	1183.0	1182.4
180°	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2
2.5°	952.4	948.7	945.8	939.2	935.6	930.7	926.7	931.0	926.4	928.4	925.3
5°	922.7	911.2	902.9	891.0	880.7	871.2	864.3	863.0	859.7	858.1	853.1
7.5°	886.9	872.5	858.4	842.8	829.6	816.2	807.6	800.6	795.9	789.7	785.5
10°	865.9	846.5	830.1	811.2	794.7	780.3	768.8	763.0	757.7	749.9	747.0
12.5°	839.9	819.9	799.8	779.6	763.8	747.7	737.8	729.1	725.5	716.6	715.7
15°	808.7	778.7	758.9	738.4	716.5	703.4	695.1	685.7	681.6	675.4	670.9
17.5°	771.5	744.7	720.0	698.7	680.0	668.9	658.7	652.2	645.2	641.1	633.7
20°	744.6	719.1	694.3	671.7	657.4	644.6	636.4	630.2	622.8	620.8	613.3
22.5°	721.8	693.7	670.0	651.0	635.3	620.9	612.0	607.8	602.7	596.4	594.8
25°	684.9	655.7	635.6	616.6	602.6	589.5	583.3	578.0	573.0	568.5	566.8
27.5°	653.0	626.9	602.9	585.8	573.7	561.7	556.2	549.7	546.1	542.5	538.1
30°	630.6	603.9	582.9	566.4	553.3	542.6	536.8	532.3	529.0	525.7	523.2
32.5°	607.5	582.8	562.4	546.4	533.2	525.1	520.0	516.8	513.2	509.2	506.1
35°	577.1	549.9	530.2	516.3	506.0	499.8	494.0	491.2	487.0	487.0	483.7
37.5°	542.8	519.4	501.9	489.2	480.0	474.4	468.2	466.2	463.6	461.8	460.7
40°	522.4	500.6	484.2	471.4	461.5	457.0	452.1	448.8	447.1	445.0	444.3
42.5°	501.4	480.5	464.8	453.0	444.4	440.5	435.9	433.6	430.3	427.6	427.1
45°	469.4	449.2	434.8	425.3	418.0	413.4	410.5	405.6	403.9	400.7	400.2
47.5°	438.9	419.6	405.5	397.8	391.3	387.5	383.0	378.1	376.2	374.5	374.4
50°	416.3	398.6	385.4	378.0	371.9	366.5	361.9	358.7	357.4	357.4	358.3
52.5°	393.2	378.2	367.0	358.0	352.1	346.4	342.2	340.2	338.3	340.3	341.8
55°	359.5	344.3	336.0	327.4	321.7	315.1	313.1	312.2	311.0	314.3	315.9
57.5°	323.8	313.1	303.5	294.9	289.8	286.0	283.2	282.7	284.9	286.5	291.9
60°	301.1	288.8	280.1	273.5	267.4	264.9	264.1	263.2	264.9	269.4	276.4
62.5°	276.1	266.1	256.7	251.8	247.3	243.2	243.0	243.5	246.8	252.0	259.0
65°	239.4	230.8	224.6	218.8	215.2	212.7	213.5	215.2	218.8	225.9	233.6
67.5°	202.2	196.2	190.7	186.0	182.4	182.4	183.3	185.8	190.1	198.2	205.3
70°	178.1	171.5	167.0	164.9	162.1	160.4	162.9	167.0	170.7	178.1	184.3
72.5°	154.1	148.5	145.0	143.5	142.4	141.0	141.8	146.2	151.3	158.7	165.9
75°	118.4	116.4	113.9	112.3	111.1	111.9	112.7	116.8	121.0	128.7	137.0
77.5°	86.4	84.3	82.9	82.5	81.8	82.1	84.5	87.5	91.6	97.3	103.5
80°	65.4	64.6	63.8	63.4	63.4	63.8	67.0	69.1	72.8	78.2	83.1
82.5°	47.6	47.1	47.0	46.9	47.2	47.3	49.3	52.0	55.1	59.1	63.4
85°	25.1	24.2	25.5	25.9	25.1	26.3	27.2	28.8	30.0	32.1	34.1
87.5°	9.7	10.7	10.6	11.2	11.6	12.5	12.4	13.9	14.7	15.6	15.4
90°	7.4	9.0	10.5	11.9	13.3	14.7	15.8	16.8	17.8	18.9	19.6
92.5°	26.9	28.3	30.1	31.8	33.6	35.3	36.7	38.0	39.4	40.7	41.7
95°	61.5	62.7	64.7	66.8	68.8	70.9	72.3	73.8	75.2	76.6	77.6
97.5°	100.1	101.6	104.4	107.2	110.0	112.9	114.2	115.6	116.9	118.3	119.1
100°	128.9	130.2	132.8	135.5	138.2	140.9	142.7	144.5	146.4	148.2	149.3
102.5°	163.8	164.9	166.3	167.6	169.0	170.3	172.3	174.3	176.3	178.3	179.6
105°	214.0	215.1	216.3	217.5	218.8	220.0	221.3	222.4	223.7	224.9	225.9
107.5°	268.5	269.4	270.4	271.3	272.3	273.2	273.9	274.4	275.0	275.7	276.0
110°	306.0	306.8	307.4	308.1	308.7	309.3	309.9	310.5	311.2	311.7	312.0



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	342.4	343.0	343.8	344.6	345.3	346.1	346.4	346.7	347.0	347.3	347.2
115°	400.1	400.6	401.1	401.5	401.9	402.3	402.1	401.9	401.6	401.5	401.2
117.5°	455.0	455.3	455.7	456.1	456.4	456.8	456.9	457.1	457.2	457.4	457.1
120°	492.9	493.5	493.7	493.9	494.2	494.3	494.3	494.3	494.3	494.3	493.9
122.5°	528.5	529.0	529.6	530.1	530.6	531.2	531.0	530.8	530.7	530.5	530.1
125°	583.9	584.6	584.9	585.0	585.3	585.5	585.0	584.6	584.2	583.8	583.5
127.5°	637.1	637.5	637.8	638.0	638.3	638.5	638.3	638.1	637.9	637.7	637.4
130°	671.5	672.2	672.6	673.0	673.4	673.8	673.7	673.4	673.2	673.0	672.7
132.5°	707.3	708.1	708.0	707.9	707.8	707.7	707.5	707.3	707.1	706.9	706.5
135°	758.0	758.7	758.8	759.1	759.2	759.5	759.5	759.5	759.5	759.5	759.1
137.5°	807.1	807.9	808.3	808.8	809.3	809.7	809.9	810.2	810.5	810.7	810.3
140°	838.1	838.9	839.6	840.2	840.7	841.4	841.8	842.2	842.6	843.0	842.7
142.5°	869.1	870.0	870.7	871.5	872.3	873.1	873.3	873.5	873.8	874.0	873.6
145°	915.5	916.2	916.9	917.5	918.1	918.7	918.7	918.7	918.7	918.7	918.4
147.5°	957.1	957.6	958.1	958.6	959.1	959.6	960.0	960.6	961.1	961.6	961.1
150°	983.3	983.6	984.4	985.2	986.0	986.8	986.8	986.8	986.8	986.8	986.7
152.5°	1008.8	1009.1	1009.4	1009.7	1010.1	1010.4	1010.9	1011.4	1011.9	1012.3	1012.3
155°	1043.9	1044.0	1044.3	1044.4	1044.7	1044.8	1045.7	1046.5	1047.3	1048.1	1048.0
157.5°	1074.5	1074.4	1074.6	1074.8	1075.0	1075.2	1076.0	1076.8	1077.7	1078.5	1078.2
160°	1093.0	1092.8	1093.0	1093.2	1093.4	1093.6	1094.4	1095.3	1096.1	1096.9	1096.8
162.5°	1110.6	1110.4	1110.4	1110.5	1110.5	1110.6	1111.5	1112.5	1113.5	1114.5	1114.4
165°	1133.4	1133.3	1133.5	1133.7	1133.9	1134.1	1135.0	1135.8	1136.5	1137.4	1137.2
167.5°	1150.9	1150.5	1150.5	1150.5	1150.5	1150.5	1151.8	1152.9	1154.2	1155.4	1155.4
170°	1161.3	1160.8	1160.8	1160.8	1160.8	1160.8	1162.1	1163.2	1164.5	1165.7	1165.6
172.5°	1168.6	1168.2	1168.2	1168.2	1168.2	1168.2	1169.4	1170.6	1171.9	1173.1	1173.1
175°	1176.9	1176.5	1176.5	1176.5	1176.5	1176.5	1177.7	1178.9	1180.1	1181.4	1181.3
177.5°	1181.8	1181.4	1181.2	1181.1	1180.8	1180.7	1181.7	1182.6	1183.7	1184.6	1184.6
180°	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2
2.5°	923.4	925.7	923.7	926.4	923.7	925.7	923.4	925.3	928.4	926.4	931.0
5°	851.0	847.4	849.9	848.2	849.9	847.4	851.0	853.1	858.1	859.7	863.0
7.5°	784.3	780.7	776.7	774.8	776.7	780.7	784.3	785.5	789.7	795.9	800.6
10°	742.5	737.9	737.5	734.7	737.5	737.9	742.5	747.0	749.9	757.7	763.0
12.5°	711.9	707.7	703.0	701.8	703.0	707.7	711.9	715.7	716.6	725.5	729.1
15°	668.4	665.1	662.3	664.7	662.3	665.1	668.4	670.9	675.4	681.6	685.7
17.5°	632.3	629.6	629.1	626.1	629.1	629.6	632.3	633.7	641.1	645.2	652.2
20°	609.6	607.5	608.4	603.0	608.4	607.5	609.6	613.3	620.8	622.8	630.2
22.5°	591.5	587.5	587.0	585.9	587.0	587.5	591.5	594.8	596.4	602.7	607.8
25°	563.2	561.1	559.0	561.1	559.0	561.1	563.2	566.8	568.5	573.0	578.0
27.5°	538.4	535.9	535.4	535.6	535.4	535.9	538.4	538.1	542.5	546.1	549.7
30°	523.2	519.1	519.5	519.1	519.5	519.1	523.2	523.2	525.7	529.0	532.3
32.5°	506.8	504.0	503.4	502.6	503.4	504.0	506.8	506.1	509.2	513.2	516.8
35°	482.5	482.5	480.5	480.5	480.5	482.5	482.5	483.7	487.0	487.0	491.2
37.5°	459.7	459.3	458.0	458.3	458.0	459.3	459.7	460.7	461.8	463.6	466.2
40°	442.6	442.2	440.9	438.5	440.9	442.2	442.6	444.3	445.0	447.1	448.8
42.5°	426.1	424.8	424.2	423.3	424.2	424.8	426.1	427.1	427.6	430.3	433.6
45°	400.2	400.2	399.4	399.0	399.4	400.2	400.2	400.2	400.7	403.9	405.6
47.5°	375.1	375.8	377.4	377.2	377.4	375.8	375.1	374.4	374.5	376.2	378.1
50°	359.9	360.4	361.6	361.9	361.6	360.4	359.9	358.3	357.4	357.4	358.7
52.5°	343.2	345.5	347.1	346.8	347.1	345.5	343.2	341.8	340.3	338.3	340.2
55°	319.6	322.5	325.3	325.8	325.3	322.5	319.6	315.9	314.3	311.0	312.2
57.5°	296.4	300.4	303.4	304.4	303.4	300.4	296.4	291.9	286.5	284.9	282.7
60°	280.5	285.9	289.6	291.2	289.6	285.9	280.5	276.4	269.4	264.9	263.2
62.5°	265.4	271.4	275.1	275.4	275.1	271.4	265.4	259.0	252.0	246.8	243.5
65°	240.7	246.8	250.1	252.5	250.1	246.8	240.7	233.6	225.9	218.8	215.2
67.5°	214.0	220.1	223.8	225.8	223.8	220.1	214.0	205.3	198.2	190.1	185.8
70°	194.6	200.7	205.7	207.3	205.7	200.7	194.6	184.3	178.1	170.7	167.0
72.5°	175.5	181.0	185.0	186.9	185.0	181.0	175.5	165.9	158.7	151.3	146.2
75°	142.4	149.7	153.4	155.5	153.4	149.7	142.4	137.0	128.7	121.0	116.8
77.5°	109.7	116.5	118.7	119.8	118.7	116.5	109.7	103.5	97.3	91.6	87.5
80°	88.0	92.1	95.0	95.5	95.0	92.1	88.0	83.1	78.2	72.8	69.1
82.5°	67.7	71.1	72.0	73.0	72.0	71.1	67.7	63.4	59.1	55.1	52.0
85°	37.0	38.7	39.1	38.7	39.1	38.7	37.0	34.1	32.1	30.0	28.8
87.5°	16.2	16.0	16.2	17.0	16.2	16.0	16.2	15.4	15.6	14.7	13.9
90°	20.3	20.8	21.5	22.1	21.5	20.8	20.3	19.6	18.9	17.8	16.8
92.5°	42.1	42.5	43.0	43.4	43.0	42.5	42.1	41.7	40.7	39.4	38.0
95°	78.0	78.3	78.7	79.1	78.7	78.3	78.0	77.6	76.6	75.2	73.8
97.5°	119.3	119.5	119.8	120.0	119.8	119.5	119.3	119.1	118.3	116.9	115.6
100°	149.7	150.1	150.6	151.0	150.6	150.1	149.7	149.3	148.2	146.4	144.5
102.5°	180.2	180.8	181.3	181.9	181.3	180.8	180.2	179.6	178.3	176.3	174.3
105°	226.5	227.0	227.7	228.3	227.7	227.0	226.5	225.9	224.9	223.7	222.4
107.5°	275.9	275.9	275.8	275.8	275.8	275.9	275.9	276.0	275.7	275.0	274.4
110°	311.7	311.6	311.3	311.2	311.3	311.6	311.7	312.0	311.7	311.2	310.5



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	346.9	346.5	346.1	345.8	346.1	346.5	346.9	347.2	347.3	347.0	346.7
115°	401.1	400.8	400.6	400.4	400.6	400.8	401.1	401.2	401.5	401.6	401.9
117.5°	456.3	455.5	454.6	453.8	454.6	455.5	456.3	457.1	457.4	457.2	457.1
120°	493.1	492.3	491.5	490.7	491.5	492.3	493.1	493.9	494.3	494.3	494.3
122.5°	529.4	528.8	528.1	527.5	528.1	528.8	529.4	530.1	530.5	530.7	530.8
125°	583.4	583.1	582.9	582.7	582.9	583.1	583.4	583.5	583.8	584.2	584.6
127.5°	637.0	636.5	636.1	635.7	636.1	636.5	637.0	637.4	637.7	637.9	638.1
130°	672.3	671.9	671.5	671.1	671.5	671.9	672.3	672.7	673.0	673.2	673.4
132.5°	705.9	705.4	704.8	704.3	704.8	705.4	705.9	706.5	706.9	707.1	707.3
135°	758.2	757.4	756.6	755.7	756.6	757.4	758.2	759.1	759.5	759.5	759.5
137.5°	809.3	808.3	807.2	806.2	807.2	808.3	809.3	810.3	810.7	810.5	810.2
140°	841.7	840.7	839.6	838.6	839.6	840.7	841.7	842.7	843.0	842.6	842.2
142.5°	872.6	871.6	870.6	869.6	870.6	871.6	872.6	873.6	874.0	873.8	873.5
145°	917.8	917.2	916.6	915.9	916.6	917.2	917.8	918.4	918.7	918.7	918.7
147.5°	959.7	958.3	957.0	955.5	957.0	958.3	959.7	961.1	961.6	961.1	960.6
150°	986.2	985.8	985.4	985.0	985.4	985.8	986.2	986.7	986.8	986.8	986.8
152.5°	1011.5	1010.7	1010.0	1009.3	1010.0	1010.7	1011.5	1012.3	1012.3	1011.9	1011.4
155°	1046.9	1045.9	1045.0	1043.9	1045.0	1045.9	1046.9	1048.0	1048.1	1047.3	1046.5
157.5°	1076.9	1075.5	1074.2	1072.9	1074.2	1075.5	1076.9	1078.2	1078.5	1077.7	1076.8
160°	1095.7	1094.7	1093.7	1092.7	1093.7	1094.7	1095.7	1096.8	1096.9	1096.1	1095.3
162.5°	1113.2	1112.0	1110.8	1109.6	1110.8	1112.0	1113.2	1114.4	1114.5	1113.5	1112.5
165°	1136.0	1134.7	1133.5	1132.3	1133.5	1134.7	1136.0	1137.2	1137.4	1136.5	1135.8
167.5°	1154.1	1152.9	1151.6	1150.3	1151.6	1152.9	1154.1	1155.4	1155.4	1154.2	1152.9
170°	1164.2	1162.8	1161.3	1159.9	1161.3	1162.8	1164.2	1165.6	1165.7	1164.5	1163.2
172.5°	1171.8	1170.5	1169.3	1168.0	1169.3	1170.5	1171.8	1173.1	1173.1	1171.9	1170.6
175°	1179.9	1178.5	1176.9	1175.5	1176.9	1178.5	1179.9	1181.3	1181.4	1180.1	1178.9
177.5°	1183.4	1182.3	1181.1	1180.0	1181.1	1182.3	1183.4	1184.6	1184.6	1183.7	1182.6
180°	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2
2.5°	926.7	930.7	935.6	939.2	945.8	948.7	952.4	955.3	960.6	965.5	971.5
5°	864.3	871.2	880.7	891.0	902.9	911.2	922.7	929.6	943.6	956.4	968.7
7.5°	807.6	816.2	829.6	842.8	858.4	872.5	886.9	902.9	920.8	941.8	959.3
10°	768.8	780.3	794.7	811.2	830.1	846.5	865.9	883.1	905.0	929.6	952.7
12.5°	737.8	747.7	763.8	779.6	799.8	819.9	839.9	862.8	888.2	915.5	944.4
15°	695.1	703.4	716.5	738.4	758.9	778.7	808.7	830.1	862.2	892.6	927.6
17.5°	658.7	668.9	680.0	698.7	720.0	744.7	771.5	798.4	829.3	867.8	907.3
20°	636.4	644.6	657.4	671.7	694.3	719.1	744.6	771.7	809.5	849.5	891.8
22.5°	612.0	620.9	635.3	651.0	670.0	693.7	721.8	751.6	791.1	830.4	876.3
25°	583.3	589.5	602.6	616.6	635.6	655.7	684.9	717.8	756.9	801.7	848.6
27.5°	556.2	561.7	573.7	585.8	602.9	626.9	653.0	686.2	723.0	768.5	820.5
30°	536.8	542.6	553.3	566.4	582.9	603.9	630.6	661.9	701.3	745.8	800.1
32.5°	520.0	525.1	533.2	546.4	562.4	582.8	607.5	639.4	679.0	724.1	777.4
35°	494.0	499.8	506.0	516.3	530.2	549.9	577.1	607.1	645.0	688.6	737.5
37.5°	468.2	474.4	480.0	489.2	501.9	519.4	542.8	574.1	608.3	650.3	697.3
40°	452.1	457.0	461.5	471.4	484.2	500.6	522.4	550.4	586.6	625.7	664.7
42.5°	435.9	440.5	444.4	453.0	464.8	480.5	501.4	528.6	562.2	598.7	633.1
45°	410.5	413.4	418.0	425.3	434.8	449.2	469.4	493.6	522.0	556.6	582.5
47.5°	383.0	387.5	391.3	397.8	405.5	419.6	438.9	459.6	485.4	511.0	529.3
50°	361.9	366.5	371.9	378.0	385.4	398.6	416.3	437.3	459.1	478.8	494.4
52.5°	342.2	346.4	352.1	358.0	367.0	378.2	393.2	411.9	433.4	447.6	460.6
55°	313.1	315.1	321.7	327.4	336.0	344.3	359.5	376.0	389.1	399.8	410.5
57.5°	283.2	286.0	289.8	294.9	303.5	313.1	323.8	338.3	346.1	351.6	359.9
60°	264.1	264.9	267.4	273.5	280.1	288.8	301.1	311.4	317.1	321.7	328.7
62.5°	243.0	243.2	247.3	251.8	256.7	266.1	276.1	284.4	289.1	291.4	298.1
65°	213.5	212.7	215.2	218.8	224.6	230.8	239.4	246.8	246.4	248.8	252.9
67.5°	183.3	182.4	182.4	186.0	190.7	196.2	202.2	206.4	206.5	209.8	211.8
70°	162.9	160.4	162.1	164.9	167.0	171.5	178.1	179.7	180.1	181.8	183.9
72.5°	141.8	141.0	142.4	143.5	145.0	148.5	154.1	155.1	155.2	156.1	159.5
75°	112.7	111.9	111.1	112.3	113.9	116.4	118.4	120.1	119.7	120.1	122.6
77.5°	84.5	82.1	81.8	82.5	82.9	84.3	86.4	86.3	86.7	86.7	89.4
80°	67.0	63.8	63.4	63.4	63.8	64.6	65.4	66.2	65.0	66.2	67.0
82.5°	49.3	47.3	47.2	46.9	47.0	47.1	47.6	48.2	47.8	48.5	49.0
85°	27.2	26.3	25.1	25.9	25.5	24.2	25.1	23.8	23.4	23.8	24.2
87.5°	12.4	12.5	11.6	11.2	10.6	10.7	9.7	9.0	8.4	8.4	9.0
90°	15.8	14.7	13.3	11.9	10.5	9.0	7.4	5.9	4.2	2.5	1.0
92.5°	36.7	35.3	33.6	31.8	30.1	28.3	26.9	25.7	24.6	23.4	22.3
95°	72.3	70.9	68.8	66.8	64.7	62.7	61.5	61.1	60.7	60.2	59.8
97.5°	114.2	112.9	110.0	107.2	104.4	101.6	100.1	99.9	99.7	99.6	99.4
100°	142.7	140.9	138.2	135.5	132.8	130.2	128.9	128.9	128.9	128.9	128.9
102.5°	172.3	170.3	169.0	167.6	166.3	164.9	163.8	163.0	162.2	161.4	160.6
105°	221.3	220.0	218.8	217.5	216.3	215.1	214.0	212.9	211.9	210.9	209.8
107.5°	273.9	273.2	272.3	271.3	270.4	269.4	268.5	267.4	266.4	265.4	264.4
110°	309.9	309.3	308.7	308.1	307.4	306.8	306.0	305.0	304.0	302.9	302.0



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	346.4	346.1	345.3	344.6	343.8	343.0	342.4	341.8	341.3	340.8	340.2
115°	402.1	402.3	401.9	401.5	401.1	400.6	400.1	399.2	398.4	397.6	396.7
117.5°	456.9	456.8	456.4	456.1	455.7	455.3	455.0	454.6	454.2	453.8	453.4
120°	494.3	494.3	494.2	493.9	493.7	493.5	492.9	491.9	490.8	489.8	488.8
122.5°	531.0	531.2	530.6	530.1	529.6	529.0	528.5	528.2	527.8	527.5	527.1
125°	585.0	585.5	585.3	585.0	584.9	584.6	583.9	582.7	581.5	580.3	579.0
127.5°	638.3	638.5	638.3	638.0	637.8	637.5	637.1	636.4	635.6	634.9	634.3
130°	673.7	673.8	673.4	673.0	672.6	672.2	671.5	670.5	669.5	668.4	667.4
132.5°	707.5	707.7	707.8	707.9	708.0	708.1	707.3	705.6	703.9	702.2	700.5
135°	759.5	759.5	759.2	759.1	758.8	758.7	758.0	756.7	755.5	754.2	753.0
137.5°	809.9	809.7	809.3	808.8	808.3	807.9	807.1	805.9	804.7	803.5	802.3
140°	841.8	841.4	840.7	840.2	839.6	838.9	838.1	837.1	836.1	835.0	834.0
142.5°	873.3	873.1	872.3	871.5	870.7	870.0	869.1	868.2	867.4	866.6	865.7
145°	918.7	918.7	918.1	917.5	916.9	916.2	915.5	914.7	913.9	913.1	912.3
147.5°	960.0	959.6	959.1	958.6	958.1	957.6	957.1	956.7	956.2	955.8	955.4
150°	986.8	986.8	986.0	985.2	984.4	983.6	983.3	983.5	983.7	983.9	984.0
152.5°	1010.9	1010.4	1010.1	1009.7	1009.4	1009.1	1008.8	1008.5	1008.2	1007.9	1007.7
155°	1045.7	1044.8	1044.7	1044.4	1044.3	1044.0	1043.9	1043.9	1043.9	1043.9	1043.9
157.5°	1076.0	1075.2	1075.0	1074.8	1074.6	1074.4	1074.5	1075.0	1075.4	1075.9	1076.3
160°	1094.4	1093.6	1093.4	1093.2	1093.0	1092.8	1093.0	1093.6	1094.2	1094.9	1095.4
162.5°	1111.5	1110.6	1110.5	1110.5	1110.4	1110.4	1110.6	1111.0	1111.5	1112.0	1112.4
165°	1135.0	1134.1	1133.9	1133.7	1133.5	1133.3	1133.4	1133.9	1134.2	1134.6	1135.0
167.5°	1151.8	1150.5	1150.5	1150.5	1150.5	1150.5	1150.9	1151.8	1152.5	1153.3	1154.2
170°	1162.1	1160.8	1160.8	1160.8	1160.8	1160.8	1161.3	1162.1	1162.8	1163.7	1164.5
172.5°	1169.4	1168.2	1168.2	1168.2	1168.2	1168.2	1168.6	1169.4	1170.2	1171.1	1171.9
175°	1177.7	1176.5	1176.5	1176.5	1176.5	1176.5	1176.9	1177.7	1178.5	1179.3	1180.1
177.5°	1181.7	1180.7	1180.8	1181.1	1181.2	1181.4	1181.8	1182.4	1183.0	1183.8	1184.4
180°	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2	969.2
2.5°	974.4	979.0	982.0	987.5	992.1	994.8	997.1	999.1	1001.4	1003.4	1008.9
5°	980.6	991.3	1000.4	1014.4	1027.1	1037.0	1047.7	1057.2	1065.0	1076.1	1084.7
7.5°	977.9	997.0	1016.8	1038.5	1060.6	1081.2	1100.1	1117.8	1133.9	1153.3	1170.3
10°	975.3	1001.2	1026.7	1055.9	1085.9	1111.4	1135.3	1159.6	1177.3	1202.0	1222.9
12.5°	973.4	1003.9	1034.6	1069.8	1102.7	1138.8	1170.5	1188.2	1215.1	1234.9	1259.8
15°	965.0	1005.4	1047.7	1087.2	1134.1	1167.4	1195.4	1229.9	1255.0	1280.1	1307.3
17.5°	950.1	995.8	1043.1	1095.0	1140.0	1175.7	1211.7	1245.1	1275.0	1308.7	1342.4
20°	943.3	988.9	1043.1	1096.2	1140.3	1177.7	1214.7	1251.3	1284.2	1327.4	1366.5
22.5°	928.8	984.0	1034.0	1085.7	1131.0	1171.8	1213.7	1255.3	1299.0	1347.8	1396.8
25°	902.9	958.9	1011.9	1063.0	1108.6	1159.6	1204.4	1260.0	1315.9	1380.5	1441.4
27.5°	876.1	929.6	978.3	1027.5	1080.8	1138.5	1196.7	1259.7	1332.9	1414.4	1500.3
30°	854.4	905.0	952.3	1002.8	1058.4	1123.4	1187.2	1262.0	1346.7	1438.4	1540.5
32.5°	829.0	875.7	921.6	975.3	1035.7	1104.3	1178.6	1260.7	1362.6	1466.8	1571.8
35°	785.7	824.7	872.0	929.2	997.5	1076.1	1162.1	1259.1	1375.9	1495.6	1584.1
37.5°	734.3	770.6	820.5	883.1	954.7	1039.0	1141.1	1256.2	1380.3	1475.8	1504.3
40°	699.7	733.4	785.3	850.2	923.4	1012.7	1124.6	1246.3	1366.5	1427.4	1403.9
42.5°	662.8	698.2	748.7	813.1	891.9	989.0	1103.9	1225.7	1326.4	1349.4	1268.4
45°	604.7	641.3	691.0	756.1	840.8	946.1	1065.8	1176.5	1234.5	1192.9	1067.5
47.5°	550.6	584.9	631.1	698.2	785.6	894.5	1009.8	1098.0	1102.6	1003.5	869.5
50°	513.8	545.4	591.9	658.9	745.8	856.0	960.0	1029.6	998.3	886.1	757.2
52.5°	477.6	508.6	554.4	620.8	706.6	807.6	904.4	953.2	894.4	779.1	669.1
55°	425.3	452.5	497.3	558.6	640.1	733.9	816.1	833.0	756.5	642.9	553.7
57.5°	374.3	399.7	440.5	496.9	571.3	654.4	718.7	715.2	634.3	536.9	466.0
60°	339.8	364.5	400.7	455.7	523.6	595.2	650.3	637.2	557.0	473.0	413.4
62.5°	308.9	330.9	365.1	413.3	475.2	541.6	586.8	567.4	488.9	415.4	368.3
65°	263.2	281.8	311.0	352.1	403.5	458.3	493.2	468.1	401.1	343.9	306.0
67.5°	219.8	234.6	259.0	291.9	335.7	379.7	401.0	375.7	322.1	280.4	252.3
70°	192.1	205.3	224.2	253.4	291.7	328.7	344.7	322.1	276.0	240.2	220.1
72.5°	164.5	175.3	191.9	218.2	248.8	281.0	295.0	273.4	235.5	205.3	186.5
75°	127.1	134.5	146.0	164.1	188.4	213.9	221.7	202.8	178.6	155.9	143.5
77.5°	91.0	97.3	106.0	117.4	134.6	150.8	157.6	146.7	127.9	113.6	103.5
80°	69.9	73.2	80.6	90.1	103.7	113.9	118.4	111.5	98.3	87.6	79.8
82.5°	49.8	53.2	57.6	65.4	74.1	81.0	85.9	81.2	71.7	63.3	58.7
85°	24.2	26.3	28.8	32.1	38.7	42.8	42.4	39.5	35.8	32.5	30.0
87.5°	9.0	9.7	11.0	13.0	14.3	15.9	16.9	16.5	15.4	14.7	13.9
90°	2.5	4.2	5.9	7.4	9.0	10.5	11.9	13.3	14.7	15.8	16.8
92.5°	23.4	24.6	25.7	26.9	28.3	30.1	31.8	33.6	35.3	36.7	38.0
95°	60.2	60.7	61.1	61.5	62.7	64.7	66.8	68.8	70.9	72.3	73.8
97.5°	99.6	99.7	99.9	100.1	101.6	104.4	107.2	110.0	112.9	114.2	115.6
100°	128.9	128.9	128.9	128.9	130.2	132.8	135.5	138.2	140.9	142.7	144.5
102.5°	161.4	162.2	163.0	163.8	164.9	166.3	167.6	169.0	170.3	172.3	174.3
105°	210.9	211.9	212.9	214.0	215.1	216.3	217.5	218.8	220.0	221.3	222.4
107.5°	265.4	266.4	267.4	268.5	269.4	270.4	271.3	272.3	273.2	273.9	274.4
110°	302.9	304.0	305.0	306.0	306.8	307.4	308.1	308.7	309.3	309.9	310.5



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	340.8	341.3	341.8	342.4	343.0	343.8	344.6	345.3	346.1	346.4	346.7
115°	397.6	398.4	399.2	400.1	400.6	401.1	401.5	401.9	402.3	402.1	401.9
117.5°	453.8	454.2	454.6	455.0	455.3	455.7	456.1	456.4	456.8	456.9	457.1
120°	489.8	490.8	491.9	492.9	493.5	493.7	493.9	494.2	494.3	494.3	494.3
122.5°	527.5	527.8	528.2	528.5	529.0	529.6	530.1	530.6	531.2	531.0	530.8
125°	580.3	581.5	582.7	583.9	584.6	584.9	585.0	585.3	585.5	585.0	584.6
127.5°	634.9	635.6	636.4	637.1	637.5	637.8	638.0	638.3	638.5	638.3	638.1
130°	668.4	669.5	670.5	671.5	672.2	672.6	673.0	673.4	673.8	673.7	673.4
132.5°	702.2	703.9	705.6	707.3	708.1	708.0	707.9	707.8	707.7	707.5	707.3
135°	754.2	755.5	756.7	758.0	758.7	758.8	759.1	759.2	759.5	759.5	759.5
137.5°	803.5	804.7	805.9	807.1	807.9	808.3	808.8	809.3	809.7	809.9	810.2
140°	835.0	836.1	837.1	838.1	838.9	839.6	840.2	840.7	841.4	841.8	842.2
142.5°	866.6	867.4	868.2	869.1	870.0	870.7	871.5	872.3	873.1	873.3	873.5
145°	913.1	913.9	914.7	915.5	916.2	916.9	917.5	918.1	918.7	918.7	918.7
147.5°	955.8	956.2	956.7	957.1	957.6	958.1	958.6	959.1	959.6	960.0	960.6
150°	983.9	983.7	983.5	983.3	983.6	984.4	985.2	986.0	986.8	986.8	986.8
152.5°	1007.9	1008.2	1008.5	1008.8	1009.1	1009.4	1009.7	1010.1	1010.4	1010.9	1011.4
155°	1043.9	1043.9	1043.9	1043.9	1044.0	1044.3	1044.4	1044.7	1044.8	1045.7	1046.5
157.5°	1075.9	1075.4	1075.0	1074.5	1074.4	1074.6	1074.8	1075.0	1075.2	1076.0	1076.8
160°	1094.9	1094.2	1093.6	1093.0	1092.8	1093.0	1093.2	1093.4	1093.6	1094.4	1095.3
162.5°	1112.0	1111.5	1111.0	1110.6	1110.4	1110.4	1110.5	1110.5	1110.6	1111.5	1112.5
165°	1134.6	1134.2	1133.9	1133.4	1133.3	1133.5	1133.7	1133.9	1134.1	1135.0	1135.8
167.5°	1153.3	1152.5	1151.8	1150.9	1150.5	1150.5	1150.5	1150.5	1150.5	1151.8	1152.9
170°	1163.7	1162.8	1162.1	1161.3	1160.8	1160.8	1160.8	1160.8	1160.8	1162.1	1163.2
172.5°	1171.1	1170.2	1169.4	1168.6	1168.2	1168.2	1168.2	1168.2	1168.2	1169.4	1170.6
175°	1179.3	1178.5	1177.7	1176.9	1176.5	1176.5	1176.5	1176.5	1176.5	1177.7	1178.9
177.5°	1183.8	1183.0	1182.4	1181.8	1181.4	1181.2	1181.1	1180.8	1180.7	1181.7	1182.6
180°	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	969.2	969.2	969.2	969.2	969.2	969.2	969.2
2.5°	1013.5	1016.2	1021.8	1019.8	1022.5	1023.7	1025.1
5°	1095.4	1108.6	1114.4	1113.5	1122.1	1120.1	1118.0
7.5°	1187.9	1201.7	1209.4	1219.1	1224.6	1225.0	1229.9
10°	1240.2	1258.3	1265.7	1276.0	1282.5	1286.3	1285.9
12.5°	1280.3	1294.5	1311.1	1316.1	1325.0	1329.7	1328.0
15°	1328.6	1351.3	1368.6	1377.2	1388.3	1391.5	1396.1
17.5°	1371.7	1402.1	1422.3	1449.1	1459.2	1465.4	1461.7
20°	1404.3	1444.2	1464.4	1496.5	1514.2	1523.6	1520.4
22.5°	1442.8	1486.1	1523.3	1551.1	1578.0	1590.8	1593.4
25°	1508.8	1568.0	1622.8	1659.4	1692.7	1700.5	1717.8
27.5°	1582.5	1652.4	1710.9	1749.4	1772.6	1781.3	1786.7
30°	1629.0	1698.4	1742.5	1767.1	1774.6	1773.7	1772.9
32.5°	1651.6	1695.2	1703.6	1696.7	1679.7	1665.5	1650.5
35°	1619.5	1587.0	1538.4	1475.9	1429.8	1383.4	1378.8
37.5°	1456.5	1352.6	1271.8	1181.5	1129.5	1097.3	1075.1
40°	1303.1	1185.1	1087.2	1011.1	958.0	937.1	916.5
42.5°	1136.6	1023.8	937.2	873.5	833.6	810.3	794.1
45°	923.4	823.9	756.1	710.0	678.3	660.2	649.9
47.5°	756.7	683.1	625.4	592.2	570.3	556.2	556.3
50°	667.2	596.8	558.6	532.3	513.3	502.2	504.3
52.5°	587.9	535.4	502.6	480.6	466.6	459.8	459.5
55°	491.5	453.7	432.3	416.3	406.8	399.0	400.7
57.5°	420.5	388.6	374.2	360.9	354.3	351.2	346.7
60°	376.4	351.7	339.4	328.7	322.1	319.6	315.1
62.5°	337.2	317.8	305.8	297.1	291.1	290.3	286.8
65°	283.4	268.6	257.9	253.8	247.6	246.0	246.0
67.5°	233.6	223.0	214.8	211.0	208.2	208.7	206.7
70°	202.4	193.8	188.4	184.3	182.2	182.6	181.0
72.5°	177.1	167.4	162.7	160.3	157.6	158.6	158.0
75°	134.1	129.1	126.7	124.2	122.6	121.8	121.0
77.5°	98.5	94.1	92.2	90.9	91.1	89.1	90.6
80°	76.1	72.4	71.1	69.1	68.7	68.7	68.3
82.5°	55.7	53.6	52.8	51.0	50.3	50.9	49.8
85°	28.8	27.2	26.8	26.8	25.9	25.1	27.2
87.5°	14.1	13.0	13.2	12.9	13.1	12.8	12.3
90°	17.8	18.9	19.6	20.3	20.8	21.5	22.1
92.5°	39.4	40.7	41.7	42.1	42.5	43.0	43.4
95°	75.2	76.6	77.6	78.0	78.3	78.7	79.1
97.5°	116.9	118.3	119.1	119.3	119.5	119.8	120.0
100°	146.4	148.2	149.3	149.7	150.1	150.6	151.0
102.5°	176.3	178.3	179.6	180.2	180.8	181.3	181.9
105°	223.7	224.9	225.9	226.5	227.0	227.7	228.3
107.5°	275.0	275.7	276.0	275.9	275.9	275.8	275.8
110°	311.2	311.7	312.0	311.7	311.6	311.3	311.2



TEST NUMBER: P333242-927

CATALOG NUMBER: S125DIP-S850D1205U927-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	347.0	347.3	347.2	346.9	346.5	346.1	345.8
115°	401.6	401.5	401.2	401.1	400.8	400.6	400.4
117.5°	457.2	457.4	457.1	456.3	455.5	454.6	453.8
120°	494.3	494.3	493.9	493.1	492.3	491.5	490.7
122.5°	530.7	530.5	530.1	529.4	528.8	528.1	527.5
125°	584.2	583.8	583.5	583.4	583.1	582.9	582.7
127.5°	637.9	637.7	637.4	637.0	636.5	636.1	635.7
130°	673.2	673.0	672.7	672.3	671.9	671.5	671.1
132.5°	707.1	706.9	706.5	705.9	705.4	704.8	704.3
135°	759.5	759.5	759.1	758.2	757.4	756.6	755.7
137.5°	810.5	810.7	810.3	809.3	808.3	807.2	806.2
140°	842.6	843.0	842.7	841.7	840.7	839.6	838.6
142.5°	873.8	874.0	873.6	872.6	871.6	870.6	869.6
145°	918.7	918.7	918.4	917.8	917.2	916.6	915.9
147.5°	961.1	961.6	961.1	959.7	958.3	957.0	955.5
150°	986.8	986.8	986.7	986.2	985.8	985.4	985.0
152.5°	1011.9	1012.3	1012.3	1011.5	1010.7	1010.0	1009.3
155°	1047.3	1048.1	1048.0	1046.9	1045.9	1045.0	1043.9
157.5°	1077.7	1078.5	1078.2	1076.9	1075.5	1074.2	1072.9
160°	1096.1	1096.9	1096.8	1095.7	1094.7	1093.7	1092.7
162.5°	1113.5	1114.5	1114.4	1113.2	1112.0	1110.8	1109.6
165°	1136.5	1137.4	1137.2	1136.0	1134.7	1133.5	1132.3
167.5°	1154.2	1155.4	1155.4	1154.1	1152.9	1151.6	1150.3
170°	1164.5	1165.7	1165.6	1164.2	1162.8	1161.3	1159.9
172.5°	1171.9	1173.1	1173.1	1171.8	1170.5	1169.3	1168.0
175°	1180.1	1181.4	1181.3	1179.9	1178.5	1176.9	1175.5
177.5°	1183.7	1184.6	1184.6	1183.4	1182.3	1181.1	1180.0
180°	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9	1182.9

(END OF REPORT)