

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333229-927

Luminaire Tested: **S125DIP-S850D810U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333229-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S850D810U927-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5274.3 lumens
Efficiency: N/A
Efficacy: 114.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333229-927

CATALOG NUMBER: S125DIP-S850D810U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

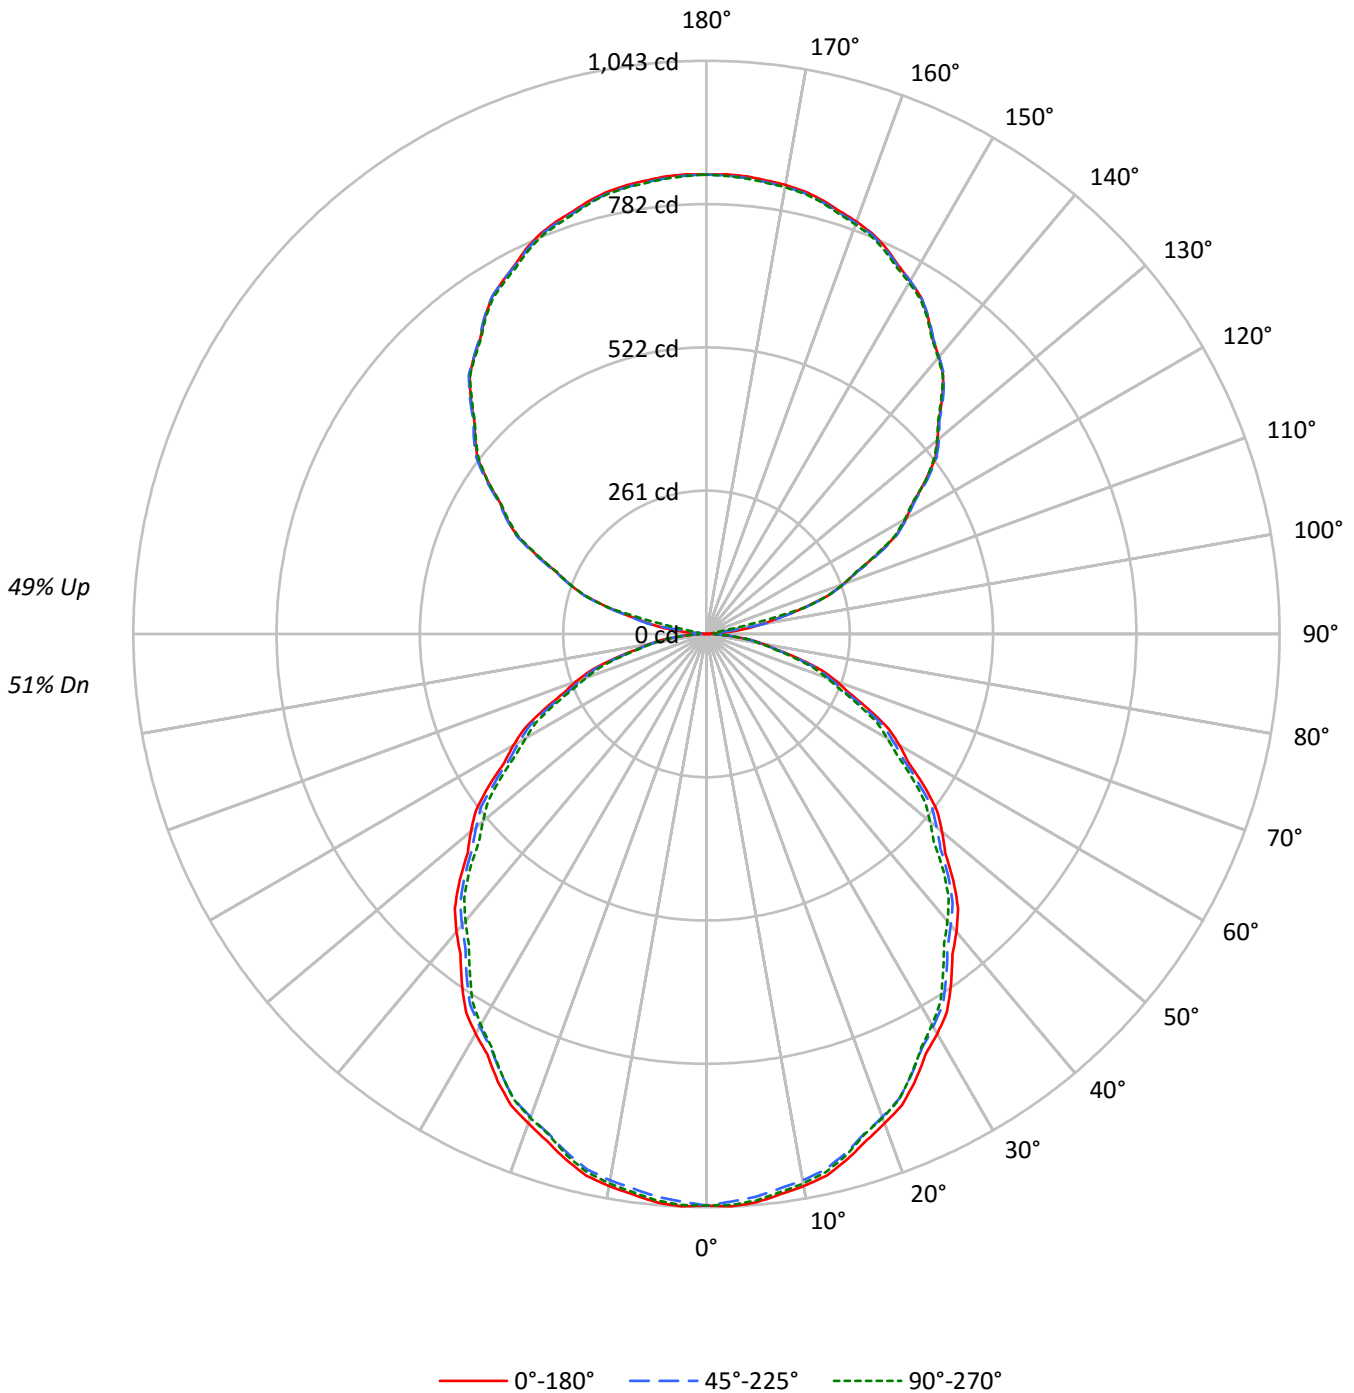



TEST NUMBER: P333229-927

CATALOG NUMBER: S125DIP-S850D810U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	84	84	84	70	70	70	57	57	57	51
1	98	94	90	86	90	87	83	80	74	71	69	62	60	58	51	49	48	43
2	89	82	76	70	82	76	70	66	64	60	57	54	51	49	44	42	41	36
3	81	72	64	59	75	67	60	55	57	52	48	48	44	41	39	37	35	30
4	74	64	56	50	68	59	52	47	50	45	41	43	38	35	35	32	30	26
5	68	57	48	42	63	53	45	40	45	40	35	38	34	30	32	28	26	23
6	63	51	43	37	58	47	40	35	41	35	31	35	30	27	29	25	23	20
7	58	46	38	32	54	43	36	30	37	31	27	31	27	24	26	23	20	18
8	54	42	34	29	50	39	32	27	34	28	24	29	24	21	24	21	18	16
9	50	38	30	25	46	36	29	24	31	25	21	26	22	19	22	19	16	14
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	21	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6716	6716	6716
5°	6731	6667	6710
10°	6690	6620	6658
15°	6618	6540	6568
20°	6514	6429	6441
25°	6402	6297	6291
30°	6264	6154	6123
35°	6117	6000	5916
40°	5966	5833	5751
45°	5802	5681	5569
50°	5621	5497	5332
55°	5447	5290	5141
60°	5239	5079	4899
65°	4991	4828	4664
70°	4755	4538	4381
75°	4332	4190	4045
80°	3857	3794	3704
85°	3349	3416	3231



TEST NUMBER: P333229-927

CATALOG NUMBER: S125DIP-S850D810U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.1	1.9
10°-20°	277.0	5.3
20°-30°	409.0	7.8
30°-40°	477.2	9.0
40°-50°	479.3	9.1
50°-60°	420.7	8.0
60°-70°	313.5	5.9
70°-80°	179.3	3.4
80°-90°	53.9	1.0
90°-100°	30.4	0.6
100°-110°	187.2	3.5
110°-120°	339.5	6.4
120°-130°	435.7	8.3
130°-140°	468.6	8.9
140°-150°	439.8	8.3
150°-160°	355.8	6.7
160°-170°	230.1	4.4
170°-180°	79.4	1.5
0°-30°	784.0	14.9
0°-40°	1261.2	23.9
0°-60°	2161.2	41.0
0°-90°	2707.8	51.3
90°-120°	557.0	10.6
90°-150°	1901.1	36.0
90°-180°	2566.0	48.7
0°-180°	5274.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1040	1040	1040	1040	1040	
5°	1038	1036	1028	1035	1035	98
15°	990	987	978	982	982	279
25°	898	894	884	885	883	413
35°	776	772	761	757	750	485
45°	635	631	622	612	610	489
55°	484	481	470	462	457	432
65°	327	325	316	309	305	324
75°	174	172	168	165	162	185
85°	45	46	46	45	44	51
90°	1	6	10	13	15	4
95°	35	32	10	13	13	45
105°	182	184	185	185	184	193
115°	342	345	346	343	340	339
125°	486	490	491	488	486	434
135°	606	610	609	608	604	467
145°	703	704	704	705	701	440
155°	774	771	772	773	769	357
165°	817	814	814	817	813	231
175°	836	832	833	837	832	80
180°	836	836	836	836	836	



TEST NUMBER: P333229-927

CATALOG NUMBER: S125DIP-S850D810U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9
2.5°	1042.6	1042.1	1041.7	1041.2	1040.8	1039.8	1038.4	1037.0	1035.5	1034.0	1035.5
5°	1038.3	1037.9	1037.5	1037.2	1036.8	1035.7	1033.9	1032.1	1030.2	1028.4	1030.1
7.5°	1028.7	1028.4	1028.0	1027.6	1027.3	1026.1	1024.1	1022.1	1020.1	1018.0	1019.6
10°	1020.2	1019.9	1019.5	1019.1	1018.7	1017.6	1015.5	1013.5	1011.5	1009.5	1011.0
12.5°	1009.6	1009.0	1008.4	1007.7	1007.0	1005.8	1003.9	1002.0	1000.1	998.3	999.5
15°	989.8	989.2	988.6	988.1	987.5	986.3	984.3	982.2	980.2	978.2	979.1
17.5°	966.9	966.1	965.3	964.5	963.7	962.2	960.1	958.1	955.9	953.9	955.0
20°	947.8	947.5	947.1	946.7	946.3	944.9	942.5	940.2	937.8	935.4	936.8
22.5°	928.7	928.0	927.4	926.7	926.1	924.6	922.4	920.1	917.9	915.7	916.6
25°	898.4	897.5	896.6	895.6	894.8	893.1	890.7	888.4	886.0	883.6	884.0
27.5°	863.0	862.5	862.0	861.4	860.9	859.4	856.9	854.4	852.0	849.5	849.6
30°	840.0	839.5	838.9	838.4	837.8	836.1	833.5	830.7	827.9	825.2	824.8
32.5°	815.0	814.1	813.3	812.5	811.7	810.0	807.6	805.1	802.6	800.2	799.5
35°	775.9	775.1	774.4	773.6	772.9	771.3	768.7	766.1	763.6	761.0	760.1
37.5°	735.2	734.3	733.3	732.5	731.5	729.8	727.5	725.0	722.6	720.3	718.8
40°	707.6	706.6	705.8	704.8	703.9	702.2	699.6	697.0	694.5	691.9	690.3
42.5°	677.9	677.2	676.4	675.7	674.9	673.2	670.7	668.0	665.5	663.0	661.5
45°	635.2	634.4	633.7	633.0	632.2	630.7	628.6	626.4	624.2	622.0	619.8
47.5°	589.1	589.1	589.1	589.1	589.2	588.0	585.3	582.7	580.0	577.4	575.1
50°	559.4	558.9	558.3	557.8	557.3	555.9	553.7	551.5	549.3	547.1	544.7
52.5°	529.2	528.8	528.4	528.0	527.6	526.2	523.9	521.5	519.2	516.8	514.8
55°	483.8	483.2	482.7	482.1	481.6	480.0	477.4	474.9	472.3	469.8	468.1
57.5°	435.9	435.6	435.3	435.0	434.7	433.5	431.3	429.2	427.0	424.8	422.7
60°	405.6	404.9	404.2	403.4	402.7	401.3	399.3	397.3	395.3	393.2	391.4
62.5°	374.0	373.4	372.9	372.2	371.7	370.5	368.8	367.1	365.4	363.6	361.7
65°	326.6	326.2	325.9	325.5	325.2	324.0	321.9	320.0	317.9	315.9	314.3
67.5°	280.7	280.0	279.2	278.4	277.7	276.5	275.0	273.5	272.0	270.5	269.1
70°	251.8	250.8	249.9	249.0	248.1	246.8	245.2	243.5	241.9	240.3	239.2
72.5°	220.1	219.5	218.9	218.3	217.7	216.8	215.8	214.7	213.7	212.6	211.4
75°	173.6	173.3	172.9	172.5	172.1	171.5	170.6	169.7	168.7	167.9	167.3
77.5°	130.6	130.5	130.4	130.2	130.1	129.8	129.2	128.7	128.2	127.7	127.4
80°	103.7	103.7	103.7	103.7	103.7	103.5	103.1	102.7	102.3	102.0	101.9
82.5°	79.9	79.7	79.4	79.1	78.8	78.6	78.5	78.5	78.4	78.3	78.0
85°	45.2	45.5	45.6	45.8	45.9	46.1	46.1	46.1	46.1	46.1	45.9
87.5°	17.9	18.1	18.3	18.5	18.8	18.9	18.9	19.0	19.0	19.1	19.3
90°	0.6	1.7	2.9	4.0	5.0	6.0	7.1	8.0	9.0	9.9	10.6
92.5°	9.5	8.8	8.0	7.2	6.5	6.5	7.4	8.2	9.0	9.9	10.6
95°	35.3	34.9	34.5	34.1	33.7	30.8	25.6	20.4	15.1	9.9	10.6
97.5°	73.8	74.5	75.2	76.0	76.7	71.9	61.6	51.2	40.8	30.5	26.6
100°	103.5	103.9	104.3	104.7	105.1	105.6	106.2	106.7	107.3	107.8	87.3
102.5°	133.7	134.2	134.8	135.2	135.8	136.2	136.6	136.9	137.2	137.5	133.6
105°	182.1	182.7	183.2	183.8	184.3	184.6	184.6	184.6	184.6	184.6	184.6
107.5°	232.4	232.4	232.4	232.4	232.4	232.6	232.8	233.1	233.4	233.7	233.7
110°	265.1	265.1	265.1	265.1	265.1	265.3	265.5	265.9	266.1	266.4	266.0



TEST NUMBER: P333229-927

CATALOG NUMBER: S125DIP-S850D810U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	295.9	296.2	296.5	296.9	297.2	297.5	297.6	297.8	297.9	298.1	297.6
115°	342.0	342.7	343.3	344.0	344.8	345.2	345.3	345.4	345.5	345.7	345.2
117.5°	389.7	389.7	389.6	389.6	389.6	389.8	390.3	390.9	391.4	391.9	391.2
120°	419.4	419.3	419.1	419.0	418.8	419.0	419.4	419.9	420.3	420.6	420.4
122.5°	445.7	446.2	446.7	447.3	447.7	448.1	448.3	448.5	448.7	448.9	448.6
125°	486.3	487.3	488.2	489.3	490.2	490.7	490.7	490.7	490.7	490.7	490.1
127.5°	525.1	525.8	526.5	527.2	527.8	528.1	528.1	528.0	527.9	527.8	527.5
130°	548.9	549.6	550.2	551.0	551.7	552.1	552.2	552.3	552.5	552.6	552.2
132.5°	572.7	573.5	574.3	575.0	575.9	576.2	575.8	575.5	575.2	574.9	574.8
135°	606.5	607.4	608.2	609.0	609.8	610.1	609.8	609.5	609.3	609.0	608.7
137.5°	637.6	638.3	639.1	639.8	640.5	640.7	640.5	640.2	640.0	639.7	639.8
140°	657.9	658.2	658.5	658.8	659.0	659.1	658.9	658.9	658.7	658.5	658.9
142.5°	676.3	676.4	676.6	676.8	676.9	677.1	677.3	677.5	677.7	677.9	677.9
145°	703.1	703.5	703.7	704.0	704.3	704.4	704.4	704.4	704.4	704.4	704.6
147.5°	726.7	726.7	726.6	726.5	726.5	726.5	726.7	726.8	727.1	727.2	727.4
150°	741.6	741.3	741.0	740.8	740.5	740.5	740.8	741.0	741.3	741.6	741.9
152.5°	756.0	755.3	754.7	754.2	753.5	753.4	753.6	753.9	754.2	754.5	754.7
155°	774.4	773.6	772.8	771.9	771.1	770.8	771.1	771.3	771.7	771.9	772.3
157.5°	788.6	788.1	787.7	787.2	786.6	786.4	786.5	786.5	786.5	786.6	787.0
160°	798.6	797.7	796.9	796.1	795.3	795.0	795.0	795.2	795.4	795.4	796.0
162.5°	806.5	805.6	804.9	804.0	803.2	802.9	803.0	803.1	803.3	803.4	804.1
165°	817.1	816.3	815.5	814.7	813.8	813.5	813.7	813.8	813.9	814.0	814.9
167.5°	825.1	824.3	823.4	822.5	821.7	821.3	821.4	821.6	821.7	821.9	822.8
170°	829.6	828.5	827.6	826.6	825.7	825.3	825.4	825.5	825.7	825.9	827.0
172.5°	832.5	831.6	830.6	829.7	828.6	828.3	828.5	828.8	829.0	829.3	830.3
175°	835.8	834.9	834.1	833.3	832.4	832.1	832.2	832.3	832.5	832.7	833.8
177.5°	837.3	836.5	835.9	835.3	834.6	834.3	834.4	834.5	834.6	834.7	835.5
180°	835.8	835.8	835.8	835.8	835.8	835.8	835.8	835.8	835.8	835.8	835.8



TEST NUMBER: P333229-927

CATALOG NUMBER: S125DIP-S850D810U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9
2.5°	1037.0	1038.4	1039.8	1040.5	1040.4	1040.2	1040.1	1039.9
5°	1031.7	1033.3	1035.0	1035.7	1035.5	1035.4	1035.1	1035.0
7.5°	1021.3	1022.9	1024.5	1025.2	1025.0	1024.8	1024.6	1024.5
10°	1012.4	1013.9	1015.3	1016.0	1015.8	1015.6	1015.4	1015.3
12.5°	1000.6	1001.8	1003.0	1003.5	1003.5	1003.5	1003.5	1003.4
15°	980.1	981.0	981.9	982.3	982.3	982.3	982.3	982.3
17.5°	956.2	957.3	958.4	958.5	957.6	956.7	955.8	954.9
20°	938.0	939.3	940.6	940.7	939.8	938.9	938.0	937.1
22.5°	917.3	918.2	919.1	919.2	918.5	917.9	917.3	916.7
25°	884.3	884.7	885.1	884.9	884.5	883.9	883.4	882.8
27.5°	849.7	849.8	849.9	849.6	849.1	848.5	848.0	847.4
30°	824.5	824.1	823.7	823.3	822.8	822.2	821.7	821.1
32.5°	798.8	798.2	797.6	796.7	795.7	794.7	793.8	792.8
35°	759.2	758.3	757.4	756.2	754.7	753.3	751.8	750.4
37.5°	717.5	716.1	714.8	713.7	712.9	712.0	711.2	710.3
40°	688.6	687.0	685.3	684.2	683.7	683.2	682.6	682.1
42.5°	660.0	658.5	657.0	655.8	655.0	654.1	653.2	652.4
45°	617.6	615.4	613.2	611.8	611.3	610.8	610.2	609.7
47.5°	572.9	570.7	568.5	566.7	565.5	564.2	562.8	561.6
50°	542.3	540.0	537.6	535.8	534.5	533.2	532.0	530.7
52.5°	512.7	510.6	508.5	506.8	505.3	503.9	502.5	501.1
55°	466.5	464.9	463.2	461.8	460.4	459.1	457.9	456.6
57.5°	420.6	418.5	416.4	414.9	414.2	413.6	412.9	412.2
60°	389.6	387.8	386.0	384.4	383.1	381.8	380.6	379.3
62.5°	359.7	357.7	355.8	354.3	353.3	352.3	351.3	350.3
65°	312.7	311.0	309.3	308.2	307.4	306.7	305.9	305.2
67.5°	267.8	266.3	265.0	264.0	263.6	263.2	262.7	262.3
70°	238.1	236.9	235.8	235.0	234.2	233.5	232.7	232.0
72.5°	210.1	208.9	207.6	206.6	205.9	205.2	204.5	203.7
75°	166.8	166.2	165.6	165.0	164.3	163.5	162.8	162.1
77.5°	127.1	126.7	126.4	126.0	125.4	124.9	124.5	123.9
80°	101.6	101.5	101.3	101.0	100.7	100.3	99.9	99.6
82.5°	77.6	77.3	77.0	76.8	76.8	76.7	76.6	76.5
85°	45.7	45.6	45.3	45.1	44.7	44.4	44.0	43.6
87.5°	19.4	19.5	19.6	19.6	19.4	19.2	19.0	18.8
90°	11.3	12.0	12.7	13.2	13.6	14.0	14.4	14.9
92.5°	11.3	12.0	12.7	13.1	13.3	13.5	13.7	13.9
95°	11.3	12.0	12.7	13.0	13.0	13.0	13.0	13.0
97.5°	22.7	18.9	15.0	13.0	13.0	13.0	13.0	13.0
100°	66.8	46.3	25.7	15.2	14.7	14.1	13.5	13.0
102.5°	129.8	125.9	122.0	115.4	106.0	96.6	87.3	78.0
105°	184.6	184.6	184.6	184.6	184.4	184.3	184.1	184.0
107.5°	233.8	233.8	233.8	233.6	233.2	232.7	232.3	232.0
110°	265.5	265.1	264.7	264.6	264.7	264.9	265.0	265.1



TEST NUMBER: P333229-927

CATALOG NUMBER: S125DIP-S850D810U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	297.1	296.5	296.0	295.6	295.5	295.2	295.1	294.9
115°	344.6	344.0	343.5	342.8	342.0	341.1	340.3	339.5
117.5°	390.5	389.8	389.0	388.5	388.2	387.8	387.5	387.1
120°	420.1	419.9	419.5	419.1	418.4	417.7	417.0	416.3
122.5°	448.4	448.1	447.8	447.3	446.5	445.7	444.9	444.1
125°	489.6	489.0	488.5	488.0	487.6	487.1	486.7	486.3
127.5°	527.2	527.0	526.6	525.9	525.0	523.9	522.9	521.9
130°	551.8	551.4	551.0	550.4	549.7	549.1	548.3	547.6
132.5°	574.7	574.6	574.6	574.2	573.5	572.8	572.1	571.5
135°	608.5	608.2	607.9	607.4	606.5	605.7	604.8	604.0
137.5°	639.8	639.8	639.9	639.6	638.9	638.2	637.5	636.8
140°	659.1	659.4	659.7	659.4	658.5	657.7	656.9	656.1
142.5°	678.0	678.0	678.1	677.7	676.9	676.0	675.3	674.4
145°	704.6	704.8	705.0	704.6	703.8	703.0	702.1	701.3
147.5°	727.5	727.7	727.9	727.5	726.4	725.5	724.5	723.5
150°	742.1	742.4	742.7	742.3	741.2	740.1	738.9	737.8
152.5°	755.0	755.3	755.6	755.2	754.2	753.2	752.3	751.2
155°	772.8	773.2	773.6	773.2	772.1	771.0	769.9	768.8
157.5°	787.4	787.9	788.3	788.0	786.9	785.8	784.7	783.5
160°	796.5	797.1	797.6	797.4	796.3	795.2	794.1	793.0
162.5°	804.9	805.7	806.4	806.3	805.0	803.8	802.6	801.5
165°	815.7	816.5	817.4	817.2	816.1	815.0	813.9	812.8
167.5°	823.9	824.8	825.9	825.7	824.4	823.2	822.0	820.8
170°	828.0	829.1	830.2	830.1	828.9	827.7	826.4	825.2
172.5°	831.2	832.3	833.3	833.1	831.9	830.7	829.4	828.1
175°	834.8	835.9	837.0	836.9	835.8	834.5	833.3	832.0
177.5°	836.3	837.0	837.8	837.8	836.9	836.0	835.1	834.2
180°	835.8	835.8	835.8	835.8	835.8	835.8	835.8	835.8

(END OF REPORT)