

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: NEO-RAY

Report Number: P333230-927

Luminaire Tested: **S125DIP-S850D810U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333230-927  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIP-S850D810U927-4F0-1E-UDD-F1  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4929.0 lumens  
Efficiency: N/A  
Efficacy: 107.4 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 45.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333230-927

CATALOG NUMBER: S125DIP-S850D810U927-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

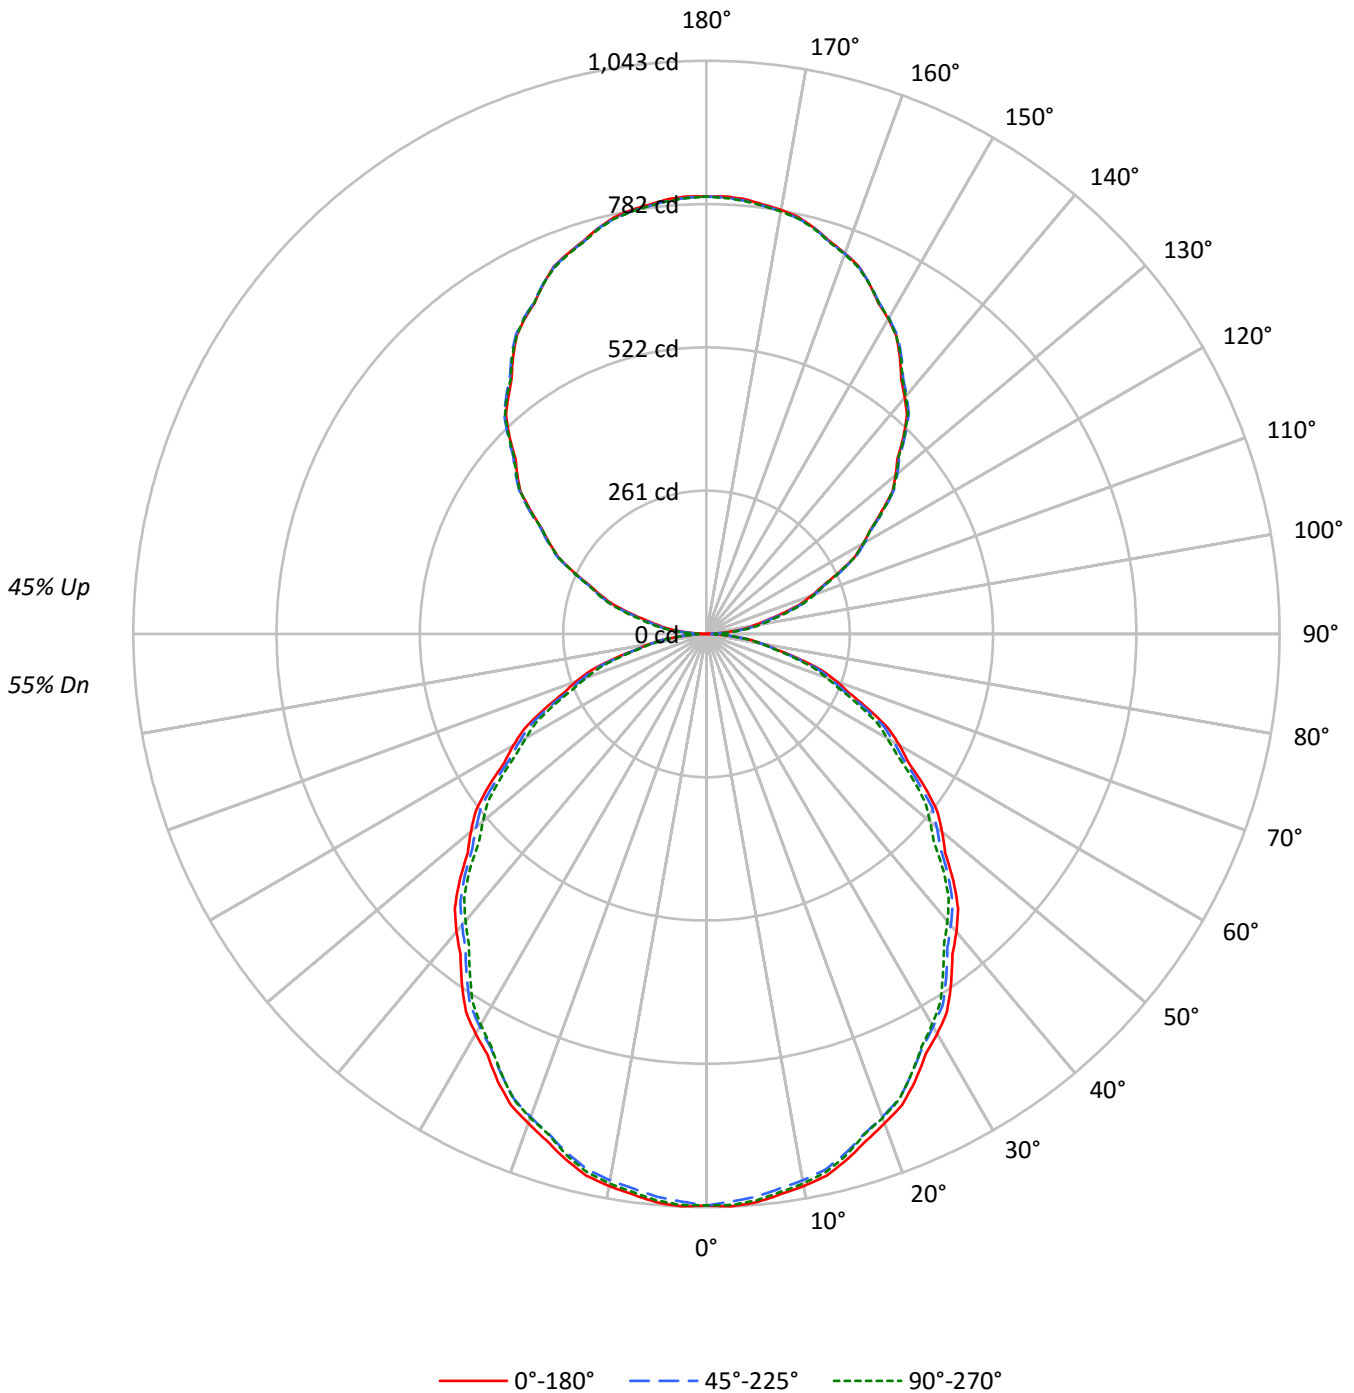



TEST NUMBER: P333230-927

CATALOG NUMBER: S125DIP-S850D810U927-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	94	90	87	92	88	84	81	75	73	71	64	62	61	54	52	51	46
2	90	82	76	71	83	77	71	67	66	62	58	56	53	51	47	45	43	39
3	82	72	65	59	76	68	61	56	58	53	49	50	46	43	42	39	37	33
4	75	64	56	50	69	60	53	47	52	46	42	44	40	37	37	34	31	28
5	69	57	49	43	64	53	46	41	46	41	36	40	35	32	34	30	27	24
6	64	51	43	37	59	48	41	35	42	36	31	36	31	28	30	27	24	21
7	59	46	38	33	54	43	36	31	38	32	28	33	28	25	28	24	21	19
8	55	42	34	29	51	39	32	27	35	29	25	30	25	22	26	22	19	17
9	51	38	31	26	47	36	29	25	32	26	22	28	23	20	24	20	17	15
10	47	35	28	23	44	33	27	22	29	24	20	25	21	18	22	18	16	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6716	6716	6716
5°	6731	6667	6710
10°	6690	6620	6658
15°	6618	6540	6568
20°	6514	6429	6441
25°	6402	6297	6291
30°	6264	6154	6123
35°	6117	6000	5916
40°	5966	5833	5751
45°	5802	5681	5569
50°	5621	5497	5332
55°	5447	5290	5141
60°	5239	5079	4899
65°	4991	4828	4664
70°	4755	4538	4381
75°	4332	4190	4045
80°	3857	3794	3704
85°	3349	3416	3231



TEST NUMBER: P333230-927

CATALOG NUMBER: S125DIP-S850D810U927-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	98.1	2.0
10°-20°	277.0	5.6
20°-30°	409.0	8.3
30°-40°	477.2	9.7
40°-50°	479.3	9.7
50°-60°	420.7	8.5
60°-70°	313.5	6.4
70°-80°	179.3	3.6
80°-90°	53.9	1.1
90°-100°	53.3	1.1
100°-110°	157.4	3.2
110°-120°	266.7	5.4
120°-130°	350.9	7.1
130°-140°	393.2	8.0
140°-150°	385.4	7.8
150°-160°	323.7	6.6
160°-170°	215.2	4.4
170°-180°	75.3	1.5
0°-30°	784.0	15.9
0°-40°	1261.2	25.6
0°-60°	2161.2	43.8
0°-90°	2707.8	54.9
90°-120°	477.4	9.7
90°-150°	1607.0	32.6
90°-180°	2221.0	45.1
0°-180°	4929.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1040	1040	1040	1040	1040	
5°	1038	1036	1028	1035	1035	98
15°	990	987	978	982	982	279
25°	898	894	884	885	883	413
35°	776	772	761	757	750	485
45°	635	631	622	612	610	489
55°	484	481	470	462	457	432
65°	327	325	316	309	305	324
75°	174	172	168	165	162	185
85°	45	46	46	45	44	51
90°	1	6	10	13	15	5
95°	40	42	48	52	53	43
105°	141	144	148	152	154	151
115°	267	269	271	270	270	264
125°	390	393	394	393	392	349
135°	507	510	511	511	509	390
145°	614	616	618	618	616	384
155°	702	702	703	705	702	323
165°	764	763	763	765	762	215
175°	794	792	792	795	791	75
180°	796	796	796	796	796	



TEST NUMBER: P333230-927

CATALOG NUMBER: S125DIP-S850D810U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9
2.5°	1042.6	1042.1	1041.7	1041.2	1040.8	1039.8	1038.4	1037.0	1035.5	1034.0	1035.5
5°	1038.3	1037.9	1037.5	1037.2	1036.8	1035.7	1033.9	1032.1	1030.2	1028.4	1030.1
7.5°	1028.7	1028.4	1028.0	1027.6	1027.3	1026.1	1024.1	1022.1	1020.1	1018.0	1019.6
10°	1020.2	1019.9	1019.5	1019.1	1018.7	1017.6	1015.5	1013.5	1011.5	1009.5	1011.0
12.5°	1009.6	1009.0	1008.4	1007.7	1007.0	1005.8	1003.9	1002.0	1000.1	998.3	999.5
15°	989.8	989.2	988.6	988.1	987.5	986.3	984.3	982.2	980.2	978.2	979.1
17.5°	966.9	966.1	965.3	964.5	963.7	962.2	960.1	958.1	955.9	953.9	955.0
20°	947.8	947.5	947.1	946.7	946.3	944.9	942.5	940.2	937.8	935.4	936.8
22.5°	928.7	928.0	927.4	926.7	926.1	924.6	922.4	920.1	917.9	915.7	916.6
25°	898.4	897.5	896.6	895.6	894.8	893.1	890.7	888.4	886.0	883.6	884.0
27.5°	863.0	862.5	862.0	861.4	860.9	859.4	856.9	854.4	852.0	849.5	849.6
30°	840.0	839.5	838.9	838.4	837.8	836.1	833.5	830.7	827.9	825.2	824.8
32.5°	815.0	814.1	813.3	812.5	811.7	810.0	807.6	805.1	802.6	800.2	799.5
35°	775.9	775.1	774.4	773.6	772.9	771.3	768.7	766.1	763.6	761.0	760.1
37.5°	735.2	734.3	733.3	732.5	731.5	729.8	727.5	725.0	722.6	720.3	718.8
40°	707.6	706.6	705.8	704.8	703.9	702.2	699.6	697.0	694.5	691.9	690.3
42.5°	677.9	677.2	676.4	675.7	674.9	673.2	670.7	668.0	665.5	663.0	661.5
45°	635.2	634.4	633.7	633.0	632.2	630.7	628.6	626.4	624.2	622.0	619.8
47.5°	589.1	589.1	589.1	589.1	589.2	588.0	585.3	582.7	580.0	577.4	575.1
50°	559.4	558.9	558.3	557.8	557.3	555.9	553.7	551.5	549.3	547.1	544.7
52.5°	529.2	528.8	528.4	528.0	527.6	526.2	523.9	521.5	519.2	516.8	514.8
55°	483.8	483.2	482.7	482.1	481.6	480.0	477.4	474.9	472.3	469.8	468.1
57.5°	435.9	435.6	435.3	435.0	434.7	433.5	431.3	429.2	427.0	424.8	422.7
60°	405.6	404.9	404.2	403.4	402.7	401.3	399.3	397.3	395.3	393.2	391.4
62.5°	374.0	373.4	372.9	372.2	371.7	370.5	368.8	367.1	365.4	363.6	361.7
65°	326.6	326.2	325.9	325.5	325.2	324.0	321.9	320.0	317.9	315.9	314.3
67.5°	280.7	280.0	279.2	278.4	277.7	276.5	275.0	273.5	272.0	270.5	269.1
70°	251.8	250.8	249.9	249.0	248.1	246.8	245.2	243.5	241.9	240.3	239.2
72.5°	220.1	219.5	218.9	218.3	217.7	216.8	215.8	214.7	213.7	212.6	211.4
75°	173.6	173.3	172.9	172.5	172.1	171.5	170.6	169.7	168.7	167.9	167.3
77.5°	130.6	130.5	130.4	130.2	130.1	129.8	129.2	128.7	128.2	127.7	127.4
80°	103.7	103.7	103.7	103.7	103.7	103.5	103.1	102.7	102.3	102.0	101.9
82.5°	79.9	79.7	79.4	79.1	78.8	78.6	78.5	78.5	78.4	78.3	78.0
85°	45.2	45.5	45.6	45.8	45.9	46.1	46.1	46.1	46.1	46.1	45.9
87.5°	17.9	18.1	18.3	18.5	18.8	18.9	18.9	19.0	19.0	19.1	19.3
90°	0.6	1.7	2.9	4.0	5.0	6.0	7.1	8.0	9.0	9.9	10.6
92.5°	15.0	15.8	16.6	17.3	18.1	19.0	20.2	21.4	22.6	23.8	24.7
95°	40.2	40.6	40.8	41.1	41.4	42.2	43.6	44.9	46.3	47.7	48.6
97.5°	66.9	67.0	67.1	67.3	67.3	68.4	70.3	72.2	74.1	76.0	76.8
100°	86.7	86.7	86.7	86.7	86.7	87.6	89.4	91.2	93.0	94.7	96.0
102.5°	108.1	108.6	109.2	109.7	110.3	111.0	111.9	112.8	113.7	114.6	116.0
105°	141.2	142.0	142.6	143.3	144.0	144.7	145.6	146.4	147.2	148.1	148.9
107.5°	177.9	178.6	179.3	180.0	180.7	181.3	182.0	182.6	183.2	183.9	184.3
110°	203.2	203.9	204.5	205.3	206.0	206.5	206.9	207.3	207.7	208.1	208.6



TEST NUMBER: P333230-927

CATALOG NUMBER: S125DIP-S850D810U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	228.9	229.3	229.7	230.0	230.4	230.8	231.3	231.9	232.4	232.9	233.1
115°	267.0	267.5	268.1	268.6	269.2	269.6	269.9	270.1	270.5	270.7	270.5
117.5°	305.1	305.4	305.6	305.9	306.1	306.4	306.7	306.9	307.1	307.4	307.4
120°	328.9	329.6	330.3	331.0	331.7	332.1	332.2	332.4	332.5	332.6	332.6
122.5°	354.7	355.0	355.2	355.5	355.7	356.0	356.3	356.7	357.0	357.4	357.3
125°	389.6	390.5	391.3	392.1	392.9	393.4	393.6	393.7	393.8	394.0	393.7
127.5°	426.8	427.3	427.7	428.2	428.6	429.0	429.1	429.3	429.5	429.7	429.5
130°	449.1	449.8	450.5	451.1	451.9	452.3	452.6	452.9	453.1	453.4	453.3
132.5°	471.4	472.5	473.6	474.8	475.9	476.4	476.4	476.3	476.3	476.3	476.1
135°	506.7	507.6	508.3	509.2	510.0	510.5	510.6	510.8	510.9	511.0	511.0
137.5°	540.0	540.7	541.5	542.3	543.1	543.7	544.0	544.2	544.5	544.9	545.0
140°	561.3	561.9	562.6	563.3	564.0	564.5	564.9	565.4	565.8	566.2	566.5
142.5°	582.6	583.1	583.7	584.2	584.9	585.4	585.9	586.5	586.9	587.5	587.6
145°	613.9	614.4	615.0	615.5	616.1	616.6	617.0	617.3	617.8	618.2	618.2
147.5°	642.9	643.2	643.5	643.8	644.0	644.4	644.8	645.1	645.4	645.7	646.0
150°	662.2	662.0	661.9	661.8	661.6	661.9	662.4	663.0	663.5	664.1	664.1
152.5°	678.0	678.3	678.4	678.7	678.8	679.1	679.2	679.5	679.7	679.9	680.2
155°	702.4	702.4	702.4	702.4	702.4	702.5	702.7	702.8	702.9	703.1	703.6
157.5°	724.3	724.0	723.7	723.3	723.0	722.9	723.1	723.3	723.3	723.5	724.1
160°	737.1	736.7	736.3	735.9	735.5	735.4	735.5	735.6	735.8	735.9	736.5
162.5°	748.5	748.2	747.9	747.7	747.3	747.2	747.2	747.3	747.3	747.3	748.0
165°	763.8	763.5	763.3	763.0	762.7	762.6	762.7	762.9	763.0	763.2	763.7
167.5°	776.7	776.1	775.5	775.0	774.4	774.2	774.2	774.2	774.2	774.2	775.0
170°	783.6	783.1	782.5	782.0	781.4	781.1	781.1	781.1	781.1	781.1	782.0
172.5°	788.5	788.0	787.4	786.9	786.3	786.1	786.1	786.1	786.1	786.1	786.9
175°	794.2	793.6	793.1	792.5	791.9	791.6	791.6	791.6	791.6	791.6	792.5
177.5°	797.0	796.5	796.1	795.7	795.2	795.0	794.9	794.7	794.6	794.5	795.2
180°	796.0	796.0	796.0	796.0	796.0	796.0	796.0	796.0	796.0	796.0	796.0



TEST NUMBER: P333230-927

CATALOG NUMBER: S125DIP-S850D810U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9	1039.9
2.5°	1037.0	1038.4	1039.8	1040.5	1040.4	1040.2	1040.1	1039.9
5°	1031.7	1033.3	1035.0	1035.7	1035.5	1035.4	1035.1	1035.0
7.5°	1021.3	1022.9	1024.5	1025.2	1025.0	1024.8	1024.6	1024.5
10°	1012.4	1013.9	1015.3	1016.0	1015.8	1015.6	1015.4	1015.3
12.5°	1000.6	1001.8	1003.0	1003.5	1003.5	1003.5	1003.5	1003.4
15°	980.1	981.0	981.9	982.3	982.3	982.3	982.3	982.3
17.5°	956.2	957.3	958.4	958.5	957.6	956.7	955.8	954.9
20°	938.0	939.3	940.6	940.7	939.8	938.9	938.0	937.1
22.5°	917.3	918.2	919.1	919.2	918.5	917.9	917.3	916.7
25°	884.3	884.7	885.1	884.9	884.5	883.9	883.4	882.8
27.5°	849.7	849.8	849.9	849.6	849.1	848.5	848.0	847.4
30°	824.5	824.1	823.7	823.3	822.8	822.2	821.7	821.1
32.5°	798.8	798.2	797.6	796.7	795.7	794.7	793.8	792.8
35°	759.2	758.3	757.4	756.2	754.7	753.3	751.8	750.4
37.5°	717.5	716.1	714.8	713.7	712.9	712.0	711.2	710.3
40°	688.6	687.0	685.3	684.2	683.7	683.2	682.6	682.1
42.5°	660.0	658.5	657.0	655.8	655.0	654.1	653.2	652.4
45°	617.6	615.4	613.2	611.8	611.3	610.8	610.2	609.7
47.5°	572.9	570.7	568.5	566.7	565.5	564.2	562.8	561.6
50°	542.3	540.0	537.6	535.8	534.5	533.2	532.0	530.7
52.5°	512.7	510.6	508.5	506.8	505.3	503.9	502.5	501.1
55°	466.5	464.9	463.2	461.8	460.4	459.1	457.9	456.6
57.5°	420.6	418.5	416.4	414.9	414.2	413.6	412.9	412.2
60°	389.6	387.8	386.0	384.4	383.1	381.8	380.6	379.3
62.5°	359.7	357.7	355.8	354.3	353.3	352.3	351.3	350.3
65°	312.7	311.0	309.3	308.2	307.4	306.7	305.9	305.2
67.5°	267.8	266.3	265.0	264.0	263.6	263.2	262.7	262.3
70°	238.1	236.9	235.8	235.0	234.2	233.5	232.7	232.0
72.5°	210.1	208.9	207.6	206.6	205.9	205.2	204.5	203.7
75°	166.8	166.2	165.6	165.0	164.3	163.5	162.8	162.1
77.5°	127.1	126.7	126.4	126.0	125.4	124.9	124.5	123.9
80°	101.6	101.5	101.3	101.0	100.7	100.3	99.9	99.6
82.5°	77.6	77.3	77.0	76.8	76.8	76.7	76.6	76.5
85°	45.7	45.6	45.3	45.1	44.7	44.4	44.0	43.6
87.5°	19.4	19.5	19.6	19.6	19.4	19.2	19.0	18.8
90°	11.2	12.0	12.7	13.2	13.6	14.0	14.4	14.9
92.5°	25.6	26.5	27.4	28.0	28.4	28.6	28.9	29.2
95°	49.6	50.6	51.6	52.2	52.4	52.8	53.0	53.2
97.5°	77.8	78.7	79.6	80.1	80.2	80.4	80.6	80.8
100°	97.3	98.5	99.7	100.5	100.8	101.0	101.3	101.6
102.5°	117.3	118.7	120.0	120.9	121.3	121.6	122.0	122.4
105°	149.7	150.5	151.4	151.9	152.4	152.8	153.2	153.6
107.5°	184.7	185.1	185.5	185.7	185.7	185.6	185.6	185.6
110°	209.0	209.4	209.8	209.9	209.8	209.6	209.5	209.4





TEST NUMBER: P333230-927

CATALOG NUMBER: S125DIP-S850D810U927-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	233.3	233.5	233.7	233.7	233.4	233.1	232.9	232.7
115°	270.5	270.3	270.1	270.0	269.9	269.7	269.6	269.5
117.5°	307.6	307.7	307.8	307.6	307.0	306.5	305.9	305.4
120°	332.6	332.6	332.6	332.4	331.8	331.3	330.7	330.2
122.5°	357.2	357.1	357.0	356.7	356.2	355.8	355.4	355.0
125°	393.4	393.2	392.8	392.7	392.5	392.4	392.3	392.1
127.5°	429.4	429.2	429.1	428.9	428.6	428.3	428.1	427.8
130°	453.1	453.0	452.9	452.7	452.4	452.1	451.9	451.5
132.5°	475.9	475.8	475.7	475.4	475.1	474.7	474.3	473.9
135°	511.0	511.0	511.0	510.8	510.2	509.7	509.1	508.6
137.5°	545.2	545.3	545.5	545.3	544.5	543.9	543.2	542.5
140°	566.7	567.0	567.3	567.0	566.4	565.7	565.0	564.4
142.5°	587.8	588.0	588.1	587.9	587.2	586.5	585.8	585.1
145°	618.2	618.2	618.2	618.0	617.6	617.2	616.8	616.3
147.5°	646.3	646.7	647.1	646.7	645.8	644.8	644.0	643.0
150°	664.1	664.1	664.1	663.9	663.6	663.4	663.1	662.8
152.5°	680.6	680.9	681.2	681.1	680.6	680.2	679.7	679.1
155°	704.2	704.7	705.3	705.2	704.5	703.9	703.1	702.4
157.5°	724.6	725.2	725.7	725.6	724.6	723.7	722.8	721.9
160°	737.0	737.5	738.1	738.1	737.4	736.7	735.9	735.3
162.5°	748.6	749.3	750.0	749.9	749.1	748.3	747.5	746.7
165°	764.3	764.9	765.3	765.2	764.4	763.6	762.7	761.9
167.5°	775.9	776.7	777.5	777.4	776.7	775.8	774.9	774.0
170°	782.8	783.6	784.4	784.3	783.4	782.4	781.5	780.5
172.5°	787.7	788.5	789.4	789.4	788.5	787.7	786.8	785.9
175°	793.3	794.2	795.0	794.9	793.9	793.0	792.0	791.1
177.5°	795.8	796.5	797.2	797.1	796.3	795.6	794.8	794.0
180°	796.0	796.0	796.0	796.0	796.0	796.0	796.0	796.0

(END OF REPORT)