

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333589-927

Luminaire Tested: **S125RDIP-S1090D590U927-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333589-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S1090D590U927-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 590 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5218.6 lumens
Efficiency: N/A
Efficacy: 106.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 48.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333589-927

CATALOG NUMBER: S125RDIP-S1090D590U927-4F0-1E-UDD-F

Luminous Intensity Polar Plot

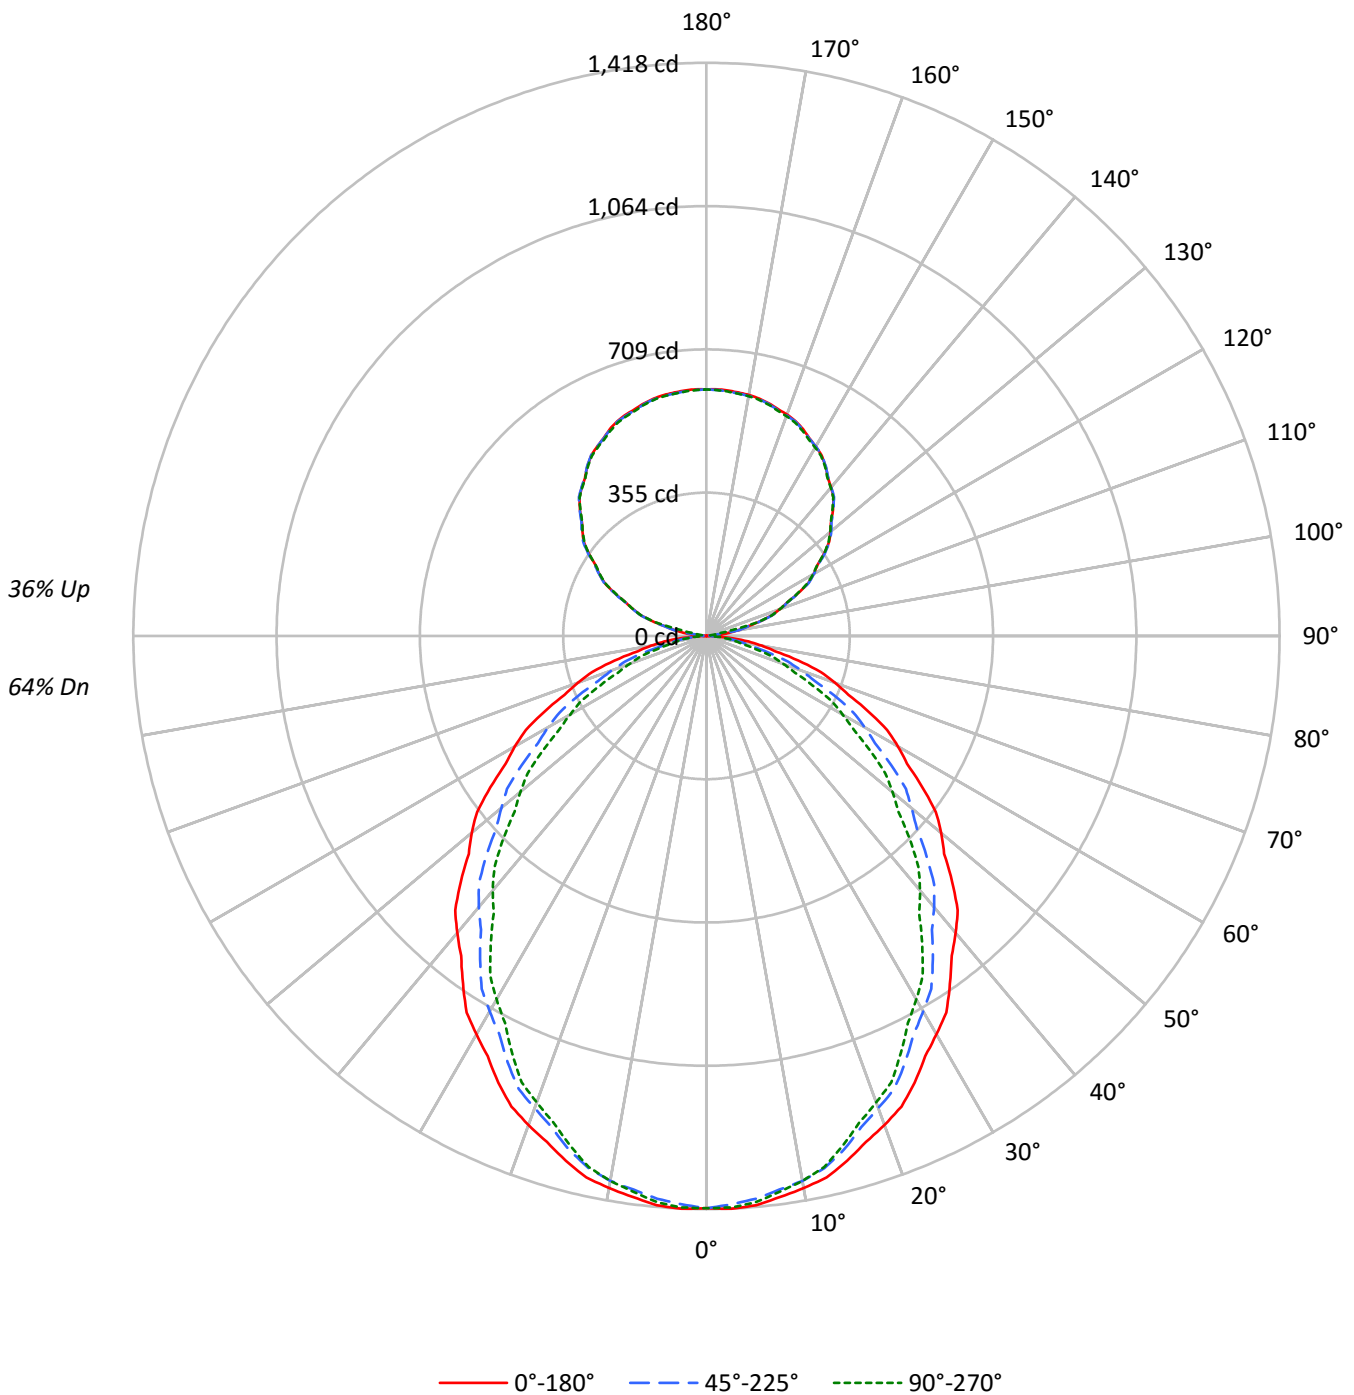



TEST NUMBER: P333589-927

CATALOG NUMBER: S125RDIP-S1090D590U927-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	91	91	91	80	80	80	69	69	69	64
1	101	97	93	90	95	91	88	85	80	78	76	71	69	67	62	60	59	55
2	92	85	79	74	87	80	75	70	71	67	63	62	59	56	54	52	50	46
3	84	75	68	62	79	71	64	59	63	58	53	55	51	48	49	45	43	39
4	77	67	59	52	73	63	56	50	56	50	46	50	45	41	44	40	37	34
5	71	60	51	45	67	56	49	43	50	44	40	45	40	36	39	36	33	30
6	66	54	45	39	62	51	43	38	45	39	35	40	36	32	36	32	29	26
7	61	49	40	35	57	46	39	33	41	35	31	37	32	28	33	29	26	23
8	57	44	36	31	53	42	35	30	38	32	28	34	29	25	30	26	23	21
9	53	40	33	28	50	38	32	27	35	29	25	31	26	23	28	24	21	19
10	49	37	30	25	47	35	29	24	32	26	22	29	24	21	26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9144	9144	9144
5°	9166	9061	9117
10°	9096	8977	8977
15°	8988	8795	8723
20°	8849	8541	8438
25°	8688	8292	8109
30°	8486	7999	7744
35°	8280	7698	7335
40°	8088	7384	6933
45°	7853	7033	6495
50°	7618	6650	6038
55°	7346	6286	5551
60°	7073	5842	5028
65°	6748	5327	4429
70°	6381	4685	3816
75°	5871	3950	3174
80°	5170	3102	2663
85°	4357	2534	2379



TEST NUMBER: P333589-927

CATALOG NUMBER: S125RDIP-S1090D590U927-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.1	2.6
10°-20°	372.1	7.1
20°-30°	539.6	10.3
30°-40°	614.9	11.8
40°-50°	599.4	11.5
50°-60°	504.6	9.7
60°-70°	353.7	6.8
70°-80°	181.8	3.5
80°-90°	47.2	0.9
90°-100°	22.2	0.4
100°-110°	136.6	2.6
110°-120°	247.7	4.7
120°-130°	317.8	6.1
130°-140°	341.9	6.6
140°-150°	320.9	6.1
150°-160°	259.6	5.0
160°-170°	167.9	3.2
170°-180°	57.9	1.1
0°-30°	1044.8	20.0
0°-40°	1659.7	31.8
0°-60°	2763.6	53.0
0°-90°	3346.3	64.1
90°-120°	406.4	7.8
90°-150°	1387.0	26.6
90°-180°	1872.0	35.9
0°-180°	5218.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1416	1416	1416	1416	1416	
5°	1414	1409	1398	1408	1406	134
15°	1344	1337	1315	1314	1305	379
25°	1219	1202	1164	1150	1138	561
35°	1050	1023	976	946	930	657
45°	860	827	770	729	711	663
55°	652	617	558	512	493	583
65°	442	404	349	307	290	437
75°	235	202	158	136	127	249
85°	59	40	34	33	32	66
90°	0	4	7	10	11	4
95°	26	24	7	9	10	33
105°	133	135	135	135	134	141
115°	250	252	252	250	248	247
125°	355	358	358	356	355	317
135°	442	445	444	443	441	341
145°	513	514	514	514	512	321
155°	565	562	563	564	561	260
165°	596	594	594	596	593	168
175°	610	607	607	611	607	58
180°	610	610	610	610	610	



TEST NUMBER: P333589-927

CATALOG NUMBER: S125RDIP-S1090D590U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1415.9	1415.9	1415.9	1415.9	1415.9	1415.9	1415.9	1415.9	1415.9	1415.9	1415.9
2.5°	1418.5	1417.9	1417.4	1416.7	1416.2	1415.0	1413.1	1411.2	1409.3	1407.4	1409.3
5°	1413.8	1412.9	1411.9	1411.0	1410.0	1408.2	1405.6	1403.0	1400.3	1397.7	1400.1
7.5°	1399.9	1399.0	1398.0	1397.2	1396.2	1394.2	1391.1	1388.0	1384.8	1381.7	1383.4
10°	1387.0	1386.3	1385.6	1384.9	1384.2	1382.2	1378.9	1375.5	1372.2	1368.9	1369.6
12.5°	1372.5	1371.6	1370.7	1369.8	1368.9	1366.2	1361.8	1357.2	1352.8	1348.3	1348.8
15°	1344.3	1342.8	1341.4	1340.0	1338.6	1335.4	1330.4	1325.4	1320.4	1315.4	1315.2
17.5°	1312.4	1310.2	1308.1	1305.8	1303.6	1299.4	1293.2	1286.9	1280.6	1274.3	1273.1
20°	1287.6	1285.2	1282.9	1280.5	1278.1	1273.1	1265.5	1257.9	1250.3	1242.7	1241.5
22.5°	1260.2	1257.8	1255.5	1253.1	1250.7	1245.5	1237.5	1229.5	1221.5	1213.5	1211.2
25°	1219.2	1215.6	1212.0	1208.5	1204.9	1198.7	1189.9	1181.1	1172.4	1163.6	1160.5
27.5°	1172.1	1167.8	1163.4	1159.1	1154.8	1148.0	1138.5	1129.1	1119.7	1110.2	1106.0
30°	1137.9	1133.4	1128.9	1124.3	1119.8	1112.5	1102.6	1092.6	1082.6	1072.6	1067.1
32.5°	1104.5	1099.2	1093.9	1088.7	1083.4	1075.7	1065.5	1055.3	1045.1	1035.0	1029.0
35°	1050.2	1044.5	1038.8	1033.1	1027.4	1019.1	1008.4	997.8	987.1	976.4	969.5
37.5°	996.9	990.0	983.0	976.1	969.2	960.2	949.1	938.1	927.1	916.1	907.8
40°	959.3	952.1	945.0	937.9	930.7	921.5	910.1	898.7	887.2	875.8	866.8
42.5°	919.9	912.6	905.3	897.9	890.7	881.1	869.3	857.5	845.7	833.9	825.3
45°	859.8	852.9	846.1	839.2	832.3	822.3	809.2	796.1	783.1	770.0	760.5
47.5°	797.6	790.3	783.0	775.8	768.5	758.3	745.1	731.9	718.7	705.6	695.8
50°	758.2	750.4	742.5	734.7	726.8	716.1	702.6	689.0	675.5	661.9	652.0
52.5°	715.4	707.4	699.3	691.3	683.3	672.9	660.1	647.3	634.5	621.8	611.0
55°	652.4	644.8	637.2	629.5	621.9	611.5	598.2	584.9	571.6	558.3	547.6
57.5°	588.6	580.5	572.4	564.2	556.1	545.7	532.8	520.0	507.2	494.3	483.9
60°	547.6	539.2	530.9	522.6	514.3	503.7	490.8	478.0	465.2	452.3	441.9
62.5°	503.9	496.0	488.1	480.1	472.1	461.7	448.7	435.6	422.6	409.6	399.9
65°	441.6	433.6	425.5	417.4	409.3	399.0	386.4	373.8	361.2	348.6	339.1
67.5°	379.9	371.8	363.7	355.6	347.5	337.5	325.3	313.3	301.3	289.1	280.5
70°	337.9	329.9	321.8	313.7	305.6	295.6	283.8	271.9	260.0	248.1	240.7
72.5°	296.9	289.0	281.1	273.2	265.3	255.8	244.7	233.5	222.4	211.4	204.5
75°	235.3	228.1	221.0	213.9	206.8	198.2	188.2	178.2	168.3	158.3	153.0
77.5°	174.1	168.4	162.7	157.0	151.3	144.4	136.5	128.5	120.5	112.5	108.8
80°	139.0	133.3	127.6	121.9	116.2	110.0	103.4	96.7	90.1	83.4	81.3
82.5°	104.8	99.7	94.5	89.4	84.3	79.5	74.9	70.3	65.8	61.2	60.2
85°	58.8	54.5	50.2	45.9	41.7	39.0	37.8	36.6	35.4	34.2	34.0
87.5°	19.8	18.6	17.4	16.2	15.1	14.5	14.4	14.4	14.3	14.3	14.4
90°	0.5	1.3	2.1	2.9	3.6	4.4	5.1	5.9	6.5	7.2	7.8
92.5°	7.0	6.4	5.9	5.3	4.7	4.8	5.4	6.0	6.6	7.2	7.8
95°	25.7	25.4	25.2	24.9	24.6	22.5	18.7	14.9	11.0	7.2	7.8
97.5°	53.8	54.3	54.9	55.4	55.9	52.4	44.9	37.3	29.8	22.3	19.4
100°	75.5	75.8	76.0	76.4	76.7	77.0	77.5	77.9	78.3	78.7	63.7
102.5°	97.5	97.9	98.3	98.7	99.0	99.3	99.6	99.9	100.1	100.4	97.5
105°	132.8	133.2	133.7	134.1	134.5	134.7	134.7	134.7	134.7	134.7	134.7
107.5°	169.6	169.6	169.6	169.6	169.6	169.7	169.8	170.1	170.3	170.5	170.5
110°	193.5	193.5	193.5	193.5	193.5	193.5	193.8	193.9	194.2	194.3	194.1



TEST NUMBER: P333589-927

CATALOG NUMBER: S125RDIP-S1090D590U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	215.9	216.1	216.3	216.6	216.8	217.0	217.1	217.2	217.4	217.5	217.1
115°	249.5	250.0	250.5	251.0	251.5	251.8	251.9	252.0	252.1	252.2	251.8
117.5°	284.3	284.2	284.2	284.2	284.2	284.4	284.8	285.2	285.5	285.9	285.4
120°	306.0	305.9	305.8	305.7	305.5	305.7	306.0	306.3	306.6	306.9	306.7
122.5°	325.1	325.5	325.9	326.3	326.7	326.9	327.1	327.3	327.3	327.5	327.3
125°	354.8	355.5	356.2	356.9	357.6	358.0	358.0	358.0	358.0	358.0	357.6
127.5°	383.1	383.6	384.1	384.6	385.1	385.3	385.2	385.2	385.2	385.1	384.8
130°	400.4	400.9	401.5	402.0	402.4	402.7	402.8	403.0	403.1	403.1	402.8
132.5°	417.8	418.4	419.0	419.5	420.1	420.3	420.1	419.9	419.6	419.5	419.4
135°	442.5	443.1	443.7	444.3	444.9	445.1	444.9	444.7	444.5	444.3	444.1
137.5°	465.2	465.7	466.2	466.8	467.2	467.5	467.2	467.1	466.9	466.7	466.8
140°	480.0	480.2	480.4	480.6	480.8	480.9	480.8	480.6	480.5	480.5	480.6
142.5°	493.4	493.5	493.6	493.8	493.8	494.0	494.2	494.2	494.4	494.6	494.6
145°	513.0	513.2	513.4	513.6	513.8	513.9	513.9	513.9	513.9	513.9	514.0
147.5°	530.1	530.1	530.0	530.0	530.0	530.0	530.1	530.3	530.4	530.5	530.7
150°	541.0	540.8	540.6	540.4	540.2	540.2	540.4	540.6	540.8	541.0	541.2
152.5°	551.5	551.0	550.6	550.2	549.7	549.6	549.8	550.0	550.2	550.4	550.6
155°	565.0	564.4	563.8	563.2	562.5	562.4	562.5	562.8	562.9	563.2	563.5
157.5°	575.4	575.0	574.6	574.3	573.9	573.8	573.8	573.8	573.8	573.9	574.2
160°	582.6	582.0	581.4	580.7	580.2	580.0	580.0	580.1	580.2	580.4	580.7
162.5°	588.4	587.8	587.2	586.5	586.0	585.7	585.8	585.9	586.0	586.1	586.7
165°	596.1	595.6	594.9	594.4	593.7	593.5	593.6	593.7	593.8	593.9	594.5
167.5°	601.9	601.3	600.7	600.1	599.4	599.2	599.3	599.4	599.4	599.6	600.3
170°	605.2	604.5	603.8	603.1	602.4	602.1	602.1	602.3	602.4	602.5	603.2
172.5°	607.4	606.7	605.9	605.2	604.5	604.3	604.4	604.7	604.8	605.0	605.7
175°	609.7	609.1	608.5	607.9	607.3	607.0	607.1	607.3	607.4	607.4	608.2
177.5°	610.8	610.3	609.8	609.3	608.9	608.6	608.7	608.8	608.9	609.0	609.6
180°	609.7	609.7	609.7	609.7	609.7	609.7	609.7	609.7	609.7	609.7	609.7



TEST NUMBER: P333589-927

CATALOG NUMBER: S125RDIP-S1090D590U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1415.9	1415.9	1415.9	1415.9	1415.9	1415.9	1415.9	1415.9
2.5°	1411.2	1413.1	1415.0	1415.8	1415.6	1415.5	1415.2	1415.1
5°	1402.5	1404.9	1407.2	1408.2	1407.7	1407.2	1406.8	1406.3
7.5°	1385.1	1386.7	1388.4	1388.9	1388.4	1387.9	1387.3	1386.8
10°	1370.3	1371.0	1371.7	1371.7	1371.0	1370.3	1369.6	1368.9
12.5°	1349.4	1349.9	1350.4	1350.1	1349.0	1348.0	1346.9	1345.8
15°	1314.9	1314.7	1314.5	1313.3	1311.1	1309.0	1306.9	1304.7
17.5°	1271.9	1270.7	1269.6	1268.1	1266.3	1264.6	1262.8	1261.1
20°	1240.3	1239.1	1237.9	1236.3	1234.1	1232.0	1229.9	1227.7
22.5°	1208.9	1206.6	1204.3	1202.2	1200.5	1198.7	1196.9	1195.2
25°	1157.4	1154.3	1151.2	1148.3	1145.7	1143.1	1140.5	1137.9
27.5°	1101.6	1097.3	1093.0	1089.6	1087.0	1084.5	1082.0	1079.5
30°	1061.7	1056.2	1050.8	1046.9	1044.8	1042.7	1040.5	1038.4
32.5°	1022.9	1016.8	1010.8	1006.5	1003.8	1001.1	998.3	995.6
35°	962.6	955.7	948.8	943.7	940.4	937.1	933.7	930.4
37.5°	899.5	891.3	883.0	877.3	874.0	870.8	867.5	864.3
40°	857.8	848.7	839.7	833.8	830.9	828.1	825.2	822.4
42.5°	816.7	807.9	799.3	792.9	788.7	784.6	780.4	776.2
45°	751.0	741.5	732.0	725.4	721.8	718.3	714.7	711.1
47.5°	686.0	676.2	666.5	659.6	655.6	651.6	647.8	643.8
50°	642.0	632.0	622.0	615.3	611.7	608.2	604.6	601.0
52.5°	600.3	589.5	578.8	571.6	568.1	564.5	560.9	557.4
55°	536.9	526.2	515.5	508.2	504.4	500.6	496.8	493.0
57.5°	473.4	463.0	452.5	445.5	442.2	438.8	435.4	432.1
60°	431.4	421.0	410.5	403.5	400.0	396.4	392.8	389.3
62.5°	390.2	380.5	370.8	364.2	360.6	357.0	353.5	349.9
65°	329.6	320.1	310.6	304.0	300.5	296.9	293.3	289.8
67.5°	271.8	263.1	254.4	248.6	245.7	242.9	240.0	237.2
70°	233.4	226.0	218.6	213.5	210.6	207.8	204.9	202.1
72.5°	197.7	190.9	184.1	179.7	177.8	175.9	174.0	172.1
75°	147.8	142.6	137.4	133.9	132.2	130.6	128.9	127.2
77.5°	105.2	101.6	97.8	95.4	94.2	92.9	91.7	90.5
80°	79.1	77.0	74.9	73.5	73.0	72.6	72.1	71.6
82.5°	59.2	58.1	57.2	56.6	56.2	55.9	55.7	55.4
85°	33.7	33.5	33.3	33.0	32.8	32.6	32.3	32.1
87.5°	14.5	14.6	14.7	14.7	14.5	14.4	14.3	14.2
90°	8.2	8.7	9.3	9.7	10.0	10.2	10.5	10.9
92.5°	8.2	8.7	9.3	9.6	9.7	9.8	10.0	10.1
95°	8.2	8.7	9.3	9.5	9.5	9.5	9.5	9.5
97.5°	16.6	13.7	10.9	9.5	9.5	9.5	9.5	9.5
100°	48.7	33.7	18.8	11.1	10.7	10.3	9.9	9.5
102.5°	94.7	91.8	89.0	84.2	77.3	70.5	63.7	56.9
105°	134.7	134.7	134.7	134.7	134.5	134.4	134.4	134.2
107.5°	170.6	170.6	170.6	170.4	170.2	169.8	169.5	169.2
110°	193.8	193.5	193.1	193.1	193.1	193.2	193.4	193.5



TEST NUMBER: P333589-927

CATALOG NUMBER: S125RDIP-S1090D590U927-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	216.7	216.3	215.9	215.7	215.6	215.4	215.3	215.2
115°	251.4	251.0	250.6	250.1	249.5	248.9	248.3	247.7
117.5°	284.9	284.3	283.8	283.4	283.2	282.9	282.7	282.4
120°	306.5	306.3	306.1	305.7	305.2	304.8	304.2	303.7
122.5°	327.1	326.9	326.7	326.3	325.7	325.1	324.6	324.0
125°	357.2	356.7	356.3	356.0	355.7	355.4	355.1	354.8
127.5°	384.6	384.4	384.2	383.7	382.9	382.2	381.5	380.7
130°	402.6	402.3	402.0	401.6	401.1	400.5	400.1	399.6
132.5°	419.3	419.2	419.2	418.9	418.4	417.9	417.4	416.9
135°	443.9	443.7	443.5	443.1	442.5	441.9	441.2	440.7
137.5°	466.8	466.8	466.8	466.6	466.1	465.6	465.1	464.5
140°	480.9	481.0	481.3	481.0	480.5	479.8	479.3	478.6
142.5°	494.6	494.6	494.7	494.4	493.8	493.2	492.6	492.0
145°	514.1	514.2	514.3	514.0	513.4	512.9	512.2	511.6
147.5°	530.8	530.9	531.0	530.7	530.0	529.3	528.5	527.8
150°	541.4	541.6	541.8	541.5	540.7	539.9	539.1	538.3
152.5°	550.8	551.0	551.2	551.0	550.2	549.5	548.7	548.0
155°	563.8	564.0	564.4	564.1	563.3	562.5	561.7	560.9
157.5°	574.5	574.8	575.1	574.9	574.1	573.2	572.4	571.6
160°	581.1	581.5	581.9	581.7	580.9	580.1	579.3	578.5
162.5°	587.2	587.8	588.4	588.2	587.3	586.5	585.6	584.6
165°	595.1	595.7	596.3	596.2	595.4	594.6	593.8	592.9
167.5°	601.0	601.7	602.5	602.4	601.5	600.6	599.7	598.7
170°	604.1	604.9	605.7	605.6	604.8	603.8	602.9	602.1
172.5°	606.4	607.2	607.9	607.8	606.9	606.0	605.1	604.2
175°	609.0	609.8	610.7	610.6	609.7	608.8	607.9	607.0
177.5°	610.1	610.7	611.2	611.2	610.5	609.9	609.3	608.6
180°	609.7	609.7	609.7	609.7	609.7	609.7	609.7	609.7

(END OF REPORT)