

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333549-927

Luminaire Tested: **S125RDIP-S610D1205U927-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333549-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S610D1205U927-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5309.0 lumens
Efficiency: N/A
Efficacy: 107.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333549-927

CATALOG NUMBER: S125RDIP-S610D1205U927-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

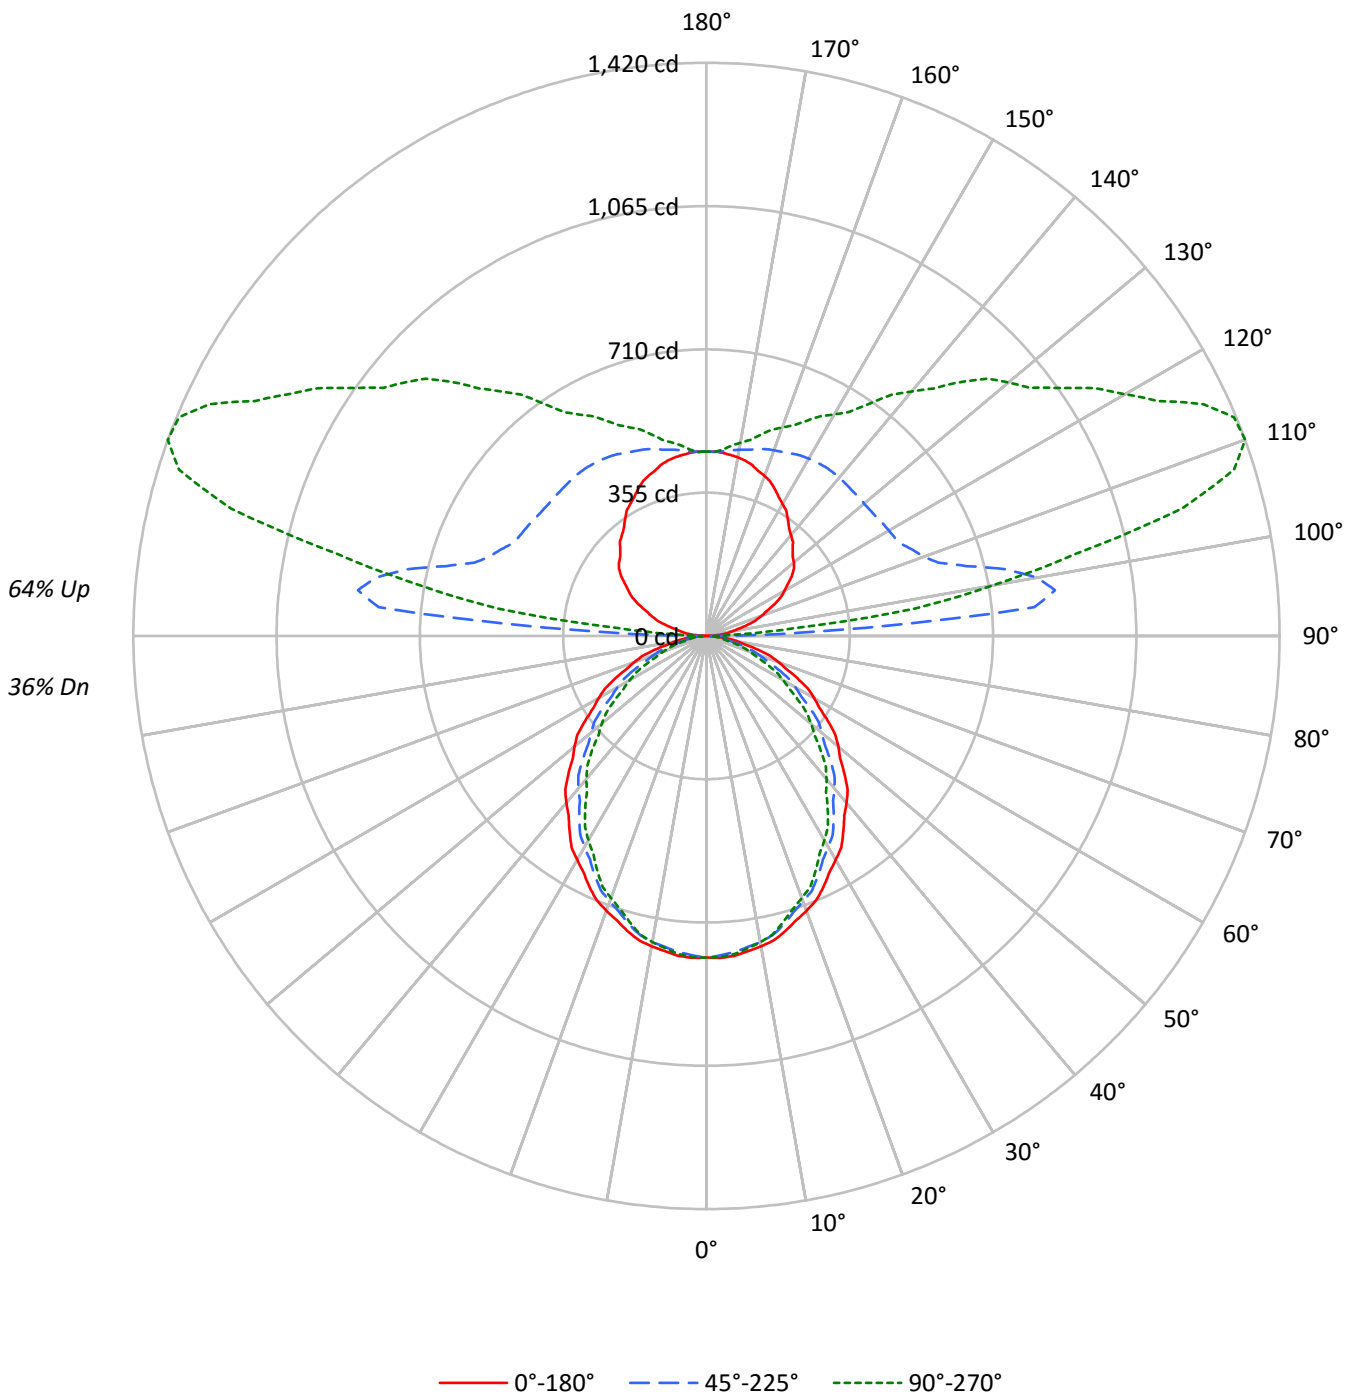



TEST NUMBER: P333549-927

CATALOG NUMBER: S125RDIP-S610D1205U927-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	43	43	43	36
1	95	91	87	83	86	82	79	76	66	64	62	52	50	49	38	37	36	30
2	86	79	73	68	78	72	67	63	58	55	52	45	43	41	34	32	31	26
3	79	70	63	57	71	63	57	52	51	47	43	40	37	35	30	28	26	22
4	72	62	54	48	65	56	50	44	46	41	37	36	33	30	27	25	23	19
5	66	55	47	41	60	50	43	38	41	36	32	32	29	26	24	22	20	16
6	61	49	41	36	55	45	38	33	37	32	28	29	25	23	22	20	18	14
7	56	44	37	31	51	41	34	29	33	28	24	26	23	20	20	18	16	13
8	52	40	33	28	47	37	30	26	30	25	22	24	21	18	18	16	14	12
9	48	37	29	24	44	34	27	23	28	23	19	22	19	16	17	15	13	10
10	45	34	27	22	41	31	25	20	25	21	17	21	17	14	16	13	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5147	5147	5147
5°	5159	5100	5131
10°	5119	5052	5052
15°	5059	4950	4910
20°	4981	4807	4748
25°	4890	4666	4563
30°	4776	4502	4359
35°	4660	4332	4128
40°	4552	4156	3903
45°	4420	3958	3656
50°	4287	3744	3399
55°	4135	3538	3125
60°	3981	3289	2830
65°	3799	2998	2492
70°	3592	2638	2149
75°	3306	2221	1787
80°	2912	1748	1499
85°	2453	1430	1341



TEST NUMBER: P333549-927

CATALOG NUMBER: S125RDIP-S610D1205U927-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	74.9	1.4
10°-20°	209.4	3.9
20°-30°	303.7	5.7
30°-40°	346.1	6.5
40°-50°	337.4	6.4
50°-60°	284.0	5.3
60°-70°	199.1	3.7
70°-80°	102.3	1.9
80°-90°	28.4	0.5
90°-100°	330.9	6.2
100°-110°	711.4	13.4
110°-120°	667.6	12.6
120°-130°	541.1	10.2
130°-140°	434.2	8.2
140°-150°	327.7	6.2
150°-160°	230.6	4.3
160°-170°	136.0	2.6
170°-180°	44.2	0.8
0°-30°	588.0	11.1
0°-40°	934.1	17.6
0°-60°	1555.4	29.3
0°-90°	1885.2	35.5
90°-120°	1710.0	32.2
90°-150°	3013.0	56.8
90°-180°	3424.0	64.5
0°-180°	5309.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	797	797	797	797	797	
5°	796	793	787	792	792	75
15°	757	752	740	739	734	213
25°	686	676	655	647	640	316
35°	591	576	550	533	524	370
45°	484	466	433	410	400	373
55°	367	347	314	288	278	328
65°	249	228	196	173	163	246
75°	132	114	89	76	72	140
85°	33	23	19	19	18	37
90°	1	8	15	19	21	3
95°	30	90	816	370	216	32
105°	104	145	667	1314	1220	110
115°	186	224	536	1155	1359	183
125°	258	302	514	919	1071	229
135°	302	363	510	770	889	234
145°	352	403	512	637	701	220
155°	401	432	499	564	588	185
165°	438	450	479	508	516	123
175°	456	456	459	465	463	43
180°	456	456	456	456	456	



TEST NUMBER: P333549-927

CATALOG NUMBER: S125RDIP-S610D1205U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9
2.5°	798.4	798.0	797.7	797.4	797.1	796.4	795.3	794.2	793.1	792.1	793.1
5°	795.7	795.2	794.6	794.1	793.5	792.6	791.1	789.6	788.1	786.6	788.0
7.5°	787.9	787.3	786.9	786.3	785.8	784.7	782.9	781.2	779.4	777.6	778.6
10°	780.6	780.2	779.8	779.4	779.0	777.9	776.0	774.2	772.3	770.4	770.8
12.5°	772.5	772.0	771.4	771.0	770.4	768.9	766.4	763.9	761.4	758.8	759.1
15°	756.6	755.7	754.9	754.2	753.4	751.5	748.8	745.9	743.1	740.3	740.2
17.5°	738.6	737.4	736.2	735.0	733.7	731.3	727.8	724.3	720.7	717.2	716.5
20°	724.7	723.3	722.0	720.6	719.3	716.5	712.3	708.0	703.7	699.4	698.7
22.5°	709.2	707.9	706.6	705.3	703.9	701.0	696.5	692.1	687.5	683.0	681.8
25°	686.2	684.1	682.1	680.2	678.1	674.6	669.7	664.7	659.8	654.8	653.2
27.5°	659.7	657.3	654.8	652.4	649.9	646.1	640.8	635.5	630.2	624.9	622.4
30°	640.4	637.9	635.3	632.8	630.3	626.1	620.5	615.0	609.3	603.7	600.6
32.5°	621.6	618.7	615.7	612.8	609.7	605.4	599.7	594.0	588.2	582.5	579.1
35°	591.0	587.9	584.6	581.5	578.2	573.6	567.6	561.6	555.6	549.5	545.7
37.5°	561.1	557.1	553.3	549.4	545.5	540.4	534.2	528.0	521.8	515.6	511.0
40°	539.9	535.9	531.9	527.8	523.9	518.6	512.2	505.8	499.4	493.0	487.9
42.5°	517.8	513.7	509.5	505.4	501.3	495.9	489.3	482.6	476.0	469.4	464.5
45°	483.9	480.1	476.2	472.3	468.4	462.8	455.4	448.1	440.7	433.3	428.0
47.5°	448.9	444.8	440.7	436.7	432.5	426.7	419.4	411.9	404.6	397.1	391.7
50°	426.7	422.3	417.9	413.5	409.1	403.1	395.5	387.9	380.2	372.6	366.9
52.5°	402.7	398.2	393.6	389.1	384.6	378.7	371.5	364.3	357.1	349.9	343.9
55°	367.2	362.9	358.6	354.3	350.1	344.1	336.7	329.2	321.7	314.2	308.2
57.5°	331.3	326.7	322.1	317.6	313.0	307.0	299.8	292.6	285.4	278.2	272.3
60°	308.2	303.5	298.8	294.1	289.5	283.5	276.2	269.0	261.8	254.6	248.7
62.5°	283.6	279.2	274.6	270.2	265.8	259.8	252.5	245.2	237.9	230.5	225.1
65°	248.6	244.1	239.5	235.0	230.4	224.6	217.5	210.4	203.3	196.2	190.8
67.5°	213.8	209.2	204.7	200.2	195.6	190.0	183.2	176.3	169.5	162.7	157.9
70°	190.2	185.7	181.1	176.6	172.0	166.4	159.7	153.0	146.3	139.7	135.5
72.5°	167.1	162.6	158.2	153.8	149.3	143.9	137.7	131.4	125.2	118.9	115.1
75°	132.5	128.4	124.4	120.4	116.4	111.5	105.9	100.3	94.7	89.0	86.1
77.5°	98.0	94.7	91.6	88.3	85.2	81.3	76.8	72.3	67.8	63.3	61.2
80°	78.3	75.0	71.9	68.6	65.4	61.9	58.1	54.4	50.7	47.0	45.7
82.5°	59.0	56.1	53.2	50.3	47.5	44.7	42.1	39.5	37.0	34.5	33.9
85°	33.1	30.7	28.3	25.9	23.4	21.9	21.2	20.6	20.0	19.3	19.1
87.5°	11.2	10.7	10.3	9.9	9.6	9.5	9.6	9.8	9.9	10.1	10.4
90°	1.0	1.8	3.6	5.5	7.4	9.2	10.1	12.0	12.9	14.7	15.7
92.5°	11.2	13.6	21.4	32.8	48.6	75.5	125.7	210.1	301.6	296.8	240.3
95°	30.3	31.3	38.7	48.8	69.0	110.4	209.0	411.5	665.5	815.6	798.0
97.5°	50.5	51.6	56.7	66.9	85.1	114.9	180.1	328.4	594.3	870.9	1009.8
100°	64.4	66.3	69.9	80.1	97.6	125.2	178.6	298.3	530.2	831.2	1061.3
102.5°	79.9	81.0	84.0	94.8	110.8	137.7	185.2	285.7	481.6	761.2	1030.4
105°	104.0	104.0	108.6	117.8	132.5	158.4	198.8	280.7	434.4	667.3	931.5
107.5°	127.5	129.4	133.8	141.4	156.7	179.8	219.0	289.2	414.5	602.7	830.7
110°	144.5	146.4	150.0	158.4	172.1	196.1	233.8	297.3	408.7	572.5	773.2



TEST NUMBER: P333549-927

CATALOG NUMBER: S125RDIP-S610D1205U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	161.4	163.3	166.2	174.5	188.3	211.5	247.8	307.6	408.7	554.8	730.5
115°	185.9	187.7	190.5	198.8	212.6	235.7	269.7	323.1	411.5	535.8	683.9
117.5°	208.0	210.8	213.7	222.0	237.7	259.9	292.2	340.8	417.6	526.3	656.1
120°	222.8	225.5	229.2	237.5	253.1	276.2	308.4	352.5	423.4	521.9	640.6
122.5°	238.2	240.3	243.2	251.4	268.6	291.6	323.8	365.8	428.6	518.2	627.4
125°	257.7	259.6	264.2	272.4	289.9	313.9	344.3	383.8	437.2	513.7	609.3
127.5°	273.0	275.8	281.7	292.2	310.8	334.7	363.9	400.4	446.9	511.4	592.8
130°	282.6	285.3	292.7	304.7	324.0	347.9	376.4	411.5	452.9	509.9	581.8
132.5°	289.9	293.4	302.3	315.8	335.8	359.7	388.2	421.0	459.5	509.9	572.9
135°	301.9	305.6	316.6	331.4	350.7	375.6	404.1	434.4	468.5	509.9	562.4
137.5°	317.0	319.8	330.1	344.8	363.8	389.4	415.3	444.4	476.8	511.0	553.0
140°	325.8	328.6	339.7	354.4	371.9	396.7	423.4	451.1	480.5	511.7	548.6
142.5°	336.1	338.2	348.5	363.2	380.0	403.4	428.6	454.7	482.7	512.5	544.9
145°	351.6	353.5	362.7	375.6	392.1	413.3	437.2	460.3	485.1	511.7	539.4
147.5°	367.8	368.9	376.8	388.8	403.1	421.8	442.8	463.6	486.0	509.4	533.7
150°	377.4	379.2	385.7	397.7	410.5	426.2	446.4	465.8	486.0	507.2	529.3
152.5°	387.7	388.8	394.5	405.0	417.2	431.3	450.1	467.2	485.3	504.2	524.1
155°	401.3	401.3	406.9	416.1	425.2	438.2	453.8	468.5	483.2	498.9	515.5
157.5°	413.5	413.3	417.7	425.6	433.7	443.5	456.9	469.4	480.9	493.4	507.4
160°	421.6	420.6	424.4	430.8	438.2	446.4	458.4	469.4	478.6	489.7	500.7
162.5°	428.2	427.3	430.9	436.7	442.6	449.4	459.9	468.7	476.4	485.3	494.9
165°	438.2	436.3	439.1	443.7	447.3	452.9	460.3	467.6	473.1	478.6	486.0
167.5°	444.8	443.9	445.5	448.1	450.7	454.2	460.3	465.4	467.9	472.2	477.4
170°	449.2	448.3	449.2	451.1	452.9	455.7	460.3	463.9	465.8	468.5	472.2
172.5°	452.2	450.5	451.4	453.2	454.3	455.7	459.5	462.5	462.8	464.1	467.1
175°	455.7	453.8	454.7	455.7	455.7	455.7	458.4	460.3	459.3	459.3	460.3
177.5°	457.3	455.8	455.8	456.5	455.8	455.8	457.3	458.0	456.5	456.5	457.3
180°	456.5	456.5	456.5	456.5	456.5	456.5	456.5	456.5	456.5	456.5	456.5



TEST NUMBER: P333549-927

CATALOG NUMBER: S125RDIP-S610D1205U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9
2.5°	794.2	795.3	796.4	796.9	796.8	796.6	796.5	796.5
5°	789.3	790.7	792.0	792.6	792.3	792.0	791.8	791.5
7.5°	779.5	780.5	781.4	781.7	781.4	781.1	780.9	780.5
10°	771.2	771.6	772.1	772.1	771.6	771.2	770.8	770.4
12.5°	759.5	759.8	760.0	759.9	759.2	758.7	758.0	757.4
15°	740.1	739.9	739.8	739.1	737.9	736.7	735.5	734.3
17.5°	715.9	715.2	714.5	713.7	712.7	711.7	710.7	709.7
20°	698.1	697.4	696.7	695.8	694.6	693.4	692.2	690.9
22.5°	680.4	679.1	677.8	676.6	675.7	674.6	673.7	672.6
25°	651.4	649.7	647.9	646.3	644.8	643.3	641.9	640.4
27.5°	620.0	617.6	615.1	613.2	611.8	610.4	609.0	607.5
30°	597.5	594.5	591.4	589.2	588.0	586.8	585.7	584.5
32.5°	575.7	572.4	568.9	566.5	564.9	563.4	561.9	560.4
35°	541.8	537.9	534.0	531.2	529.3	527.4	525.5	523.6
37.5°	506.3	501.6	496.9	493.7	491.9	490.1	488.3	486.5
40°	482.8	477.7	472.6	469.3	467.7	466.0	464.5	462.9
42.5°	459.6	454.7	449.9	446.2	443.9	441.6	439.2	436.9
45°	422.6	417.3	411.9	408.3	406.3	404.3	402.3	400.3
47.5°	386.1	380.6	375.1	371.2	369.0	366.8	364.6	362.3
50°	361.3	355.7	350.1	346.3	344.3	342.3	340.2	338.3
52.5°	337.9	331.8	325.7	321.7	319.7	317.7	315.7	313.7
55°	302.1	296.1	290.1	286.1	283.9	281.8	279.6	277.5
57.5°	266.4	260.5	254.7	250.7	248.8	246.9	245.1	243.2
60°	242.8	236.9	231.1	227.1	225.1	223.1	221.1	219.1
62.5°	219.6	214.1	208.7	204.9	203.0	201.0	198.9	196.9
65°	185.5	180.1	174.8	171.1	169.1	167.2	165.1	163.1
67.5°	153.0	148.1	143.1	139.9	138.3	136.7	135.1	133.5
70°	131.3	127.2	123.0	120.2	118.6	117.0	115.3	113.8
72.5°	111.3	107.4	103.6	101.2	100.1	99.0	98.0	96.9
75°	83.2	80.2	77.3	75.3	74.5	73.5	72.6	71.6
77.5°	59.2	57.1	55.1	53.7	53.0	52.3	51.7	50.9
80°	44.5	43.3	42.1	41.4	41.1	40.9	40.6	40.3
82.5°	33.3	32.7	32.2	31.8	31.7	31.5	31.4	31.2
85°	19.0	18.9	18.7	18.6	18.5	18.3	18.2	18.1
87.5°	10.5	10.7	10.9	11.2	11.1	11.0	11.1	11.0
90°	16.6	17.5	18.4	20.3	20.3	20.3	21.2	21.2
92.5°	163.1	118.4	89.1	75.5	63.7	61.5	60.2	58.7
95°	661.8	521.9	408.7	331.4	266.0	238.4	231.1	216.3
97.5°	985.6	887.6	777.3	669.7	612.8	561.3	534.6	522.8
100°	1132.2	1087.1	992.3	896.5	833.1	766.8	732.7	718.0
102.5°	1181.5	1209.3	1163.9	1099.1	1031.1	984.0	947.0	936.0
105°	1152.5	1278.6	1319.1	1308.9	1279.5	1249.1	1230.7	1219.6
107.5°	1048.6	1216.9	1320.9	1369.0	1383.9	1383.7	1377.6	1370.2
110°	972.0	1146.9	1276.7	1354.9	1396.4	1413.9	1420.3	1420.3



TEST NUMBER: P333549-927

CATALOG NUMBER: S125RDIP-S610D1205U927-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	911.6	1077.7	1208.9	1301.2	1361.8	1391.8	1407.8	1414.4
115°	835.8	978.5	1104.5	1204.9	1276.7	1320.9	1346.6	1358.6
117.5°	786.8	909.8	1018.4	1110.5	1182.3	1228.0	1253.5	1260.8
120°	760.3	870.8	972.0	1053.0	1121.2	1165.3	1190.2	1197.5
122.5°	740.5	842.8	933.0	1008.8	1069.6	1110.1	1135.0	1141.6
125°	711.5	805.4	885.5	951.8	1003.3	1041.1	1061.3	1070.6
127.5°	682.1	769.7	844.5	906.5	953.2	986.6	1005.8	1009.8
130°	663.7	744.7	816.5	876.3	922.3	952.7	971.1	976.6
132.5°	645.2	721.1	786.2	843.9	889.9	920.3	937.2	943.5
135°	621.3	684.8	743.8	796.2	836.7	867.1	883.7	889.2
137.5°	601.1	652.4	701.4	746.0	782.2	809.8	825.1	831.2
140°	590.0	633.3	675.7	714.3	748.4	772.3	786.1	790.7
142.5°	580.4	617.1	653.6	687.1	716.0	736.2	749.2	753.1
145°	567.9	596.4	625.0	649.8	671.9	687.6	697.8	701.4
147.5°	556.2	579.3	601.3	620.0	637.5	650.1	655.9	657.6
150°	549.5	569.8	587.2	603.8	617.7	628.7	632.4	633.3
152.5°	542.2	560.2	576.2	589.1	600.7	609.5	613.2	614.2
155°	531.1	545.8	558.7	568.9	578.1	584.5	587.2	588.2
157.5°	520.1	532.2	542.2	550.1	557.2	562.6	565.1	565.0
160°	512.7	521.9	531.1	537.6	544.0	548.6	550.5	549.5
162.5°	504.6	513.1	520.8	526.5	531.5	535.4	535.8	535.5
165°	493.4	499.8	505.3	509.9	513.7	515.5	515.5	515.5
167.5°	482.7	487.0	491.2	494.5	496.3	498.0	497.3	497.1
170°	476.8	479.6	482.4	484.2	486.0	487.0	487.0	486.0
172.5°	470.2	472.9	475.0	476.1	476.4	478.1	476.7	475.7
175°	463.0	463.0	464.9	464.9	464.9	465.8	463.9	463.0
177.5°	458.0	458.8	458.8	458.8	458.0	458.8	456.5	456.5
180°	456.5	456.5	456.5	456.5	456.5	456.5	456.5	456.5

(END OF REPORT)