

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333536-927

Luminaire Tested: **S125RDIP-S610D810U927-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333536-927
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S610D810U927-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4105.5 lumens
Efficiency: N/A
Efficacy: 106.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 38.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333536-927

CATALOG NUMBER: S125RDIP-S610D810U927-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

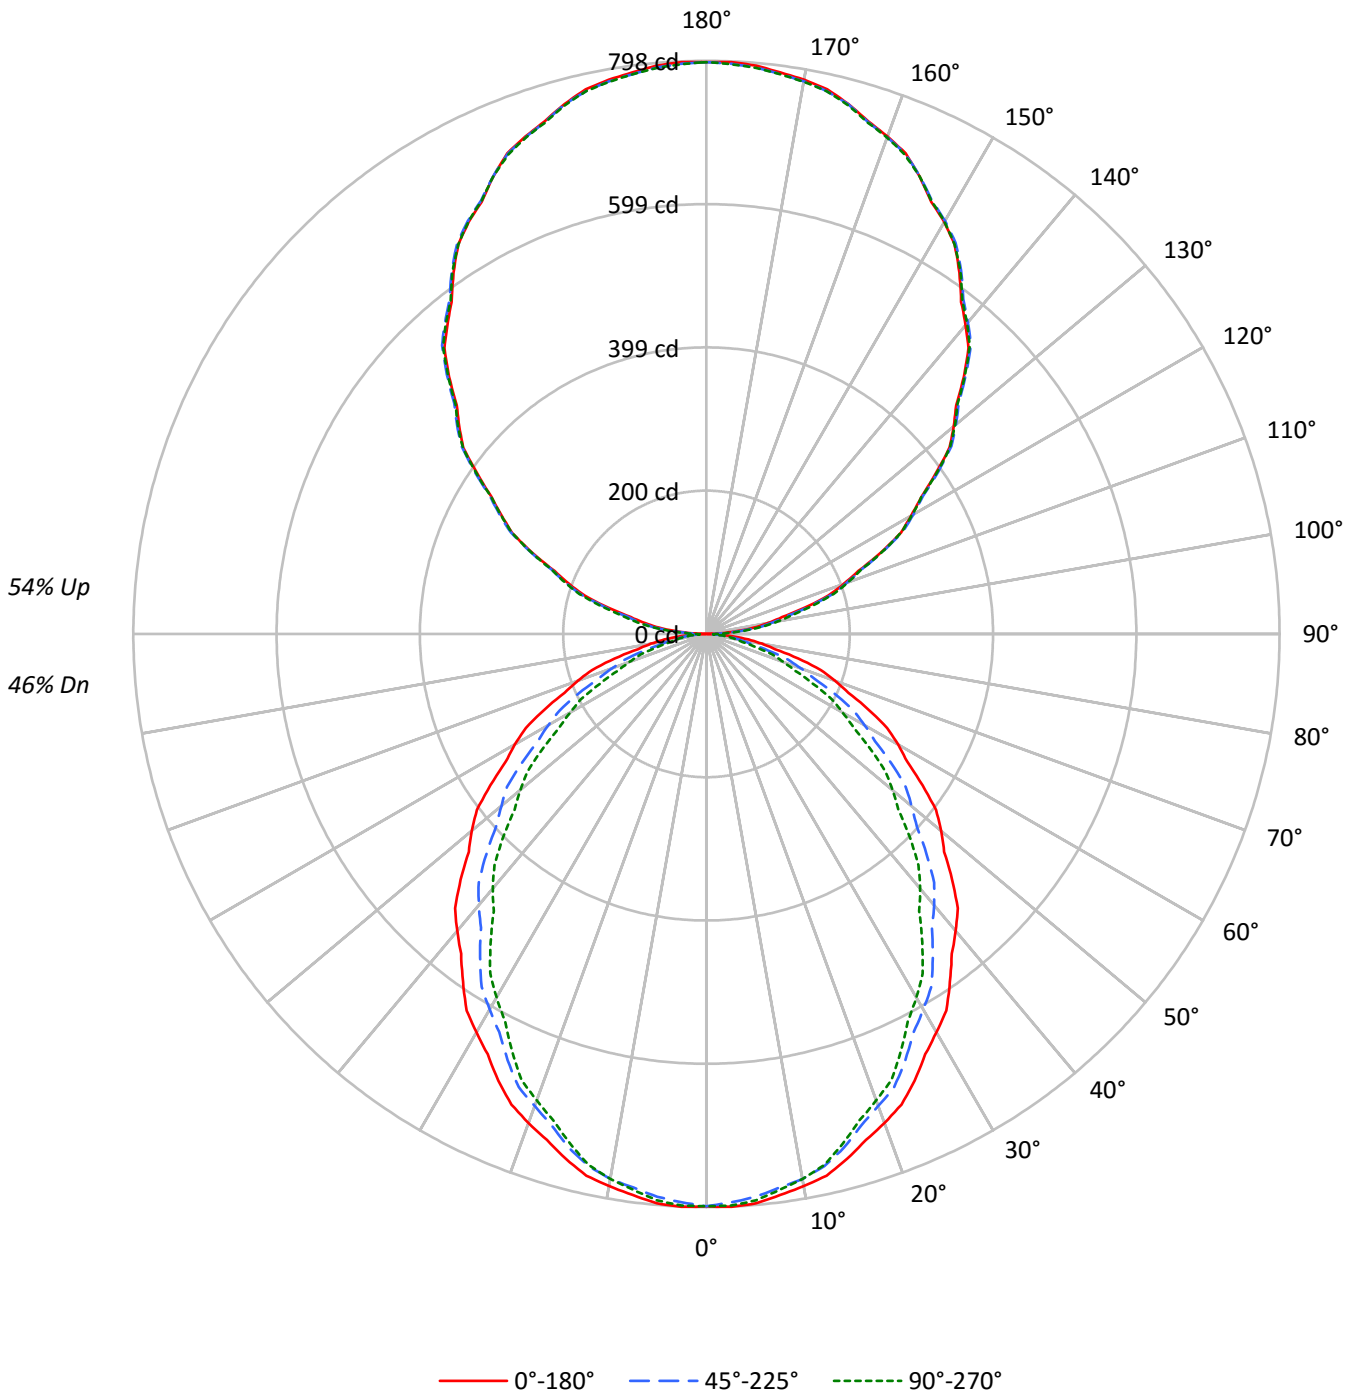



TEST NUMBER: P333536-927

CATALOG NUMBER: S125RDIP-S610D810U927-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	46
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	47	46	45	39
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	41	39	38	33
3	81	72	64	59	74	66	60	55	55	51	47	46	42	40	37	34	32	28
4	74	63	56	50	68	59	52	47	49	44	40	41	37	34	33	30	28	24
5	68	57	49	43	62	52	45	40	44	39	35	37	33	30	30	27	25	21
6	63	51	43	37	57	47	40	35	40	34	30	33	29	26	27	24	22	19
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	25	22	19	17
8	54	42	34	29	49	39	32	27	33	28	24	28	24	21	23	20	17	15
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	21	18	16	14
10	47	35	28	23	43	32	26	22	28	23	19	24	20	17	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5147	5147	5147
5°	5159	5100	5131
10°	5119	5052	5052
15°	5059	4950	4910
20°	4981	4807	4748
25°	4890	4666	4563
30°	4776	4502	4359
35°	4660	4332	4128
40°	4552	4156	3903
45°	4420	3958	3656
50°	4287	3744	3399
55°	4135	3538	3125
60°	3981	3289	2830
65°	3799	2998	2492
70°	3592	2638	2149
75°	3306	2221	1787
80°	2912	1748	1499
85°	2453	1430	1341



TEST NUMBER: P333536-927

CATALOG NUMBER: S125RDIP-S610D810U927-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	74.9	1.8
10°-20°	209.4	5.1
20°-30°	303.7	7.4
30°-40°	346.1	8.4
40°-50°	337.4	8.2
50°-60°	284.0	6.9
60°-70°	199.1	4.8
70°-80°	102.3	2.5
80°-90°	27.6	0.7
90°-100°	53.3	1.3
100°-110°	157.4	3.8
110°-120°	266.7	6.5
120°-130°	350.9	8.5
130°-140°	393.2	9.6
140°-150°	385.4	9.4
150°-160°	323.7	7.9
160°-170°	215.2	5.2
170°-180°	75.3	1.8
0°-30°	588.0	14.3
0°-40°	934.1	22.8
0°-60°	1555.4	37.9
0°-90°	1884.4	45.9
90°-120°	477.4	11.6
90°-150°	1607.0	39.1
90°-180°	2221.0	54.1
0°-180°	4105.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	797	797	797	797	797	
5°	796	793	787	792	792	75
15°	757	752	740	739	734	213
25°	686	676	655	647	640	316
35°	591	576	550	533	524	370
45°	484	466	433	410	400	373
55°	367	347	314	288	278	328
65°	249	228	196	173	163	246
75°	132	114	89	76	72	140
85°	33	23	19	19	18	37
90°	1	6	10	13	15	4
95°	40	42	48	52	53	43
105°	141	144	148	152	154	151
115°	267	269	271	270	270	264
125°	390	393	394	393	392	349
135°	507	510	511	511	509	390
145°	614	616	618	618	616	384
155°	702	702	703	705	702	323
165°	764	763	763	765	762	215
175°	794	792	792	795	791	75
180°	796	796	796	796	796	



TEST NUMBER: P333536-927

CATALOG NUMBER: S125RDIP-S610D810U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9
2.5°	798.4	798.0	797.7	797.4	797.1	796.4	795.3	794.2	793.1	792.1	793.1
5°	795.7	795.2	794.6	794.1	793.5	792.6	791.1	789.6	788.1	786.6	788.0
7.5°	787.9	787.3	786.9	786.3	785.8	784.7	782.9	781.2	779.4	777.6	778.6
10°	780.6	780.2	779.8	779.4	779.0	777.9	776.0	774.2	772.3	770.4	770.8
12.5°	772.5	772.0	771.4	771.0	770.4	768.9	766.4	763.9	761.4	758.8	759.1
15°	756.6	755.7	754.9	754.2	753.4	751.5	748.8	745.9	743.1	740.3	740.2
17.5°	738.6	737.4	736.2	735.0	733.7	731.3	727.8	724.3	720.7	717.2	716.5
20°	724.7	723.3	722.0	720.6	719.3	716.5	712.3	708.0	703.7	699.4	698.7
22.5°	709.2	707.9	706.6	705.3	703.9	701.0	696.5	692.1	687.5	683.0	681.8
25°	686.2	684.1	682.1	680.2	678.1	674.6	669.7	664.7	659.8	654.8	653.2
27.5°	659.7	657.3	654.8	652.4	649.9	646.1	640.8	635.5	630.2	624.9	622.4
30°	640.4	637.9	635.3	632.8	630.3	626.1	620.5	615.0	609.3	603.7	600.6
32.5°	621.6	618.7	615.7	612.8	609.7	605.4	599.7	594.0	588.2	582.5	579.1
35°	591.0	587.9	584.6	581.5	578.2	573.6	567.6	561.6	555.6	549.5	545.7
37.5°	561.1	557.1	553.3	549.4	545.5	540.4	534.2	528.0	521.8	515.6	511.0
40°	539.9	535.9	531.9	527.8	523.9	518.6	512.2	505.8	499.4	493.0	487.9
42.5°	517.8	513.7	509.5	505.4	501.3	495.9	489.3	482.6	476.0	469.4	464.5
45°	483.9	480.1	476.2	472.3	468.4	462.8	455.4	448.1	440.7	433.3	428.0
47.5°	448.9	444.8	440.7	436.7	432.5	426.7	419.4	411.9	404.6	397.1	391.7
50°	426.7	422.3	417.9	413.5	409.1	403.1	395.5	387.9	380.2	372.6	366.9
52.5°	402.7	398.2	393.6	389.1	384.6	378.7	371.5	364.3	357.1	349.9	343.9
55°	367.2	362.9	358.6	354.3	350.1	344.1	336.7	329.2	321.7	314.2	308.2
57.5°	331.3	326.7	322.1	317.6	313.0	307.0	299.8	292.6	285.4	278.2	272.3
60°	308.2	303.5	298.8	294.1	289.5	283.5	276.2	269.0	261.8	254.6	248.7
62.5°	283.6	279.2	274.6	270.2	265.8	259.8	252.5	245.2	237.9	230.5	225.1
65°	248.6	244.1	239.5	235.0	230.4	224.6	217.5	210.4	203.3	196.2	190.8
67.5°	213.8	209.2	204.7	200.2	195.6	190.0	183.2	176.3	169.5	162.7	157.9
70°	190.2	185.7	181.1	176.6	172.0	166.4	159.7	153.0	146.3	139.7	135.5
72.5°	167.1	162.6	158.2	153.8	149.3	143.9	137.7	131.4	125.2	118.9	115.1
75°	132.5	128.4	124.4	120.4	116.4	111.5	105.9	100.3	94.7	89.0	86.1
77.5°	98.0	94.7	91.6	88.3	85.2	81.3	76.8	72.3	67.8	63.3	61.2
80°	78.3	75.0	71.9	68.6	65.4	61.9	58.1	54.4	50.7	47.0	45.7
82.5°	59.0	56.1	53.2	50.3	47.5	44.7	42.1	39.5	37.0	34.5	33.9
85°	33.1	30.7	28.3	25.9	23.4	21.9	21.2	20.6	20.0	19.3	19.1
87.5°	11.2	10.7	10.1	9.6	9.1	8.9	9.0	9.0	9.1	9.2	9.3
90°	0.6	1.7	2.9	4.0	5.0	6.0	7.1	8.0	9.0	9.9	10.6
92.5°	15.0	15.8	16.6	17.3	18.1	19.0	20.2	21.4	22.6	23.8	24.7
95°	40.2	40.6	40.8	41.1	41.4	42.2	43.6	44.9	46.3	47.7	48.6
97.5°	66.9	67.0	67.1	67.3	67.3	68.4	70.3	72.2	74.1	76.0	76.8
100°	86.7	86.7	86.7	86.7	86.7	87.6	89.4	91.2	93.0	94.7	96.0
102.5°	108.1	108.6	109.2	109.7	110.3	111.0	111.9	112.8	113.7	114.6	116.0
105°	141.2	142.0	142.6	143.3	144.0	144.7	145.6	146.4	147.2	148.1	148.9
107.5°	177.9	178.6	179.3	180.0	180.7	181.3	182.0	182.6	183.2	183.9	184.3
110°	203.2	203.9	204.5	205.3	206.0	206.5	206.9	207.3	207.7	208.1	208.6



TEST NUMBER: P333536-927

CATALOG NUMBER: S125RDIP-S610D810U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	228.9	229.3	229.7	230.0	230.4	230.8	231.3	231.9	232.4	232.9	233.1
115°	267.0	267.5	268.1	268.6	269.2	269.6	269.9	270.1	270.5	270.7	270.5
117.5°	305.1	305.4	305.6	305.9	306.1	306.4	306.7	306.9	307.1	307.4	307.4
120°	328.9	329.6	330.3	331.0	331.7	332.1	332.2	332.4	332.5	332.6	332.6
122.5°	354.7	355.0	355.2	355.5	355.7	356.0	356.3	356.7	357.0	357.4	357.3
125°	389.6	390.5	391.3	392.1	392.9	393.4	393.6	393.7	393.8	394.0	393.7
127.5°	426.8	427.3	427.7	428.2	428.6	429.0	429.1	429.3	429.5	429.7	429.5
130°	449.1	449.8	450.5	451.1	451.9	452.3	452.6	452.9	453.1	453.4	453.3
132.5°	471.4	472.5	473.6	474.8	475.9	476.4	476.4	476.3	476.3	476.3	476.1
135°	506.7	507.6	508.3	509.2	510.0	510.5	510.6	510.8	510.9	511.0	511.0
137.5°	540.0	540.7	541.5	542.3	543.1	543.7	544.0	544.2	544.5	544.9	545.0
140°	561.3	561.9	562.6	563.3	564.0	564.5	564.9	565.4	565.8	566.2	566.5
142.5°	582.6	583.1	583.7	584.2	584.9	585.4	585.9	586.5	586.9	587.5	587.6
145°	613.9	614.4	615.0	615.5	616.1	616.6	617.0	617.3	617.8	618.2	618.2
147.5°	642.9	643.2	643.5	643.8	644.0	644.4	644.8	645.1	645.4	645.7	646.0
150°	662.2	662.0	661.9	661.8	661.6	661.9	662.4	663.0	663.5	664.1	664.1
152.5°	678.0	678.3	678.4	678.7	678.8	679.1	679.2	679.5	679.7	679.9	680.2
155°	702.4	702.4	702.4	702.4	702.4	702.5	702.7	702.8	702.9	703.1	703.6
157.5°	724.3	724.0	723.7	723.3	723.0	722.9	723.1	723.3	723.3	723.5	724.1
160°	737.1	736.7	736.3	735.9	735.5	735.4	735.5	735.6	735.8	735.9	736.5
162.5°	748.5	748.2	747.9	747.7	747.3	747.2	747.2	747.3	747.3	747.3	748.0
165°	763.8	763.5	763.3	763.0	762.7	762.6	762.7	762.9	763.0	763.2	763.7
167.5°	776.7	776.1	775.5	775.0	774.4	774.2	774.2	774.2	774.2	774.2	775.0
170°	783.6	783.1	782.5	782.0	781.4	781.1	781.1	781.1	781.1	781.1	782.0
172.5°	788.5	788.0	787.4	786.9	786.3	786.1	786.1	786.1	786.1	786.1	786.9
175°	794.2	793.6	793.1	792.5	791.9	791.6	791.6	791.6	791.6	791.6	792.5
177.5°	797.0	796.5	796.1	795.7	795.2	795.0	794.9	794.7	794.6	794.5	795.2
180°	796.0	796.0	796.0	796.0	796.0	796.0	796.0	796.0	796.0	796.0	796.0



TEST NUMBER: P333536-927

CATALOG NUMBER: S125RDIP-S610D810U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	796.9	796.9	796.9	796.9	796.9	796.9	796.9	796.9
2.5°	794.2	795.3	796.4	796.9	796.8	796.6	796.5	796.5
5°	789.3	790.7	792.0	792.6	792.3	792.0	791.8	791.5
7.5°	779.5	780.5	781.4	781.7	781.4	781.1	780.9	780.5
10°	771.2	771.6	772.1	772.1	771.6	771.2	770.8	770.4
12.5°	759.5	759.8	760.0	759.9	759.2	758.7	758.0	757.4
15°	740.1	739.9	739.8	739.1	737.9	736.7	735.5	734.3
17.5°	715.9	715.2	714.5	713.7	712.7	711.7	710.7	709.7
20°	698.1	697.4	696.7	695.8	694.6	693.4	692.2	690.9
22.5°	680.4	679.1	677.8	676.6	675.7	674.6	673.7	672.6
25°	651.4	649.7	647.9	646.3	644.8	643.3	641.9	640.4
27.5°	620.0	617.6	615.1	613.2	611.8	610.4	609.0	607.5
30°	597.5	594.5	591.4	589.2	588.0	586.8	585.7	584.5
32.5°	575.7	572.4	568.9	566.5	564.9	563.4	561.9	560.4
35°	541.8	537.9	534.0	531.2	529.3	527.4	525.5	523.6
37.5°	506.3	501.6	496.9	493.7	491.9	490.1	488.3	486.5
40°	482.8	477.7	472.6	469.3	467.7	466.0	464.5	462.9
42.5°	459.6	454.7	449.9	446.2	443.9	441.6	439.2	436.9
45°	422.6	417.3	411.9	408.3	406.3	404.3	402.3	400.3
47.5°	386.1	380.6	375.1	371.2	369.0	366.8	364.6	362.3
50°	361.3	355.7	350.1	346.3	344.3	342.3	340.2	338.3
52.5°	337.9	331.8	325.7	321.7	319.7	317.7	315.7	313.7
55°	302.1	296.1	290.1	286.1	283.9	281.8	279.6	277.5
57.5°	266.4	260.5	254.7	250.7	248.8	246.9	245.1	243.2
60°	242.8	236.9	231.1	227.1	225.1	223.1	221.1	219.1
62.5°	219.6	214.1	208.7	204.9	203.0	201.0	198.9	196.9
65°	185.5	180.1	174.8	171.1	169.1	167.2	165.1	163.1
67.5°	153.0	148.1	143.1	139.9	138.3	136.7	135.1	133.5
70°	131.3	127.2	123.0	120.2	118.6	117.0	115.3	113.8
72.5°	111.3	107.4	103.6	101.2	100.1	99.0	98.0	96.9
75°	83.2	80.2	77.3	75.3	74.5	73.5	72.6	71.6
77.5°	59.2	57.1	55.1	53.7	53.0	52.3	51.7	50.9
80°	44.5	43.3	42.1	41.4	41.1	40.9	40.6	40.3
82.5°	33.3	32.7	32.2	31.8	31.7	31.5	31.4	31.2
85°	19.0	18.9	18.7	18.6	18.5	18.3	18.2	18.1
87.5°	9.5	9.6	9.7	9.8	9.8	9.7	9.7	9.7
90°	11.2	12.0	12.7	13.2	13.6	14.0	14.4	14.9
92.5°	25.6	26.5	27.4	28.0	28.4	28.6	28.9	29.2
95°	49.6	50.6	51.6	52.2	52.4	52.8	53.0	53.2
97.5°	77.8	78.7	79.6	80.1	80.2	80.4	80.6	80.8
100°	97.3	98.5	99.7	100.5	100.8	101.0	101.3	101.6
102.5°	117.3	118.7	120.0	120.9	121.3	121.6	122.0	122.4
105°	149.7	150.5	151.4	151.9	152.4	152.8	153.2	153.6
107.5°	184.7	185.1	185.5	185.7	185.7	185.6	185.6	185.6
110°	209.0	209.4	209.8	209.9	209.8	209.6	209.5	209.4



TEST NUMBER: P333536-927

CATALOG NUMBER: S125RDIP-S610D810U927-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	233.3	233.5	233.7	233.7	233.4	233.1	232.9	232.7
115°	270.5	270.3	270.1	270.0	269.9	269.7	269.6	269.5
117.5°	307.6	307.7	307.8	307.6	307.0	306.5	305.9	305.4
120°	332.6	332.6	332.6	332.4	331.8	331.3	330.7	330.2
122.5°	357.2	357.1	357.0	356.7	356.2	355.8	355.4	355.0
125°	393.4	393.2	392.8	392.7	392.5	392.4	392.3	392.1
127.5°	429.4	429.2	429.1	428.9	428.6	428.3	428.1	427.8
130°	453.1	453.0	452.9	452.7	452.4	452.1	451.9	451.5
132.5°	475.9	475.8	475.7	475.4	475.1	474.7	474.3	473.9
135°	511.0	511.0	511.0	510.8	510.2	509.7	509.1	508.6
137.5°	545.2	545.3	545.5	545.3	544.5	543.9	543.2	542.5
140°	566.7	567.0	567.3	567.0	566.4	565.7	565.0	564.4
142.5°	587.8	588.0	588.1	587.9	587.2	586.5	585.8	585.1
145°	618.2	618.2	618.2	618.0	617.6	617.2	616.8	616.3
147.5°	646.3	646.7	647.1	646.7	645.8	644.8	644.0	643.0
150°	664.1	664.1	664.1	663.9	663.6	663.4	663.1	662.8
152.5°	680.6	680.9	681.2	681.1	680.6	680.2	679.7	679.1
155°	704.2	704.7	705.3	705.2	704.5	703.9	703.1	702.4
157.5°	724.6	725.2	725.7	725.6	724.6	723.7	722.8	721.9
160°	737.0	737.5	738.1	738.1	737.4	736.7	735.9	735.3
162.5°	748.6	749.3	750.0	749.9	749.1	748.3	747.5	746.7
165°	764.3	764.9	765.3	765.2	764.4	763.6	762.7	761.9
167.5°	775.9	776.7	777.5	777.4	776.7	775.8	774.9	774.0
170°	782.8	783.6	784.4	784.3	783.4	782.4	781.5	780.5
172.5°	787.7	788.5	789.4	789.4	788.5	787.7	786.8	785.9
175°	793.3	794.2	795.0	794.9	793.9	793.0	792.0	791.1
177.5°	795.8	796.5	797.2	797.1	796.3	795.6	794.8	794.0
180°	796.0	796.0	796.0	796.0	796.0	796.0	796.0	796.0

(END OF REPORT)