

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333292-830

Luminaire Tested: **S125DIP-S1090D1205U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333292-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIP-S1090D1205U830-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1205 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8726.0 lumens  
Efficiency: N/A  
Efficacy: 133.4 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 65.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333292-830

CATALOG NUMBER: S125DIP-S1090D1205U830-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

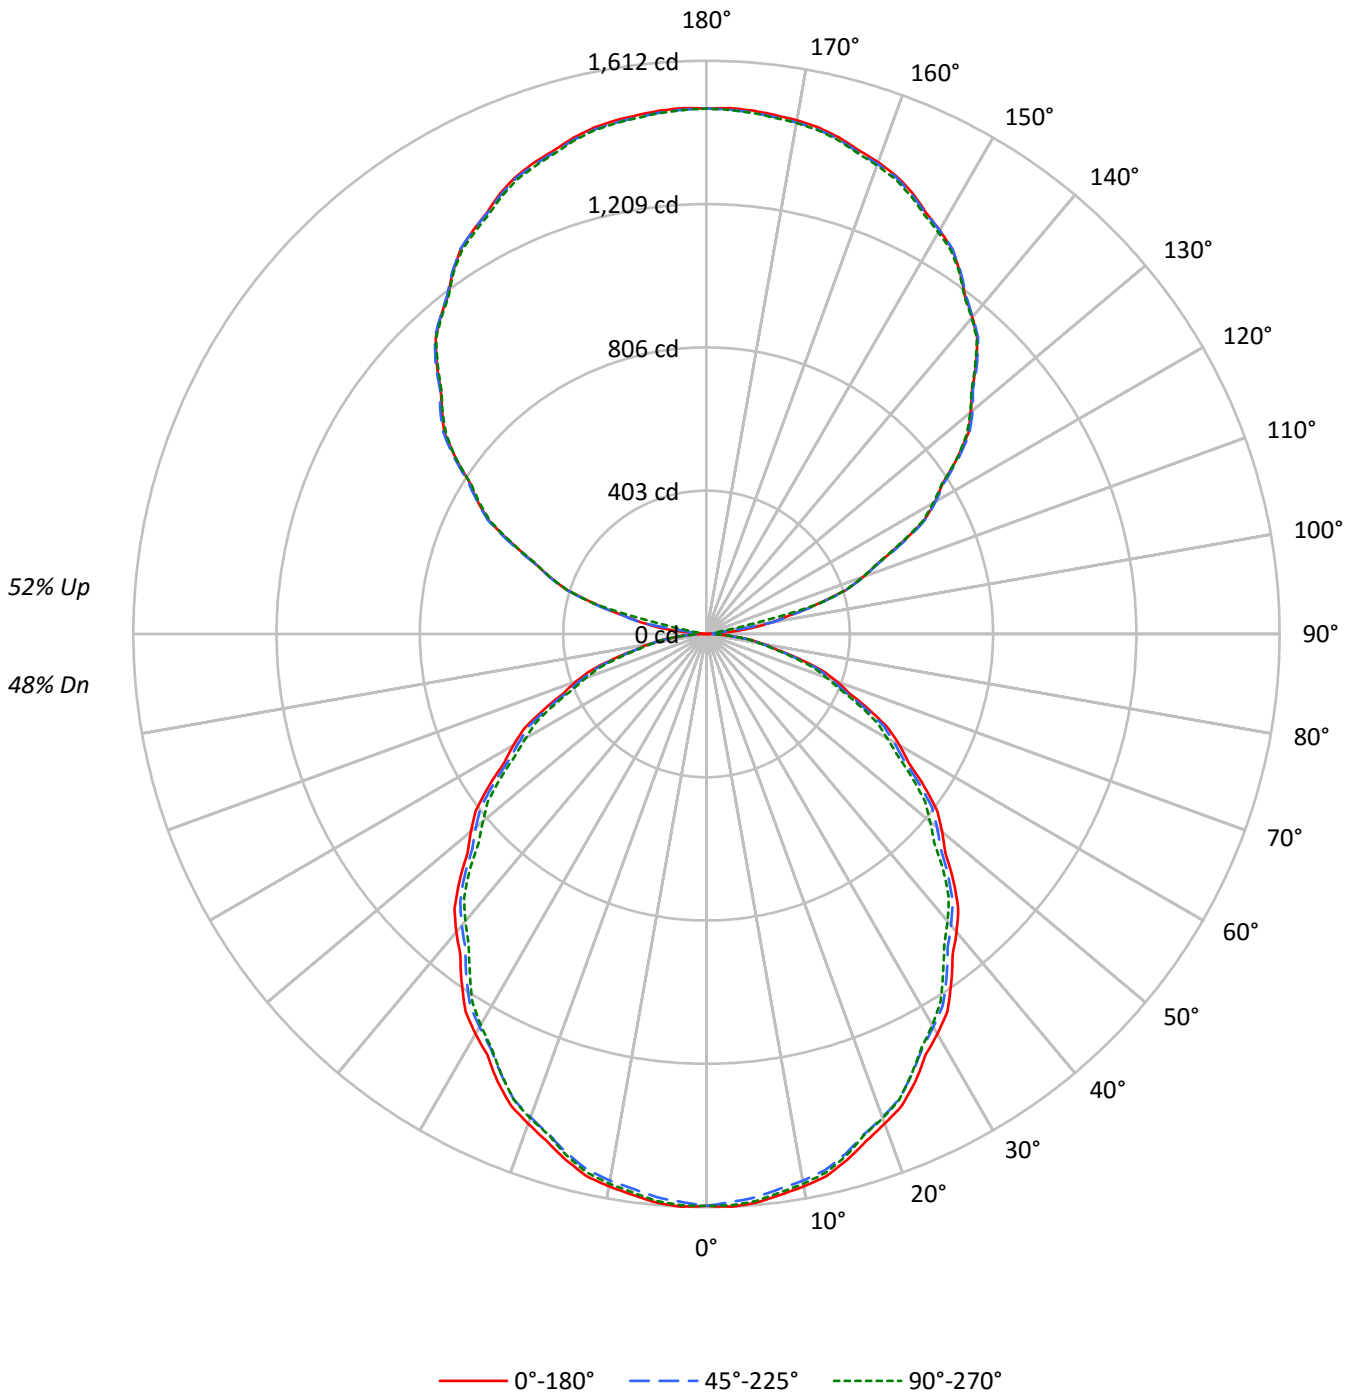



TEST NUMBER: P333292-830

CATALOG NUMBER: S125DIP-S1090D1205U830-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	54	54	54	48
1	97	93	89	86	89	86	82	79	72	70	67	59	58	56	48	47	46	40
2	89	81	75	70	81	75	69	65	63	59	56	52	49	47	42	40	38	34
3	81	71	64	58	74	66	59	54	56	51	47	46	43	40	37	35	33	29
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	30	28	24
5	68	56	48	42	62	52	45	39	44	39	34	37	33	29	30	27	25	21
6	62	50	42	36	57	47	39	34	40	34	30	33	29	26	27	24	22	19
7	58	45	37	32	53	42	35	30	36	30	26	30	26	23	25	22	19	17
8	54	41	33	28	49	38	31	27	33	27	23	28	23	20	23	20	17	15
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15	13
10	47	34	27	22	43	32	26	21	28	22	19	23	19	16	20	16	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	10388	10388	10388
5°	10410	10311	10377
10°	10347	10238	10297
15°	10235	10116	10158
20°	10074	9943	9961
25°	9902	9738	9729
30°	9688	9517	9470
35°	9460	9280	9150
40°	9226	9022	8893
45°	8972	8786	8611
50°	8694	8501	8246
55°	8425	8180	7952
60°	8103	7856	7576
65°	7719	7467	7213
70°	7353	7017	6775
75°	6697	6478	6253
80°	5962	5869	5724
85°	5180	5283	4994



TEST NUMBER: P333292-830

CATALOG NUMBER: S125DIP-S1090D1205U830-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	151.6	1.7
10°-20°	428.4	4.9
20°-30°	632.5	7.2
30°-40°	738.0	8.5
40°-50°	741.2	8.5
50°-60°	650.7	7.5
60°-70°	484.8	5.6
70°-80°	277.2	3.2
80°-90°	83.7	1.0
90°-100°	53.7	0.6
100°-110°	330.9	3.8
110°-120°	600.2	6.9
120°-130°	770.3	8.8
130°-140°	828.6	9.5
140°-150°	777.7	8.9
150°-160°	629.1	7.2
160°-170°	406.9	4.7
170°-180°	140.3	1.6
0°-30°	1212.5	13.9
0°-40°	1950.5	22.4
0°-60°	3342.4	38.3
0°-90°	4188.2	48.0
90°-120°	984.9	11.3
90°-150°	3361.5	38.5
90°-180°	4538.0	52.0
0°-180°	8726.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1608	1608	1608	1608	1608	
5°	1606	1603	1590	1601	1601	152
15°	1531	1526	1513	1519	1519	431
25°	1390	1383	1367	1369	1365	639
35°	1200	1194	1177	1170	1160	750
45°	982	977	962	947	943	757
55°	748	744	726	715	706	668
65°	505	502	489	477	472	501
75°	268	266	260	256	251	286
85°	70	71	71	70	67	78
90°	1	10	18	23	26	6
95°	62	57	18	23	23	80
105°	322	326	326	326	325	341
115°	605	610	611	607	600	599
125°	860	867	868	863	860	768
135°	1072	1078	1077	1074	1068	826
145°	1243	1245	1246	1246	1240	777
155°	1369	1363	1365	1368	1359	631
165°	1445	1439	1439	1445	1437	408
175°	1478	1472	1472	1480	1471	141
180°	1478	1478	1478	1478	1478	



TEST NUMBER: P333292-830

CATALOG NUMBER: S125DIP-S1090D1205U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4
2.5°	1612.4	1611.7	1611.0	1610.3	1609.7	1608.2	1605.9	1603.6	1601.4	1599.1	1601.4
5°	1605.8	1605.2	1604.7	1604.1	1603.5	1601.9	1599.0	1596.2	1593.4	1590.5	1593.1
7.5°	1591.0	1590.4	1589.9	1589.3	1588.7	1586.9	1583.8	1580.6	1577.5	1574.4	1577.0
10°	1577.8	1577.3	1576.7	1576.1	1575.6	1573.7	1570.6	1567.4	1564.3	1561.2	1563.5
12.5°	1561.5	1560.5	1559.4	1558.4	1557.5	1555.5	1552.6	1549.7	1546.8	1543.9	1545.8
15°	1530.7	1529.8	1529.0	1528.1	1527.3	1525.3	1522.2	1519.1	1516.0	1512.9	1514.3
17.5°	1495.3	1494.1	1492.8	1491.6	1490.3	1488.1	1484.9	1481.7	1478.5	1475.2	1477.0
20°	1465.8	1465.3	1464.7	1464.1	1463.6	1461.4	1457.7	1454.1	1450.4	1446.7	1448.7
22.5°	1436.2	1435.3	1434.3	1433.2	1432.2	1429.9	1426.5	1423.1	1419.7	1416.2	1417.5
25°	1389.5	1388.1	1386.7	1385.3	1383.8	1381.3	1377.6	1373.9	1370.3	1366.6	1367.2
27.5°	1334.7	1333.9	1333.0	1332.2	1331.3	1329.1	1325.2	1321.4	1317.7	1313.9	1314.0
30°	1299.1	1298.3	1297.4	1296.6	1295.7	1293.2	1288.9	1284.7	1280.4	1276.2	1275.6
32.5°	1260.5	1259.1	1257.8	1256.5	1255.3	1252.7	1248.9	1245.1	1241.3	1237.6	1236.5
35°	1199.9	1198.7	1197.6	1196.5	1195.3	1192.8	1188.8	1184.9	1180.9	1177.0	1175.5
37.5°	1137.0	1135.6	1134.2	1132.7	1131.3	1128.8	1125.0	1121.3	1117.6	1113.9	1111.7
40°	1094.3	1092.9	1091.5	1090.1	1088.6	1085.9	1081.9	1078.0	1074.0	1070.1	1067.5
42.5°	1048.5	1047.3	1046.1	1044.9	1043.7	1041.1	1037.2	1033.2	1029.3	1025.3	1022.9
45°	982.3	981.2	980.1	978.9	977.8	975.5	972.1	968.7	965.4	962.0	958.6
47.5°	911.1	911.1	911.2	911.3	911.3	909.3	905.2	901.1	897.0	893.0	889.5
50°	865.3	864.4	863.6	862.7	861.9	859.7	856.3	852.9	849.5	846.1	842.4
52.5°	818.4	817.7	817.2	816.5	816.0	813.8	810.2	806.5	803.0	799.3	796.1
55°	748.2	747.3	746.5	745.6	744.8	742.3	738.4	734.4	730.5	726.5	724.0
57.5°	674.1	673.6	673.3	672.8	672.3	670.4	667.0	663.7	660.4	657.0	653.7
60°	627.3	626.1	625.0	623.9	622.7	620.7	617.6	614.4	611.3	608.2	605.4
62.5°	578.4	577.5	576.6	575.7	574.9	573.1	570.3	567.7	565.1	562.4	559.3
65°	505.1	504.5	504.0	503.4	502.8	501.1	497.9	494.8	491.7	488.6	486.1
67.5°	434.1	432.9	431.8	430.6	429.4	427.6	425.3	423.0	420.7	418.4	416.2
70°	389.4	388.0	386.5	385.1	383.7	381.7	379.2	376.6	374.1	371.6	369.9
72.5°	340.5	339.5	338.6	337.6	336.7	335.4	333.8	332.1	330.5	328.8	326.9
75°	268.4	267.9	267.3	266.7	266.2	265.2	263.8	262.4	261.0	259.6	258.7
77.5°	202.1	201.8	201.6	201.4	201.1	200.7	199.8	199.1	198.3	197.5	197.0
80°	160.3	160.3	160.3	160.3	160.3	160.0	159.5	158.9	158.3	157.8	157.5
82.5°	123.7	123.2	122.8	122.3	121.9	121.6	121.5	121.4	121.2	121.1	120.6
85°	69.9	70.2	70.5	70.8	71.1	71.3	71.3	71.3	71.3	71.3	71.0
87.5°	27.7	28.1	28.5	28.8	29.2	29.5	29.6	29.8	29.9	30.0	30.3
90°	1.1	3.0	5.0	7.0	8.9	10.7	12.4	14.1	15.8	17.5	18.8
92.5°	16.9	15.6	14.1	12.8	11.4	11.5	13.0	14.5	16.0	17.5	18.8
95°	62.4	61.7	61.0	60.2	59.5	54.6	45.2	36.0	26.8	17.5	18.8
97.5°	130.4	131.7	133.0	134.3	135.6	127.1	108.8	90.5	72.2	53.9	47.0
100°	182.9	183.7	184.4	185.1	185.9	186.7	187.7	188.7	189.6	190.6	154.3
102.5°	236.4	237.3	238.3	239.1	240.1	240.8	241.4	242.0	242.6	243.2	236.3
105°	322.1	323.0	324.0	325.0	325.9	326.4	326.4	326.4	326.4	326.4	326.4
107.5°	411.0	411.0	411.0	411.0	411.0	411.2	411.7	412.2	412.7	413.2	413.2
110°	468.8	468.8	468.8	468.8	468.8	469.1	469.6	470.0	470.5	471.0	470.3



TEST NUMBER: P333292-830

CATALOG NUMBER: S125DIP-S1090D1205U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	523.2	523.8	524.3	524.9	525.5	525.9	526.2	526.5	526.8	527.1	526.2
115°	604.6	605.9	607.1	608.3	609.5	610.3	610.5	610.8	611.0	611.2	610.3
117.5°	689.0	689.0	688.9	688.9	688.8	689.3	690.2	691.1	692.0	693.0	691.7
120°	741.6	741.3	741.1	740.8	740.6	740.8	741.6	742.3	743.0	743.8	743.3
122.5°	788.1	789.0	789.9	790.8	791.7	792.4	792.7	793.1	793.4	793.7	793.2
125°	859.9	861.6	863.3	865.0	866.7	867.5	867.5	867.5	867.5	867.5	866.6
127.5°	928.5	929.7	930.9	932.1	933.3	933.9	933.7	933.6	933.4	933.3	932.7
130°	970.5	971.8	973.0	974.2	975.4	976.1	976.4	976.7	976.9	977.1	976.4
132.5°	1012.6	1014.0	1015.4	1016.8	1018.2	1018.7	1018.1	1017.6	1017.1	1016.5	1016.4
135°	1072.4	1073.8	1075.3	1076.8	1078.3	1078.7	1078.3	1077.8	1077.2	1076.8	1076.3
137.5°	1127.4	1128.7	1129.9	1131.1	1132.5	1132.8	1132.5	1132.0	1131.5	1131.1	1131.2
140°	1163.3	1163.9	1164.3	1164.8	1165.3	1165.4	1165.2	1164.9	1164.7	1164.4	1164.9
142.5°	1195.7	1196.0	1196.4	1196.7	1196.9	1197.2	1197.6	1197.9	1198.3	1198.6	1198.7
145°	1243.3	1243.8	1244.3	1244.7	1245.2	1245.5	1245.5	1245.5	1245.5	1245.5	1245.8
147.5°	1284.9	1284.8	1284.7	1284.6	1284.5	1284.6	1284.9	1285.2	1285.5	1285.8	1286.1
150°	1311.2	1310.7	1310.2	1309.8	1309.3	1309.3	1309.8	1310.2	1310.7	1311.2	1311.6
152.5°	1336.6	1335.6	1334.5	1333.4	1332.3	1332.0	1332.6	1333.0	1333.5	1334.0	1334.5
155°	1369.2	1367.8	1366.3	1364.9	1363.4	1362.9	1363.4	1363.9	1364.4	1364.9	1365.6
157.5°	1394.5	1393.5	1392.7	1391.9	1390.9	1390.5	1390.6	1390.6	1390.7	1390.7	1391.5
160°	1412.0	1410.5	1409.1	1407.6	1406.2	1405.5	1405.8	1406.0	1406.3	1406.5	1407.5
162.5°	1426.0	1424.6	1423.1	1421.6	1420.1	1419.6	1419.8	1420.0	1420.3	1420.5	1421.9
165°	1444.8	1443.4	1441.9	1440.5	1439.0	1438.4	1438.6	1438.9	1439.1	1439.4	1440.9
167.5°	1458.9	1457.4	1455.9	1454.3	1452.8	1452.2	1452.5	1452.6	1452.9	1453.2	1454.9
170°	1466.8	1465.1	1463.3	1461.6	1459.9	1459.2	1459.4	1459.7	1459.9	1460.2	1462.2
172.5°	1472.0	1470.3	1468.6	1466.9	1465.2	1464.5	1465.0	1465.5	1465.8	1466.3	1468.1
175°	1477.7	1476.2	1474.8	1473.3	1471.9	1471.2	1471.5	1471.8	1472.0	1472.3	1474.1
177.5°	1480.4	1479.1	1478.0	1476.9	1475.6	1475.2	1475.4	1475.6	1475.7	1475.9	1477.3
180°	1477.7	1477.7	1477.7	1477.7	1477.7	1477.7	1477.7	1477.7	1477.7	1477.7	1477.7



TEST NUMBER: P333292-830

CATALOG NUMBER: S125DIP-S1090D1205U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4	1608.4
2.5°	1603.6	1605.9	1608.2	1609.2	1609.0	1608.7	1608.5	1608.4
5°	1595.6	1598.2	1600.7	1601.9	1601.6	1601.3	1601.0	1600.7
7.5°	1579.4	1582.0	1584.4	1585.5	1585.3	1585.0	1584.7	1584.4
10°	1565.8	1568.0	1570.3	1571.3	1571.0	1570.7	1570.5	1570.2
12.5°	1547.6	1549.4	1551.1	1552.1	1552.0	1551.9	1551.9	1551.8
15°	1515.7	1517.1	1518.5	1519.3	1519.3	1519.3	1519.3	1519.3
17.5°	1478.8	1480.5	1482.2	1482.4	1481.0	1479.6	1478.2	1476.8
20°	1450.7	1452.6	1454.6	1454.9	1453.5	1452.1	1450.7	1449.3
22.5°	1418.8	1420.1	1421.4	1421.5	1420.6	1419.7	1418.7	1417.7
25°	1367.7	1368.3	1368.9	1368.7	1367.8	1367.0	1366.1	1365.3
27.5°	1314.1	1314.2	1314.4	1314.0	1313.2	1312.3	1311.5	1310.6
30°	1275.1	1274.5	1273.9	1273.3	1272.4	1271.6	1270.7	1269.9
32.5°	1235.5	1234.4	1233.5	1232.2	1230.7	1229.2	1227.6	1226.1
35°	1174.1	1172.7	1171.3	1169.5	1167.2	1165.0	1162.7	1160.5
37.5°	1109.7	1107.6	1105.5	1103.8	1102.5	1101.2	1099.9	1098.6
40°	1065.0	1062.4	1059.9	1058.2	1057.3	1056.5	1055.6	1054.8
42.5°	1020.7	1018.3	1016.1	1014.2	1013.0	1011.6	1010.3	1009.0
45°	955.2	951.8	948.4	946.2	945.4	944.5	943.7	942.8
47.5°	886.1	882.6	879.2	876.5	874.5	872.5	870.5	868.6
50°	838.8	835.1	831.4	828.6	826.6	824.6	822.7	820.7
52.5°	792.9	789.7	786.5	783.7	781.5	779.3	777.1	774.9
55°	721.4	718.9	716.3	714.1	712.1	710.1	708.1	706.2
57.5°	650.5	647.2	643.9	641.8	640.7	639.6	638.6	637.4
60°	602.6	599.7	596.9	594.5	592.5	590.5	588.5	586.5
62.5°	556.3	553.3	550.2	547.9	546.4	544.9	543.3	541.8
65°	483.5	481.0	478.4	476.5	475.4	474.3	473.2	472.0
67.5°	414.1	411.9	409.7	408.3	407.6	407.0	406.3	405.7
70°	368.2	366.5	364.8	363.4	362.2	361.1	360.0	358.8
72.5°	325.0	323.0	321.1	319.6	318.5	317.4	316.2	315.1
75°	257.9	257.0	256.2	255.1	254.0	252.9	251.8	250.6
77.5°	196.4	196.0	195.5	194.8	194.0	193.2	192.4	191.6
80°	157.2	156.9	156.7	156.2	155.6	155.0	154.5	153.9
82.5°	120.1	119.6	119.1	118.8	118.7	118.6	118.5	118.3
85°	70.7	70.4	70.1	69.7	69.1	68.5	68.0	67.4
87.5°	30.4	30.7	30.9	30.9	30.6	30.3	30.0	29.7
90°	20.0	21.2	22.4	23.4	24.1	24.8	25.5	26.3
92.5°	20.0	21.2	22.4	23.2	23.5	23.8	24.2	24.5
95°	20.0	21.2	22.4	23.0	23.0	23.0	23.0	23.0
97.5°	40.2	33.3	26.4	23.0	23.0	23.0	23.0	23.0
100°	118.1	81.8	45.5	26.9	25.9	25.0	23.9	23.0
102.5°	229.4	222.6	215.7	204.1	187.5	170.9	154.4	137.8
105°	326.4	326.4	326.4	326.3	326.0	325.8	325.6	325.4
107.5°	413.3	413.3	413.4	413.0	412.3	411.6	410.9	410.1
110°	469.6	468.8	468.1	467.9	468.1	468.3	468.6	468.8





TEST NUMBER: P333292-830

CATALOG NUMBER: S125DIP-S1090D1205U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	525.3	524.3	523.4	522.7	522.5	522.1	521.8	521.4
115°	609.3	608.3	607.4	606.1	604.6	603.2	601.7	600.3
117.5°	690.4	689.2	687.9	686.9	686.3	685.7	685.0	684.4
120°	742.8	742.3	741.9	741.0	739.8	738.6	737.4	736.1
122.5°	792.8	792.3	791.8	790.8	789.4	788.0	786.6	785.2
125°	865.6	864.6	863.7	862.8	862.0	861.4	860.6	859.9
127.5°	932.2	931.7	931.1	930.0	928.2	926.3	924.5	922.7
130°	975.6	974.9	974.2	973.2	971.9	970.8	969.6	968.4
132.5°	1016.2	1016.1	1016.0	1015.3	1014.1	1012.9	1011.6	1010.4
135°	1075.8	1075.3	1074.9	1073.8	1072.4	1070.9	1069.5	1068.0
137.5°	1131.3	1131.4	1131.5	1131.0	1129.6	1128.4	1127.1	1125.9
140°	1165.4	1165.8	1166.4	1165.8	1164.4	1163.0	1161.5	1160.1
142.5°	1198.8	1198.9	1199.0	1198.3	1196.8	1195.4	1193.9	1192.5
145°	1245.9	1246.2	1246.4	1245.9	1244.3	1242.9	1241.4	1240.0
147.5°	1286.4	1286.7	1286.9	1286.2	1284.5	1282.7	1281.0	1279.2
150°	1312.2	1312.7	1313.2	1312.4	1310.5	1308.5	1306.6	1304.7
152.5°	1334.9	1335.5	1336.0	1335.3	1333.5	1331.8	1330.0	1328.3
155°	1366.3	1367.1	1367.8	1367.2	1365.3	1363.3	1361.3	1359.4
157.5°	1392.3	1393.1	1393.8	1393.3	1391.3	1389.4	1387.4	1385.4
160°	1408.4	1409.4	1410.4	1409.9	1408.0	1406.0	1404.1	1402.1
162.5°	1423.2	1424.7	1426.0	1425.6	1423.4	1421.3	1419.2	1417.0
165°	1442.3	1443.8	1445.2	1444.9	1443.0	1441.1	1439.1	1437.2
167.5°	1456.7	1458.4	1460.2	1460.0	1457.7	1455.6	1453.4	1451.2
170°	1464.1	1466.0	1468.0	1467.8	1465.7	1463.5	1461.3	1459.1
172.5°	1469.8	1471.6	1473.3	1473.1	1470.9	1468.8	1466.5	1464.3
175°	1476.1	1478.1	1480.0	1479.9	1477.7	1475.6	1473.3	1471.1
177.5°	1478.7	1480.1	1481.4	1481.3	1479.8	1478.2	1476.6	1475.1
180°	1477.7	1477.7	1477.7	1477.7	1477.7	1477.7	1477.7	1477.7

(END OF REPORT)