

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P333269-830

Luminaire Tested: **S125DIP-S1090D810U830-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333269-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1090D810U830-4F0-1E-UDD-A1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6874.2 lumens
Efficiency: N/A
Efficacy: 126.4 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

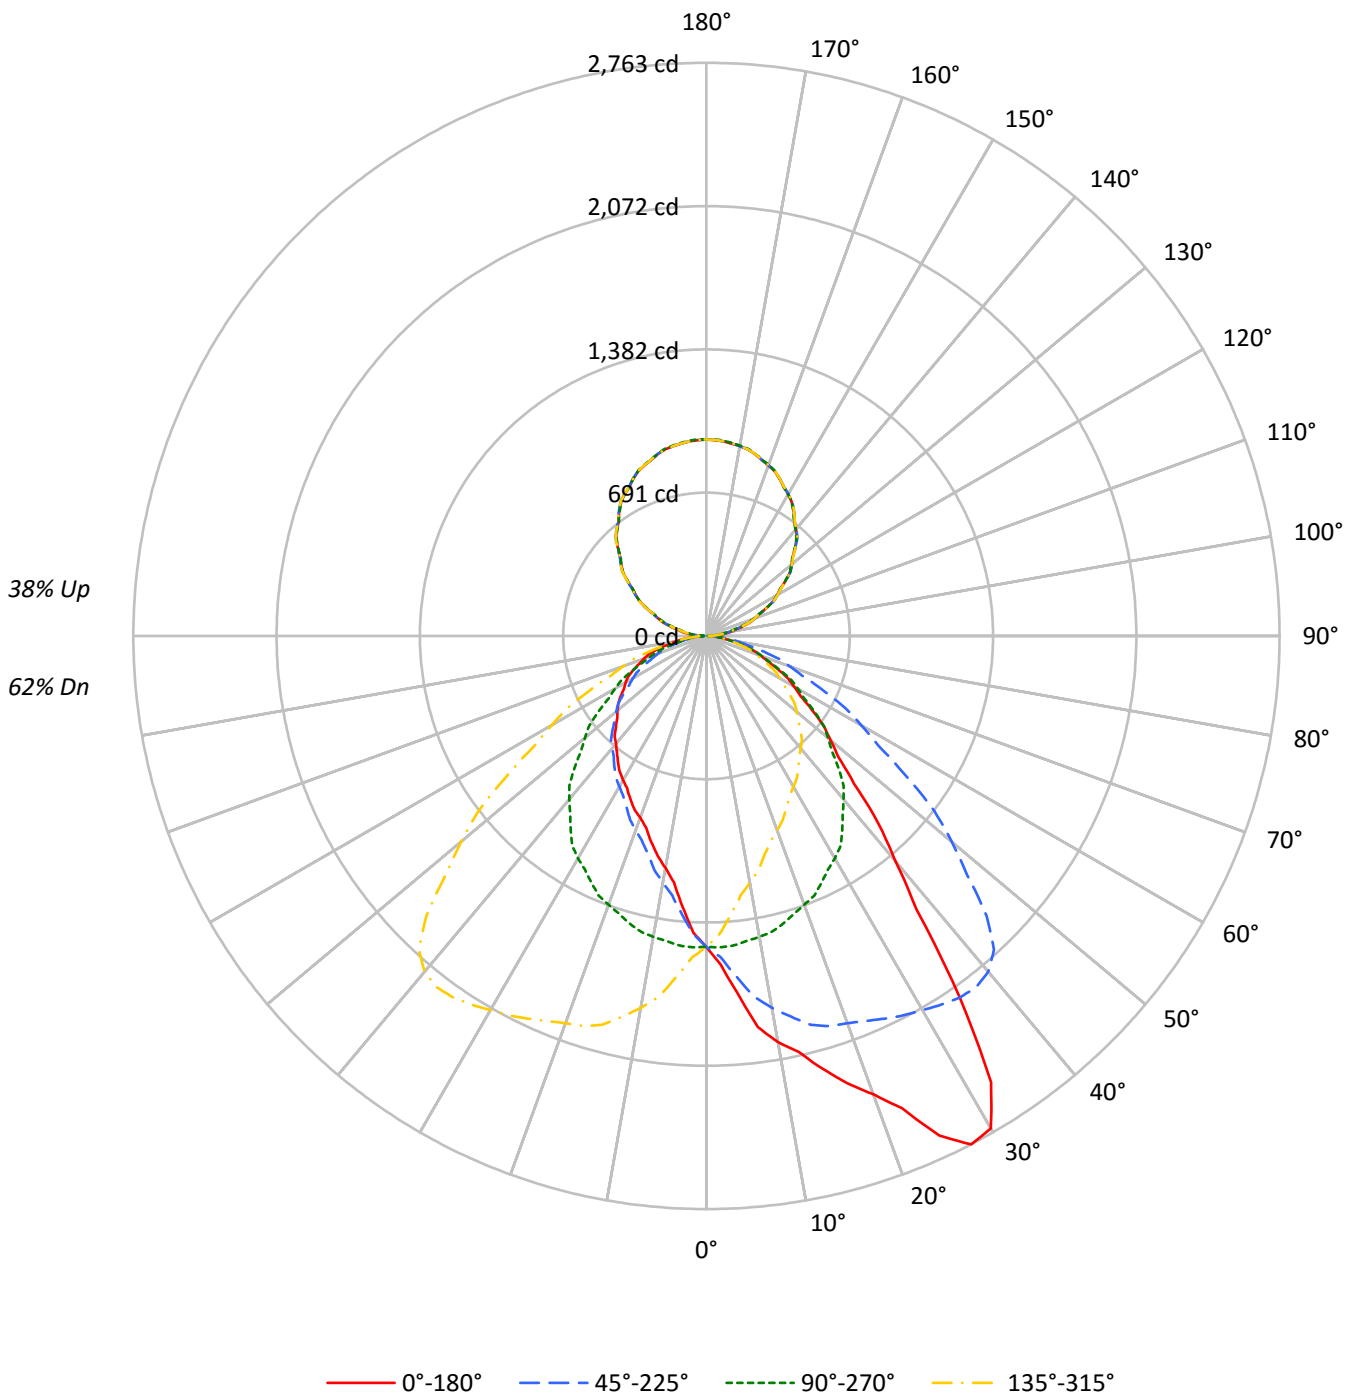



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67	62
1	101	96	93	89	94	90	87	84	79	77	74	69	67	65	59	58	57	52
2	92	84	78	73	86	79	74	69	70	66	62	61	58	55	53	50	48	44
3	84	74	67	61	78	70	64	58	62	57	52	54	50	47	47	44	41	38
4	77	66	58	52	72	62	55	50	55	49	45	48	44	40	42	39	36	33
5	71	59	51	45	66	56	48	43	49	43	39	43	39	35	38	34	31	28
6	65	53	45	39	61	50	43	37	45	39	34	39	34	31	34	31	28	25
7	60	48	40	34	56	45	38	33	40	34	30	36	31	27	31	28	25	22
8	56	44	36	30	52	41	34	29	37	31	27	33	28	24	29	25	22	20
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	27	23	20	18
10	49	37	29	24	46	35	28	23	31	26	22	28	23	20	25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	9680	9680	9680	9680
5°	11210	9713	8504	9713
10°	13042	9663	7451	9663
15°	14437	9591	6873	9591
20°	16160	9479	6410	9479
25°	18932	9352	6183	9352
30°	20448	9228	5988	9228
35°	16812	8993	5858	8993
40°	11950	8667	5718	8667
45°	9180	8227	5636	8227
50°	7837	7683	5626	7683
55°	6977	7149	5674	7149
60°	6294	6566	5818	6566
65°	5813	5978	5969	5978
70°	5285	5370	6056	5370
75°	4666	4729	5999	4729
80°	3927	3857	5490	3857
85°	3105	2779	4431	2779



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.3	2.1
10°-20°	429.6	6.2
20°-30°	697.6	10.1
30°-40°	850.9	12.4
40°-50°	774.1	11.3
50°-60°	616.6	9.0
60°-70°	429.5	6.2
70°-80°	229.0	3.3
80°-90°	59.9	0.9
90°-100°	63.4	0.9
100°-110°	187.3	2.7
110°-120°	317.3	4.6
120°-130°	417.5	6.1
130°-140°	467.9	6.8
140°-150°	458.6	6.7
150°-160°	385.1	5.6
160°-170°	256.0	3.7
170°-180°	89.6	1.3
0°-30°	1271.5	18.5
0°-40°	2122.4	30.9
0°-60°	3513.1	51.1
0°-90°	4231.4	61.6
90°-120°	568.0	8.3
90°-150°	1912.0	27.8
90°-180°	2643.0	38.4
0°-180°	6874.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1499	1499	1499	1499	1499	
5°	1729	1498	1312	1498	1729	174
15°	2159	1434	1028	1434	2159	618
25°	2657	1312	868	1312	2657	1213
35°	2132	1141	743	1141	2132	1305
45°	1005	901	617	901	1005	804
55°	620	635	504	635	620	558
65°	380	391	391	391	380	378
75°	187	190	240	190	187	201
85°	42	38	60	38	42	49
90°	18	1	18	1	18	12
95°	63	48	63	48	63	65
105°	183	168	183	168	183	194
115°	321	318	321	318	321	317
125°	467	464	467	464	467	417
135°	605	603	605	603	605	467
145°	733	730	733	730	733	458
155°	836	836	836	836	836	385
165°	906	909	906	909	906	256
175°	941	945	941	945	941	89
180°	947	947	947	947	947	



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8
2.5°	1585.4	1583.3	1581.3	1577.2	1580.3	1571.6	1567.5	1560.4	1551.7	1548.7	1545.1
5°	1729.1	1732.3	1735.5	1722.1	1723.3	1714.5	1694.1	1677.5	1664.2	1647.0	1634.9
7.5°	1902.1	1894.6	1894.0	1885.4	1870.5	1858.5	1837.1	1809.9	1783.6	1753.5	1728.7
10°	1988.7	1989.3	1983.6	1973.4	1957.5	1946.1	1918.1	1891.3	1858.9	1820.7	1793.4
12.5°	2053.8	2056.4	2049.3	2035.5	2027.7	2002.1	1980.2	1948.3	1909.8	1879.2	1837.7
15°	2159.2	2152.2	2147.1	2129.9	2116.6	2089.8	2054.8	2021.8	1979.7	1941.0	1902.1
17.5°	2260.7	2266.2	2256.7	2241.1	2199.6	2168.4	2121.5	2076.2	2023.9	1971.9	1925.5
20°	2351.3	2356.4	2341.7	2314.4	2264.7	2233.6	2171.9	2113.4	2053.0	1986.1	1935.2
22.5°	2464.3	2460.2	2440.4	2398.9	2355.9	2298.2	2231.5	2160.2	2084.4	2009.0	1941.4
25°	2656.7	2629.9	2617.8	2566.4	2509.7	2425.1	2333.5	2229.1	2135.0	2035.1	1948.6
27.5°	2763.3	2754.9	2741.4	2705.5	2646.0	2555.5	2447.5	2320.4	2187.5	2061.4	1948.2
30°	2741.9	2743.2	2744.4	2733.0	2694.8	2626.8	2519.2	2382.5	2224.7	2082.8	1951.7
32.5°	2552.6	2575.7	2597.8	2624.0	2634.8	2621.7	2554.4	2430.8	2268.4	2107.2	1949.7
35°	2132.4	2139.5	2211.3	2282.6	2379.3	2454.4	2504.6	2449.9	2313.1	2128.0	1947.3
37.5°	1662.7	1697.0	1746.8	1827.3	1966.9	2091.9	2252.6	2326.5	2282.4	2134.8	1942.9
40°	1417.4	1449.2	1481.7	1563.7	1681.4	1832.8	2015.3	2171.2	2207.5	2113.4	1927.6
42.5°	1228.0	1253.3	1289.3	1350.9	1449.3	1583.5	1757.8	1961.5	2086.9	2051.3	1895.5
45°	1005.1	1021.1	1049.0	1098.1	1169.3	1274.2	1428.2	1650.9	1844.9	1909.1	1819.5
47.5°	860.4	860.3	882.0	915.9	967.2	1056.4	1170.3	1344.7	1552.0	1705.3	1698.2
50°	780.0	776.7	793.9	823.2	863.9	923.1	1031.9	1171.2	1370.3	1544.0	1592.3
52.5°	710.8	711.1	721.7	743.3	777.4	827.9	909.2	1034.8	1204.9	1383.2	1474.2
55°	619.6	617.1	629.1	643.9	668.6	701.7	760.3	856.3	994.3	1169.9	1288.3
57.5°	536.1	543.2	548.0	558.2	578.8	601.0	650.3	720.8	830.3	981.0	1106.1
60°	487.3	494.3	498.1	508.3	524.8	543.9	582.1	639.3	731.6	861.4	985.4
62.5°	443.6	449.0	450.3	459.4	473.0	491.5	521.5	569.7	642.5	756.0	877.5
65°	380.4	380.4	383.0	392.5	398.9	415.4	438.3	473.3	531.9	620.3	724.0
67.5°	319.6	322.6	322.1	326.2	332.1	345.0	361.4	390.2	433.6	498.1	581.1
70°	279.9	282.5	281.8	285.0	291.3	299.6	313.0	340.4	371.6	426.9	498.1
72.5°	244.3	245.3	243.6	247.9	251.7	258.9	273.8	288.4	317.5	364.3	422.8
75°	187.0	188.3	189.5	192.1	196.0	199.7	207.4	222.1	241.1	276.1	313.7
77.5°	140.3	137.8	140.8	140.4	142.6	145.5	152.3	160.0	175.7	197.8	226.9
80°	105.6	106.2	106.2	106.9	110.1	112.0	117.7	123.4	135.5	152.0	172.4
82.5°	77.1	78.8	77.8	78.9	81.5	82.9	86.1	90.9	97.8	110.8	125.5
85°	41.9	38.8	40.1	41.4	41.4	41.9	44.5	46.5	50.2	55.3	61.1
87.5°	15.7	16.7	17.1	17.0	17.4	17.2	19.1	18.9	20.4	21.7	23.5
90°	17.7	17.2	16.7	16.2	15.7	15.1	14.2	13.4	12.6	11.8	10.7
92.5°	34.8	34.4	34.0	33.7	33.4	32.6	31.6	30.4	29.4	28.3	26.9
95°	63.3	63.1	62.8	62.4	62.1	61.4	60.2	59.0	57.9	56.7	55.1
97.5°	96.1	96.0	95.7	95.5	95.3	94.7	93.6	92.6	91.4	90.4	88.1
100°	120.8	120.6	120.2	119.9	119.6	118.7	117.2	115.7	114.2	112.7	110.7
102.5°	145.6	145.2	144.7	144.3	143.8	142.8	141.2	139.6	138.0	136.4	135.3
105°	182.8	182.3	181.8	181.3	180.8	180.1	179.1	178.1	177.1	176.2	175.1
107.5°	220.8	220.8	220.8	220.9	220.9	220.7	220.2	219.7	219.2	218.8	218.0
110°	249.1	249.3	249.4	249.6	249.8	249.6	249.1	248.6	248.2	247.6	247.1



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	276.8	277.1	277.4	277.7	278.1	278.1	277.8	277.6	277.4	277.1	276.5
115°	320.7	320.7	320.9	321.1	321.2	321.4	321.6	321.8	321.9	322.1	321.8
117.5°	363.4	364.0	364.7	365.3	366.0	366.3	366.1	366.0	365.8	365.7	365.4
120°	392.9	393.5	394.2	394.8	395.5	395.8	395.8	395.8	395.8	395.8	395.6
122.5°	422.4	422.8	423.4	423.9	424.4	424.7	424.9	425.0	425.1	425.3	424.8
125°	466.6	466.7	466.8	467.0	467.2	467.4	467.8	468.1	468.4	468.7	468.5
127.5°	509.0	509.3	509.6	510.0	510.3	510.6	510.7	510.9	511.0	511.2	511.0
130°	537.2	537.6	537.9	538.3	538.6	538.9	539.0	539.1	539.3	539.5	539.1
132.5°	563.8	564.3	564.8	565.2	565.6	566.0	566.1	566.3	566.5	566.7	566.7
135°	605.1	605.8	606.4	607.1	607.8	608.0	608.0	608.0	608.0	608.0	607.8
137.5°	645.5	646.3	647.1	647.9	648.8	649.0	648.8	648.7	648.5	648.3	647.9
140°	671.5	672.2	673.1	673.9	674.7	675.0	674.6	674.3	674.0	673.6	673.2
142.5°	696.2	697.0	697.9	698.6	699.5	699.7	699.6	699.4	699.2	699.0	698.3
145°	733.3	733.9	734.3	734.8	735.3	735.6	735.6	735.6	735.6	735.6	735.1
147.5°	765.1	766.2	767.2	768.4	769.5	769.9	769.5	769.0	768.6	768.3	767.9
150°	788.6	788.9	789.3	789.6	789.9	790.1	790.1	790.1	790.1	790.1	789.5
152.5°	808.0	808.7	809.3	809.8	810.4	810.5	810.1	809.7	809.4	809.0	808.7
155°	835.8	836.6	837.4	838.2	839.1	839.1	838.5	837.8	837.2	836.5	836.3
157.5°	858.9	860.0	861.1	862.1	863.3	863.5	862.8	862.1	861.5	860.8	860.6
160°	874.9	875.6	876.5	877.3	878.2	878.2	877.5	876.9	876.3	875.6	875.4
162.5°	888.4	889.4	890.3	891.3	892.2	892.3	891.6	890.7	889.9	889.2	889.1
165°	906.5	907.5	908.5	909.5	910.5	910.6	910.0	909.4	908.7	908.0	907.9
167.5°	921.0	922.0	923.0	924.1	925.0	925.1	924.1	923.1	922.1	921.1	921.1
170°	928.7	929.8	930.9	932.1	933.2	933.3	932.4	931.3	930.4	929.3	929.3
172.5°	935.1	936.1	937.2	938.2	939.2	939.2	938.2	937.3	936.2	935.3	935.3
175°	941.2	942.4	943.5	944.6	945.7	945.8	944.9	943.9	942.9	941.9	941.9
177.5°	944.7	945.7	946.6	947.4	948.4	948.5	947.6	946.9	946.1	945.3	945.5
180°	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8
2.5°	1542.1	1538.5	1534.5	1527.3	1518.6	1514.1	1506.9	1502.4	1493.2	1485.5	1477.4
5°	1620.3	1603.8	1588.6	1568.8	1547.2	1533.1	1516.6	1498.2	1479.1	1459.3	1437.8
7.5°	1701.4	1672.1	1640.3	1606.1	1572.6	1541.8	1512.4	1483.6	1456.6	1424.0	1396.4
10°	1755.9	1718.9	1679.5	1633.0	1587.9	1548.4	1508.4	1473.4	1437.8	1399.6	1365.8
12.5°	1810.2	1761.1	1705.4	1654.4	1600.1	1552.5	1505.3	1460.7	1415.9	1373.7	1334.3
15°	1848.7	1805.4	1753.9	1681.4	1620.3	1554.8	1492.4	1434.5	1380.4	1333.4	1283.8
17.5°	1874.1	1818.3	1762.9	1693.4	1613.4	1540.0	1469.4	1403.2	1342.2	1282.5	1234.6
20°	1878.6	1821.4	1763.5	1695.4	1613.4	1529.4	1458.8	1379.2	1313.7	1252.0	1193.4
22.5°	1877.1	1812.2	1749.2	1679.1	1599.1	1521.7	1436.3	1355.3	1284.2	1223.5	1162.4
25°	1862.7	1793.4	1714.5	1643.9	1565.0	1482.9	1396.4	1312.4	1239.9	1170.5	1110.1
27.5°	1850.8	1760.8	1671.5	1589.1	1513.0	1437.8	1354.9	1268.9	1188.5	1118.2	1061.3
30°	1836.0	1737.4	1636.8	1551.0	1472.7	1399.6	1321.4	1237.4	1153.4	1084.7	1023.6
32.5°	1822.8	1707.9	1601.8	1508.3	1425.4	1354.2	1282.1	1202.2	1119.7	1050.1	989.0
35°	1797.1	1664.2	1542.8	1437.1	1348.7	1275.5	1215.1	1140.7	1065.0	997.5	939.0
37.5°	1764.7	1606.9	1476.6	1365.8	1268.9	1191.8	1135.6	1078.5	1005.8	940.8	887.9
40°	1739.3	1566.2	1428.2	1314.9	1214.5	1134.3	1082.1	1028.0	967.6	907.2	851.2
42.5°	1707.2	1529.7	1379.3	1257.4	1157.9	1079.9	1025.1	979.2	925.9	869.5	817.6
45°	1648.3	1463.2	1300.3	1169.3	1068.7	991.7	935.2	900.8	860.7	807.3	763.4
47.5°	1561.7	1383.4	1214.9	1079.7	976.0	904.7	851.6	818.6	790.4	750.6	710.9
50°	1484.8	1323.9	1153.4	1019.2	915.5	843.6	794.6	764.7	740.5	709.9	676.3
52.5°	1398.8	1249.1	1092.8	960.1	857.4	786.6	738.6	712.3	692.1	670.2	637.1
55°	1262.2	1134.9	989.9	863.9	769.1	699.7	657.8	634.9	618.4	601.8	581.5
57.5°	1111.6	1012.1	883.6	768.5	681.2	618.1	578.9	556.7	543.8	535.3	523.3
60°	1005.8	920.6	809.8	704.8	619.6	563.6	525.5	508.3	497.5	490.5	481.5
62.5°	907.6	837.5	735.0	639.2	564.7	511.7	477.7	461.0	450.6	447.2	439.9
65°	762.8	708.7	624.1	544.6	481.0	435.7	407.2	391.2	384.8	381.1	381.7
67.5°	620.1	587.2	519.2	451.4	400.7	362.8	339.9	327.6	324.4	319.3	319.2
70°	533.1	508.3	451.0	391.9	346.7	317.4	297.1	284.4	281.2	278.6	278.1
72.5°	456.3	434.5	384.8	337.4	296.8	271.2	254.3	246.7	241.5	240.0	239.9
75°	342.9	330.8	291.3	253.8	225.8	208.0	196.6	189.5	185.8	185.1	185.8
77.5°	243.7	233.2	208.1	181.5	163.9	150.4	140.7	138.3	133.9	134.1	133.5
80°	183.2	176.3	160.3	139.3	124.7	113.2	108.1	103.7	102.5	100.5	102.5
82.5°	132.8	125.4	114.5	101.1	89.1	82.2	77.1	75.7	74.9	74.1	74.5
85°	65.5	66.2	59.8	49.6	44.5	40.7	37.5	37.5	36.9	36.3	36.9
87.5°	24.3	23.1	20.7	19.0	16.2	14.4	13.7	13.9	12.6	12.3	13.1
90°	9.5	8.4	7.2	5.9	4.7	3.4	2.1	0.8	2.1	3.4	4.7
92.5°	25.4	24.0	22.6	21.5	20.5	19.7	18.8	17.8	18.8	19.7	20.5
95°	53.4	51.8	50.2	49.2	48.9	48.5	48.3	47.9	48.3	48.5	48.9
97.5°	85.9	83.6	81.3	80.1	80.0	79.8	79.7	79.6	79.7	79.8	80.0
100°	108.5	106.4	104.2	103.2	103.2	103.2	103.2	103.2	103.2	103.2	103.2
102.5°	134.2	133.1	132.1	131.2	130.5	129.9	129.2	128.6	129.2	129.9	130.5
105°	174.2	173.2	172.2	171.4	170.5	169.7	168.9	168.1	168.9	169.7	170.5
107.5°	217.3	216.5	215.7	215.0	214.1	213.3	212.4	211.7	212.4	213.3	214.1
110°	246.7	246.2	245.7	245.1	244.2	243.4	242.6	241.8	242.6	243.4	244.2



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	275.9	275.2	274.7	274.1	273.7	273.2	272.9	272.4	272.9	273.2	273.7
115°	321.4	321.1	320.7	320.3	319.6	319.0	318.3	317.6	318.3	319.0	319.6
117.5°	365.1	364.9	364.6	364.2	363.9	363.6	363.4	363.1	363.4	363.6	363.9
120°	395.5	395.3	395.1	394.6	393.8	393.0	392.2	391.3	392.2	393.0	393.8
122.5°	424.4	424.0	423.6	423.2	422.9	422.6	422.4	422.0	422.4	422.6	422.9
125°	468.4	468.3	468.1	467.5	466.6	465.5	464.6	463.5	464.6	465.5	466.6
127.5°	510.8	510.6	510.4	510.0	509.4	508.9	508.4	507.8	508.4	508.9	509.4
130°	538.9	538.5	538.2	537.6	536.8	536.0	535.2	534.3	535.2	536.0	536.8
132.5°	566.8	566.8	566.8	566.3	564.9	563.5	562.2	560.9	562.2	563.5	564.9
135°	607.8	607.6	607.4	606.8	605.9	604.8	603.9	602.9	603.9	604.8	605.9
137.5°	647.5	647.2	646.9	646.2	645.3	644.3	643.4	642.4	643.4	644.3	645.3
140°	672.7	672.1	671.7	671.0	670.2	669.4	668.5	667.8	668.5	669.4	670.2
142.5°	697.8	697.1	696.5	695.9	695.1	694.5	693.8	693.1	693.8	694.5	695.1
145°	734.5	734.1	733.6	733.0	732.4	731.7	731.0	730.4	731.0	731.7	732.4
147.5°	767.5	767.1	766.7	766.3	766.0	765.6	765.3	764.9	765.3	765.6	766.0
150°	788.8	788.2	787.5	787.2	787.4	787.6	787.7	787.9	787.7	787.6	787.4
152.5°	808.4	808.1	807.9	807.7	807.5	807.2	807.0	806.7	807.0	807.2	807.5
155°	836.2	836.0	835.8	835.8	835.8	835.8	835.8	835.8	835.8	835.8	835.8
157.5°	860.5	860.4	860.2	860.3	860.6	861.0	861.4	861.8	861.4	861.0	860.6
160°	875.2	875.1	875.0	875.1	875.6	876.1	876.6	877.0	876.6	876.1	875.6
162.5°	889.1	889.0	889.0	889.2	889.6	889.9	890.2	890.6	890.2	889.9	889.6
165°	907.7	907.5	907.4	907.5	907.8	908.1	908.4	908.8	908.4	908.1	907.8
167.5°	921.1	921.1	921.1	921.4	922.1	922.7	923.4	924.1	923.4	922.7	922.1
170°	929.3	929.3	929.3	929.7	930.4	931.0	931.7	932.4	931.7	931.0	930.4
172.5°	935.3	935.3	935.3	935.6	936.2	936.9	937.5	938.2	937.5	936.9	936.2
175°	941.9	941.9	941.9	942.3	942.9	943.6	944.2	944.9	944.2	943.6	942.9
177.5°	945.6	945.7	945.8	946.1	946.7	947.3	947.7	948.3	947.7	947.3	946.7
180°	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8
2.5°	1472.8	1467.3	1462.6	1452.5	1446.9	1439.3	1433.1	1439.7	1432.7	1435.7	1431.2
5°	1426.9	1409.1	1396.4	1377.9	1362.1	1347.4	1336.6	1334.6	1329.6	1327.0	1319.4
7.5°	1371.7	1349.4	1327.6	1303.3	1283.0	1262.3	1249.1	1238.1	1230.9	1221.3	1214.8
10°	1339.2	1309.2	1283.8	1254.5	1229.1	1206.8	1189.0	1180.1	1171.9	1159.7	1155.3
12.5°	1298.9	1268.0	1237.0	1205.7	1181.2	1156.4	1141.1	1127.7	1121.9	1108.3	1106.9
15°	1250.8	1204.3	1173.7	1141.9	1108.2	1087.9	1075.2	1060.5	1054.1	1044.6	1037.6
17.5°	1193.2	1151.7	1113.5	1080.6	1051.7	1034.5	1018.8	1008.7	997.8	991.6	980.1
20°	1151.5	1112.0	1073.8	1038.9	1016.6	996.8	984.1	974.6	963.2	960.0	948.6
22.5°	1116.3	1072.8	1036.2	1006.8	982.5	960.3	946.5	940.0	932.1	922.3	920.0
25°	1059.2	1014.1	982.9	953.7	932.0	911.6	902.1	893.8	886.2	879.2	876.7
27.5°	1009.8	969.5	932.5	906.1	887.2	868.6	860.3	850.2	844.6	839.0	832.1
30°	975.2	933.9	901.4	876.0	855.6	839.1	830.2	823.2	818.1	813.0	809.2
32.5°	939.6	901.4	869.9	845.0	824.6	812.1	804.3	799.3	793.7	787.6	782.8
35°	892.6	850.6	820.0	798.4	782.5	773.0	764.0	759.6	753.2	753.2	748.1
37.5°	839.5	803.2	776.3	756.6	742.3	733.8	724.1	721.0	717.0	714.3	712.5
40°	807.9	774.2	748.8	729.1	713.8	706.8	699.2	694.1	691.5	688.3	687.0
42.5°	775.3	743.2	718.8	700.6	687.3	681.4	674.2	670.6	665.5	661.4	660.6
45°	725.9	694.7	672.4	657.8	646.3	639.3	634.9	627.3	624.7	619.6	619.0
47.5°	678.9	649.0	627.2	615.2	605.1	599.4	592.4	584.8	581.8	579.3	579.0
50°	643.9	616.4	596.1	584.7	575.1	566.8	559.9	554.8	552.8	552.8	554.1
52.5°	608.2	584.8	567.6	553.6	544.6	535.7	529.3	526.2	523.3	526.4	528.7
55°	556.0	532.4	519.7	506.4	497.5	487.3	484.1	482.9	481.0	486.1	488.6
57.5°	500.8	484.3	469.4	456.1	448.1	442.2	437.9	437.2	440.7	443.2	451.4
60°	465.7	446.6	433.2	423.0	413.5	409.7	408.4	407.2	409.7	416.7	427.5
62.5°	427.0	411.5	397.1	389.5	382.5	376.1	375.9	376.6	381.7	389.7	400.5
65°	370.2	356.8	347.3	338.5	332.7	328.9	330.2	332.7	338.5	349.2	361.4
67.5°	312.6	303.5	294.9	287.7	282.2	282.2	283.5	287.3	294.1	306.5	317.5
70°	275.5	265.3	258.3	255.1	250.6	248.1	251.9	258.3	264.0	275.5	285.0
72.5°	238.3	229.7	224.2	222.1	220.1	218.1	219.3	226.2	233.9	245.4	256.5
75°	183.2	180.0	176.3	173.7	171.7	173.1	174.3	180.7	187.0	199.2	211.9
77.5°	133.7	130.4	128.1	127.5	126.5	127.1	130.6	135.3	141.6	150.4	160.0
80°	101.1	99.9	98.6	97.9	97.9	98.6	103.7	106.9	112.6	120.8	128.5
82.5°	73.7	72.9	72.7	72.5	73.0	73.1	76.3	80.4	85.1	91.3	97.9
85°	38.8	37.5	39.4	40.1	38.8	40.7	41.9	44.5	46.5	49.6	52.8
87.5°	13.9	15.2	14.9	15.6	15.8	17.2	16.8	18.9	20.2	21.3	20.9
90°	5.9	7.2	8.4	9.5	10.7	11.8	12.6	13.4	14.2	15.1	15.7
92.5°	21.5	22.6	24.0	25.4	26.9	28.3	29.4	30.4	31.6	32.6	33.4
95°	49.2	50.2	51.8	53.4	55.1	56.7	57.9	59.0	60.2	61.4	62.1
97.5°	80.1	81.3	83.6	85.9	88.1	90.4	91.4	92.6	93.6	94.7	95.3
100°	103.2	104.2	106.4	108.5	110.7	112.7	114.2	115.7	117.2	118.7	119.6
102.5°	131.2	132.1	133.1	134.2	135.3	136.4	138.0	139.6	141.2	142.8	143.8
105°	171.4	172.2	173.2	174.2	175.1	176.2	177.1	178.1	179.1	180.1	180.8
107.5°	215.0	215.7	216.5	217.3	218.0	218.8	219.2	219.7	220.2	220.7	220.9
110°	245.1	245.7	246.2	246.7	247.1	247.6	248.2	248.6	249.1	249.6	249.8



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	274.1	274.7	275.2	275.9	276.5	277.1	277.4	277.6	277.8	278.1	278.1
115°	320.3	320.7	321.1	321.4	321.8	322.1	321.9	321.8	321.6	321.4	321.2
117.5°	364.2	364.6	364.9	365.1	365.4	365.7	365.8	366.0	366.1	366.3	366.0
120°	394.6	395.1	395.3	395.5	395.6	395.8	395.8	395.8	395.8	395.8	395.5
122.5°	423.2	423.6	424.0	424.4	424.8	425.3	425.1	425.0	424.9	424.7	424.4
125°	467.5	468.1	468.3	468.4	468.5	468.7	468.4	468.1	467.8	467.4	467.2
127.5°	510.0	510.4	510.6	510.8	511.0	511.2	511.0	510.9	510.7	510.6	510.3
130°	537.6	538.2	538.5	538.9	539.1	539.5	539.3	539.1	539.0	538.9	538.6
132.5°	566.3	566.8	566.8	566.8	566.7	566.7	566.5	566.3	566.1	566.0	565.6
135°	606.8	607.4	607.6	607.8	607.8	608.0	608.0	608.0	608.0	608.0	607.8
137.5°	646.2	646.9	647.2	647.5	647.9	648.3	648.5	648.7	648.8	649.0	648.8
140°	671.0	671.7	672.1	672.7	673.2	673.6	674.0	674.3	674.6	675.0	674.7
142.5°	695.9	696.5	697.1	697.8	698.3	699.0	699.2	699.4	699.6	699.7	699.5
145°	733.0	733.6	734.1	734.5	735.1	735.6	735.6	735.6	735.6	735.6	735.3
147.5°	766.3	766.7	767.1	767.5	767.9	768.3	768.6	769.0	769.5	769.9	769.5
150°	787.2	787.5	788.2	788.8	789.5	790.1	790.1	790.1	790.1	790.1	789.9
152.5°	807.7	807.9	808.1	808.4	808.7	809.0	809.4	809.7	810.1	810.5	810.4
155°	835.8	835.8	836.0	836.2	836.3	836.5	837.2	837.8	838.5	839.1	839.1
157.5°	860.3	860.2	860.4	860.5	860.6	860.8	861.5	862.1	862.8	863.5	863.3
160°	875.1	875.0	875.1	875.2	875.4	875.6	876.3	876.9	877.5	878.2	878.2
162.5°	889.2	889.0	889.0	889.1	889.1	889.2	889.9	890.7	891.6	892.3	892.2
165°	907.5	907.4	907.5	907.7	907.9	908.0	908.7	909.4	910.0	910.6	910.5
167.5°	921.4	921.1	921.1	921.1	921.1	921.1	922.1	923.1	924.1	925.1	925.0
170°	929.7	929.3	929.3	929.3	929.3	929.3	930.4	931.3	932.4	933.3	933.2
172.5°	935.6	935.3	935.3	935.3	935.3	935.3	936.2	937.3	938.2	939.2	939.2
175°	942.3	941.9	941.9	941.9	941.9	941.9	942.9	943.9	944.9	945.8	945.7
177.5°	946.1	945.8	945.7	945.6	945.5	945.3	946.1	946.9	947.6	948.5	948.4
180°	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8
2.5°	1428.0	1431.6	1428.6	1432.7	1428.6	1431.6	1428.0	1431.2	1435.7	1432.7	1439.7
5°	1316.3	1310.5	1314.3	1311.7	1314.3	1310.5	1316.3	1319.4	1327.0	1329.6	1334.6
7.5°	1213.0	1207.5	1201.2	1198.3	1201.2	1207.5	1213.0	1214.8	1221.3	1230.9	1238.1
10°	1148.3	1141.3	1140.7	1136.2	1140.7	1141.3	1148.3	1155.3	1159.7	1171.9	1180.1
12.5°	1101.0	1094.5	1087.2	1085.3	1087.2	1094.5	1101.0	1106.9	1108.3	1121.9	1127.7
15°	1033.8	1028.7	1024.3	1028.0	1024.3	1028.7	1033.8	1037.6	1044.6	1054.1	1060.5
17.5°	977.9	973.7	973.0	968.3	973.0	973.7	977.9	980.1	991.6	997.8	1008.7
20°	942.8	939.6	940.9	932.6	940.9	939.6	942.8	948.6	960.0	963.2	974.6
22.5°	914.8	908.6	907.9	906.2	907.9	908.6	914.8	920.0	922.3	932.1	940.0
25°	870.9	867.7	864.6	867.7	864.6	867.7	870.9	876.7	879.2	886.2	893.8
27.5°	832.6	828.8	827.9	828.3	827.9	828.8	832.6	832.1	839.0	844.6	850.2
30°	809.2	802.9	803.5	802.9	803.5	802.9	809.2	809.2	813.0	818.1	823.2
32.5°	783.7	779.4	778.5	777.4	778.5	779.4	783.7	782.8	787.6	793.7	799.3
35°	746.2	746.2	743.0	743.0	743.0	746.2	746.2	748.1	753.2	753.2	759.6
37.5°	711.0	710.3	708.4	708.7	708.4	710.3	711.0	712.5	714.3	717.0	721.0
40°	684.5	683.9	681.9	678.2	681.9	683.9	684.5	687.0	688.3	691.5	694.1
42.5°	659.0	657.0	656.0	654.8	656.0	657.0	659.0	660.6	661.4	665.5	670.6
45°	619.0	619.0	617.7	617.1	617.7	619.0	619.0	619.0	619.6	624.7	627.3
47.5°	580.0	581.2	583.6	583.2	583.6	581.2	580.0	579.0	579.3	581.8	584.8
50°	556.7	557.3	559.2	559.9	559.2	557.3	556.7	554.1	552.8	552.8	554.8
52.5°	530.7	534.4	536.8	536.4	536.8	534.4	530.7	528.7	526.4	523.3	526.2
55°	494.3	498.8	503.2	503.9	503.2	498.8	494.3	488.6	486.1	481.0	482.9
57.5°	458.3	464.5	469.2	470.8	469.2	464.5	458.3	451.4	443.2	440.7	437.2
60°	433.9	442.1	447.9	450.4	447.9	442.1	433.9	427.5	416.7	409.7	407.2
62.5°	410.5	419.7	425.5	425.9	425.5	419.7	410.5	400.5	389.7	381.7	376.6
65°	372.1	381.7	386.8	390.6	386.8	381.7	372.1	361.4	349.2	338.5	332.7
67.5°	330.9	340.4	346.1	349.1	346.1	340.4	330.9	317.5	306.5	294.1	287.3
70°	301.0	310.5	318.1	320.7	318.1	310.5	301.0	285.0	275.5	264.0	258.3
72.5°	271.4	279.9	286.1	289.1	286.1	279.9	271.4	256.5	245.4	233.9	226.2
75°	220.1	231.6	237.3	240.4	237.3	231.6	220.1	211.9	199.2	187.0	180.7
77.5°	169.8	180.1	183.6	185.2	183.6	180.1	169.8	160.0	150.4	141.6	135.3
80°	136.1	142.5	146.9	147.6	146.9	142.5	136.1	128.5	120.8	112.6	106.9
82.5°	104.6	109.9	111.3	113.0	111.3	109.9	104.6	97.9	91.3	85.1	80.4
85°	57.2	59.8	60.4	59.8	60.4	59.8	57.2	52.8	49.6	46.5	44.5
87.5°	22.1	21.7	21.8	22.9	21.8	21.7	22.1	20.9	21.3	20.2	18.9
90°	16.2	16.7	17.2	17.7	17.2	16.7	16.2	15.7	15.1	14.2	13.4
92.5°	33.7	34.0	34.4	34.8	34.4	34.0	33.7	33.4	32.6	31.6	30.4
95°	62.4	62.8	63.1	63.3	63.1	62.8	62.4	62.1	61.4	60.2	59.0
97.5°	95.5	95.7	96.0	96.1	96.0	95.7	95.5	95.3	94.7	93.6	92.6
100°	119.9	120.2	120.6	120.8	120.6	120.2	119.9	119.6	118.7	117.2	115.7
102.5°	144.3	144.7	145.2	145.6	145.2	144.7	144.3	143.8	142.8	141.2	139.6
105°	181.3	181.8	182.3	182.8	182.3	181.8	181.3	180.8	180.1	179.1	178.1
107.5°	220.9	220.8	220.8	220.8	220.8	220.8	220.9	220.9	220.7	220.2	219.7
110°	249.6	249.4	249.3	249.1	249.3	249.4	249.6	249.8	249.6	249.1	248.6



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	277.7	277.4	277.1	276.8	277.1	277.4	277.7	278.1	278.1	277.8	277.6
115°	321.1	320.9	320.7	320.7	320.7	320.9	321.1	321.2	321.4	321.6	321.8
117.5°	365.3	364.7	364.0	363.4	364.0	364.7	365.3	366.0	366.3	366.1	366.0
120°	394.8	394.2	393.5	392.9	393.5	394.2	394.8	395.5	395.8	395.8	395.8
122.5°	423.9	423.4	422.8	422.4	422.8	423.4	423.9	424.4	424.7	424.9	425.0
125°	467.0	466.8	466.7	466.6	466.7	466.8	467.0	467.2	467.4	467.8	468.1
127.5°	510.0	509.6	509.3	509.0	509.3	509.6	510.0	510.3	510.6	510.7	510.9
130°	538.3	537.9	537.6	537.2	537.6	537.9	538.3	538.6	538.9	539.0	539.1
132.5°	565.2	564.8	564.3	563.8	564.3	564.8	565.2	565.6	566.0	566.1	566.3
135°	607.1	606.4	605.8	605.1	605.8	606.4	607.1	607.8	608.0	608.0	608.0
137.5°	647.9	647.1	646.3	645.5	646.3	647.1	647.9	648.8	649.0	648.8	648.7
140°	673.9	673.1	672.2	671.5	672.2	673.1	673.9	674.7	675.0	674.6	674.3
142.5°	698.6	697.9	697.0	696.2	697.0	697.9	698.6	699.5	699.7	699.6	699.4
145°	734.8	734.3	733.9	733.3	733.9	734.3	734.8	735.3	735.6	735.6	735.6
147.5°	768.4	767.2	766.2	765.1	766.2	767.2	768.4	769.5	769.9	769.5	769.0
150°	789.6	789.3	788.9	788.6	788.9	789.3	789.6	789.9	790.1	790.1	790.1
152.5°	809.8	809.3	808.7	808.0	808.7	809.3	809.8	810.4	810.5	810.1	809.7
155°	838.2	837.4	836.6	835.8	836.6	837.4	838.2	839.1	839.1	838.5	837.8
157.5°	862.1	861.1	860.0	858.9	860.0	861.1	862.1	863.3	863.5	862.8	862.1
160°	877.3	876.5	875.6	874.9	875.6	876.5	877.3	878.2	878.2	877.5	876.9
162.5°	891.3	890.3	889.4	888.4	889.4	890.3	891.3	892.2	892.3	891.6	890.7
165°	909.5	908.5	907.5	906.5	907.5	908.5	909.5	910.5	910.6	910.0	909.4
167.5°	924.1	923.0	922.0	921.0	922.0	923.0	924.1	925.0	925.1	924.1	923.1
170°	932.1	930.9	929.8	928.7	929.8	930.9	932.1	933.2	933.3	932.4	931.3
172.5°	938.2	937.2	936.1	935.1	936.1	937.2	938.2	939.2	939.2	938.2	937.3
175°	944.6	943.5	942.4	941.2	942.4	943.5	944.6	945.7	945.8	944.9	943.9
177.5°	947.4	946.6	945.7	944.7	945.7	946.6	947.4	948.4	948.5	947.6	946.9
180°	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8
2.5°	1433.1	1439.3	1446.9	1452.5	1462.6	1467.3	1472.8	1477.4	1485.5	1493.2	1502.4
5°	1336.6	1347.4	1362.1	1377.9	1396.4	1409.1	1426.9	1437.8	1459.3	1479.1	1498.2
7.5°	1249.1	1262.3	1283.0	1303.3	1327.6	1349.4	1371.7	1396.4	1424.0	1456.6	1483.6
10°	1189.0	1206.8	1229.1	1254.5	1283.8	1309.2	1339.2	1365.8	1399.6	1437.8	1473.4
12.5°	1141.1	1156.4	1181.2	1205.7	1237.0	1268.0	1298.9	1334.3	1373.7	1415.9	1460.7
15°	1075.2	1087.9	1108.2	1141.9	1173.7	1204.3	1250.8	1283.8	1333.4	1380.4	1434.5
17.5°	1018.8	1034.5	1051.7	1080.6	1113.5	1151.7	1193.2	1234.6	1282.5	1342.2	1403.2
20°	984.1	996.8	1016.6	1038.9	1073.8	1112.0	1151.5	1193.4	1252.0	1313.7	1379.2
22.5°	946.5	960.3	982.5	1006.8	1036.2	1072.8	1116.3	1162.4	1223.5	1284.2	1355.3
25°	902.1	911.6	932.0	953.7	982.9	1014.1	1059.2	1110.1	1170.5	1239.9	1312.4
27.5°	860.3	868.6	887.2	906.1	932.5	969.5	1009.8	1061.3	1118.2	1188.5	1268.9
30°	830.2	839.1	855.6	876.0	901.4	933.9	975.2	1023.6	1084.7	1153.4	1237.4
32.5°	804.3	812.1	824.6	845.0	869.9	901.4	939.6	989.0	1050.1	1119.7	1202.2
35°	764.0	773.0	782.5	798.4	820.0	850.6	892.6	939.0	997.5	1065.0	1140.7
37.5°	724.1	733.8	742.3	756.6	776.3	803.2	839.5	887.9	940.8	1005.8	1078.5
40°	699.2	706.8	713.8	729.1	748.8	774.2	807.9	851.2	907.2	967.6	1028.0
42.5°	674.2	681.4	687.3	700.6	718.8	743.2	775.3	817.6	869.5	925.9	979.2
45°	634.9	639.3	646.3	657.8	672.4	694.7	725.9	763.4	807.3	860.7	900.8
47.5°	592.4	599.4	605.1	615.2	627.2	649.0	678.9	710.9	750.6	790.4	818.6
50°	559.9	566.8	575.1	584.7	596.1	616.4	643.9	676.3	709.9	740.5	764.7
52.5°	529.3	535.7	544.6	553.6	567.6	584.8	608.2	637.1	670.2	692.1	712.3
55°	484.1	487.3	497.5	506.4	519.7	532.4	556.0	581.5	601.8	618.4	634.9
57.5°	437.9	442.2	448.1	456.1	469.4	484.3	500.8	523.3	535.3	543.8	556.7
60°	408.4	409.7	413.5	423.0	433.2	446.6	465.7	481.5	490.5	497.5	508.3
62.5°	375.9	376.1	382.5	389.5	397.1	411.5	427.0	439.9	447.2	450.6	461.0
65°	330.2	328.9	332.7	338.5	347.3	356.8	370.2	381.7	381.1	384.8	391.2
67.5°	283.5	282.2	282.2	287.7	294.9	303.5	312.6	319.2	319.3	324.4	327.6
70°	251.9	248.1	250.6	255.1	258.3	265.3	275.5	278.1	278.6	281.2	284.4
72.5°	219.3	218.1	220.1	222.1	224.2	229.7	238.3	239.9	240.0	241.5	246.7
75°	174.3	173.1	171.7	173.7	176.3	180.0	183.2	185.8	185.1	185.8	189.5
77.5°	130.6	127.1	126.5	127.5	128.1	130.4	133.7	133.5	134.1	133.9	138.3
80°	103.7	98.6	97.9	97.9	98.6	99.9	101.1	102.5	100.5	102.5	103.7
82.5°	76.3	73.1	73.0	72.5	72.7	72.9	73.7	74.5	74.1	74.9	75.7
85°	41.9	40.7	38.8	40.1	39.4	37.5	38.8	36.9	36.3	36.9	37.5
87.5°	16.8	17.2	15.8	15.6	14.9	15.2	13.9	13.1	12.3	12.6	13.9
90°	12.6	11.8	10.7	9.5	8.4	7.2	5.9	4.7	3.4	2.1	0.8
92.5°	29.4	28.3	26.9	25.4	24.0	22.6	21.5	20.5	19.7	18.8	17.8
95°	57.9	56.7	55.1	53.4	51.8	50.2	49.2	48.9	48.5	48.3	47.9
97.5°	91.4	90.4	88.1	85.9	83.6	81.3	80.1	80.0	79.8	79.7	79.6
100°	114.2	112.7	110.7	108.5	106.4	104.2	103.2	103.2	103.2	103.2	103.2
102.5°	138.0	136.4	135.3	134.2	133.1	132.1	131.2	130.5	129.9	129.2	128.6
105°	177.1	176.2	175.1	174.2	173.2	172.2	171.4	170.5	169.7	168.9	168.1
107.5°	219.2	218.8	218.0	217.3	216.5	215.7	215.0	214.1	213.3	212.4	211.7
110°	248.2	247.6	247.1	246.7	246.2	245.7	245.1	244.2	243.4	242.6	241.8



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	277.4	277.1	276.5	275.9	275.2	274.7	274.1	273.7	273.2	272.9	272.4
115°	321.9	322.1	321.8	321.4	321.1	320.7	320.3	319.6	319.0	318.3	317.6
117.5°	365.8	365.7	365.4	365.1	364.9	364.6	364.2	363.9	363.6	363.4	363.1
120°	395.8	395.8	395.6	395.5	395.3	395.1	394.6	393.8	393.0	392.2	391.3
122.5°	425.1	425.3	424.8	424.4	424.0	423.6	423.2	422.9	422.6	422.4	422.0
125°	468.4	468.7	468.5	468.4	468.3	468.1	467.5	466.6	465.5	464.6	463.5
127.5°	511.0	511.2	511.0	510.8	510.6	510.4	510.0	509.4	508.9	508.4	507.8
130°	539.3	539.5	539.1	538.9	538.5	538.2	537.6	536.8	536.0	535.2	534.3
132.5°	566.5	566.7	566.7	566.8	566.8	566.8	566.3	564.9	563.5	562.2	560.9
135°	608.0	608.0	607.8	607.8	607.6	607.4	606.8	605.9	604.8	603.9	602.9
137.5°	648.5	648.3	647.9	647.5	647.2	646.9	646.2	645.3	644.3	643.4	642.4
140°	674.0	673.6	673.2	672.7	672.1	671.7	671.0	670.2	669.4	668.5	667.8
142.5°	699.2	699.0	698.3	697.8	697.1	696.5	695.9	695.1	694.5	693.8	693.1
145°	735.6	735.6	735.1	734.5	734.1	733.6	733.0	732.4	731.7	731.0	730.4
147.5°	768.6	768.3	767.9	767.5	767.1	766.7	766.3	766.0	765.6	765.3	764.9
150°	790.1	790.1	789.5	788.8	788.2	787.5	787.2	787.4	787.6	787.7	787.9
152.5°	809.4	809.0	808.7	808.4	808.1	807.9	807.7	807.5	807.2	807.0	806.7
155°	837.2	836.5	836.3	836.2	836.0	835.8	835.8	835.8	835.8	835.8	835.8
157.5°	861.5	860.8	860.6	860.5	860.4	860.2	860.3	860.6	861.0	861.4	861.8
160°	876.3	875.6	875.4	875.2	875.1	875.0	875.1	875.6	876.1	876.6	877.0
162.5°	889.9	889.2	889.1	889.1	889.0	889.0	889.2	889.6	889.9	890.2	890.6
165°	908.7	908.0	907.9	907.7	907.5	907.4	907.5	907.8	908.1	908.4	908.8
167.5°	922.1	921.1	921.1	921.1	921.1	921.1	921.4	922.1	922.7	923.4	924.1
170°	930.4	929.3	929.3	929.3	929.3	929.3	929.7	930.4	931.0	931.7	932.4
172.5°	936.2	935.3	935.3	935.3	935.3	935.3	935.6	936.2	936.9	937.5	938.2
175°	942.9	941.9	941.9	941.9	941.9	941.9	942.3	942.9	943.6	944.2	944.9
177.5°	946.1	945.3	945.5	945.6	945.7	945.8	946.1	946.7	947.3	947.7	948.3
180°	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8
2.5°	1506.9	1514.1	1518.6	1527.3	1534.5	1538.5	1542.1	1545.1	1548.7	1551.7	1560.4
5°	1516.6	1533.1	1547.2	1568.8	1588.6	1603.8	1620.3	1634.9	1647.0	1664.2	1677.5
7.5°	1512.4	1541.8	1572.6	1606.1	1640.3	1672.1	1701.4	1728.7	1753.5	1783.6	1809.9
10°	1508.4	1548.4	1587.9	1633.0	1679.5	1718.9	1755.9	1793.4	1820.7	1858.9	1891.3
12.5°	1505.3	1552.5	1600.1	1654.4	1705.4	1761.1	1810.2	1837.7	1879.2	1909.8	1948.3
15°	1492.4	1554.8	1620.3	1681.4	1753.9	1805.4	1848.7	1902.1	1941.0	1979.7	2021.8
17.5°	1469.4	1540.0	1613.4	1693.4	1762.9	1818.3	1874.1	1925.5	1971.9	2023.9	2076.2
20°	1458.8	1529.4	1613.4	1695.4	1763.5	1821.4	1878.6	1935.2	1986.1	2053.0	2113.4
22.5°	1436.3	1521.7	1599.1	1679.1	1749.2	1812.2	1877.1	1941.4	2009.0	2084.4	2160.2
25°	1396.4	1482.9	1565.0	1643.9	1714.5	1793.4	1862.7	1948.6	2035.1	2135.0	2229.1
27.5°	1354.9	1437.8	1513.0	1589.1	1671.5	1760.8	1850.8	1948.2	2061.4	2187.5	2320.4
30°	1321.4	1399.6	1472.7	1551.0	1636.8	1737.4	1836.0	1951.7	2082.8	2224.7	2382.5
32.5°	1282.1	1354.2	1425.4	1508.3	1601.8	1707.9	1822.8	1949.7	2107.2	2268.4	2430.8
35°	1215.1	1275.5	1348.7	1437.1	1542.8	1664.2	1797.1	1947.3	2128.0	2313.1	2449.9
37.5°	1135.6	1191.8	1268.9	1365.8	1476.6	1606.9	1764.7	1942.9	2134.8	2282.4	2326.5
40°	1082.1	1134.3	1214.5	1314.9	1428.2	1566.2	1739.3	1927.6	2113.4	2207.5	2171.2
42.5°	1025.1	1079.9	1157.9	1257.4	1379.3	1529.7	1707.2	1895.5	2051.3	2086.9	1961.5
45°	935.2	991.7	1068.7	1169.3	1300.3	1463.2	1648.3	1819.5	1909.1	1844.9	1650.9
47.5°	851.6	904.7	976.0	1079.7	1214.9	1383.4	1561.7	1698.2	1705.3	1552.0	1344.7
50°	794.6	843.6	915.5	1019.2	1153.4	1323.9	1484.8	1592.3	1544.0	1370.3	1171.2
52.5°	738.6	786.6	857.4	960.1	1092.8	1249.1	1398.8	1474.2	1383.2	1204.9	1034.8
55°	657.8	699.7	769.1	863.9	989.9	1134.9	1262.2	1288.3	1169.9	994.3	856.3
57.5°	578.9	618.1	681.2	768.5	883.6	1012.1	1111.6	1106.1	981.0	830.3	720.8
60°	525.5	563.6	619.6	704.8	809.8	920.6	1005.8	985.4	861.4	731.6	639.3
62.5°	477.7	511.7	564.7	639.2	735.0	837.5	907.6	877.5	756.0	642.5	569.7
65°	407.2	435.7	481.0	544.6	624.1	708.7	762.8	724.0	620.3	531.9	473.3
67.5°	339.9	362.8	400.7	451.4	519.2	587.2	620.1	581.1	498.1	433.6	390.2
70°	297.1	317.4	346.7	391.9	451.0	508.3	533.1	498.1	426.9	371.6	340.4
72.5°	254.3	271.2	296.8	337.4	384.8	434.5	456.3	422.8	364.3	317.5	288.4
75°	196.6	208.0	225.8	253.8	291.3	330.8	342.9	313.7	276.1	241.1	222.1
77.5°	140.7	150.4	163.9	181.5	208.1	233.2	243.7	226.9	197.8	175.7	160.0
80°	108.1	113.2	124.7	139.3	160.3	176.3	183.2	172.4	152.0	135.5	123.4
82.5°	77.1	82.2	89.1	101.1	114.5	125.4	132.8	125.5	110.8	97.8	90.9
85°	37.5	40.7	44.5	49.6	59.8	66.2	65.5	61.1	55.3	50.2	46.5
87.5°	13.7	14.4	16.2	19.0	20.7	23.1	24.3	23.5	21.7	20.4	18.9
90°	2.1	3.4	4.7	5.9	7.2	8.4	9.5	10.7	11.8	12.6	13.4
92.5°	18.8	19.7	20.5	21.5	22.6	24.0	25.4	26.9	28.3	29.4	30.4
95°	48.3	48.5	48.9	49.2	50.2	51.8	53.4	55.1	56.7	57.9	59.0
97.5°	79.7	79.8	80.0	80.1	81.3	83.6	85.9	88.1	90.4	91.4	92.6
100°	103.2	103.2	103.2	103.2	104.2	106.4	108.5	110.7	112.7	114.2	115.7
102.5°	129.2	129.9	130.5	131.2	132.1	133.1	134.2	135.3	136.4	138.0	139.6
105°	168.9	169.7	170.5	171.4	172.2	173.2	174.2	175.1	176.2	177.1	178.1
107.5°	212.4	213.3	214.1	215.0	215.7	216.5	217.3	218.0	218.8	219.2	219.7
110°	242.6	243.4	244.2	245.1	245.7	246.2	246.7	247.1	247.6	248.2	248.6



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	272.9	273.2	273.7	274.1	274.7	275.2	275.9	276.5	277.1	277.4	277.6
115°	318.3	319.0	319.6	320.3	320.7	321.1	321.4	321.8	322.1	321.9	321.8
117.5°	363.4	363.6	363.9	364.2	364.6	364.9	365.1	365.4	365.7	365.8	366.0
120°	392.2	393.0	393.8	394.6	395.1	395.3	395.5	395.6	395.8	395.8	395.8
122.5°	422.4	422.6	422.9	423.2	423.6	424.0	424.4	424.8	425.3	425.1	425.0
125°	464.6	465.5	466.6	467.5	468.1	468.3	468.4	468.5	468.7	468.4	468.1
127.5°	508.4	508.9	509.4	510.0	510.4	510.6	510.8	511.0	511.2	511.0	510.9
130°	535.2	536.0	536.8	537.6	538.2	538.5	538.9	539.1	539.5	539.3	539.1
132.5°	562.2	563.5	564.9	566.3	566.8	566.8	566.8	566.7	566.7	566.5	566.3
135°	603.9	604.8	605.9	606.8	607.4	607.6	607.8	607.8	608.0	608.0	608.0
137.5°	643.4	644.3	645.3	646.2	646.9	647.2	647.5	647.9	648.3	648.5	648.7
140°	668.5	669.4	670.2	671.0	671.7	672.1	672.7	673.2	673.6	674.0	674.3
142.5°	693.8	694.5	695.1	695.9	696.5	697.1	697.8	698.3	699.0	699.2	699.4
145°	731.0	731.7	732.4	733.0	733.6	734.1	734.5	735.1	735.6	735.6	735.6
147.5°	765.3	765.6	766.0	766.3	766.7	767.1	767.5	767.9	768.3	768.6	769.0
150°	787.7	787.6	787.4	787.2	787.5	788.2	788.8	789.5	790.1	790.1	790.1
152.5°	807.0	807.2	807.5	807.7	807.9	808.1	808.4	808.7	809.0	809.4	809.7
155°	835.8	835.8	835.8	835.8	835.8	836.0	836.2	836.3	836.5	837.2	837.8
157.5°	861.4	861.0	860.6	860.3	860.2	860.4	860.5	860.6	860.8	861.5	862.1
160°	876.6	876.1	875.6	875.1	875.0	875.1	875.2	875.4	875.6	876.3	876.9
162.5°	890.2	889.9	889.6	889.2	889.0	889.0	889.1	889.1	889.2	889.9	890.7
165°	908.4	908.1	907.8	907.5	907.4	907.5	907.7	907.9	908.0	908.7	909.4
167.5°	923.4	922.7	922.1	921.4	921.1	921.1	921.1	921.1	921.1	922.1	923.1
170°	931.7	931.0	930.4	929.7	929.3	929.3	929.3	929.3	929.3	930.4	931.3
172.5°	937.5	936.9	936.2	935.6	935.3	935.3	935.3	935.3	935.3	936.2	937.3
175°	944.2	943.6	942.9	942.3	941.9	941.9	941.9	941.9	941.9	942.9	943.9
177.5°	947.7	947.3	946.7	946.1	945.8	945.7	945.6	945.5	945.3	946.1	946.9
180°	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8	1498.8
2.5°	1567.5	1571.6	1580.3	1577.2	1581.3	1583.3	1585.4
5°	1694.1	1714.5	1723.3	1722.1	1735.5	1732.3	1729.1
7.5°	1837.1	1858.5	1870.5	1885.4	1894.0	1894.6	1902.1
10°	1918.1	1946.1	1957.5	1973.4	1983.6	1989.3	1988.7
12.5°	1980.2	2002.1	2027.7	2035.5	2049.3	2056.4	2053.8
15°	2054.8	2089.8	2116.6	2129.9	2147.1	2152.2	2159.2
17.5°	2121.5	2168.4	2199.6	2241.1	2256.7	2266.2	2260.7
20°	2171.9	2233.6	2264.7	2314.4	2341.7	2356.4	2351.3
22.5°	2231.5	2298.2	2355.9	2398.9	2440.4	2460.2	2464.3
25°	2333.5	2425.1	2509.7	2566.4	2617.8	2629.9	2656.7
27.5°	2447.5	2555.5	2646.0	2705.5	2741.4	2754.9	2763.3
30°	2519.2	2626.8	2694.8	2733.0	2744.4	2743.2	2741.9
32.5°	2554.4	2621.7	2634.8	2624.0	2597.8	2575.7	2552.6
35°	2504.6	2454.4	2379.3	2282.6	2211.3	2139.5	2132.4
37.5°	2252.6	2091.9	1966.9	1827.3	1746.8	1697.0	1662.7
40°	2015.3	1832.8	1681.4	1563.7	1481.7	1449.2	1417.4
42.5°	1757.8	1583.5	1449.3	1350.9	1289.3	1253.3	1228.0
45°	1428.2	1274.2	1169.3	1098.1	1049.0	1021.1	1005.1
47.5°	1170.3	1056.4	967.2	915.9	882.0	860.3	860.4
50°	1031.9	923.1	863.9	823.2	793.9	776.7	780.0
52.5°	909.2	827.9	777.4	743.3	721.7	711.1	710.8
55°	760.3	701.7	668.6	643.9	629.1	617.1	619.6
57.5°	650.3	601.0	578.8	558.2	548.0	543.2	536.1
60°	582.1	543.9	524.8	508.3	498.1	494.3	487.3
62.5°	521.5	491.5	473.0	459.4	450.3	449.0	443.6
65°	438.3	415.4	398.9	392.5	383.0	380.4	380.4
67.5°	361.4	345.0	332.1	326.2	322.1	322.6	319.6
70°	313.0	299.6	291.3	285.0	281.8	282.5	279.9
72.5°	273.8	258.9	251.7	247.9	243.6	245.3	244.3
75°	207.4	199.7	196.0	192.1	189.5	188.3	187.0
77.5°	152.3	145.5	142.6	140.4	140.8	137.8	140.3
80°	117.7	112.0	110.1	106.9	106.2	106.2	105.6
82.5°	86.1	82.9	81.5	78.9	77.8	78.8	77.1
85°	44.5	41.9	41.4	41.4	40.1	38.8	41.9
87.5°	19.1	17.2	17.4	17.0	17.1	16.7	15.7
90°	14.2	15.1	15.7	16.2	16.7	17.2	17.7
92.5°	31.6	32.6	33.4	33.7	34.0	34.4	34.8
95°	60.2	61.4	62.1	62.4	62.8	63.1	63.3
97.5°	93.6	94.7	95.3	95.5	95.7	96.0	96.1
100°	117.2	118.7	119.6	119.9	120.2	120.6	120.8
102.5°	141.2	142.8	143.8	144.3	144.7	145.2	145.6
105°	179.1	180.1	180.8	181.3	181.8	182.3	182.8
107.5°	220.2	220.7	220.9	220.9	220.8	220.8	220.8
110°	249.1	249.6	249.8	249.6	249.4	249.3	249.1



TEST NUMBER: P333269-830

CATALOG NUMBER: S125DIP-S1090D810U830-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	277.8	278.1	278.1	277.7	277.4	277.1	276.8
115°	321.6	321.4	321.2	321.1	320.9	320.7	320.7
117.5°	366.1	366.3	366.0	365.3	364.7	364.0	363.4
120°	395.8	395.8	395.5	394.8	394.2	393.5	392.9
122.5°	424.9	424.7	424.4	423.9	423.4	422.8	422.4
125°	467.8	467.4	467.2	467.0	466.8	466.7	466.6
127.5°	510.7	510.6	510.3	510.0	509.6	509.3	509.0
130°	539.0	538.9	538.6	538.3	537.9	537.6	537.2
132.5°	566.1	566.0	565.6	565.2	564.8	564.3	563.8
135°	608.0	608.0	607.8	607.1	606.4	605.8	605.1
137.5°	648.8	649.0	648.8	647.9	647.1	646.3	645.5
140°	674.6	675.0	674.7	673.9	673.1	672.2	671.5
142.5°	699.6	699.7	699.5	698.6	697.9	697.0	696.2
145°	735.6	735.6	735.3	734.8	734.3	733.9	733.3
147.5°	769.5	769.9	769.5	768.4	767.2	766.2	765.1
150°	790.1	790.1	789.9	789.6	789.3	788.9	788.6
152.5°	810.1	810.5	810.4	809.8	809.3	808.7	808.0
155°	838.5	839.1	839.1	838.2	837.4	836.6	835.8
157.5°	862.8	863.5	863.3	862.1	861.1	860.0	858.9
160°	877.5	878.2	878.2	877.3	876.5	875.6	874.9
162.5°	891.6	892.3	892.2	891.3	890.3	889.4	888.4
165°	910.0	910.6	910.5	909.5	908.5	907.5	906.5
167.5°	924.1	925.1	925.0	924.1	923.0	922.0	921.0
170°	932.4	933.3	933.2	932.1	930.9	929.8	928.7
172.5°	938.2	939.2	939.2	938.2	937.2	936.1	935.1
175°	944.9	945.8	945.7	944.6	943.5	942.4	941.2
177.5°	947.6	948.5	948.4	947.4	946.6	945.7	944.7
180°	947.1	947.1	947.1	947.1	947.1	947.1	947.1

(END OF REPORT)