

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333329-830

Luminaire Tested: **S125DIP-S1270D1035U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333329-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIP-S1270D1035U830-4F0-1E-UDD-F1  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1035 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8210.3 lumens  
Efficiency: N/A  
Efficacy: 122.9 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 66.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333329-830

CATALOG NUMBER: S125DIP-S1270D1035U830-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

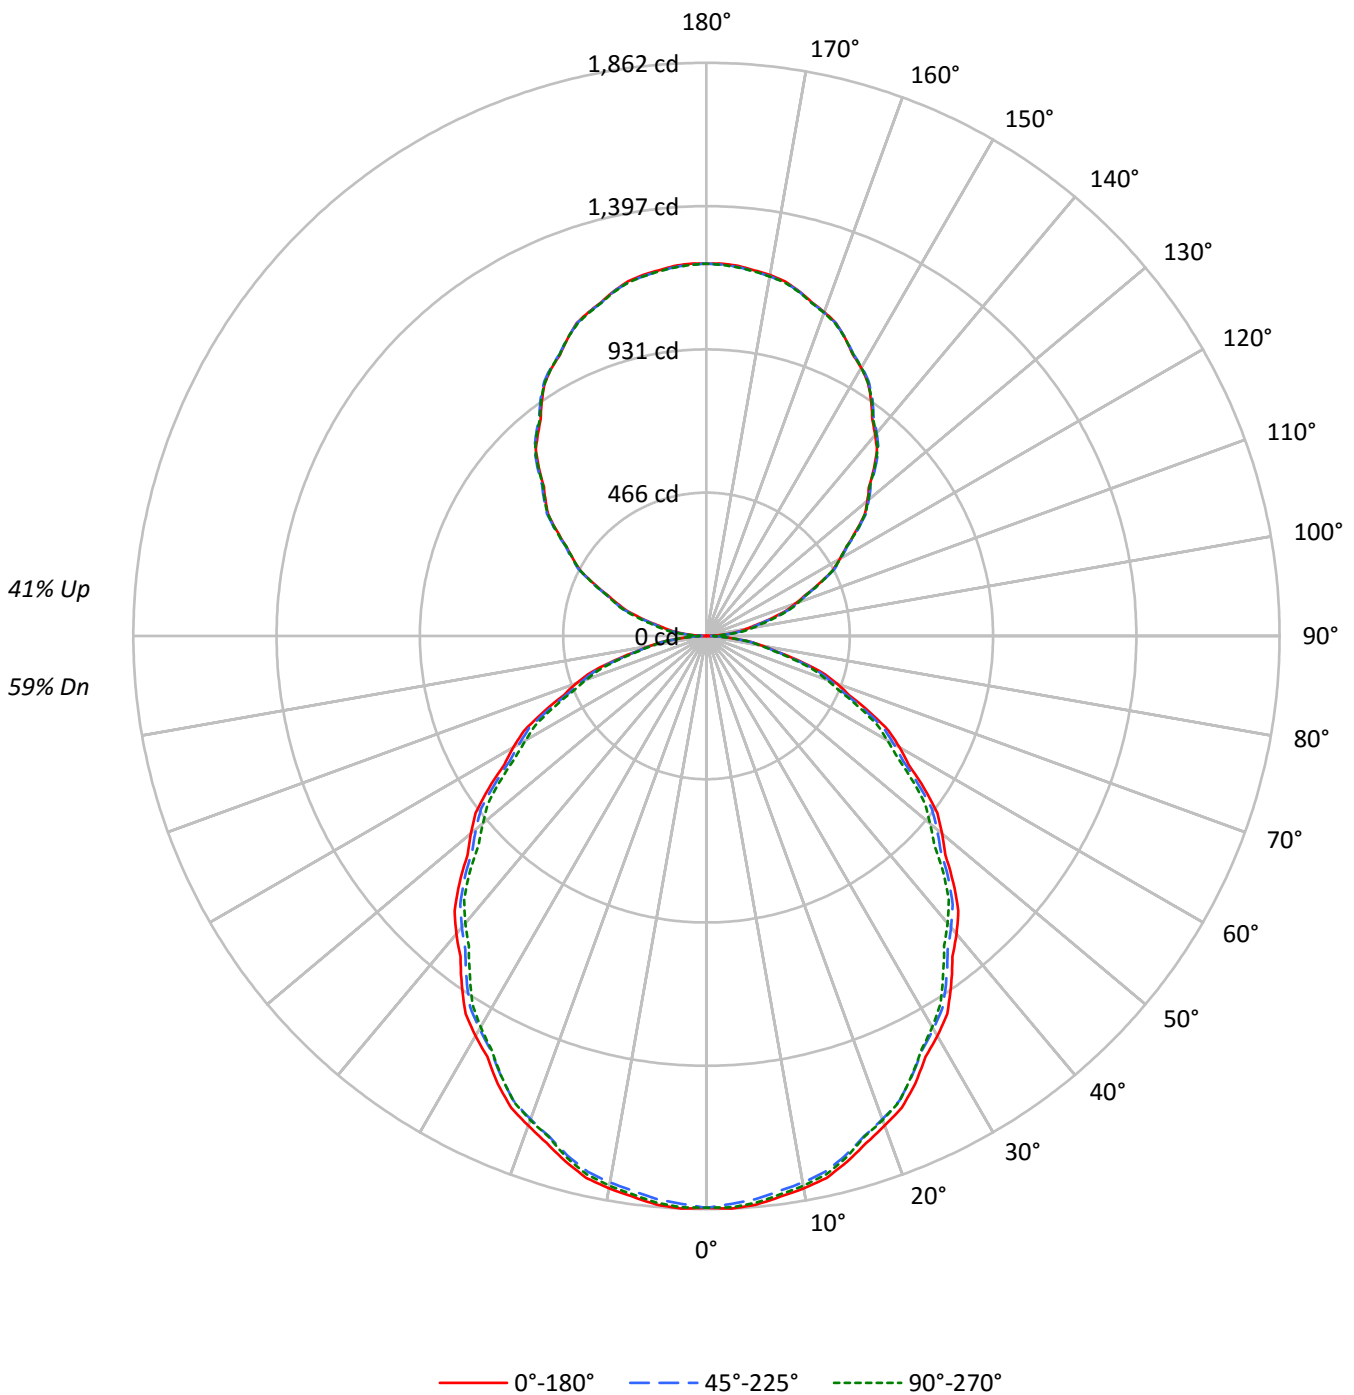



TEST NUMBER: P333329-830

CATALOG NUMBER: S125DIP-S1270D1035U830-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59
1	100	95	91	88	93	89	86	82	77	75	72	67	65	63	57	55	54	49
2	91	83	77	72	84	78	72	68	68	64	60	58	55	53	50	48	46	41
3	83	73	66	60	77	68	62	56	60	55	50	52	48	44	44	41	39	35
4	76	65	57	50	70	61	54	48	53	47	43	46	42	38	39	36	33	30
5	70	58	49	43	65	54	47	41	48	42	37	41	37	33	36	32	29	26
6	64	52	44	38	60	49	41	36	43	37	32	37	33	29	32	29	26	23
7	59	47	39	33	55	44	37	32	39	33	29	34	29	26	29	26	23	20
8	55	43	35	29	51	40	33	28	36	30	25	31	26	23	27	23	20	18
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	21	18	16
10	48	36	28	23	45	34	27	23	30	24	21	27	22	19	23	19	17	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	11996	11996	11996
5°	12023	11909	11985
10°	11950	11825	11893
15°	11820	11683	11732
20°	11635	11483	11504
25°	11436	11247	11236
30°	11189	10992	10937
35°	10925	10717	10566
40°	10655	10420	10270
45°	10361	10147	9945
50°	10040	9818	9523
55°	9730	9448	9183
60°	9357	9074	8751
65°	8915	8623	8332
70°	8492	8103	7825
75°	7738	7481	7224
80°	6884	6776	6616
85°	5995	6099	5772



TEST NUMBER: P333329-830

CATALOG NUMBER: S125DIP-S1270D1035U830-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	175.1	2.1
10°-20°	494.7	6.0
20°-30°	730.5	8.9
30°-40°	852.4	10.4
40°-50°	856.1	10.4
50°-60°	751.5	9.2
60°-70°	559.9	6.8
70°-80°	320.2	3.9
80°-90°	95.8	1.2
90°-100°	81.0	1.0
100°-110°	239.1	2.9
110°-120°	405.1	4.9
120°-130°	533.1	6.5
130°-140°	597.3	7.3
140°-150°	585.5	7.1
150°-160°	491.7	6.0
160°-170°	326.9	4.0
170°-180°	114.4	1.4
0°-30°	1400.3	17.1
0°-40°	2252.7	27.4
0°-60°	3860.3	47.0
0°-90°	4836.2	58.9
90°-120°	725.2	8.8
90°-150°	2441.1	29.7
90°-180°	3374.0	41.1
0°-180°	8210.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1858	1858	1858	1858	1858	
5°	1854	1851	1837	1849	1849	176
15°	1768	1763	1747	1754	1755	498
25°	1605	1597	1578	1581	1577	738
35°	1386	1379	1359	1352	1340	866
45°	1134	1128	1111	1094	1089	874
55°	864	859	839	826	816	771
65°	583	580	564	551	545	579
75°	310	307	300	295	290	331
85°	81	82	82	81	78	90
90°	1	8	15	20	23	8
95°	61	64	72	79	81	65
105°	214	219	225	230	233	229
115°	406	409	411	410	409	401
125°	592	597	598	597	596	530
135°	770	775	776	776	772	593
145°	933	936	939	939	936	583
155°	1067	1067	1068	1071	1067	491
165°	1160	1159	1159	1162	1157	327
175°	1206	1203	1203	1208	1202	115
180°	1209	1209	1209	1209	1209	



TEST NUMBER: P333329-830

CATALOG NUMBER: S125DIP-S1270D1035U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5
2.5°	1862.2	1861.4	1860.7	1859.8	1859.1	1857.4	1854.7	1852.1	1849.6	1846.9	1849.6
5°	1854.5	1853.9	1853.2	1852.6	1851.9	1850.0	1846.7	1843.4	1840.2	1836.9	1839.8
7.5°	1837.5	1836.8	1836.2	1835.5	1834.8	1832.8	1829.2	1825.6	1822.0	1818.4	1821.3
10°	1822.2	1821.6	1820.9	1820.2	1819.6	1817.5	1813.9	1810.3	1806.7	1803.1	1805.7
12.5°	1803.4	1802.2	1801.1	1799.9	1798.7	1796.5	1793.1	1789.8	1786.5	1783.1	1785.3
15°	1767.8	1766.9	1765.9	1764.9	1764.0	1761.6	1758.0	1754.4	1750.9	1747.3	1748.9
17.5°	1727.0	1725.6	1724.1	1722.7	1721.3	1718.6	1715.0	1711.2	1707.5	1703.7	1705.8
20°	1692.9	1692.2	1691.6	1690.9	1690.3	1687.8	1683.6	1679.3	1675.1	1670.8	1673.1
22.5°	1658.8	1657.6	1656.4	1655.3	1654.1	1651.5	1647.6	1643.6	1639.6	1635.6	1637.1
25°	1604.8	1603.1	1601.5	1599.9	1598.2	1595.3	1591.0	1586.8	1582.5	1578.3	1578.9
27.5°	1541.5	1540.6	1539.5	1538.6	1537.7	1534.9	1530.6	1526.2	1521.8	1517.4	1517.6
30°	1500.4	1499.4	1498.5	1497.4	1496.5	1493.6	1488.7	1483.8	1478.8	1473.9	1473.3
32.5°	1455.8	1454.2	1452.7	1451.2	1449.7	1446.8	1442.4	1438.0	1433.6	1429.3	1428.1
35°	1385.7	1384.5	1383.2	1381.9	1380.5	1377.6	1373.0	1368.5	1363.9	1359.3	1357.7
37.5°	1313.2	1311.5	1309.9	1308.2	1306.6	1303.6	1299.4	1295.1	1290.7	1286.5	1284.0
40°	1263.8	1262.2	1260.6	1258.9	1257.3	1254.1	1249.6	1245.0	1240.5	1235.9	1232.9
42.5°	1210.9	1209.6	1208.2	1206.7	1205.4	1202.4	1197.9	1193.3	1188.7	1184.1	1181.5
45°	1134.4	1133.2	1131.9	1130.6	1129.3	1126.6	1122.8	1118.8	1114.9	1111.0	1107.0
47.5°	1052.2	1052.3	1052.3	1052.3	1052.4	1050.1	1045.5	1040.8	1036.0	1031.3	1027.4
50°	999.3	998.3	997.3	996.4	995.3	992.9	989.0	985.1	981.2	977.2	973.0
52.5°	945.2	944.5	943.8	943.0	942.4	939.9	935.7	931.5	927.4	923.1	919.5
55°	864.1	863.1	862.1	861.1	860.2	857.4	852.8	848.3	843.7	839.1	836.1
57.5°	778.5	778.1	777.5	777.0	776.5	774.3	770.4	766.6	762.7	758.8	755.1
60°	724.4	723.2	721.9	720.6	719.3	716.8	713.2	709.6	706.1	702.5	699.2
62.5°	668.1	667.0	666.0	664.9	663.8	661.9	658.7	655.6	652.6	649.5	646.0
65°	583.4	582.8	582.1	581.5	580.8	578.6	575.0	571.5	567.9	564.3	561.4
67.5°	501.4	500.0	498.7	497.3	496.0	493.9	491.3	488.5	485.9	483.1	480.7
70°	449.7	448.1	446.4	444.8	443.2	440.8	437.9	435.0	432.1	429.1	427.2
72.5°	393.2	392.1	391.1	389.9	388.8	387.3	385.4	383.5	381.6	379.8	377.5
75°	310.1	309.4	308.8	308.1	307.5	306.3	304.7	303.0	301.4	299.8	298.8
77.5°	233.4	233.1	232.8	232.6	232.3	231.8	230.8	229.9	228.9	228.1	227.5
80°	185.1	185.1	185.1	185.1	185.1	184.8	184.2	183.5	182.9	182.2	181.9
82.5°	142.8	142.3	141.8	141.3	140.7	140.4	140.3	140.2	140.1	139.9	139.3
85°	80.9	81.2	81.4	81.8	82.1	82.3	82.3	82.3	82.3	82.3	82.0
87.5°	32.0	32.2	32.6	32.9	33.3	33.5	33.5	33.6	33.6	33.6	33.7
90°	0.9	2.6	4.2	5.9	7.6	9.2	10.7	12.2	13.6	15.1	16.1
92.5°	22.8	23.9	25.1	26.3	27.4	28.9	30.7	32.5	34.3	36.1	37.5
95°	61.2	61.5	62.0	62.4	62.9	64.1	66.2	68.2	70.4	72.5	73.9
97.5°	101.6	101.8	102.0	102.2	102.3	103.9	106.7	109.6	112.4	115.4	116.8
100°	131.8	131.8	131.8	131.8	131.8	133.1	135.8	138.6	141.3	143.9	145.8
102.5°	164.1	164.9	165.8	166.6	167.5	168.5	169.9	171.4	172.7	174.1	176.2
105°	214.5	215.6	216.6	217.7	218.8	219.9	221.1	222.3	223.7	224.9	226.1
107.5°	270.2	271.3	272.3	273.4	274.5	275.4	276.4	277.4	278.3	279.3	279.9
110°	308.7	309.7	310.8	311.8	312.8	313.7	314.2	314.9	315.6	316.1	316.8



TEST NUMBER: P333329-830

CATALOG NUMBER: S125DIP-S1270D1035U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	347.8	348.4	348.8	349.4	350.0	350.6	351.5	352.2	353.0	353.8	354.1
115°	405.6	406.4	407.3	408.1	408.9	409.5	409.9	410.4	410.8	411.2	411.0
117.5°	463.5	463.9	464.3	464.7	465.1	465.4	465.8	466.2	466.6	466.9	467.1
120°	499.6	500.7	501.7	502.8	503.9	504.4	504.6	504.9	505.1	505.3	505.3
122.5°	538.9	539.2	539.6	540.0	540.4	540.7	541.3	541.9	542.4	542.9	542.8
125°	591.9	593.1	594.4	595.7	596.9	597.7	597.9	598.0	598.2	598.5	598.0
127.5°	648.4	649.0	649.8	650.4	651.2	651.7	652.0	652.1	652.4	652.7	652.4
130°	682.2	683.2	684.3	685.3	686.4	687.1	687.6	688.0	688.3	688.8	688.6
132.5°	716.0	717.8	719.5	721.2	722.9	723.8	723.7	723.6	723.5	723.4	723.2
135°	769.8	771.0	772.2	773.5	774.8	775.5	775.7	775.9	776.1	776.3	776.3
137.5°	820.2	821.3	822.6	823.8	825.0	825.9	826.3	826.8	827.3	827.6	827.9
140°	852.5	853.6	854.6	855.6	856.7	857.5	858.2	858.8	859.4	860.1	860.4
142.5°	884.9	885.8	886.6	887.5	888.4	889.3	890.0	890.9	891.6	892.4	892.7
145°	932.6	933.4	934.2	935.0	935.9	936.6	937.3	937.8	938.5	939.1	939.1
147.5°	976.6	977.0	977.5	978.0	978.4	978.9	979.4	979.9	980.3	980.9	981.4
150°	1005.9	1005.7	1005.5	1005.3	1005.1	1005.4	1006.3	1007.1	1007.9	1008.7	1008.7
152.5°	1030.0	1030.3	1030.6	1030.9	1031.1	1031.5	1031.8	1032.2	1032.5	1032.8	1033.3
155°	1067.1	1067.1	1067.1	1067.1	1067.1	1067.1	1067.4	1067.6	1067.8	1068.0	1068.8
157.5°	1100.2	1099.8	1099.3	1098.8	1098.3	1098.3	1098.4	1098.6	1098.9	1099.1	1099.9
160°	1119.7	1119.2	1118.5	1117.9	1117.3	1117.1	1117.3	1117.5	1117.7	1117.9	1118.7
162.5°	1137.1	1136.6	1136.1	1135.7	1135.3	1135.0	1135.1	1135.1	1135.2	1135.2	1136.2
165°	1160.3	1159.8	1159.4	1159.0	1158.6	1158.5	1158.7	1158.9	1159.0	1159.3	1160.2
167.5°	1179.8	1178.9	1178.2	1177.3	1176.5	1176.0	1176.0	1176.0	1176.0	1176.0	1177.3
170°	1190.3	1189.5	1188.6	1187.9	1187.0	1186.6	1186.6	1186.6	1186.6	1186.6	1187.9
172.5°	1197.9	1197.0	1196.2	1195.3	1194.6	1194.1	1194.1	1194.1	1194.1	1194.1	1195.3
175°	1206.4	1205.5	1204.7	1203.8	1203.0	1202.6	1202.6	1202.6	1202.6	1202.6	1203.8
177.5°	1210.7	1210.0	1209.4	1208.6	1208.0	1207.6	1207.4	1207.2	1207.1	1206.9	1208.0
180°	1209.2	1209.2	1209.2	1209.2	1209.2	1209.2	1209.2	1209.2	1209.2	1209.2	1209.2



TEST NUMBER: P333329-830

CATALOG NUMBER: S125DIP-S1270D1035U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5
2.5°	1852.1	1854.7	1857.4	1858.5	1858.3	1858.0	1857.8	1857.5
5°	1842.8	1845.8	1848.7	1850.0	1849.6	1849.4	1849.0	1848.7
7.5°	1824.1	1827.0	1829.9	1831.2	1830.9	1830.5	1830.2	1829.9
10°	1808.4	1811.0	1813.5	1814.7	1814.4	1814.0	1813.7	1813.5
12.5°	1787.3	1789.4	1791.5	1792.5	1792.4	1792.3	1792.3	1792.2
15°	1750.6	1752.2	1753.8	1754.6	1754.6	1754.6	1754.6	1754.6
17.5°	1707.8	1709.9	1711.8	1712.0	1710.4	1708.8	1707.1	1705.5
20°	1675.5	1677.7	1680.0	1680.4	1678.7	1677.1	1675.5	1673.8
22.5°	1638.6	1640.1	1641.6	1641.8	1640.7	1639.6	1638.4	1637.4
25°	1579.6	1580.3	1580.9	1580.7	1579.8	1578.8	1577.8	1576.8
27.5°	1517.7	1517.9	1518.0	1517.5	1516.6	1515.6	1514.6	1513.6
30°	1472.6	1472.0	1471.3	1470.6	1469.5	1468.6	1467.5	1466.6
32.5°	1426.9	1425.8	1424.6	1423.1	1421.4	1419.6	1417.8	1416.1
35°	1356.0	1354.4	1352.8	1350.7	1348.0	1345.5	1342.8	1340.2
37.5°	1281.6	1279.2	1276.8	1274.8	1273.3	1271.8	1270.3	1268.8
40°	1230.0	1227.1	1224.1	1222.2	1221.2	1220.2	1219.2	1218.2
42.5°	1178.8	1176.1	1173.5	1171.4	1169.9	1168.4	1166.9	1165.4
45°	1103.2	1099.2	1095.3	1092.9	1091.8	1090.9	1089.9	1088.9
47.5°	1023.3	1019.4	1015.4	1012.3	1009.9	1007.7	1005.4	1003.1
50°	968.7	964.5	960.3	957.0	954.7	952.4	950.2	947.8
52.5°	915.7	912.0	908.2	905.1	902.6	900.0	897.5	894.9
55°	833.2	830.3	827.4	824.7	822.5	820.2	817.8	815.6
57.5°	751.3	747.5	743.8	741.2	740.0	738.8	737.4	736.2
60°	695.9	692.7	689.4	686.6	684.3	682.0	679.8	677.5
62.5°	642.4	638.9	635.5	632.8	631.0	629.2	627.5	625.8
65°	558.5	555.4	552.5	550.4	549.1	547.8	546.5	545.2
67.5°	478.2	475.7	473.3	471.6	470.8	470.0	469.3	468.4
70°	425.2	423.2	421.2	419.6	418.3	417.0	415.8	414.4
72.5°	375.3	373.1	370.9	369.1	367.8	366.5	365.1	363.8
75°	297.8	296.8	295.9	294.7	293.4	292.1	290.8	289.5
77.5°	226.9	226.3	225.7	225.0	224.0	223.1	222.3	221.3
80°	181.5	181.3	180.9	180.4	179.7	179.1	178.4	177.9
82.5°	138.7	138.2	137.5	137.2	137.0	137.0	136.8	136.7
85°	81.6	81.3	81.0	80.5	79.8	79.2	78.5	77.9
87.5°	34.0	34.2	34.4	34.3	33.9	33.6	33.1	32.7
90°	17.2	18.2	19.2	20.1	20.7	21.3	22.0	22.6
92.5°	38.9	40.2	41.7	42.6	43.1	43.5	43.9	44.4
95°	75.4	76.8	78.3	79.3	79.6	80.1	80.5	81.0
97.5°	118.1	119.5	120.9	121.7	122.0	122.2	122.4	122.7
100°	147.7	149.6	151.5	152.7	153.1	153.4	153.9	154.3
102.5°	178.1	180.2	182.3	183.6	184.2	184.7	185.4	186.0
105°	227.4	228.7	229.9	230.8	231.5	232.1	232.7	233.4
107.5°	280.5	281.2	281.8	282.1	282.0	282.0	282.0	281.9
110°	317.4	318.0	318.7	318.9	318.7	318.5	318.3	318.0





TEST NUMBER: P333329-830

CATALOG NUMBER: S125DIP-S1270D1035U830-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	354.4	354.7	355.0	355.0	354.6	354.2	353.8	353.5
115°	410.8	410.6	410.4	410.2	409.9	409.7	409.5	409.3
117.5°	467.2	467.4	467.6	467.2	466.4	465.6	464.8	463.9
120°	505.3	505.3	505.3	504.9	504.1	503.2	502.4	501.5
122.5°	542.6	542.4	542.2	541.9	541.2	540.5	539.9	539.2
125°	597.7	597.2	596.8	596.4	596.3	596.1	595.9	595.7
127.5°	652.2	652.1	651.9	651.5	651.1	650.6	650.3	649.9
130°	688.3	688.2	688.0	687.7	687.2	686.8	686.4	686.0
132.5°	723.0	722.8	722.6	722.2	721.6	721.0	720.5	719.8
135°	776.3	776.3	776.3	775.9	775.1	774.2	773.4	772.5
137.5°	828.2	828.4	828.7	828.3	827.3	826.2	825.2	824.2
140°	860.9	861.3	861.8	861.4	860.4	859.3	858.3	857.2
142.5°	893.0	893.2	893.4	893.1	892.0	891.0	889.9	888.8
145°	939.1	939.1	939.1	938.8	938.2	937.5	936.9	936.3
147.5°	981.8	982.4	982.9	982.4	981.0	979.6	978.2	976.8
150°	1008.7	1008.7	1008.7	1008.5	1008.1	1007.7	1007.3	1006.8
152.5°	1033.9	1034.3	1034.8	1034.7	1034.0	1033.2	1032.5	1031.7
155°	1069.7	1070.5	1071.4	1071.3	1070.3	1069.1	1068.1	1067.1
157.5°	1100.7	1101.5	1102.4	1102.1	1100.8	1099.4	1098.0	1096.6
160°	1119.6	1120.4	1121.2	1121.2	1120.1	1119.1	1118.0	1116.9
162.5°	1137.2	1138.2	1139.3	1139.2	1137.9	1136.7	1135.5	1134.3
165°	1160.9	1161.8	1162.6	1162.4	1161.2	1159.9	1158.7	1157.4
167.5°	1178.6	1179.8	1181.1	1181.0	1179.8	1178.5	1177.1	1175.8
170°	1189.1	1190.3	1191.6	1191.5	1190.1	1188.5	1187.1	1185.6
172.5°	1196.7	1197.9	1199.1	1199.1	1197.8	1196.6	1195.2	1193.9
175°	1205.1	1206.4	1207.6	1207.5	1206.1	1204.6	1203.1	1201.6
177.5°	1208.9	1209.9	1210.9	1210.9	1209.7	1208.5	1207.3	1206.2
180°	1209.2	1209.2	1209.2	1209.2	1209.2	1209.2	1209.2	1209.2

(END OF REPORT)