

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333339-830

Luminaire Tested: **S125DIP-S1270D1205U830-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333339-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1270D1205U830-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8910.2 lumens
Efficiency: N/A
Efficacy: 124.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333339-830

CATALOG NUMBER: S125DIP-S1270D1205U830-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

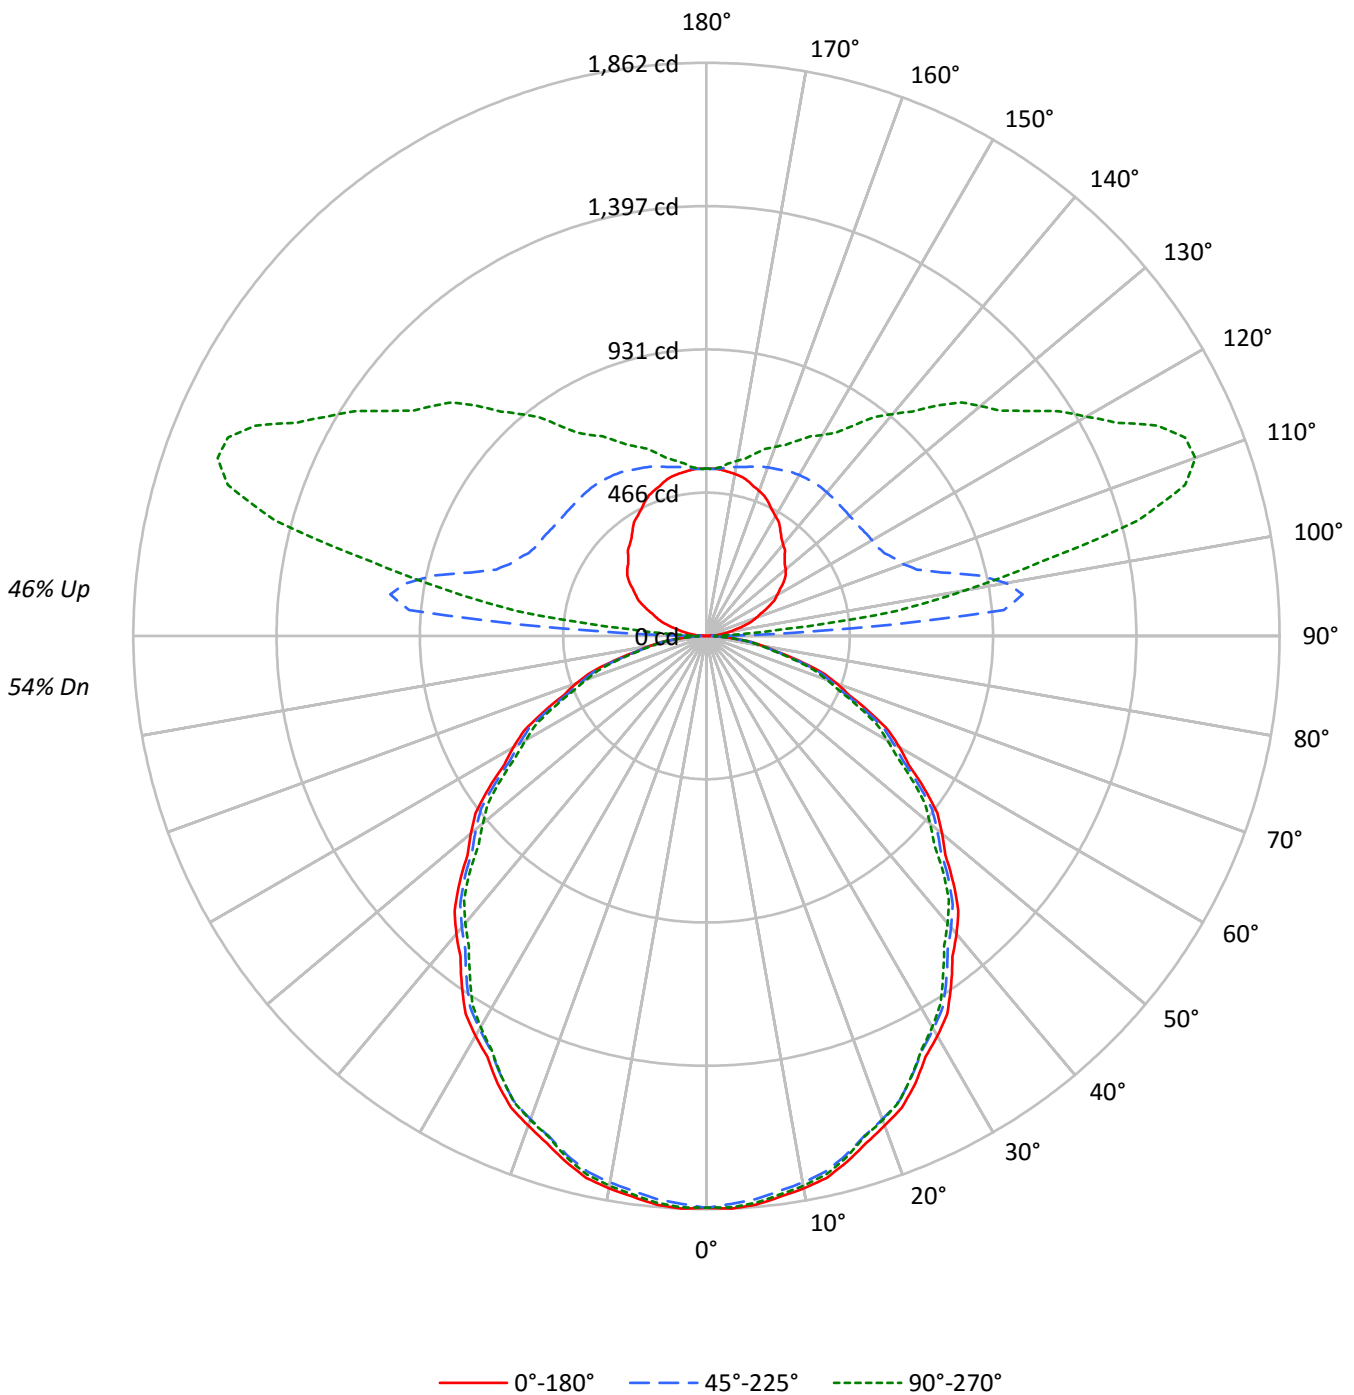



TEST NUMBER: P333339-830

CATALOG NUMBER: S125DIP-S1270D1205U830-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	72	72	72	60	60	60	54
1	99	94	90	87	91	88	84	81	75	73	70	64	62	60	53	52	51	46
2	90	82	76	71	83	77	71	67	66	62	58	56	53	50	47	44	43	38
3	82	72	65	59	76	67	61	56	58	53	49	49	46	42	41	39	36	32
4	75	64	56	50	69	60	53	47	52	46	42	44	40	36	37	34	31	28
5	69	57	49	43	64	53	46	40	46	40	36	39	35	31	33	30	27	24
6	63	51	43	37	59	48	41	35	42	36	31	36	31	28	30	27	24	21
7	59	46	38	33	54	43	36	31	38	32	28	32	28	24	28	24	21	19
8	54	42	34	29	50	39	32	27	34	29	25	30	25	22	25	22	19	17
9	51	38	31	26	47	36	29	24	32	26	22	27	23	20	23	20	17	15
10	47	35	28	23	44	33	26	22	29	24	20	25	21	18	22	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11996	11996	11996
5°	12023	11909	11985
10°	11950	11825	11893
15°	11820	11683	11732
20°	11635	11483	11504
25°	11436	11247	11236
30°	11189	10992	10937
35°	10925	10717	10566
40°	10655	10420	10270
45°	10361	10147	9945
50°	10040	9818	9523
55°	9730	9448	9183
60°	9357	9074	8751
65°	8915	8623	8332
70°	8492	8103	7825
75°	7738	7481	7224
80°	6884	6776	6616
85°	5995	6099	5772



TEST NUMBER: P333339-830

CATALOG NUMBER: S125DIP-S1270D1205U830-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	175.1	2.0
10°-20°	494.7	5.6
20°-30°	730.5	8.2
30°-40°	852.4	9.6
40°-50°	856.1	9.6
50°-60°	751.5	8.4
60°-70°	559.9	6.3
70°-80°	320.2	3.6
80°-90°	96.2	1.1
90°-100°	393.7	4.4
100°-110°	846.4	9.5
110°-120°	794.4	8.9
120°-130°	643.8	7.2
130°-140°	516.6	5.8
140°-150°	389.9	4.4
150°-160°	274.4	3.1
160°-170°	161.8	1.8
170°-180°	52.6	0.6
0°-30°	1400.3	15.7
0°-40°	2252.7	25.3
0°-60°	3860.3	43.3
0°-90°	4836.5	54.3
90°-120°	2034.5	22.8
90°-150°	3584.8	40.2
90°-180°	4074.0	45.7
0°-180°	8910.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1858	1858	1858	1858	1858	
5°	1854	1851	1837	1849	1849	176
15°	1768	1763	1747	1754	1755	498
25°	1605	1597	1578	1581	1577	738
35°	1386	1379	1359	1352	1340	866
45°	1134	1128	1111	1094	1089	874
55°	864	859	839	826	816	771
65°	583	580	564	551	545	579
75°	310	307	300	295	290	331
85°	81	82	82	81	78	90
90°	1	10	18	23	25	7
95°	36	107	970	440	257	38
105°	124	173	794	1563	1451	130
115°	221	267	637	1374	1616	218
125°	307	359	611	1093	1274	272
135°	359	432	607	916	1058	279
145°	418	479	609	758	834	262
155°	478	514	594	671	700	220
165°	521	536	570	604	613	147
175°	542	542	546	553	551	51
180°	543	543	543	543	543	



TEST NUMBER: P333339-830

CATALOG NUMBER: S125DIP-S1270D1205U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5
2.5°	1862.2	1861.4	1860.7	1859.8	1859.1	1857.4	1854.7	1852.1	1849.6	1846.9	1849.6
5°	1854.5	1853.9	1853.2	1852.6	1851.9	1850.0	1846.7	1843.4	1840.2	1836.9	1839.8
7.5°	1837.5	1836.8	1836.2	1835.5	1834.8	1832.8	1829.2	1825.6	1822.0	1818.4	1821.3
10°	1822.2	1821.6	1820.9	1820.2	1819.6	1817.5	1813.9	1810.3	1806.7	1803.1	1805.7
12.5°	1803.4	1802.2	1801.1	1799.9	1798.7	1796.5	1793.1	1789.8	1786.5	1783.1	1785.3
15°	1767.8	1766.9	1765.9	1764.9	1764.0	1761.6	1758.0	1754.4	1750.9	1747.3	1748.9
17.5°	1727.0	1725.6	1724.1	1722.7	1721.3	1718.6	1715.0	1711.2	1707.5	1703.7	1705.8
20°	1692.9	1692.2	1691.6	1690.9	1690.3	1687.8	1683.6	1679.3	1675.1	1670.8	1673.1
22.5°	1658.8	1657.6	1656.4	1655.3	1654.1	1651.5	1647.6	1643.6	1639.6	1635.6	1637.1
25°	1604.8	1603.1	1601.5	1599.9	1598.2	1595.3	1591.0	1586.8	1582.5	1578.3	1578.9
27.5°	1541.5	1540.6	1539.5	1538.6	1537.7	1534.9	1530.6	1526.2	1521.8	1517.4	1517.6
30°	1500.4	1499.4	1498.5	1497.4	1496.5	1493.6	1488.7	1483.8	1478.8	1473.9	1473.3
32.5°	1455.8	1454.2	1452.7	1451.2	1449.7	1446.8	1442.4	1438.0	1433.6	1429.3	1428.1
35°	1385.7	1384.5	1383.2	1381.9	1380.5	1377.6	1373.0	1368.5	1363.9	1359.3	1357.7
37.5°	1313.2	1311.5	1309.9	1308.2	1306.6	1303.6	1299.4	1295.1	1290.7	1286.5	1284.0
40°	1263.8	1262.2	1260.6	1258.9	1257.3	1254.1	1249.6	1245.0	1240.5	1235.9	1232.9
42.5°	1210.9	1209.6	1208.2	1206.7	1205.4	1202.4	1197.9	1193.3	1188.7	1184.1	1181.5
45°	1134.4	1133.2	1131.9	1130.6	1129.3	1126.6	1122.8	1118.8	1114.9	1111.0	1107.0
47.5°	1052.2	1052.3	1052.3	1052.3	1052.4	1050.1	1045.5	1040.8	1036.0	1031.3	1027.4
50°	999.3	998.3	997.3	996.4	995.3	992.9	989.0	985.1	981.2	977.2	973.0
52.5°	945.2	944.5	943.8	943.0	942.4	939.9	935.7	931.5	927.4	923.1	919.5
55°	864.1	863.1	862.1	861.1	860.2	857.4	852.8	848.3	843.7	839.1	836.1
57.5°	778.5	778.1	777.5	777.0	776.5	774.3	770.4	766.6	762.7	758.8	755.1
60°	724.4	723.2	721.9	720.6	719.3	716.8	713.2	709.6	706.1	702.5	699.2
62.5°	668.1	667.0	666.0	664.9	663.8	661.9	658.7	655.6	652.6	649.5	646.0
65°	583.4	582.8	582.1	581.5	580.8	578.6	575.0	571.5	567.9	564.3	561.4
67.5°	501.4	500.0	498.7	497.3	496.0	493.9	491.3	488.5	485.9	483.1	480.7
70°	449.7	448.1	446.4	444.8	443.2	440.8	437.9	435.0	432.1	429.1	427.2
72.5°	393.2	392.1	391.1	389.9	388.8	387.3	385.4	383.5	381.6	379.8	377.5
75°	310.1	309.4	308.8	308.1	307.5	306.3	304.7	303.0	301.4	299.8	298.8
77.5°	233.4	233.1	232.8	232.6	232.3	231.8	230.8	229.9	228.9	228.1	227.5
80°	185.1	185.1	185.1	185.1	185.1	184.8	184.2	183.5	182.9	182.2	181.9
82.5°	142.8	142.3	141.8	141.3	140.7	140.4	140.3	140.2	140.1	139.9	139.3
85°	80.9	81.2	81.4	81.8	82.1	82.3	82.3	82.3	82.3	82.3	82.0
87.5°	32.0	32.1	32.6	33.1	33.5	33.8	33.7	33.9	33.9	34.0	34.3
90°	1.1	2.2	4.3	6.6	8.8	10.9	12.1	14.2	15.4	17.5	18.7
92.5°	13.4	16.2	25.4	39.0	57.9	89.8	149.6	250.0	358.8	353.1	285.9
95°	36.1	37.2	46.0	58.1	82.1	131.4	248.6	489.6	791.8	970.3	949.5
97.5°	60.0	61.4	67.5	79.6	101.2	136.7	214.2	390.8	707.1	1036.2	1201.5
100°	76.6	78.9	83.2	95.3	116.1	148.9	212.4	354.9	630.8	988.9	1262.7
102.5°	95.1	96.4	99.9	112.8	131.9	163.8	220.4	340.0	573.0	905.7	1226.0
105°	123.8	123.8	129.2	140.2	157.7	188.4	236.6	334.0	516.9	794.0	1108.3
107.5°	151.7	154.0	159.2	168.2	186.4	214.0	260.6	344.1	493.2	717.1	988.4
110°	171.9	174.2	178.5	188.4	204.8	233.3	278.1	353.7	486.3	681.2	919.9



TEST NUMBER: P333339-830

CATALOG NUMBER: S125DIP-S1270D1205U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	192.1	194.3	197.7	207.6	224.0	251.7	294.8	366.0	486.3	660.2	869.1
115°	221.2	223.4	226.7	236.6	253.0	280.4	320.9	384.4	489.6	637.4	813.7
117.5°	247.5	250.8	254.3	264.2	282.8	309.2	347.6	405.5	496.8	626.2	780.6
120°	265.0	268.3	272.7	282.6	301.1	328.6	366.9	419.4	503.8	620.9	762.2
122.5°	283.4	285.9	289.4	299.2	319.6	346.9	385.3	435.3	509.9	616.6	746.5
125°	306.6	308.9	314.3	324.1	345.0	373.4	409.6	456.7	520.2	611.1	725.0
127.5°	324.8	328.1	335.2	347.6	369.8	398.2	433.0	476.5	531.8	608.5	705.3
130°	336.2	339.5	348.3	362.5	385.5	414.0	447.9	489.6	538.9	606.7	692.2
132.5°	345.0	349.1	359.7	375.7	399.5	428.0	461.9	501.0	546.7	606.7	681.6
135°	359.2	363.6	376.7	394.3	417.3	446.9	480.8	516.9	557.4	606.7	669.2
137.5°	377.2	380.5	392.8	410.3	432.8	463.3	494.2	528.8	567.3	608.0	658.0
140°	387.7	391.0	404.2	421.7	442.4	472.0	503.8	536.7	571.7	608.9	652.7
142.5°	399.9	402.4	414.6	432.2	452.1	479.9	509.9	541.0	574.3	609.8	648.4
145°	418.4	420.6	431.5	446.9	466.6	491.7	520.2	547.6	577.2	608.9	641.8
147.5°	437.6	438.9	448.4	462.6	479.7	501.8	526.8	551.6	578.2	606.1	635.0
150°	449.0	451.2	458.9	473.2	488.4	507.1	531.1	554.2	578.2	603.4	629.7
152.5°	461.3	462.6	469.4	481.9	496.3	513.2	535.6	555.9	577.4	599.9	623.6
155°	477.5	477.5	484.1	495.0	506.0	521.3	539.9	557.4	575.0	593.6	613.3
157.5°	492.0	491.7	497.0	506.4	516.0	527.6	543.7	558.6	572.1	587.0	603.7
160°	501.6	500.5	504.9	512.6	521.3	531.1	545.4	558.6	569.5	582.7	595.8
162.5°	509.4	508.4	512.7	519.5	526.6	534.7	547.1	557.7	566.8	577.4	588.8
165°	521.3	519.2	522.5	527.9	532.3	538.9	547.6	556.4	562.9	569.5	578.2
167.5°	529.2	528.1	530.1	533.1	536.2	540.4	547.6	553.7	556.8	561.8	568.0
170°	534.4	533.4	534.4	536.7	538.9	542.2	547.6	552.0	554.2	557.4	561.8
172.5°	538.0	536.0	537.1	539.2	540.5	542.2	546.7	550.3	550.6	552.2	555.7
175°	542.2	539.9	541.0	542.2	542.2	542.2	545.4	547.6	546.5	546.5	547.6
177.5°	544.1	542.3	542.3	543.2	542.3	542.3	544.1	545.0	543.2	543.2	544.1
180°	543.2	543.2	543.2	543.2	543.2	543.2	543.2	543.2	543.2	543.2	543.2



TEST NUMBER: P333339-830

CATALOG NUMBER: S125DIP-S1270D1205U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5	1857.5
2.5°	1852.1	1854.7	1857.4	1858.5	1858.3	1858.0	1857.8	1857.5
5°	1842.8	1845.8	1848.7	1850.0	1849.6	1849.4	1849.0	1848.7
7.5°	1824.1	1827.0	1829.9	1831.2	1830.9	1830.5	1830.2	1829.9
10°	1808.4	1811.0	1813.5	1814.7	1814.4	1814.0	1813.7	1813.5
12.5°	1787.3	1789.4	1791.5	1792.5	1792.4	1792.3	1792.3	1792.2
15°	1750.6	1752.2	1753.8	1754.6	1754.6	1754.6	1754.6	1754.6
17.5°	1707.8	1709.9	1711.8	1712.0	1710.4	1708.8	1707.1	1705.5
20°	1675.5	1677.7	1680.0	1680.4	1678.7	1677.1	1675.5	1673.8
22.5°	1638.6	1640.1	1641.6	1641.8	1640.7	1639.6	1638.4	1637.4
25°	1579.6	1580.3	1580.9	1580.7	1579.8	1578.8	1577.8	1576.8
27.5°	1517.7	1517.9	1518.0	1517.5	1516.6	1515.6	1514.6	1513.6
30°	1472.6	1472.0	1471.3	1470.6	1469.5	1468.6	1467.5	1466.6
32.5°	1426.9	1425.8	1424.6	1423.1	1421.4	1419.6	1417.8	1416.1
35°	1356.0	1354.4	1352.8	1350.7	1348.0	1345.5	1342.8	1340.2
37.5°	1281.6	1279.2	1276.8	1274.8	1273.3	1271.8	1270.3	1268.8
40°	1230.0	1227.1	1224.1	1222.2	1221.2	1220.2	1219.2	1218.2
42.5°	1178.8	1176.1	1173.5	1171.4	1169.9	1168.4	1166.9	1165.4
45°	1103.2	1099.2	1095.3	1092.9	1091.8	1090.9	1089.9	1088.9
47.5°	1023.3	1019.4	1015.4	1012.3	1009.9	1007.7	1005.4	1003.1
50°	968.7	964.5	960.3	957.0	954.7	952.4	950.2	947.8
52.5°	915.7	912.0	908.2	905.1	902.6	900.0	897.5	894.9
55°	833.2	830.3	827.4	824.7	822.5	820.2	817.8	815.6
57.5°	751.3	747.5	743.8	741.2	740.0	738.8	737.4	736.2
60°	695.9	692.7	689.4	686.6	684.3	682.0	679.8	677.5
62.5°	642.4	638.9	635.5	632.8	631.0	629.2	627.5	625.8
65°	558.5	555.4	552.5	550.4	549.1	547.8	546.5	545.2
67.5°	478.2	475.7	473.3	471.6	470.8	470.0	469.3	468.4
70°	425.2	423.2	421.2	419.6	418.3	417.0	415.8	414.4
72.5°	375.3	373.1	370.9	369.1	367.8	366.5	365.1	363.8
75°	297.8	296.8	295.9	294.7	293.4	292.1	290.8	289.5
77.5°	226.9	226.3	225.7	225.0	224.0	223.1	222.3	221.3
80°	181.5	181.3	180.9	180.4	179.7	179.1	178.4	177.9
82.5°	138.7	138.2	137.5	137.2	137.0	137.0	136.8	136.7
85°	81.6	81.3	81.0	80.5	79.8	79.2	78.5	77.9
87.5°	34.5	34.7	35.0	35.2	34.6	34.1	33.7	33.3
90°	19.7	20.8	21.9	24.1	24.1	24.1	25.2	25.2
92.5°	194.1	140.8	106.0	89.8	75.8	73.1	71.6	69.8
95°	787.4	620.9	486.3	394.3	316.5	283.6	274.9	257.4
97.5°	1172.7	1056.0	924.8	796.8	729.2	667.9	636.1	622.1
100°	1347.1	1293.5	1180.6	1066.7	991.2	912.3	871.8	854.2
102.5°	1405.8	1438.9	1384.8	1307.7	1226.8	1170.7	1126.7	1113.6
105°	1371.2	1521.3	1569.4	1557.4	1522.3	1486.2	1464.2	1451.1
107.5°	1247.6	1447.8	1571.6	1628.8	1646.5	1646.3	1639.1	1630.3
110°	1156.5	1364.6	1519.0	1612.1	1661.4	1682.2	1689.9	1689.9



TEST NUMBER: P333339-830

CATALOG NUMBER: S125DIP-S1270D1205U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1084.7	1282.2	1438.4	1548.1	1620.2	1656.0	1675.0	1682.9
115°	994.5	1164.2	1314.2	1433.6	1519.0	1571.6	1602.2	1616.5
117.5°	936.1	1082.5	1211.7	1321.3	1406.7	1461.0	1491.5	1500.2
120°	904.7	1036.0	1156.5	1252.9	1334.0	1386.5	1416.1	1424.8
122.5°	881.0	1002.8	1110.1	1200.3	1272.6	1320.8	1350.4	1358.3
125°	846.6	958.3	1053.6	1132.5	1193.7	1238.7	1262.7	1273.8
127.5°	811.5	915.8	1004.8	1078.6	1134.2	1173.8	1196.7	1201.5
130°	789.7	886.0	971.5	1042.6	1097.4	1133.5	1155.5	1162.0
132.5°	767.7	858.0	935.5	1004.1	1058.9	1095.0	1115.1	1122.6
135°	739.2	814.8	885.0	947.3	995.5	1031.7	1051.4	1058.0
137.5°	715.2	776.3	834.5	887.6	930.7	963.6	981.8	988.9
140°	702.0	753.5	803.9	849.9	890.4	918.9	935.3	940.8
142.5°	690.6	734.2	777.6	817.5	851.9	875.9	891.5	896.1
145°	675.7	709.6	743.7	773.2	799.5	818.1	830.2	834.5
147.5°	661.8	689.3	715.4	737.7	758.6	773.5	780.4	782.4
150°	653.8	678.0	698.7	718.4	734.9	748.0	752.4	753.5
152.5°	645.1	666.6	685.6	701.0	714.7	725.2	729.6	730.8
155°	631.9	649.4	664.8	676.8	687.8	695.4	698.7	699.8
157.5°	618.8	633.2	645.1	654.5	663.0	669.4	672.4	672.2
160°	610.0	620.9	631.9	639.6	647.2	652.7	655.0	653.8
162.5°	600.4	610.5	619.6	626.4	632.4	637.0	637.4	637.2
165°	587.0	594.7	601.2	606.7	611.1	613.3	613.3	613.3
167.5°	574.3	579.4	584.4	588.3	590.5	592.5	591.6	591.4
170°	567.3	570.6	573.9	576.1	578.2	579.4	579.4	578.2
172.5°	559.4	562.7	565.1	566.5	566.8	568.8	567.1	566.0
175°	550.9	550.9	553.1	553.1	553.1	554.2	552.0	550.9
177.5°	545.0	545.8	545.8	545.8	545.0	545.8	543.2	543.2
180°	543.2	543.2	543.2	543.2	543.2	543.2	543.2	543.2

(END OF REPORT)