

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333130-830

Luminaire Tested: **S125DIP-S375D590U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333130-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S375D590U830-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 375 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 590 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3662.0 lumens
Efficiency: N/A
Efficacy: 143.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 25.6
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333130-830

CATALOG NUMBER: S125DIP-S375D590U830-4F0-1E-UDD-F

Luminous Intensity Polar Plot

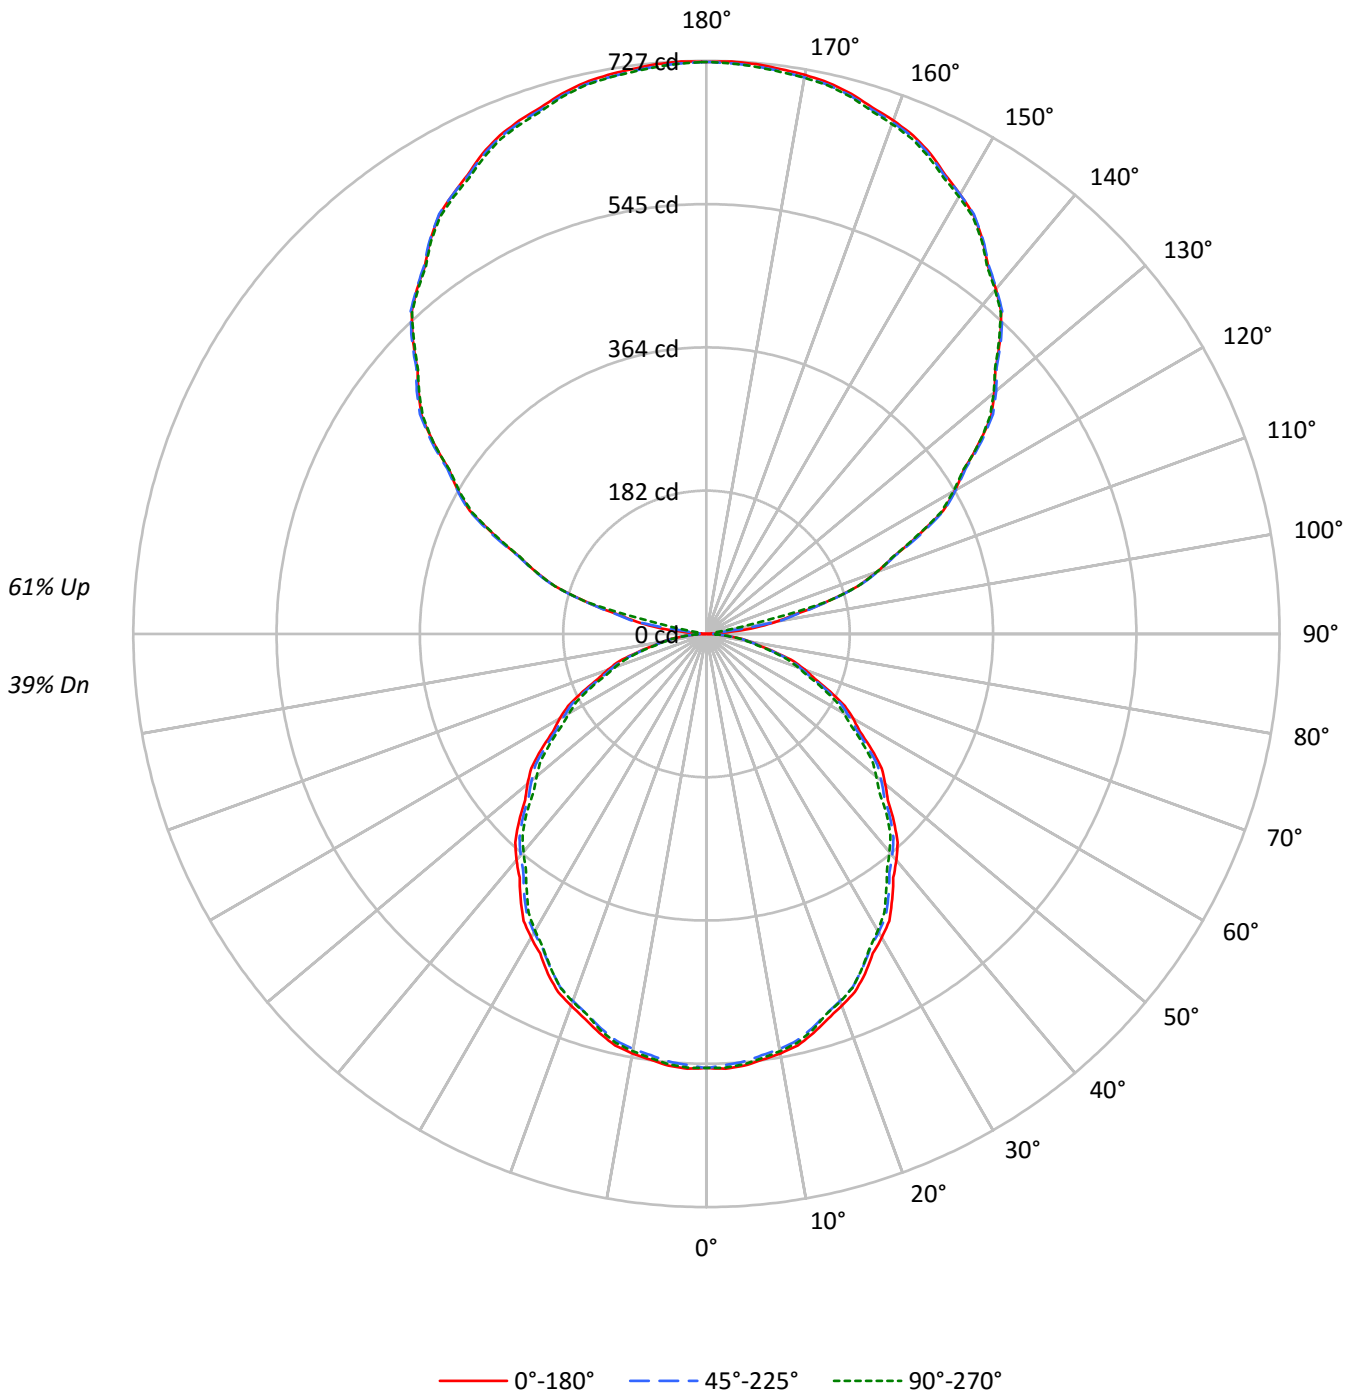



TEST NUMBER: P333130-830

CATALOG NUMBER: S125DIP-S375D590U830-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	95	95	95	95	77	77	77	61	61	61	46	46	46	39
1	95	91	87	84	86	83	80	77	68	65	63	54	52	51	41	40	39	33
2	87	79	73	68	79	72	67	63	59	56	52	47	44	42	36	34	33	27
3	79	70	63	57	72	64	57	52	52	48	44	42	38	36	32	30	28	23
4	72	62	54	48	65	56	50	44	46	41	37	37	33	31	28	26	24	20
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	21	17
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18	15
7	56	44	36	31	51	41	34	29	34	28	25	27	23	20	21	18	16	13
8	52	40	33	27	47	37	30	25	31	25	22	25	21	18	19	17	15	12
9	49	37	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13	11
10	45	33	26	22	41	31	24	20	26	21	17	21	17	15	17	14	12	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3556	3556	3556
5°	3564	3530	3553
10°	3543	3505	3525
15°	3504	3463	3477
20°	3449	3404	3410
25°	3390	3334	3331
30°	3317	3258	3242
35°	3239	3177	3132
40°	3159	3089	3044
45°	3072	3008	2948
50°	2976	2910	2823
55°	2884	2800	2723
60°	2773	2689	2595
65°	2644	2557	2470
70°	2517	2402	2319
75°	2293	2218	2141
80°	2042	2008	1960
85°	1771	1808	1712



TEST NUMBER: P333130-830

CATALOG NUMBER: S125DIP-S375D590U830-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.9	1.4
10°-20°	146.6	4.0
20°-30°	216.5	5.9
30°-40°	252.7	6.9
40°-50°	253.8	6.9
50°-60°	222.8	6.1
60°-70°	166.0	4.5
70°-80°	94.9	2.6
80°-90°	29.1	0.8
90°-100°	26.4	0.7
100°-110°	162.5	4.4
110°-120°	294.7	8.0
120°-130°	378.2	10.3
130°-140°	406.7	11.1
140°-150°	381.8	10.4
150°-160°	308.8	8.4
160°-170°	199.7	5.5
170°-180°	68.9	1.9
0°-30°	415.1	11.3
0°-40°	667.8	18.2
0°-60°	1144.3	31.2
0°-90°	1434.3	39.2
90°-120°	483.5	13.2
90°-150°	1650.2	45.1
90°-180°	2228.0	60.8
0°-180°	3662.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	551	551	551	551	551	
5°	550	549	544	548	548	52
15°	524	522	518	520	520	148
25°	476	473	468	469	467	219
35°	411	409	403	401	397	257
45°	336	334	329	324	323	259
55°	256	255	249	245	242	229
65°	173	172	167	164	162	172
75°	92	91	89	88	86	98
85°	24	24	24	24	23	27
90°	1	5	9	11	13	3
95°	31	28	9	11	11	39
105°	158	160	160	160	160	168
115°	297	299	300	298	295	294
125°	422	426	426	424	422	377
135°	526	529	529	527	524	406
145°	610	611	611	612	609	382
155°	672	669	670	671	667	310
165°	709	706	707	709	706	200
175°	726	722	723	727	722	69
180°	726	726	726	726	726	



TEST NUMBER: P333130-830

CATALOG NUMBER: S125DIP-S375D590U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6
2.5°	552.0	551.8	551.6	551.3	551.1	550.5	549.8	549.0	548.3	547.4	548.3
5°	549.7	549.5	549.3	549.1	548.9	548.4	547.4	546.5	545.4	544.5	545.4
7.5°	544.7	544.5	544.3	544.1	543.9	543.3	542.2	541.1	540.1	539.0	539.9
10°	540.2	540.0	539.8	539.6	539.4	538.8	537.7	536.6	535.6	534.5	535.3
12.5°	534.6	534.2	533.9	533.6	533.2	532.5	531.5	530.6	529.5	528.6	529.1
15°	524.1	523.8	523.5	523.2	522.8	522.2	521.1	520.1	519.0	517.9	518.4
17.5°	511.9	511.5	511.0	510.7	510.2	509.4	508.3	507.3	506.1	505.0	505.7
20°	501.8	501.6	501.4	501.2	501.1	500.3	499.1	497.8	496.5	495.3	496.0
22.5°	491.7	491.3	491.0	490.7	490.3	489.6	488.3	487.2	486.0	484.8	485.3
25°	475.7	475.2	474.7	474.2	473.7	472.9	471.6	470.3	469.1	467.9	468.1
27.5°	456.9	456.7	456.4	456.1	455.8	455.0	453.7	452.4	451.1	449.8	449.9
30°	444.8	444.5	444.1	443.8	443.6	442.7	441.3	439.8	438.4	436.9	436.7
32.5°	431.5	431.0	430.6	430.2	429.7	428.9	427.5	426.2	425.0	423.7	423.3
35°	410.8	410.4	410.0	409.6	409.3	408.3	407.0	405.7	404.3	402.9	402.5
37.5°	389.3	388.8	388.3	387.8	387.3	386.4	385.1	383.9	382.6	381.4	380.6
40°	374.7	374.1	373.6	373.2	372.7	371.7	370.4	369.1	367.7	366.4	365.5
42.5°	358.9	358.5	358.2	357.7	357.3	356.5	355.1	353.7	352.3	351.0	350.2
45°	336.3	335.9	335.5	335.2	334.7	333.9	332.8	331.7	330.5	329.3	328.2
47.5°	311.9	311.9	311.9	312.0	312.0	311.3	309.9	308.5	307.1	305.7	304.5
50°	296.2	296.0	295.7	295.3	295.0	294.4	293.1	292.0	290.9	289.6	288.4
52.5°	280.2	279.9	279.7	279.6	279.4	278.6	277.4	276.2	274.8	273.6	272.6
55°	256.1	255.8	255.5	255.2	255.0	254.1	252.8	251.5	250.1	248.7	247.9
57.5°	230.8	230.6	230.5	230.4	230.2	229.5	228.4	227.2	226.1	225.0	223.9
60°	214.7	214.3	214.0	213.6	213.2	212.4	211.4	210.4	209.2	208.2	207.3
62.5°	198.0	197.7	197.4	197.1	196.8	196.1	195.3	194.4	193.4	192.6	191.5
65°	173.0	172.8	172.6	172.4	172.2	171.5	170.5	169.4	168.3	167.3	166.4
67.5°	148.6	148.3	147.8	147.4	147.0	146.4	145.6	144.8	144.0	143.3	142.5
70°	133.3	132.8	132.3	131.9	131.4	130.6	129.8	128.9	128.1	127.2	126.6
72.5°	116.6	116.2	115.9	115.6	115.3	114.8	114.2	113.7	113.1	112.5	111.9
75°	91.9	91.7	91.5	91.3	91.1	90.8	90.3	89.8	89.4	88.9	88.6
77.5°	69.2	69.1	69.0	68.9	68.9	68.7	68.4	68.1	67.9	67.6	67.4
80°	54.9	54.9	54.9	54.9	54.9	54.8	54.6	54.4	54.2	54.0	53.9
82.5°	42.3	42.2	42.0	41.8	41.8	41.7	41.6	41.6	41.5	41.5	41.3
85°	23.9	24.0	24.1	24.2	24.3	24.4	24.4	24.4	24.4	24.4	24.3
87.5°	9.5	9.7	9.9	10.1	10.3	10.5	10.6	10.6	10.7	10.7	10.9
90°	0.6	1.5	2.5	3.4	4.3	5.3	6.1	7.0	7.7	8.6	9.2
92.5°	8.3	7.6	7.0	6.3	5.6	5.7	6.4	7.2	7.8	8.6	9.2
95°	30.6	30.3	30.0	29.6	29.2	26.8	22.2	17.7	13.1	8.6	9.2
97.5°	64.0	64.7	65.3	65.9	66.5	62.4	53.4	44.4	35.4	26.5	23.1
100°	89.8	90.2	90.5	90.9	91.2	91.6	92.2	92.7	93.1	93.6	75.8
102.5°	116.0	116.5	117.0	117.4	117.8	118.2	118.5	118.9	119.1	119.4	116.0
105°	158.1	158.5	159.1	159.6	160.0	160.2	160.2	160.2	160.2	160.2	160.2
107.5°	201.8	201.8	201.8	201.8	201.8	201.9	202.1	202.4	202.6	202.8	202.8
110°	230.2	230.2	230.2	230.2	230.2	230.3	230.5	230.7	231.0	231.2	230.9



TEST NUMBER: P333130-830

CATALOG NUMBER: S125DIP-S375D590U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	256.8	257.1	257.4	257.7	258.0	258.2	258.4	258.4	258.6	258.7	258.4
115°	296.8	297.5	298.0	298.6	299.3	299.6	299.7	299.8	299.9	300.1	299.6
117.5°	338.3	338.2	338.2	338.2	338.2	338.4	338.8	339.3	339.7	340.2	339.6
120°	364.1	363.9	363.8	363.7	363.5	363.7	364.1	364.4	364.8	365.1	364.9
122.5°	386.8	387.3	387.8	388.2	388.7	389.0	389.2	389.4	389.5	389.6	389.5
125°	422.2	423.0	423.8	424.6	425.5	425.9	425.9	425.9	425.9	425.9	425.5
127.5°	455.8	456.4	457.0	457.6	458.2	458.5	458.4	458.4	458.3	458.2	457.9
130°	476.5	477.0	477.7	478.2	478.8	479.2	479.3	479.5	479.6	479.7	479.3
132.5°	497.1	497.8	498.5	499.2	499.8	500.1	499.8	499.5	499.3	499.1	499.0
135°	526.5	527.2	527.9	528.6	529.3	529.6	529.3	529.0	528.9	528.6	528.4
137.5°	553.5	554.1	554.7	555.3	555.9	556.2	555.9	555.7	555.5	555.3	555.3
140°	571.1	571.4	571.6	571.8	572.0	572.1	572.0	571.8	571.7	571.7	571.8
142.5°	587.0	587.2	587.3	587.5	587.6	587.8	588.0	588.1	588.2	588.4	588.4
145°	610.4	610.6	610.9	611.1	611.3	611.4	611.4	611.4	611.4	611.4	611.5
147.5°	630.7	630.7	630.7	630.7	630.6	630.7	630.7	630.9	631.0	631.2	631.4
150°	643.7	643.5	643.2	643.0	642.7	642.7	643.0	643.2	643.5	643.7	643.9
152.5°	656.2	655.6	655.2	654.6	654.0	653.9	654.1	654.4	654.6	654.9	655.2
155°	672.2	671.5	670.8	670.1	669.3	669.1	669.3	669.6	669.8	670.1	670.4
157.5°	684.6	684.1	683.7	683.2	682.9	682.7	682.7	682.7	682.7	682.8	683.2
160°	693.1	692.5	691.7	691.0	690.3	690.0	690.1	690.2	690.3	690.5	691.0
162.5°	700.0	699.4	698.6	697.9	697.2	696.9	697.0	697.1	697.2	697.4	698.0
165°	709.3	708.6	707.8	707.2	706.4	706.2	706.2	706.3	706.5	706.6	707.3
167.5°	716.1	715.5	714.7	714.0	713.2	712.9	713.0	713.1	713.2	713.4	714.3
170°	720.1	719.3	718.4	717.6	716.7	716.3	716.4	716.6	716.7	716.8	717.7
172.5°	722.6	721.8	721.0	720.1	719.3	719.0	719.2	719.4	719.6	719.8	720.7
175°	725.5	724.7	724.0	723.3	722.6	722.3	722.4	722.6	722.6	722.7	723.7
177.5°	726.7	726.1	725.6	725.0	724.4	724.2	724.2	724.3	724.4	724.5	725.3
180°	725.5	725.5	725.5	725.5	725.5	725.5	725.5	725.5	725.5	725.5	725.5



TEST NUMBER: P333130-830

CATALOG NUMBER: S125DIP-S375D590U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	550.6	550.6	550.6	550.6	550.6	550.6	550.6	550.6
2.5°	549.0	549.8	550.5	550.9	550.8	550.7	550.7	550.6
5°	546.2	547.1	548.0	548.4	548.3	548.2	548.1	548.0
7.5°	540.7	541.6	542.4	542.8	542.7	542.6	542.5	542.4
10°	536.0	536.8	537.6	537.9	537.8	537.7	537.6	537.5
12.5°	529.8	530.5	531.0	531.3	531.3	531.3	531.3	531.2
15°	518.9	519.3	519.9	520.1	520.1	520.1	520.1	520.1
17.5°	506.2	506.8	507.5	507.5	507.0	506.5	506.1	505.6
20°	496.6	497.3	497.9	498.1	497.6	497.1	496.6	496.2
22.5°	485.7	486.2	486.6	486.6	486.4	486.0	485.7	485.3
25°	468.3	468.4	468.6	468.5	468.3	468.0	467.7	467.4
27.5°	449.9	449.9	450.0	449.9	449.5	449.2	448.9	448.7
30°	436.5	436.3	436.1	435.9	435.6	435.4	435.0	434.7
32.5°	423.0	422.6	422.3	421.9	421.3	420.8	420.3	419.7
35°	402.0	401.5	401.0	400.4	399.6	398.8	398.0	397.3
37.5°	379.9	379.2	378.4	377.9	377.4	377.0	376.5	376.1
40°	364.6	363.7	362.9	362.3	362.0	361.7	361.4	361.1
42.5°	349.4	348.6	347.8	347.2	346.8	346.3	345.9	345.4
45°	327.0	325.8	324.7	324.0	323.7	323.4	323.1	322.8
47.5°	303.3	302.2	301.0	300.0	299.4	298.7	298.0	297.4
50°	287.2	285.9	284.6	283.7	283.0	282.3	281.6	281.0
52.5°	271.5	270.3	269.2	268.3	267.6	266.8	266.1	265.3
55°	246.9	246.1	245.2	244.5	243.8	243.1	242.4	241.8
57.5°	222.7	221.6	220.5	219.7	219.3	219.0	218.6	218.2
60°	206.3	205.3	204.3	203.5	202.8	202.2	201.5	200.9
62.5°	190.5	189.4	188.3	187.6	187.1	186.5	186.0	185.5
65°	165.5	164.7	163.8	163.2	162.8	162.4	162.0	161.6
67.5°	141.8	141.0	140.3	139.8	139.6	139.3	139.1	138.8
70°	126.0	125.5	124.9	124.4	124.0	123.7	123.2	122.8
72.5°	111.2	110.6	109.9	109.4	109.1	108.7	108.2	107.8
75°	88.3	88.0	87.7	87.4	87.0	86.6	86.2	85.8
77.5°	67.3	67.1	66.9	66.7	66.4	66.2	65.9	65.6
80°	53.8	53.7	53.6	53.4	53.3	53.1	52.9	52.7
82.5°	41.1	40.9	40.8	40.6	40.6	40.6	40.5	40.5
85°	24.2	24.1	24.0	23.8	23.7	23.5	23.3	23.1
87.5°	11.0	11.1	11.2	11.3	11.2	11.1	11.0	10.9
90°	9.8	10.4	11.0	11.5	11.9	12.2	12.5	12.9
92.5°	9.8	10.4	11.0	11.4	11.5	11.7	11.9	12.1
95°	9.8	10.4	11.0	11.3	11.3	11.3	11.3	11.3
97.5°	19.7	16.3	13.0	11.3	11.3	11.3	11.3	11.3
100°	58.0	40.2	22.3	13.2	12.7	12.3	11.8	11.3
102.5°	112.6	109.2	105.9	100.2	92.0	83.9	75.8	67.7
105°	160.2	160.2	160.2	160.2	160.0	159.9	159.9	159.7
107.5°	202.9	202.9	202.9	202.7	202.5	202.1	201.7	201.3
110°	230.5	230.2	229.8	229.7	229.8	229.9	230.1	230.2



TEST NUMBER: P333130-830

CATALOG NUMBER: S125DIP-S375D590U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	257.9	257.4	256.9	256.7	256.5	256.3	256.2	256.0
115°	299.1	298.6	298.1	297.6	296.8	296.1	295.4	294.7
117.5°	338.9	338.3	337.7	337.2	337.0	336.6	336.3	336.0
120°	364.7	364.4	364.2	363.7	363.2	362.6	361.9	361.4
122.5°	389.2	389.0	388.7	388.2	387.6	386.8	386.2	385.5
125°	425.0	424.4	424.0	423.6	423.2	422.8	422.5	422.2
127.5°	457.6	457.4	457.1	456.6	455.6	454.8	453.9	453.0
130°	479.0	478.6	478.2	477.8	477.2	476.5	476.0	475.4
132.5°	498.9	498.8	498.8	498.4	497.9	497.2	496.6	496.1
135°	528.1	527.9	527.6	527.2	526.5	525.8	525.0	524.3
137.5°	555.3	555.4	555.4	555.2	554.6	553.9	553.4	552.7
140°	572.1	572.3	572.6	572.3	571.7	570.9	570.2	569.5
142.5°	588.5	588.5	588.6	588.2	587.6	586.8	586.1	585.4
145°	611.7	611.8	611.9	611.6	610.9	610.2	609.4	608.7
147.5°	631.5	631.7	631.8	631.4	630.6	629.7	628.9	628.0
150°	644.1	644.4	644.6	644.3	643.4	642.3	641.4	640.5
152.5°	655.3	655.6	655.8	655.5	654.7	653.8	652.9	652.1
155°	670.8	671.1	671.5	671.2	670.2	669.3	668.4	667.3
157.5°	683.5	683.9	684.3	684.0	683.1	682.0	681.1	680.1
160°	691.4	691.9	692.4	692.1	691.2	690.2	689.3	688.3
162.5°	698.7	699.4	700.0	699.8	698.8	697.8	696.7	695.6
165°	708.0	708.8	709.5	709.4	708.4	707.5	706.5	705.5
167.5°	715.1	716.0	716.8	716.7	715.7	714.5	713.5	712.4
170°	718.8	719.7	720.7	720.6	719.5	718.4	717.4	716.3
172.5°	721.5	722.5	723.3	723.2	722.1	721.0	719.9	718.9
175°	724.6	725.6	726.6	726.5	725.5	724.3	723.3	722.2
177.5°	725.9	726.6	727.3	727.2	726.4	725.7	724.9	724.2
180°	725.5	725.5	725.5	725.5	725.5	725.5	725.5	725.5

(END OF REPORT)