

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333625-830

Luminaire Tested: **S125RDIP-S1270D810U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333625-830  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIP-S1270D810U830-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 810 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7652.1 lumens  
Efficiency: N/A  
Efficacy: 126.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 60.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333625-830

CATALOG NUMBER: S125RDIP-S1270D810U830-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

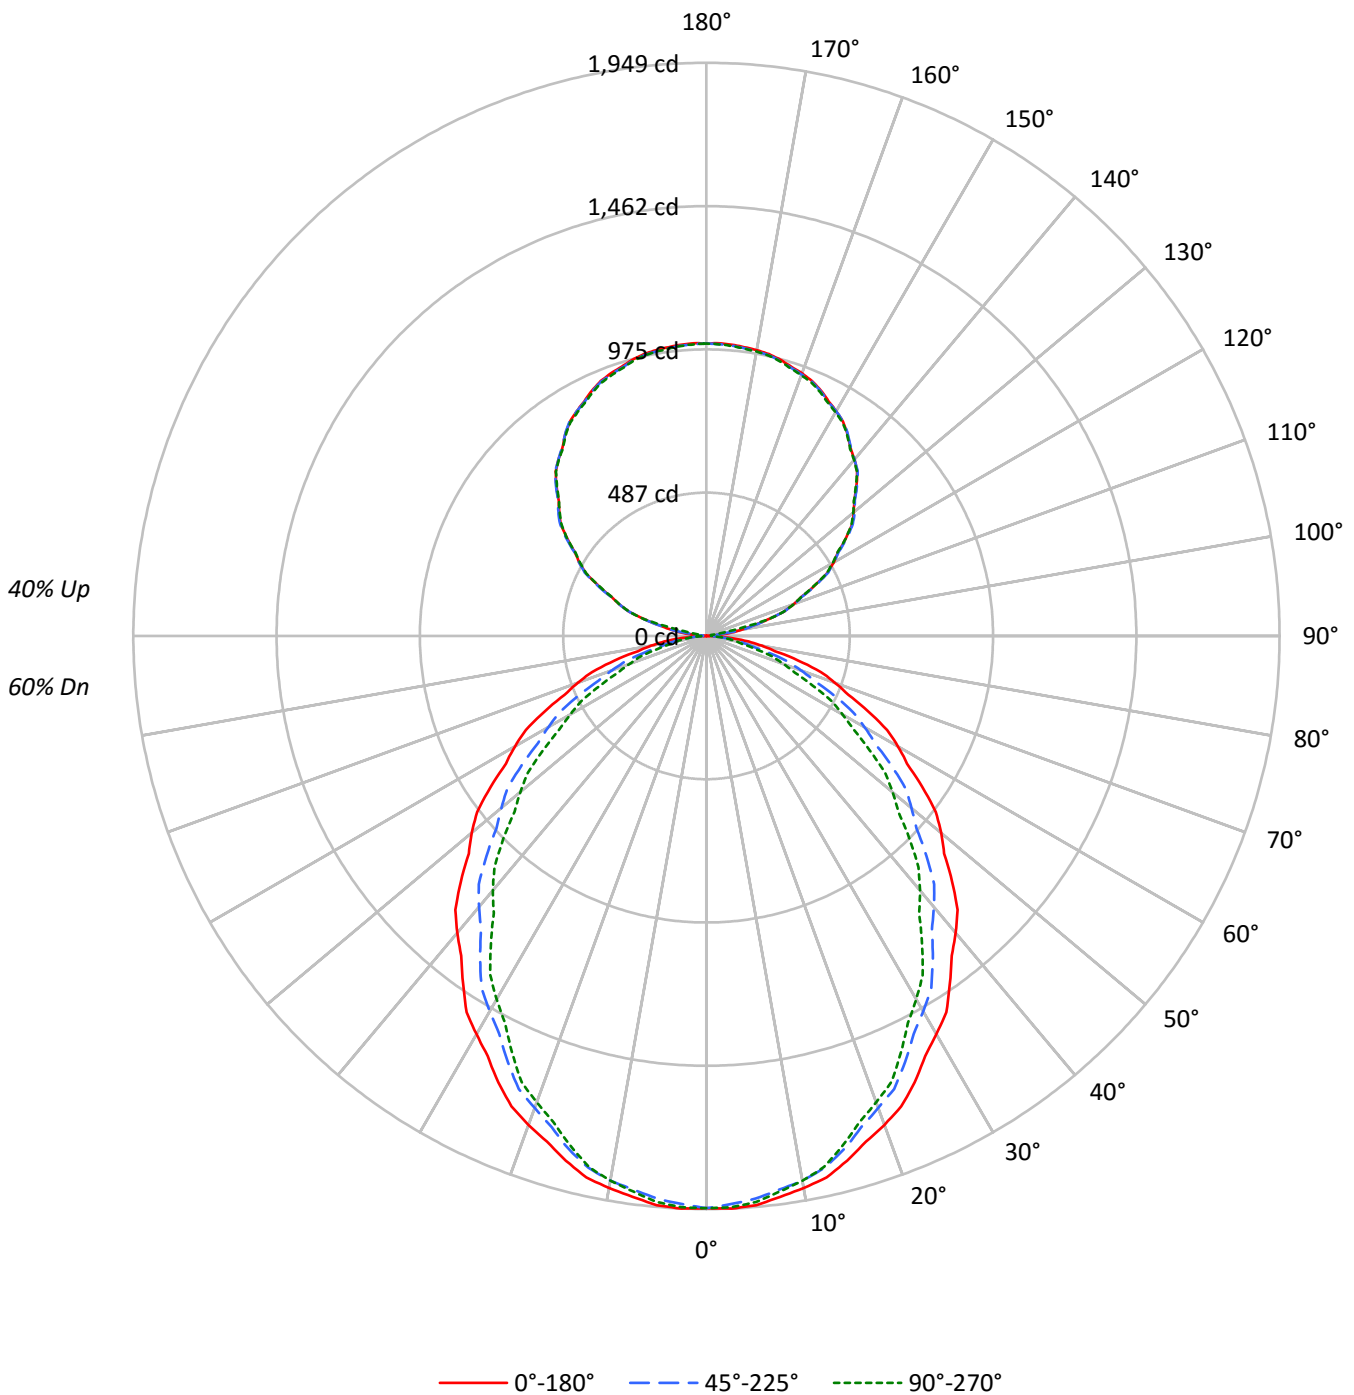



TEST NUMBER: P333625-830

CATALOG NUMBER: S125RDIP-S1270D810U830-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65	60
1	100	96	92	89	94	90	87	84	78	76	74	68	66	64	58	57	56	51
2	92	84	78	73	85	79	74	69	69	65	61	60	57	54	52	49	47	43
3	84	74	67	61	78	70	63	58	61	56	52	53	49	46	46	43	41	37
4	77	66	58	52	71	62	55	49	54	49	45	48	43	40	41	38	35	32
5	71	59	51	45	66	55	48	43	49	43	39	43	38	35	37	34	31	28
6	65	53	45	39	61	50	43	37	44	38	34	39	34	30	34	30	27	25
7	60	48	40	34	56	45	38	33	40	34	30	35	31	27	31	27	24	22
8	56	44	36	30	52	41	34	29	37	31	27	32	28	24	28	25	22	20
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	26	23	20	18
10	49	37	29	25	46	35	28	24	31	26	22	28	23	20	24	21	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	12566	12566	12566
5°	12595	12452	12528
10°	12499	12336	12336
15°	12351	12085	11987
20°	12160	11736	11595
25°	11938	11393	11142
30°	11660	10992	10641
35°	11378	10578	10080
40°	11113	10146	9528
45°	10791	9664	8925
50°	10468	9139	8298
55°	10094	8637	7629
60°	9719	8029	6909
65°	9274	7321	6085
70°	8769	6437	5246
75°	8067	5425	4362
80°	7107	4262	3663
85°	5995	3483	3268



TEST NUMBER: P333625-830

CATALOG NUMBER: S125RDIP-S1270D810U830-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	183.0	2.4
10°-20°	511.3	6.7
20°-30°	741.4	9.7
30°-40°	845.0	11.0
40°-50°	823.6	10.8
50°-60°	693.3	9.1
60°-70°	486.0	6.4
70°-80°	249.8	3.3
80°-90°	65.2	0.9
90°-100°	36.1	0.5
100°-110°	222.7	2.9
110°-120°	403.9	5.3
120°-130°	518.4	6.8
130°-140°	557.5	7.3
140°-150°	523.3	6.8
150°-160°	423.3	5.5
160°-170°	273.8	3.6
170°-180°	94.4	1.2
0°-30°	1435.7	18.8
0°-40°	2280.6	29.8
0°-60°	3797.6	49.6
0°-90°	4598.6	60.1
90°-120°	662.7	8.7
90°-150°	2262.0	29.6
90°-180°	3054.0	39.9
0°-180°	7652.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1946	1946	1946	1946	1946	
5°	1943	1936	1921	1934	1932	184
15°	1847	1837	1808	1805	1793	520
25°	1675	1651	1599	1580	1564	770
35°	1443	1406	1342	1300	1278	903
45°	1182	1137	1058	1001	977	911
55°	896	847	767	703	678	802
65°	607	555	479	422	398	601
75°	323	278	217	186	175	342
85°	81	55	47	46	44	91
90°	1	7	12	15	18	5
95°	42	38	12	15	16	54
105°	217	219	220	220	219	230
115°	407	410	411	408	404	403
125°	579	584	584	581	579	517
135°	722	726	725	723	719	556
145°	837	838	838	839	834	523
155°	921	917	918	920	915	424
165°	972	968	969	972	967	275
175°	994	990	991	996	990	95
180°	994	994	994	994	994	



TEST NUMBER: P333625-830

CATALOG NUMBER: S125RDIP-S1270D810U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1945.7	1945.7	1945.7	1945.7	1945.7	1945.7	1945.7	1945.7	1945.7	1945.7	1945.7
2.5°	1949.2	1948.4	1947.6	1946.8	1946.1	1944.4	1941.7	1939.1	1936.5	1933.9	1936.5
5°	1942.8	1941.4	1940.1	1938.8	1937.5	1935.0	1931.5	1927.9	1924.3	1920.7	1923.9
7.5°	1923.6	1922.4	1921.2	1919.9	1918.6	1915.9	1911.6	1907.2	1903.0	1898.7	1900.9
10°	1906.0	1905.0	1904.0	1903.1	1902.1	1899.3	1894.7	1890.2	1885.6	1881.0	1882.0
12.5°	1886.0	1884.8	1883.5	1882.3	1881.0	1877.4	1871.2	1865.1	1858.9	1852.8	1853.5
15°	1847.2	1845.2	1843.3	1841.4	1839.4	1834.9	1828.1	1821.3	1814.4	1807.5	1807.2
17.5°	1803.4	1800.4	1797.4	1794.4	1791.4	1785.6	1777.0	1768.3	1759.7	1751.1	1749.5
20°	1769.3	1766.0	1762.7	1759.5	1756.2	1749.4	1739.0	1728.5	1718.1	1707.6	1706.0
22.5°	1731.7	1728.4	1725.1	1721.9	1718.6	1711.6	1700.5	1689.6	1678.6	1667.6	1664.4
25°	1675.3	1670.4	1665.5	1660.6	1655.7	1647.2	1635.1	1623.1	1610.9	1598.8	1594.6
27.5°	1610.6	1604.7	1598.7	1592.8	1586.9	1577.4	1564.4	1551.5	1538.6	1525.7	1519.8
30°	1563.6	1557.4	1551.1	1545.0	1538.8	1528.8	1515.0	1501.4	1487.6	1473.9	1466.4
32.5°	1517.8	1510.5	1503.3	1496.0	1488.7	1478.1	1464.1	1450.2	1436.2	1422.2	1413.9
35°	1443.1	1435.2	1427.4	1419.6	1411.7	1400.4	1385.7	1371.1	1356.4	1341.7	1332.2
37.5°	1369.9	1360.4	1350.9	1341.3	1331.7	1319.4	1304.3	1289.1	1273.9	1258.8	1247.5
40°	1318.1	1308.3	1298.5	1288.7	1279.0	1266.2	1250.6	1234.9	1219.2	1203.5	1191.2
42.5°	1264.1	1254.1	1244.0	1233.9	1223.9	1210.7	1194.6	1178.4	1162.2	1145.9	1134.1
45°	1181.5	1172.1	1162.5	1153.1	1143.6	1129.9	1111.9	1094.0	1076.0	1058.1	1045.0
47.5°	1096.0	1086.0	1076.0	1066.0	1056.0	1042.0	1023.9	1005.8	987.7	969.6	956.1
50°	1041.9	1031.1	1020.3	1009.6	998.8	984.1	965.4	946.9	928.2	909.6	895.9
52.5°	983.1	972.0	961.0	950.0	939.0	924.6	907.1	889.6	871.9	854.4	839.6
55°	896.5	886.0	875.5	865.1	854.6	840.3	822.0	803.7	785.4	767.1	752.4
57.5°	808.8	797.7	786.5	775.3	764.1	749.8	732.2	714.4	696.8	679.2	664.9
60°	752.4	740.9	729.5	718.1	706.7	692.1	674.5	656.9	639.2	621.6	607.3
62.5°	692.5	681.6	670.6	659.7	648.8	634.4	616.5	598.6	580.7	562.8	549.5
65°	606.9	595.8	584.8	573.6	562.5	548.3	531.0	513.7	496.3	479.1	466.0
67.5°	522.0	510.9	499.7	488.7	477.6	463.7	447.1	430.6	414.0	397.4	385.4
70°	464.4	453.3	442.1	431.0	420.0	406.2	389.9	373.6	357.2	340.9	330.8
72.5°	407.9	397.1	386.3	375.4	364.6	351.5	336.2	320.9	305.7	290.4	281.1
75°	323.3	313.5	303.7	293.9	284.1	272.4	258.6	245.0	231.2	217.4	210.3
77.5°	239.2	231.4	223.6	215.7	207.9	198.5	187.5	176.5	165.6	154.6	149.6
80°	191.1	183.2	175.4	167.5	159.7	151.2	142.0	132.9	123.8	114.6	111.7
82.5°	144.0	137.0	129.9	122.8	115.8	109.1	102.8	96.6	90.3	84.1	82.7
85°	80.9	74.9	69.1	63.2	57.3	53.5	51.9	50.3	48.6	47.0	46.7
87.5°	27.1	25.6	24.0	22.5	20.9	20.1	20.1	20.1	20.0	20.0	20.2
90°	0.8	2.1	3.4	4.7	5.9	7.2	8.4	9.5	10.7	11.8	12.6
92.5°	11.3	10.5	9.5	8.6	7.7	7.7	8.8	9.8	10.7	11.8	12.6
95°	42.0	41.6	41.0	40.5	40.1	36.7	30.4	24.2	18.0	11.8	12.6
97.5°	87.8	88.6	89.4	90.4	91.2	85.6	73.2	60.9	48.5	36.3	31.7
100°	123.1	123.6	124.0	124.6	125.1	125.6	126.3	127.0	127.6	128.3	103.9
102.5°	159.1	159.7	160.3	160.9	161.6	162.0	162.5	162.9	163.2	163.6	159.0
105°	216.7	217.4	218.0	218.7	219.3	219.6	219.6	219.6	219.6	219.6	219.6
107.5°	276.5	276.5	276.5	276.5	276.5	276.7	277.0	277.4	277.7	278.1	278.1
110°	315.5	315.5	315.5	315.5	315.5	315.7	315.9	316.3	316.6	317.0	316.5



TEST NUMBER: P333625-830

CATALOG NUMBER: S125RDIP-S1270D810U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	352.0	352.4	352.8	353.3	353.6	353.9	354.1	354.3	354.5	354.7	354.1
115°	406.9	407.7	408.5	409.3	410.2	410.7	410.9	410.9	411.1	411.3	410.7
117.5°	463.6	463.6	463.5	463.5	463.5	463.8	464.4	465.1	465.7	466.3	465.4
120°	499.0	498.9	498.7	498.5	498.3	498.5	499.0	499.5	500.0	500.5	500.2
122.5°	530.3	530.9	531.5	532.2	532.7	533.2	533.4	533.7	533.9	534.1	533.8
125°	578.6	579.8	580.9	582.1	583.2	583.8	583.8	583.8	583.8	583.8	583.2
127.5°	624.8	625.6	626.4	627.3	628.0	628.4	628.3	628.2	628.1	628.0	627.6
130°	653.1	653.9	654.7	655.5	656.4	656.9	657.0	657.1	657.3	657.5	657.0
132.5°	681.4	682.3	683.2	684.2	685.2	685.5	685.1	684.8	684.4	684.0	683.9
135°	721.6	722.6	723.6	724.6	725.6	725.9	725.6	725.2	724.9	724.6	724.2
137.5°	758.7	759.5	760.3	761.2	762.0	762.3	762.0	761.8	761.5	761.1	761.2
140°	782.8	783.2	783.4	783.8	784.1	784.2	784.0	783.9	783.7	783.5	783.9
142.5°	804.6	804.8	805.0	805.2	805.4	805.6	805.9	806.1	806.3	806.5	806.6
145°	836.6	837.0	837.3	837.6	837.9	838.1	838.1	838.1	838.1	838.1	838.3
147.5°	864.6	864.6	864.5	864.4	864.4	864.4	864.6	864.8	865.1	865.3	865.4
150°	882.3	882.0	881.7	881.4	881.0	881.0	881.4	881.7	882.0	882.3	882.7
152.5°	899.5	898.7	898.0	897.3	896.5	896.4	896.6	897.0	897.3	897.7	898.0
155°	921.4	920.4	919.5	918.4	917.5	917.1	917.5	917.8	918.1	918.4	918.9
157.5°	938.3	937.7	937.2	936.6	935.9	935.7	935.8	935.8	935.8	935.9	936.3
160°	950.2	949.1	948.2	947.2	946.2	945.8	945.9	946.1	946.3	946.4	947.1
162.5°	959.6	958.6	957.6	956.6	955.6	955.3	955.4	955.5	955.7	955.9	956.8
165°	972.2	971.3	970.3	969.3	968.3	967.9	968.1	968.3	968.4	968.6	969.6
167.5°	981.7	980.7	979.7	978.6	977.6	977.2	977.3	977.5	977.7	977.9	979.0
170°	987.0	985.8	984.7	983.5	982.4	981.9	982.0	982.2	982.4	982.6	983.9
172.5°	990.5	989.4	988.3	987.1	985.9	985.5	985.8	986.1	986.4	986.7	987.9
175°	994.4	993.3	992.4	991.5	990.4	990.0	990.1	990.3	990.5	990.7	992.0
177.5°	996.2	995.3	994.6	993.8	993.0	992.7	992.8	992.9	993.1	993.2	994.1
180°	994.4	994.4	994.4	994.4	994.4	994.4	994.4	994.4	994.4	994.4	994.4



TEST NUMBER: P333625-830

CATALOG NUMBER: S125RDIP-S1270D810U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1945.7	1945.7	1945.7	1945.7	1945.7	1945.7	1945.7	1945.7
2.5°	1939.1	1941.7	1944.4	1945.5	1945.3	1945.0	1944.7	1944.5
5°	1927.2	1930.5	1933.7	1935.0	1934.4	1933.7	1933.1	1932.4
7.5°	1903.2	1905.5	1907.8	1908.6	1907.8	1907.1	1906.4	1905.7
10°	1882.9	1884.0	1884.9	1884.9	1884.0	1882.9	1882.0	1881.0
12.5°	1854.3	1854.9	1855.7	1855.3	1853.8	1852.3	1850.8	1849.3
15°	1806.9	1806.6	1806.2	1804.6	1801.7	1798.7	1795.7	1792.8
17.5°	1747.9	1746.2	1744.6	1742.6	1740.1	1737.7	1735.3	1732.9
20°	1704.3	1702.7	1701.1	1698.7	1695.8	1692.9	1690.0	1687.1
22.5°	1661.2	1658.0	1654.8	1652.0	1649.6	1647.2	1644.7	1642.4
25°	1590.4	1586.1	1581.9	1577.9	1574.3	1570.7	1567.2	1563.6
27.5°	1513.8	1507.9	1501.9	1497.2	1493.7	1490.3	1486.8	1483.4
30°	1459.0	1451.4	1443.9	1438.7	1435.8	1432.8	1429.8	1426.9
32.5°	1405.6	1397.3	1389.0	1383.0	1379.3	1375.5	1371.9	1368.1
35°	1322.8	1313.2	1303.8	1296.8	1292.2	1287.6	1283.1	1278.5
37.5°	1236.1	1224.7	1213.3	1205.4	1201.0	1196.6	1192.1	1187.7
40°	1178.7	1166.3	1154.0	1145.8	1141.8	1137.9	1134.0	1130.1
42.5°	1122.2	1110.3	1098.4	1089.6	1083.8	1078.1	1072.3	1066.6
45°	1031.9	1018.9	1005.8	996.8	991.9	987.0	982.1	977.2
47.5°	942.7	929.3	915.8	906.3	900.9	895.5	890.0	884.7
50°	882.2	868.5	854.8	845.5	840.6	835.7	830.8	825.9
52.5°	824.8	810.1	795.3	785.5	780.6	775.7	770.8	765.9
55°	737.7	723.0	708.3	698.3	693.1	687.9	682.7	677.5
57.5°	650.4	636.1	621.7	612.3	607.6	602.9	598.3	593.7
60°	592.9	578.5	564.1	554.5	549.6	544.7	539.8	534.9
62.5°	536.2	522.8	509.5	500.4	495.5	490.6	485.7	480.8
65°	453.0	439.9	426.8	417.8	412.9	408.0	403.1	398.2
67.5°	373.4	361.5	349.6	341.6	337.7	333.8	329.9	325.9
70°	320.7	310.6	300.5	293.4	289.5	285.6	281.6	277.8
72.5°	271.7	262.4	253.0	247.0	244.4	241.9	239.2	236.6
75°	203.1	196.0	188.8	184.0	181.7	179.5	177.2	174.8
77.5°	144.5	139.5	134.5	131.1	129.4	127.7	126.0	124.3
80°	108.8	105.8	102.8	101.0	100.4	99.7	99.2	98.5
82.5°	81.3	79.9	78.6	77.7	77.3	76.9	76.5	76.2
85°	46.4	46.1	45.7	45.4	45.1	44.8	44.4	44.1
87.5°	20.4	20.5	20.6	20.6	20.5	20.4	20.2	20.0
90°	13.5	14.2	15.1	15.7	16.2	16.7	17.2	17.7
92.5°	13.5	14.2	15.1	15.6	15.8	16.0	16.3	16.5
95°	13.5	14.2	15.1	15.5	15.5	15.5	15.5	15.5
97.5°	27.1	22.4	17.8	15.5	15.5	15.5	15.5	15.5
100°	79.5	55.0	30.6	18.1	17.4	16.8	16.1	15.5
102.5°	154.4	149.8	145.2	137.3	126.1	115.0	103.9	92.7
105°	219.6	219.6	219.6	219.6	219.4	219.2	219.0	219.0
107.5°	278.1	278.1	278.1	278.0	277.5	276.9	276.4	276.0
110°	315.9	315.5	315.0	314.8	315.0	315.2	315.3	315.5





TEST NUMBER: P333625-830

CATALOG NUMBER: S125RDIP-S1270D810U830-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	353.5	352.8	352.2	351.8	351.6	351.3	351.1	350.9
115°	410.0	409.3	408.7	407.8	406.9	405.9	404.9	404.0
117.5°	464.6	463.7	462.9	462.2	461.8	461.4	461.0	460.5
120°	499.8	499.5	499.2	498.6	497.8	497.0	496.2	495.3
122.5°	533.5	533.1	532.8	532.2	531.2	530.3	529.3	528.4
125°	582.5	581.8	581.2	580.6	580.1	579.6	579.1	578.6
127.5°	627.3	627.0	626.6	625.8	624.6	623.4	622.2	620.9
130°	656.5	656.0	655.5	654.9	654.0	653.3	652.4	651.6
132.5°	683.8	683.7	683.6	683.2	682.4	681.6	680.7	680.0
135°	724.0	723.6	723.3	722.6	721.6	720.7	719.6	718.7
137.5°	761.3	761.3	761.4	761.0	760.2	759.3	758.5	757.6
140°	784.2	784.6	784.9	784.6	783.5	782.6	781.6	780.6
142.5°	806.7	806.7	806.8	806.3	805.4	804.4	803.4	802.4
145°	838.4	838.6	838.8	838.3	837.4	836.4	835.4	834.4
147.5°	865.6	865.8	866.0	865.5	864.3	863.2	862.0	860.8
150°	883.0	883.4	883.6	883.2	881.8	880.5	879.2	877.9
152.5°	898.3	898.6	899.0	898.5	897.4	896.2	895.0	893.8
155°	919.5	919.9	920.4	920.0	918.7	917.4	916.1	914.7
157.5°	936.9	937.5	937.9	937.5	936.2	934.9	933.6	932.3
160°	947.7	948.4	949.0	948.8	947.4	946.1	944.8	943.5
162.5°	957.7	958.7	959.5	959.3	957.8	956.4	955.0	953.6
165°	970.5	971.5	972.5	972.3	971.0	969.7	968.4	967.0
167.5°	980.2	981.4	982.6	982.4	980.9	979.5	978.0	976.6
170°	985.1	986.5	987.8	987.7	986.3	984.8	983.3	981.8
172.5°	989.0	990.2	991.5	991.3	989.8	988.4	986.8	985.3
175°	993.3	994.6	995.9	995.8	994.4	992.9	991.5	990.0
177.5°	995.0	995.9	996.8	996.8	995.7	994.7	993.6	992.6
180°	994.4	994.4	994.4	994.4	994.4	994.4	994.4	994.4

(END OF REPORT)