

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333559-830

Luminaire Tested: **S125RDIP-S850D590U830-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333559-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S850D590U830-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 590 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5291.1 lumens
Efficiency: N/A
Efficacy: 131.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333559-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F

Luminous Intensity Polar Plot

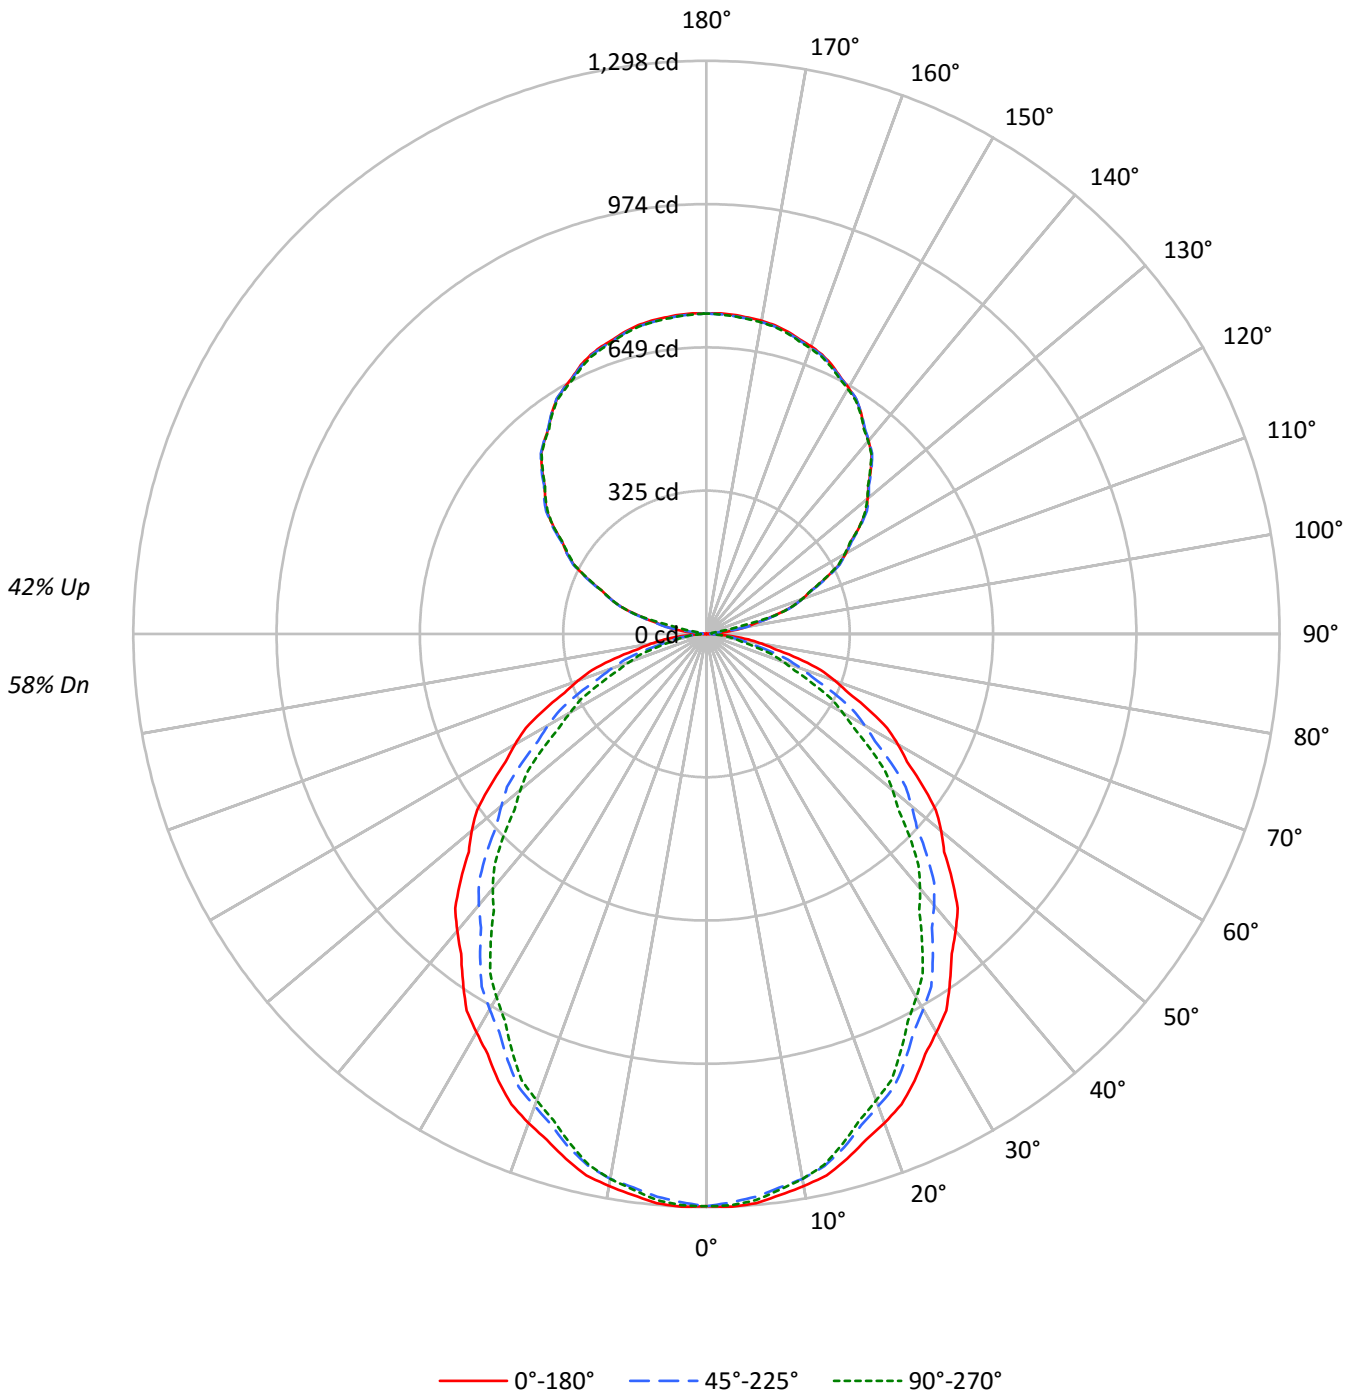



TEST NUMBER: P333559-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	63	63	63	58
1	100	96	92	88	93	89	86	83	77	75	73	66	65	63	56	55	54	49
2	91	84	78	72	85	78	73	68	68	64	61	59	56	53	50	48	46	42
3	83	74	66	61	77	69	63	57	60	55	51	52	48	45	44	42	39	36
4	76	65	58	52	71	61	54	49	54	48	44	47	42	39	40	37	34	31
5	70	59	50	44	65	55	48	42	48	42	38	42	37	34	36	33	30	27
6	65	53	44	39	60	49	42	37	44	38	33	38	33	30	33	29	26	24
7	60	48	40	34	56	45	38	32	40	34	29	35	30	26	30	26	24	21
8	56	43	36	30	52	41	34	29	36	30	26	32	27	24	28	24	21	19
9	52	40	32	27	48	37	31	26	33	28	24	29	25	21	26	22	19	17
10	49	36	29	24	45	34	28	23	31	25	21	27	23	19	24	20	17	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8371	8371	8371
5°	8390	8294	8345
10°	8326	8217	8217
15°	8227	8050	7985
20°	8100	7818	7724
25°	7953	7590	7422
30°	7767	7322	7088
35°	7579	7046	6714
40°	7403	6759	6347
45°	7188	6437	5945
50°	6973	6089	5528
55°	6723	5754	5082
60°	6473	5349	4602
65°	6178	4876	4053
70°	5840	4288	3493
75°	5375	3616	2907
80°	4731	2838	2440
85°	3987	2319	2179



TEST NUMBER: P333559-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.9	2.3
10°-20°	340.6	6.4
20°-30°	493.9	9.3
30°-40°	562.9	10.6
40°-50°	548.6	10.4
50°-60°	461.8	8.7
60°-70°	323.7	6.1
70°-80°	166.4	3.1
80°-90°	43.5	0.8
90°-100°	26.4	0.5
100°-110°	162.5	3.1
110°-120°	294.7	5.6
120°-130°	378.2	7.1
130°-140°	406.7	7.7
140°-150°	381.8	7.2
150°-160°	308.8	5.8
160°-170°	199.7	3.8
170°-180°	68.9	1.3
0°-30°	956.3	18.1
0°-40°	1519.2	28.7
0°-60°	2529.7	47.8
0°-90°	3063.4	57.9
90°-120°	483.5	9.1
90°-150°	1650.2	31.2
90°-180°	2228.0	42.1
0°-180°	5291.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1296	1296	1296	1296	1296	
5°	1294	1290	1279	1289	1287	123
15°	1230	1224	1204	1203	1194	347
25°	1116	1100	1065	1052	1042	513
35°	961	937	894	866	852	602
45°	787	757	705	667	651	607
55°	597	564	511	468	451	534
65°	404	370	319	281	265	400
75°	215	185	145	124	116	228
85°	54	37	31	30	29	60
90°	1	5	9	11	13	4
95°	31	28	9	11	11	39
105°	158	160	160	160	160	168
115°	297	299	300	298	295	294
125°	422	426	426	424	422	377
135°	526	529	529	527	524	406
145°	610	611	611	612	609	382
155°	672	669	670	671	667	310
165°	709	706	707	709	706	200
175°	726	722	723	727	722	69
180°	726	726	726	726	726	



TEST NUMBER: P333559-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1298.4	1297.9	1297.3	1296.8	1296.3	1295.1	1293.5	1291.7	1290.0	1288.2	1290.0
5°	1294.1	1293.3	1292.3	1291.5	1290.6	1289.0	1286.6	1284.2	1281.8	1279.4	1281.6
7.5°	1281.4	1280.5	1279.7	1278.8	1278.1	1276.2	1273.4	1270.5	1267.6	1264.7	1266.2
10°	1269.6	1268.9	1268.3	1267.6	1267.0	1265.2	1262.2	1259.0	1256.0	1253.0	1253.6
12.5°	1256.3	1255.5	1254.6	1253.9	1253.0	1250.6	1246.4	1242.4	1238.3	1234.2	1234.6
15°	1230.5	1229.2	1227.9	1226.5	1225.2	1222.3	1217.8	1213.1	1208.6	1204.0	1203.8
17.5°	1201.3	1199.3	1197.3	1195.3	1193.3	1189.4	1183.6	1177.9	1172.1	1166.4	1165.4
20°	1178.6	1176.4	1174.2	1172.1	1169.9	1165.3	1158.4	1151.4	1144.4	1137.5	1136.4
22.5°	1153.5	1151.3	1149.1	1147.0	1144.8	1140.1	1132.7	1125.5	1118.1	1110.9	1108.7
25°	1116.0	1112.7	1109.4	1106.2	1102.9	1097.2	1089.2	1081.1	1073.1	1065.1	1062.2
27.5°	1072.9	1068.9	1065.0	1061.0	1057.1	1050.7	1042.2	1033.5	1024.9	1016.2	1012.3
30°	1041.5	1037.4	1033.3	1029.2	1025.0	1018.3	1009.3	1000.1	991.0	981.8	976.9
32.5°	1011.0	1006.2	1001.4	996.6	991.6	984.6	975.3	966.0	956.7	947.3	941.9
35°	961.3	956.0	950.8	945.6	940.4	932.8	923.1	913.3	903.5	893.7	887.4
37.5°	912.5	906.2	899.8	893.4	887.1	878.9	868.8	858.7	848.6	838.5	830.9
40°	878.1	871.6	865.0	858.5	852.0	843.5	833.0	822.6	812.2	801.7	793.4
42.5°	842.1	835.4	828.7	821.9	815.2	806.5	795.7	784.9	774.1	763.4	755.4
45°	787.0	780.7	774.4	768.1	761.8	752.6	740.6	728.8	716.8	704.8	696.1
47.5°	730.1	723.4	716.7	710.1	703.4	694.1	682.0	670.0	657.9	645.8	636.9
50°	694.0	686.8	679.7	672.5	665.3	655.5	643.1	630.7	618.3	606.0	596.8
52.5°	654.9	647.5	640.2	632.8	625.5	616.0	604.3	592.6	580.8	569.1	559.3
55°	597.1	590.1	583.2	576.3	569.3	559.7	547.5	535.4	523.2	511.0	501.1
57.5°	538.8	531.3	523.9	516.4	509.1	499.5	487.7	475.9	464.2	452.4	442.9
60°	501.1	493.6	486.0	478.3	470.7	461.1	449.3	437.5	425.8	414.1	404.5
62.5°	461.3	454.0	446.8	439.4	432.2	422.6	410.7	398.8	386.8	374.9	366.1
65°	404.3	396.9	389.5	382.1	374.7	365.2	353.7	342.1	330.6	319.1	310.4
67.5°	347.7	340.3	332.9	325.6	318.1	308.9	297.8	286.8	275.8	264.7	256.7
70°	309.3	301.9	294.5	287.1	279.7	270.6	259.8	248.8	238.0	227.1	220.4
72.5°	271.7	264.5	257.3	250.1	242.9	234.1	223.9	213.8	203.6	193.4	187.2
75°	215.4	208.9	202.3	195.8	189.3	181.4	172.3	163.2	154.0	144.9	140.1
77.5°	159.4	154.1	148.9	143.7	138.5	132.2	124.9	117.6	110.3	103.0	99.6
80°	127.2	122.1	116.8	111.6	106.4	100.8	94.6	88.5	82.5	76.3	74.4
82.5°	96.0	91.2	86.5	81.8	77.1	72.7	68.5	64.4	60.1	56.0	55.0
85°	53.8	50.0	46.0	42.1	38.2	35.6	34.6	33.5	32.4	31.3	31.1
87.5°	18.1	17.1	16.0	15.1	14.0	13.5	13.5	13.5	13.5	13.5	13.6
90°	0.6	1.5	2.5	3.4	4.3	5.3	6.1	7.0	7.7	8.6	9.2
92.5°	8.3	7.6	7.0	6.3	5.6	5.7	6.4	7.2	7.8	8.6	9.2
95°	30.6	30.3	30.0	29.6	29.2	26.8	22.2	17.7	13.1	8.6	9.2
97.5°	64.0	64.7	65.3	65.9	66.5	62.4	53.4	44.4	35.4	26.5	23.1
100°	89.8	90.2	90.5	90.9	91.2	91.6	92.2	92.7	93.1	93.6	75.8
102.5°	116.0	116.5	117.0	117.4	117.8	118.2	118.5	118.9	119.1	119.4	116.0
105°	158.1	158.5	159.1	159.6	160.0	160.2	160.2	160.2	160.2	160.2	160.2
107.5°	201.8	201.8	201.8	201.8	201.8	201.9	202.1	202.4	202.6	202.8	202.8
110°	230.2	230.2	230.2	230.2	230.2	230.3	230.5	230.7	231.0	231.2	230.9



TEST NUMBER: P333559-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	256.8	257.1	257.4	257.7	258.0	258.2	258.4	258.4	258.6	258.7	258.4
115°	296.8	297.5	298.0	298.6	299.3	299.6	299.7	299.8	299.9	300.1	299.6
117.5°	338.3	338.2	338.2	338.2	338.2	338.4	338.8	339.3	339.7	340.2	339.6
120°	364.1	363.9	363.8	363.7	363.5	363.7	364.1	364.4	364.8	365.1	364.9
122.5°	386.8	387.3	387.8	388.2	388.7	389.0	389.2	389.4	389.5	389.6	389.5
125°	422.2	423.0	423.8	424.6	425.5	425.9	425.9	425.9	425.9	425.9	425.5
127.5°	455.8	456.4	457.0	457.6	458.2	458.5	458.4	458.4	458.3	458.2	457.9
130°	476.5	477.0	477.7	478.2	478.8	479.2	479.3	479.5	479.6	479.7	479.3
132.5°	497.1	497.8	498.5	499.2	499.8	500.1	499.8	499.5	499.3	499.1	499.0
135°	526.5	527.2	527.9	528.6	529.3	529.6	529.3	529.0	528.9	528.6	528.4
137.5°	553.5	554.1	554.7	555.3	555.9	556.2	555.9	555.7	555.5	555.3	555.3
140°	571.1	571.4	571.6	571.8	572.0	572.1	572.0	571.8	571.7	571.7	571.8
142.5°	587.0	587.2	587.3	587.5	587.6	587.8	588.0	588.1	588.2	588.4	588.4
145°	610.4	610.6	610.9	611.1	611.3	611.4	611.4	611.4	611.4	611.4	611.5
147.5°	630.7	630.7	630.7	630.7	630.6	630.7	630.7	630.9	631.0	631.2	631.4
150°	643.7	643.5	643.2	643.0	642.7	642.7	643.0	643.2	643.5	643.7	643.9
152.5°	656.2	655.6	655.2	654.6	654.0	653.9	654.1	654.4	654.6	654.9	655.2
155°	672.2	671.5	670.8	670.1	669.3	669.1	669.3	669.6	669.8	670.1	670.4
157.5°	684.6	684.1	683.7	683.2	682.9	682.7	682.7	682.7	682.7	682.8	683.2
160°	693.1	692.5	691.7	691.0	690.3	690.0	690.1	690.2	690.3	690.5	691.0
162.5°	700.0	699.4	698.6	697.9	697.2	696.9	697.0	697.1	697.2	697.4	698.0
165°	709.3	708.6	707.8	707.2	706.4	706.2	706.2	706.3	706.5	706.6	707.3
167.5°	716.1	715.5	714.7	714.0	713.2	712.9	713.0	713.1	713.2	713.4	714.3
170°	720.1	719.3	718.4	717.6	716.7	716.3	716.4	716.6	716.7	716.8	717.7
172.5°	722.6	721.8	721.0	720.1	719.3	719.0	719.2	719.4	719.6	719.8	720.7
175°	725.5	724.7	724.0	723.3	722.6	722.3	722.4	722.6	722.6	722.7	723.7
177.5°	726.7	726.1	725.6	725.0	724.4	724.2	724.2	724.3	724.4	724.5	725.3
180°	725.5	725.5	725.5	725.5	725.5	725.5	725.5	725.5	725.5	725.5	725.5



TEST NUMBER: P333559-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1291.7	1293.5	1295.1	1296.0	1295.8	1295.6	1295.4	1295.2
5°	1283.7	1285.9	1288.1	1289.0	1288.5	1288.1	1287.7	1287.2
7.5°	1267.8	1269.3	1270.8	1271.3	1270.8	1270.4	1269.9	1269.4
10°	1254.2	1254.9	1255.6	1255.6	1254.9	1254.2	1253.6	1253.0
12.5°	1235.1	1235.6	1236.1	1235.9	1234.8	1233.8	1232.8	1231.8
15°	1203.6	1203.3	1203.2	1202.1	1200.1	1198.2	1196.2	1194.2
17.5°	1164.2	1163.2	1162.1	1160.7	1159.1	1157.5	1155.9	1154.3
20°	1135.3	1134.2	1133.1	1131.6	1129.6	1127.7	1125.7	1123.8
22.5°	1106.5	1104.5	1102.3	1100.4	1098.8	1097.2	1095.6	1094.0
25°	1059.4	1056.6	1053.8	1051.1	1048.7	1046.3	1044.0	1041.5
27.5°	1008.3	1004.4	1000.4	997.3	995.0	992.7	990.4	988.1
30°	971.9	966.9	961.8	958.4	956.4	954.4	952.4	950.5
32.5°	936.3	930.8	925.3	921.2	918.8	916.3	913.8	911.3
35°	881.1	874.8	868.5	863.8	860.7	857.7	854.7	851.6
37.5°	823.4	815.8	808.2	803.0	800.0	797.0	794.1	791.2
40°	785.1	776.9	768.6	763.2	760.6	758.0	755.4	752.8
42.5°	747.5	739.6	731.7	725.8	722.0	718.1	714.3	710.5
45°	687.4	678.7	670.0	664.0	660.7	657.5	654.2	650.9
47.5°	627.9	619.0	610.0	603.7	600.1	596.5	592.9	589.3
50°	587.7	578.5	569.4	563.2	560.0	556.7	553.4	550.2
52.5°	549.5	539.6	529.8	523.2	520.0	516.7	513.5	510.2
55°	491.4	481.6	471.8	465.1	461.8	458.3	454.8	451.3
57.5°	433.3	423.8	414.2	407.8	404.7	401.6	398.6	395.5
60°	394.9	385.3	375.8	369.4	366.1	362.9	359.6	356.3
62.5°	357.1	348.3	339.4	333.4	330.1	326.8	323.6	320.3
65°	301.7	293.0	284.3	278.3	275.0	271.8	268.5	265.2
67.5°	248.7	240.8	232.8	227.5	225.0	222.3	219.7	217.2
70°	213.6	206.9	200.1	195.5	192.8	190.2	187.7	185.0
72.5°	181.0	174.7	168.5	164.6	162.8	161.1	159.4	157.6
75°	135.3	130.5	125.7	122.6	121.0	119.5	118.0	116.5
77.5°	96.2	92.9	89.5	87.4	86.2	85.1	84.0	82.8
80°	72.5	70.5	68.5	67.3	66.9	66.4	66.0	65.6
82.5°	54.2	53.3	52.3	51.7	51.5	51.3	51.0	50.7
85°	30.9	30.6	30.4	30.3	30.0	29.8	29.6	29.4
87.5°	13.7	13.9	13.9	13.9	13.9	13.8	13.7	13.6
90°	9.8	10.4	11.0	11.5	11.9	12.2	12.5	12.9
92.5°	9.8	10.4	11.0	11.4	11.5	11.7	11.9	12.1
95°	9.8	10.4	11.0	11.3	11.3	11.3	11.3	11.3
97.5°	19.7	16.3	13.0	11.3	11.3	11.3	11.3	11.3
100°	58.0	40.2	22.3	13.2	12.7	12.3	11.8	11.3
102.5°	112.6	109.2	105.9	100.2	92.0	83.9	75.8	67.7
105°	160.2	160.2	160.2	160.2	160.0	159.9	159.9	159.7
107.5°	202.9	202.9	202.9	202.7	202.5	202.1	201.7	201.3
110°	230.5	230.2	229.8	229.7	229.8	229.9	230.1	230.2



TEST NUMBER: P333559-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	257.9	257.4	256.9	256.7	256.5	256.3	256.2	256.0
115°	299.1	298.6	298.1	297.6	296.8	296.1	295.4	294.7
117.5°	338.9	338.3	337.7	337.2	337.0	336.6	336.3	336.0
120°	364.7	364.4	364.2	363.7	363.2	362.6	361.9	361.4
122.5°	389.2	389.0	388.7	388.2	387.6	386.8	386.2	385.5
125°	425.0	424.4	424.0	423.6	423.2	422.8	422.5	422.2
127.5°	457.6	457.4	457.1	456.6	455.6	454.8	453.9	453.0
130°	479.0	478.6	478.2	477.8	477.2	476.5	476.0	475.4
132.5°	498.9	498.8	498.8	498.4	497.9	497.2	496.6	496.1
135°	528.1	527.9	527.6	527.2	526.5	525.8	525.0	524.3
137.5°	555.3	555.4	555.4	555.2	554.6	553.9	553.4	552.7
140°	572.1	572.3	572.6	572.3	571.7	570.9	570.2	569.5
142.5°	588.5	588.5	588.6	588.2	587.6	586.8	586.1	585.4
145°	611.7	611.8	611.9	611.6	610.9	610.2	609.4	608.7
147.5°	631.5	631.7	631.8	631.4	630.6	629.7	628.9	628.0
150°	644.1	644.4	644.6	644.3	643.4	642.3	641.4	640.5
152.5°	655.3	655.6	655.8	655.5	654.7	653.8	652.9	652.1
155°	670.8	671.1	671.5	671.2	670.2	669.3	668.4	667.3
157.5°	683.5	683.9	684.3	684.0	683.1	682.0	681.1	680.1
160°	691.4	691.9	692.4	692.1	691.2	690.2	689.3	688.3
162.5°	698.7	699.4	700.0	699.8	698.8	697.8	696.7	695.6
165°	708.0	708.8	709.5	709.4	708.4	707.5	706.5	705.5
167.5°	715.1	716.0	716.8	716.7	715.7	714.5	713.5	712.4
170°	718.8	719.7	720.7	720.6	719.5	718.4	717.4	716.3
172.5°	721.5	722.5	723.3	723.2	722.1	721.0	719.9	718.9
175°	724.6	725.6	726.6	726.5	725.5	724.3	723.3	722.2
177.5°	725.9	726.6	727.3	727.2	726.4	725.7	724.9	724.2
180°	725.5	725.5	725.5	725.5	725.5	725.5	725.5	725.5

(END OF REPORT)