

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333560-830

Luminaire Tested: **S125RDIP-S850D590U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333560-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S850D590U830-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 590 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4991.4 lumens
Efficiency: N/A
Efficacy: 123.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333560-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

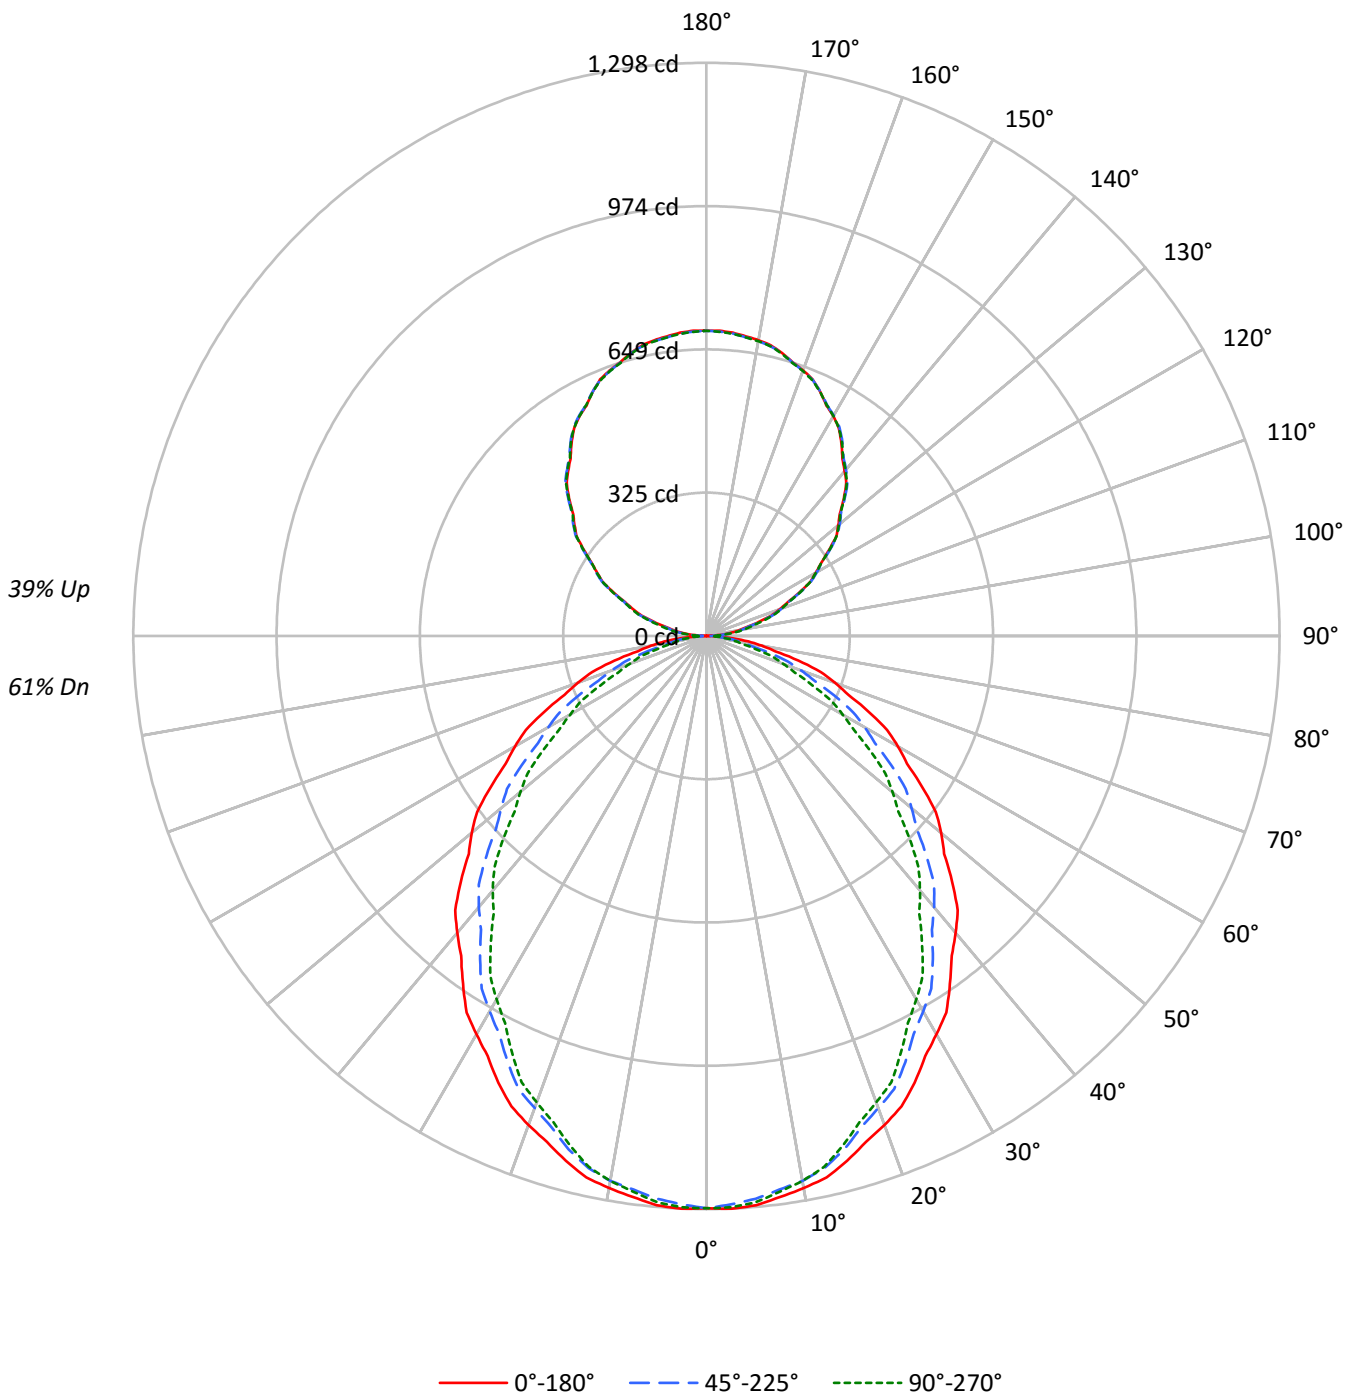



TEST NUMBER: P333560-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67	61
1	101	96	92	89	94	90	87	84	79	77	74	69	67	65	59	58	57	52
2	92	84	78	73	86	79	74	69	70	66	62	61	58	55	52	50	48	44
3	84	74	67	61	78	70	63	58	62	57	52	54	50	47	47	44	41	38
4	77	66	58	52	72	62	55	50	55	49	45	48	44	40	42	39	36	33
5	71	59	51	45	66	56	48	43	49	43	39	43	39	35	38	34	31	28
6	65	53	45	39	61	50	43	37	45	39	34	39	35	31	34	31	28	25
7	60	48	40	34	57	45	38	33	41	35	30	36	31	27	32	28	25	22
8	56	44	36	31	53	41	34	29	37	31	27	33	28	25	29	25	22	20
9	52	40	33	27	49	38	31	26	34	28	24	30	26	22	27	23	20	18
10	49	37	30	25	46	35	28	24	31	26	22	28	23	20	25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8371	8371	8371
5°	8390	8294	8345
10°	8326	8217	8217
15°	8227	8050	7985
20°	8100	7818	7724
25°	7953	7590	7422
30°	7767	7322	7088
35°	7579	7046	6714
40°	7403	6759	6347
45°	7188	6437	5945
50°	6973	6089	5528
55°	6723	5754	5082
60°	6473	5349	4602
65°	6178	4876	4053
70°	5840	4288	3493
75°	5375	3616	2907
80°	4731	2838	2440
85°	3987	2319	2179



TEST NUMBER: P333560-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.9	2.4
10°-20°	340.6	6.8
20°-30°	493.9	9.9
30°-40°	562.9	11.3
40°-50°	548.6	11.0
50°-60°	461.8	9.3
60°-70°	323.7	6.5
70°-80°	166.4	3.3
80°-90°	43.5	0.9
90°-100°	46.3	0.9
100°-110°	136.7	2.7
110°-120°	231.5	4.6
120°-130°	304.6	6.1
130°-140°	341.3	6.8
140°-150°	334.5	6.7
150°-160°	281.0	5.6
160°-170°	186.8	3.7
170°-180°	65.4	1.3
0°-30°	956.3	19.2
0°-40°	1519.2	30.4
0°-60°	2529.7	50.7
0°-90°	3063.4	61.4
90°-120°	414.4	8.3
90°-150°	1394.9	27.9
90°-180°	1928.0	38.6
0°-180°	4991.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1296	1296	1296	1296	1296	
5°	1294	1290	1279	1289	1287	123
15°	1230	1224	1204	1203	1194	347
25°	1116	1100	1065	1052	1042	513
35°	961	937	894	866	852	602
45°	787	757	705	667	651	607
55°	597	564	511	468	451	534
65°	404	370	319	281	265	400
75°	215	185	145	124	116	228
85°	54	37	31	30	29	60
90°	1	5	9	11	13	4
95°	35	36	41	45	46	37
105°	123	125	128	132	133	131
115°	232	234	235	234	234	229
125°	338	341	342	341	340	303
135°	440	443	444	444	442	339
145°	533	535	537	536	535	333
155°	610	610	610	612	610	281
165°	663	662	662	664	661	187
175°	689	687	687	690	687	65
180°	691	691	691	691	691	



TEST NUMBER: P333560-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1298.4	1297.9	1297.3	1296.8	1296.3	1295.1	1293.5	1291.7	1290.0	1288.2	1290.0
5°	1294.1	1293.3	1292.3	1291.5	1290.6	1289.0	1286.6	1284.2	1281.8	1279.4	1281.6
7.5°	1281.4	1280.5	1279.7	1278.8	1278.1	1276.2	1273.4	1270.5	1267.6	1264.7	1266.2
10°	1269.6	1268.9	1268.3	1267.6	1267.0	1265.2	1262.2	1259.0	1256.0	1253.0	1253.6
12.5°	1256.3	1255.5	1254.6	1253.9	1253.0	1250.6	1246.4	1242.4	1238.3	1234.2	1234.6
15°	1230.5	1229.2	1227.9	1226.5	1225.2	1222.3	1217.8	1213.1	1208.6	1204.0	1203.8
17.5°	1201.3	1199.3	1197.3	1195.3	1193.3	1189.4	1183.6	1177.9	1172.1	1166.4	1165.4
20°	1178.6	1176.4	1174.2	1172.1	1169.9	1165.3	1158.4	1151.4	1144.4	1137.5	1136.4
22.5°	1153.5	1151.3	1149.1	1147.0	1144.8	1140.1	1132.7	1125.5	1118.1	1110.9	1108.7
25°	1116.0	1112.7	1109.4	1106.2	1102.9	1097.2	1089.2	1081.1	1073.1	1065.1	1062.2
27.5°	1072.9	1068.9	1065.0	1061.0	1057.1	1050.7	1042.2	1033.5	1024.9	1016.2	1012.3
30°	1041.5	1037.4	1033.3	1029.2	1025.0	1018.3	1009.3	1000.1	991.0	981.8	976.9
32.5°	1011.0	1006.2	1001.4	996.6	991.6	984.6	975.3	966.0	956.7	947.3	941.9
35°	961.3	956.0	950.8	945.6	940.4	932.8	923.1	913.3	903.5	893.7	887.4
37.5°	912.5	906.2	899.8	893.4	887.1	878.9	868.8	858.7	848.6	838.5	830.9
40°	878.1	871.6	865.0	858.5	852.0	843.5	833.0	822.6	812.2	801.7	793.4
42.5°	842.1	835.4	828.7	821.9	815.2	806.5	795.7	784.9	774.1	763.4	755.4
45°	787.0	780.7	774.4	768.1	761.8	752.6	740.6	728.8	716.8	704.8	696.1
47.5°	730.1	723.4	716.7	710.1	703.4	694.1	682.0	670.0	657.9	645.8	636.9
50°	694.0	686.8	679.7	672.5	665.3	655.5	643.1	630.7	618.3	606.0	596.8
52.5°	654.9	647.5	640.2	632.8	625.5	616.0	604.3	592.6	580.8	569.1	559.3
55°	597.1	590.1	583.2	576.3	569.3	559.7	547.5	535.4	523.2	511.0	501.1
57.5°	538.8	531.3	523.9	516.4	509.1	499.5	487.7	475.9	464.2	452.4	442.9
60°	501.1	493.6	486.0	478.3	470.7	461.1	449.3	437.5	425.8	414.1	404.5
62.5°	461.3	454.0	446.8	439.4	432.2	422.6	410.7	398.8	386.8	374.9	366.1
65°	404.3	396.9	389.5	382.1	374.7	365.2	353.7	342.1	330.6	319.1	310.4
67.5°	347.7	340.3	332.9	325.6	318.1	308.9	297.8	286.8	275.8	264.7	256.7
70°	309.3	301.9	294.5	287.1	279.7	270.6	259.8	248.8	238.0	227.1	220.4
72.5°	271.7	264.5	257.3	250.1	242.9	234.1	223.9	213.8	203.6	193.4	187.2
75°	215.4	208.9	202.3	195.8	189.3	181.4	172.3	163.2	154.0	144.9	140.1
77.5°	159.4	154.1	148.9	143.7	138.5	132.2	124.9	117.6	110.3	103.0	99.6
80°	127.2	122.1	116.8	111.6	106.4	100.8	94.6	88.5	82.5	76.3	74.4
82.5°	96.0	91.2	86.5	81.8	77.1	72.7	68.5	64.4	60.1	56.0	55.0
85°	53.8	50.0	46.0	42.1	38.2	35.6	34.6	33.5	32.4	31.3	31.1
87.5°	18.1	17.1	16.0	15.1	14.0	13.5	13.5	13.5	13.5	13.5	13.6
90°	0.6	1.5	2.5	3.4	4.3	5.3	6.1	7.0	7.7	8.6	9.2
92.5°	13.0	13.7	14.3	15.0	15.6	16.5	17.5	18.6	19.6	20.6	21.4
95°	35.0	35.2	35.4	35.6	35.9	36.7	37.8	39.0	40.2	41.4	42.2
97.5°	58.1	58.2	58.2	58.3	58.4	59.3	61.0	62.6	64.3	65.9	66.7
100°	75.3	75.3	75.3	75.3	75.3	76.1	77.6	79.2	80.7	82.3	83.3
102.5°	93.8	94.3	94.7	95.2	95.7	96.3	97.1	97.9	98.7	99.4	100.7
105°	122.6	123.2	123.8	124.4	125.0	125.6	126.4	127.1	127.8	128.5	129.2
107.5°	154.4	155.0	155.6	156.2	156.8	157.4	158.0	158.4	159.0	159.6	159.9
110°	176.3	176.9	177.6	178.1	178.8	179.3	179.6	179.9	180.3	180.7	181.1



TEST NUMBER: P333560-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	198.7	199.1	199.3	199.6	200.0	200.4	200.9	201.2	201.7	202.2	202.4
115°	231.8	232.2	232.7	233.2	233.7	234.0	234.2	234.5	234.7	235.0	234.9
117.5°	264.9	265.0	265.3	265.5	265.7	266.0	266.2	266.4	266.6	266.8	266.9
120°	285.5	286.2	286.7	287.3	287.9	288.2	288.4	288.5	288.6	288.7	288.7
122.5°	307.9	308.1	308.3	308.5	308.8	309.0	309.3	309.6	309.9	310.3	310.2
125°	338.2	338.9	339.6	340.4	341.1	341.5	341.6	341.8	341.9	342.0	341.8
127.5°	370.5	370.9	371.3	371.6	372.1	372.4	372.5	372.7	372.8	373.0	372.9
130°	389.8	390.4	391.1	391.6	392.2	392.7	392.9	393.1	393.3	393.6	393.5
132.5°	409.2	410.2	411.1	412.1	413.1	413.6	413.5	413.5	413.4	413.4	413.3
135°	439.8	440.5	441.3	442.0	442.7	443.1	443.3	443.4	443.5	443.6	443.6
137.5°	468.6	469.4	470.0	470.7	471.5	471.9	472.2	472.4	472.7	473.0	473.1
140°	487.1	487.8	488.3	488.9	489.6	490.0	490.4	490.8	491.1	491.4	491.7
142.5°	505.7	506.1	506.6	507.2	507.7	508.1	508.6	509.1	509.5	509.9	510.1
145°	532.8	533.3	533.9	534.3	534.8	535.2	535.6	535.9	536.3	536.6	536.6
147.5°	558.0	558.3	558.6	558.8	559.1	559.3	559.6	560.0	560.2	560.5	560.8
150°	574.8	574.7	574.6	574.5	574.3	574.5	575.0	575.4	575.9	576.4	576.4
152.5°	588.5	588.7	588.9	589.1	589.2	589.4	589.6	589.7	589.9	590.2	590.5
155°	609.7	609.7	609.7	609.7	609.7	609.8	609.9	610.0	610.2	610.3	610.8
157.5°	628.7	628.4	628.1	627.9	627.6	627.5	627.6	627.8	627.9	628.0	628.5
160°	639.9	639.5	639.1	638.8	638.4	638.3	638.4	638.6	638.7	638.8	639.2
162.5°	649.8	649.5	649.2	648.9	648.7	648.6	648.6	648.7	648.7	648.7	649.2
165°	663.0	662.7	662.5	662.2	662.0	661.9	662.0	662.2	662.3	662.4	662.9
167.5°	674.2	673.7	673.2	672.7	672.2	672.0	672.0	672.0	672.0	672.0	672.7
170°	680.1	679.7	679.2	678.7	678.3	678.1	678.1	678.1	678.1	678.1	678.7
172.5°	684.5	684.0	683.5	683.1	682.6	682.3	682.3	682.3	682.3	682.3	683.1
175°	689.3	688.8	688.3	687.9	687.4	687.2	687.2	687.2	687.2	687.2	687.9
177.5°	691.8	691.4	691.1	690.7	690.2	690.0	689.9	689.8	689.8	689.7	690.2
180°	691.0	691.0	691.0	691.0	691.0	691.0	691.0	691.0	691.0	691.0	691.0



TEST NUMBER: P333560-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1291.7	1293.5	1295.1	1296.0	1295.8	1295.6	1295.4	1295.2
5°	1283.7	1285.9	1288.1	1289.0	1288.5	1288.1	1287.7	1287.2
7.5°	1267.8	1269.3	1270.8	1271.3	1270.8	1270.4	1269.9	1269.4
10°	1254.2	1254.9	1255.6	1255.6	1254.9	1254.2	1253.6	1253.0
12.5°	1235.1	1235.6	1236.1	1235.9	1234.8	1233.8	1232.8	1231.8
15°	1203.6	1203.3	1203.2	1202.1	1200.1	1198.2	1196.2	1194.2
17.5°	1164.2	1163.2	1162.1	1160.7	1159.1	1157.5	1155.9	1154.3
20°	1135.3	1134.2	1133.1	1131.6	1129.6	1127.7	1125.7	1123.8
22.5°	1106.5	1104.5	1102.3	1100.4	1098.8	1097.2	1095.6	1094.0
25°	1059.4	1056.6	1053.8	1051.1	1048.7	1046.3	1044.0	1041.5
27.5°	1008.3	1004.4	1000.4	997.3	995.0	992.7	990.4	988.1
30°	971.9	966.9	961.8	958.4	956.4	954.4	952.4	950.5
32.5°	936.3	930.8	925.3	921.2	918.8	916.3	913.8	911.3
35°	881.1	874.8	868.5	863.8	860.7	857.7	854.7	851.6
37.5°	823.4	815.8	808.2	803.0	800.0	797.0	794.1	791.2
40°	785.1	776.9	768.6	763.2	760.6	758.0	755.4	752.8
42.5°	747.5	739.6	731.7	725.8	722.0	718.1	714.3	710.5
45°	687.4	678.7	670.0	664.0	660.7	657.5	654.2	650.9
47.5°	627.9	619.0	610.0	603.7	600.1	596.5	592.9	589.3
50°	587.7	578.5	569.4	563.2	560.0	556.7	553.4	550.2
52.5°	549.5	539.6	529.8	523.2	520.0	516.7	513.5	510.2
55°	491.4	481.6	471.8	465.1	461.8	458.3	454.8	451.3
57.5°	433.3	423.8	414.2	407.8	404.7	401.6	398.6	395.5
60°	394.9	385.3	375.8	369.4	366.1	362.9	359.6	356.3
62.5°	357.1	348.3	339.4	333.4	330.1	326.8	323.6	320.3
65°	301.7	293.0	284.3	278.3	275.0	271.8	268.5	265.2
67.5°	248.7	240.8	232.8	227.5	225.0	222.3	219.7	217.2
70°	213.6	206.9	200.1	195.5	192.8	190.2	187.7	185.0
72.5°	181.0	174.7	168.5	164.6	162.8	161.1	159.4	157.6
75°	135.3	130.5	125.7	122.6	121.0	119.5	118.0	116.5
77.5°	96.2	92.9	89.5	87.4	86.2	85.1	84.0	82.8
80°	72.5	70.5	68.5	67.3	66.9	66.4	66.0	65.6
82.5°	54.2	53.3	52.3	51.7	51.5	51.3	51.0	50.7
85°	30.9	30.6	30.4	30.3	30.0	29.8	29.6	29.4
87.5°	13.7	13.9	13.9	13.9	13.9	13.8	13.7	13.6
90°	9.8	10.4	11.0	11.5	11.9	12.2	12.5	12.9
92.5°	22.2	23.0	23.8	24.3	24.6	24.9	25.1	25.4
95°	43.1	43.9	44.8	45.2	45.5	45.8	46.0	46.3
97.5°	67.5	68.3	69.1	69.6	69.7	69.8	69.9	70.1
100°	84.5	85.5	86.5	87.2	87.5	87.8	87.9	88.2
102.5°	101.8	103.0	104.2	104.9	105.3	105.6	105.9	106.2
105°	130.0	130.6	131.4	132.0	132.2	132.6	133.0	133.4
107.5°	160.3	160.7	161.0	161.2	161.2	161.2	161.1	161.1
110°	181.3	181.7	182.1	182.2	182.1	182.0	181.8	181.7



TEST NUMBER: P333560-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	202.6	202.6	202.8	202.8	202.6	202.4	202.2	202.0
115°	234.7	234.6	234.5	234.4	234.2	234.1	234.0	233.9
117.5°	267.0	267.1	267.2	267.0	266.6	266.1	265.6	265.0
120°	288.7	288.7	288.7	288.5	288.0	287.6	287.1	286.6
122.5°	310.1	310.0	309.9	309.6	309.2	308.9	308.5	308.1
125°	341.5	341.3	341.0	340.8	340.7	340.6	340.4	340.4
127.5°	372.7	372.6	372.5	372.3	372.0	371.8	371.6	371.4
130°	393.3	393.2	393.1	392.9	392.7	392.5	392.2	392.0
132.5°	413.1	413.0	412.9	412.6	412.4	412.0	411.7	411.3
135°	443.6	443.6	443.6	443.4	442.9	442.4	442.0	441.5
137.5°	473.3	473.3	473.5	473.3	472.7	472.1	471.6	470.9
140°	491.9	492.2	492.4	492.2	491.6	491.1	490.4	489.8
142.5°	510.2	510.4	510.5	510.3	509.7	509.1	508.5	507.9
145°	536.6	536.6	536.6	536.4	536.1	535.7	535.4	535.0
147.5°	561.1	561.4	561.7	561.4	560.5	559.8	558.9	558.2
150°	576.4	576.4	576.4	576.3	576.1	575.8	575.6	575.3
152.5°	590.8	591.1	591.4	591.3	590.8	590.4	589.9	589.6
155°	611.2	611.7	612.2	612.2	611.5	611.0	610.3	609.7
157.5°	629.0	629.4	629.9	629.8	629.0	628.2	627.5	626.6
160°	639.7	640.2	640.6	640.6	640.1	639.4	638.9	638.3
162.5°	649.8	650.4	651.0	650.9	650.3	649.5	648.8	648.1
165°	663.4	663.8	664.4	664.2	663.5	662.8	662.0	661.4
167.5°	673.4	674.2	674.9	674.9	674.1	673.4	672.6	671.9
170°	679.5	680.1	680.9	680.8	680.0	679.2	678.3	677.5
172.5°	683.8	684.5	685.2	685.2	684.5	683.7	683.0	682.2
175°	688.6	689.3	690.0	689.9	689.2	688.3	687.5	686.6
177.5°	690.8	691.4	691.9	691.9	691.3	690.6	689.8	689.2
180°	691.0	691.0	691.0	691.0	691.0	691.0	691.0	691.0

(END OF REPORT)