

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333561-830

Luminaire Tested: **S125RDIP-S850D590U830-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333561-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S850D590U830-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 590 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5063.2 lumens
Efficiency: N/A
Efficacy: 125.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333561-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

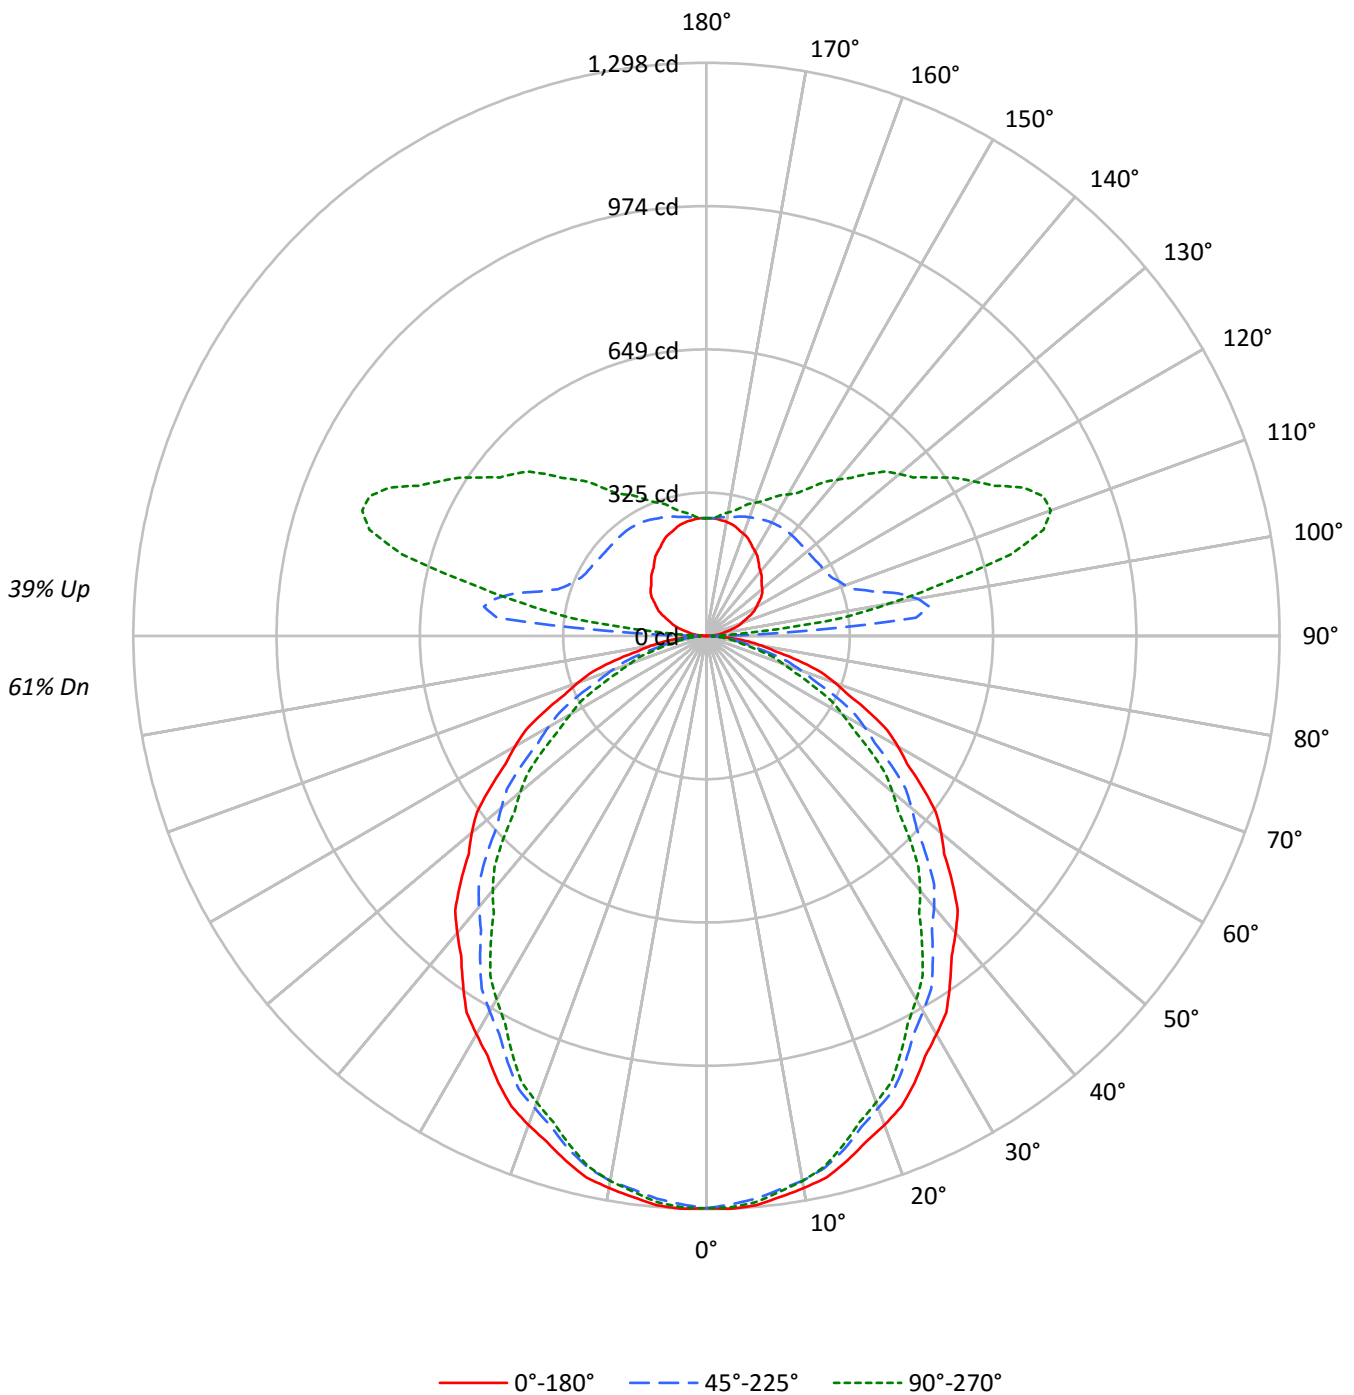



TEST NUMBER: P333561-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66
1	100	96	92	89	94	90	87	84	79	76	74	68	66	65	59	57	56
2	92	84	78	73	85	79	74	69	69	65	62	60	57	54	52	50	48
3	84	74	67	61	78	70	63	58	61	56	52	53	50	46	46	43	41
4	77	66	58	52	72	62	55	49	55	49	45	48	43	40	41	38	35
5	71	59	51	45	66	56	48	43	49	43	39	43	38	35	37	34	31
6	65	53	45	39	61	50	43	37	44	38	34	39	34	31	34	30	27
7	60	48	40	34	56	45	38	33	40	34	30	36	31	27	31	27	24
8	56	44	36	31	52	41	34	29	37	31	27	33	28	24	29	25	22
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	26	23	20
10	49	37	29	25	46	35	28	24	31	26	22	28	23	20	25	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8371	8371	8371
5°	8390	8294	8345
10°	8326	8217	8217
15°	8227	8050	7985
20°	8100	7818	7724
25°	7953	7590	7422
30°	7767	7322	7088
35°	7579	7046	6714
40°	7403	6759	6347
45°	7188	6437	5945
50°	6973	6089	5528
55°	6723	5754	5082
60°	6473	5349	4602
65°	6178	4876	4053
70°	5840	4288	3493
75°	5375	3616	2907
80°	4731	2838	2440
85°	3987	2319	2179



TEST NUMBER: P333561-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.9	2.4
10°-20°	340.6	6.7
20°-30°	493.9	9.8
30°-40°	562.9	11.1
40°-50°	548.6	10.8
50°-60°	461.8	9.1
60°-70°	323.7	6.4
70°-80°	166.4	3.3
80°-90°	43.5	0.9
90°-100°	193.3	3.8
100°-110°	415.5	8.2
110°-120°	390.0	7.7
120°-130°	316.0	6.2
130°-140°	253.6	5.0
140°-150°	191.4	3.8
150°-160°	134.7	2.7
160°-170°	79.4	1.6
170°-180°	25.8	0.5
0°-30°	956.3	18.9
0°-40°	1519.2	30.0
0°-60°	2529.7	50.0
0°-90°	3063.3	60.5
90°-120°	998.8	19.7
90°-150°	1759.9	34.8
90°-180°	2000.0	39.5
0°-180°	5063.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1296	1296	1296	1296	1296	
5°	1294	1290	1279	1289	1287	123
15°	1230	1224	1204	1203	1194	347
25°	1116	1100	1065	1052	1042	513
35°	961	937	894	866	852	602
45°	787	757	705	667	651	607
55°	597	564	511	468	451	534
65°	404	370	319	281	265	400
75°	215	185	145	124	116	228
85°	54	37	31	30	29	60
90°	1	5	9	11	12	4
95°	18	52	476	216	126	19
105°	61	85	390	767	712	64
115°	109	131	313	674	794	107
125°	150	176	300	537	625	134
135°	176	212	298	450	519	137
145°	205	235	299	372	410	129
155°	234	252	291	329	344	108
165°	256	263	280	296	301	72
175°	266	266	268	272	270	25
180°	267	267	267	267	267	



TEST NUMBER: P333561-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1298.4	1297.9	1297.3	1296.8	1296.3	1295.1	1293.5	1291.7	1290.0	1288.2	1290.0
5°	1294.1	1293.3	1292.3	1291.5	1290.6	1289.0	1286.6	1284.2	1281.8	1279.4	1281.6
7.5°	1281.4	1280.5	1279.7	1278.8	1278.1	1276.2	1273.4	1270.5	1267.6	1264.7	1266.2
10°	1269.6	1268.9	1268.3	1267.6	1267.0	1265.2	1262.2	1259.0	1256.0	1253.0	1253.6
12.5°	1256.3	1255.5	1254.6	1253.9	1253.0	1250.6	1246.4	1242.4	1238.3	1234.2	1234.6
15°	1230.5	1229.2	1227.9	1226.5	1225.2	1222.3	1217.8	1213.1	1208.6	1204.0	1203.8
17.5°	1201.3	1199.3	1197.3	1195.3	1193.3	1189.4	1183.6	1177.9	1172.1	1166.4	1165.4
20°	1178.6	1176.4	1174.2	1172.1	1169.9	1165.3	1158.4	1151.4	1144.4	1137.5	1136.4
22.5°	1153.5	1151.3	1149.1	1147.0	1144.8	1140.1	1132.7	1125.5	1118.1	1110.9	1108.7
25°	1116.0	1112.7	1109.4	1106.2	1102.9	1097.2	1089.2	1081.1	1073.1	1065.1	1062.2
27.5°	1072.9	1068.9	1065.0	1061.0	1057.1	1050.7	1042.2	1033.5	1024.9	1016.2	1012.3
30°	1041.5	1037.4	1033.3	1029.2	1025.0	1018.3	1009.3	1000.1	991.0	981.8	976.9
32.5°	1011.0	1006.2	1001.4	996.6	991.6	984.6	975.3	966.0	956.7	947.3	941.9
35°	961.3	956.0	950.8	945.6	940.4	932.8	923.1	913.3	903.5	893.7	887.4
37.5°	912.5	906.2	899.8	893.4	887.1	878.9	868.8	858.7	848.6	838.5	830.9
40°	878.1	871.6	865.0	858.5	852.0	843.5	833.0	822.6	812.2	801.7	793.4
42.5°	842.1	835.4	828.7	821.9	815.2	806.5	795.7	784.9	774.1	763.4	755.4
45°	787.0	780.7	774.4	768.1	761.8	752.6	740.6	728.8	716.8	704.8	696.1
47.5°	730.1	723.4	716.7	710.1	703.4	694.1	682.0	670.0	657.9	645.8	636.9
50°	694.0	686.8	679.7	672.5	665.3	655.5	643.1	630.7	618.3	606.0	596.8
52.5°	654.9	647.5	640.2	632.8	625.5	616.0	604.3	592.6	580.8	569.1	559.3
55°	597.1	590.1	583.2	576.3	569.3	559.7	547.5	535.4	523.2	511.0	501.1
57.5°	538.8	531.3	523.9	516.4	509.1	499.5	487.7	475.9	464.2	452.4	442.9
60°	501.1	493.6	486.0	478.3	470.7	461.1	449.3	437.5	425.8	414.1	404.5
62.5°	461.3	454.0	446.8	439.4	432.2	422.6	410.7	398.8	386.8	374.9	366.1
65°	404.3	396.9	389.5	382.1	374.7	365.2	353.7	342.1	330.6	319.1	310.4
67.5°	347.7	340.3	332.9	325.6	318.1	308.9	297.8	286.8	275.8	264.7	256.7
70°	309.3	301.9	294.5	287.1	279.7	270.6	259.8	248.8	238.0	227.1	220.4
72.5°	271.7	264.5	257.3	250.1	242.9	234.1	223.9	213.8	203.6	193.4	187.2
75°	215.4	208.9	202.3	195.8	189.3	181.4	172.3	163.2	154.0	144.9	140.1
77.5°	159.4	154.1	148.9	143.7	138.5	132.2	124.9	117.6	110.3	103.0	99.6
80°	127.2	122.1	116.8	111.6	106.4	100.8	94.6	88.5	82.5	76.3	74.4
82.5°	96.0	91.2	86.5	81.8	77.1	72.7	68.5	64.4	60.1	56.0	55.0
85°	53.8	50.0	46.0	42.1	38.2	35.6	34.6	33.5	32.4	31.3	31.1
87.5°	18.1	17.0	16.0	15.0	14.0	13.5	13.5	13.5	13.4	13.5	13.6
90°	0.6	1.0	2.2	3.2	4.3	5.4	5.9	7.0	7.5	8.6	9.1
92.5°	6.6	7.9	12.4	19.1	28.4	44.1	73.4	122.7	176.2	173.3	140.3
95°	17.7	18.3	22.6	28.5	40.3	64.6	122.1	240.3	388.7	476.4	466.2
97.5°	29.5	30.1	33.1	39.0	49.7	67.1	105.2	191.8	347.1	508.7	589.8
100°	37.6	38.7	40.9	46.8	57.0	73.1	104.3	174.2	309.7	485.5	619.9
102.5°	46.7	47.3	49.0	55.4	64.8	80.4	108.2	166.9	281.3	444.6	601.8
105°	60.8	60.8	63.4	68.8	77.4	92.5	116.1	164.0	253.7	389.8	544.1
107.5°	74.6	75.6	78.1	82.6	91.5	105.1	128.0	168.9	242.1	352.0	485.2
110°	84.5	85.5	87.7	92.5	100.6	114.5	136.6	173.6	238.7	334.4	451.7



TEST NUMBER: P333561-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	94.3	95.4	97.1	102.0	110.0	123.6	144.8	179.6	238.7	324.1	426.7
115°	108.6	109.7	111.3	116.1	124.2	137.6	157.5	188.7	240.3	312.9	399.4
117.5°	121.5	123.1	124.9	129.7	138.8	151.8	170.7	199.1	243.8	307.5	383.2
120°	130.1	131.8	133.8	138.7	147.9	161.3	180.1	205.9	247.3	304.8	374.2
122.5°	139.1	140.3	142.0	146.8	156.9	170.3	189.2	213.7	250.3	302.7	366.5
125°	150.5	151.7	154.3	159.1	169.4	183.3	201.0	224.2	255.4	300.0	355.9
127.5°	159.5	161.1	164.6	170.7	181.5	195.5	212.5	233.8	261.1	298.7	346.3
130°	165.0	166.6	171.0	178.0	189.3	203.2	219.9	240.3	264.6	297.8	339.8
132.5°	169.4	171.4	176.5	184.5	196.1	210.1	226.8	245.9	268.4	297.8	334.6
135°	176.3	178.5	184.9	193.6	204.8	219.3	236.0	253.7	273.6	297.8	328.5
137.5°	185.2	186.8	192.8	201.4	212.4	227.4	242.6	259.6	278.5	298.5	323.0
140°	190.3	191.9	198.4	207.0	217.3	231.8	247.3	263.4	280.7	299.0	320.5
142.5°	196.3	197.6	203.6	212.2	222.0	235.6	250.3	265.6	281.9	299.4	318.3
145°	205.4	206.4	211.8	219.3	229.0	241.4	255.4	268.8	283.3	299.0	315.1
147.5°	214.8	215.5	220.1	227.1	235.4	246.4	258.6	270.8	283.9	297.6	311.7
150°	220.5	221.5	225.3	232.2	239.8	248.9	260.8	272.0	283.9	296.2	309.2
152.5°	226.5	227.1	230.5	236.6	243.6	251.9	262.9	272.9	283.4	294.5	306.1
155°	234.4	234.4	237.6	243.0	248.4	255.9	265.0	273.6	282.3	291.4	301.0
157.5°	241.5	241.4	244.0	248.6	253.4	259.0	266.9	274.2	280.9	288.1	296.3
160°	246.3	245.7	247.9	251.7	255.9	260.8	267.8	274.2	279.6	286.1	292.5
162.5°	250.2	249.6	251.8	255.1	258.5	262.5	268.6	273.8	278.3	283.4	289.1
165°	255.9	254.9	256.5	259.1	261.3	264.6	268.8	273.1	276.4	279.6	283.9
167.5°	259.8	259.3	260.2	261.7	263.3	265.2	268.8	271.8	273.3	275.8	278.8
170°	262.4	261.8	262.4	263.4	264.6	266.2	268.8	271.0	272.0	273.6	275.8
172.5°	264.1	263.2	263.6	264.8	265.4	266.2	268.4	270.1	270.3	271.1	272.8
175°	266.2	265.0	265.6	266.2	266.2	266.2	267.8	268.8	268.2	268.2	268.8
177.5°	267.1	266.3	266.3	266.6	266.3	266.3	267.1	267.5	266.6	266.6	267.1
180°	266.6	266.6	266.6	266.6	266.6	266.6	266.6	266.6	266.6	266.6	266.6



TEST NUMBER: P333561-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1291.7	1293.5	1295.1	1296.0	1295.8	1295.6	1295.4	1295.2
5°	1283.7	1285.9	1288.1	1289.0	1288.5	1288.1	1287.7	1287.2
7.5°	1267.8	1269.3	1270.8	1271.3	1270.8	1270.4	1269.9	1269.4
10°	1254.2	1254.9	1255.6	1255.6	1254.9	1254.2	1253.6	1253.0
12.5°	1235.1	1235.6	1236.1	1235.9	1234.8	1233.8	1232.8	1231.8
15°	1203.6	1203.3	1203.2	1202.1	1200.1	1198.2	1196.2	1194.2
17.5°	1164.2	1163.2	1162.1	1160.7	1159.1	1157.5	1155.9	1154.3
20°	1135.3	1134.2	1133.1	1131.6	1129.6	1127.7	1125.7	1123.8
22.5°	1106.5	1104.5	1102.3	1100.4	1098.8	1097.2	1095.6	1094.0
25°	1059.4	1056.6	1053.8	1051.1	1048.7	1046.3	1044.0	1041.5
27.5°	1008.3	1004.4	1000.4	997.3	995.0	992.7	990.4	988.1
30°	971.9	966.9	961.8	958.4	956.4	954.4	952.4	950.5
32.5°	936.3	930.8	925.3	921.2	918.8	916.3	913.8	911.3
35°	881.1	874.8	868.5	863.8	860.7	857.7	854.7	851.6
37.5°	823.4	815.8	808.2	803.0	800.0	797.0	794.1	791.2
40°	785.1	776.9	768.6	763.2	760.6	758.0	755.4	752.8
42.5°	747.5	739.6	731.7	725.8	722.0	718.1	714.3	710.5
45°	687.4	678.7	670.0	664.0	660.7	657.5	654.2	650.9
47.5°	627.9	619.0	610.0	603.7	600.1	596.5	592.9	589.3
50°	587.7	578.5	569.4	563.2	560.0	556.7	553.4	550.2
52.5°	549.5	539.6	529.8	523.2	520.0	516.7	513.5	510.2
55°	491.4	481.6	471.8	465.1	461.8	458.3	454.8	451.3
57.5°	433.3	423.8	414.2	407.8	404.7	401.6	398.6	395.5
60°	394.9	385.3	375.8	369.4	366.1	362.9	359.6	356.3
62.5°	357.1	348.3	339.4	333.4	330.1	326.8	323.6	320.3
65°	301.7	293.0	284.3	278.3	275.0	271.8	268.5	265.2
67.5°	248.7	240.8	232.8	227.5	225.0	222.3	219.7	217.2
70°	213.6	206.9	200.1	195.5	192.8	190.2	187.7	185.0
72.5°	181.0	174.7	168.5	164.6	162.8	161.1	159.4	157.6
75°	135.3	130.5	125.7	122.6	121.0	119.5	118.0	116.5
77.5°	96.2	92.9	89.5	87.4	86.2	85.1	84.0	82.8
80°	72.5	70.5	68.5	67.3	66.9	66.4	66.0	65.6
82.5°	54.2	53.3	52.3	51.7	51.5	51.3	51.0	50.7
85°	30.9	30.6	30.4	30.3	30.0	29.8	29.6	29.4
87.5°	13.7	13.8	13.9	14.0	13.9	13.7	13.6	13.5
90°	9.7	10.2	10.7	11.8	11.8	11.8	12.3	12.3
92.5°	95.3	69.2	52.0	44.1	37.2	35.9	35.2	34.3
95°	386.5	304.8	238.7	193.6	155.4	139.2	135.0	126.4
97.5°	575.7	518.4	454.0	391.2	358.0	327.8	312.3	305.4
100°	661.3	635.0	579.6	523.7	486.5	447.9	428.0	419.3
102.5°	690.1	706.3	679.8	642.0	602.3	574.8	553.2	546.7
105°	673.2	746.8	770.4	764.5	747.3	729.6	718.9	712.4
107.5°	612.5	710.8	771.6	799.6	808.3	808.2	804.6	800.3
110°	567.8	670.0	745.7	791.5	815.6	825.9	829.6	829.6



TEST NUMBER: P333561-830

CATALOG NUMBER: S125RDIP-S850D590U830-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	532.5	629.5	706.2	760.1	795.4	812.9	822.3	826.1
115°	488.1	571.6	645.2	703.8	745.7	771.6	786.6	793.6
117.5°	459.6	531.4	594.8	648.7	690.6	717.3	732.2	736.5
120°	444.1	508.6	567.8	615.1	654.9	680.7	695.2	699.5
122.5°	432.5	492.3	545.0	589.3	624.7	648.4	662.9	666.8
125°	415.6	470.4	517.3	555.9	586.1	608.1	619.9	625.3
127.5°	398.4	449.6	493.2	529.5	556.8	576.3	587.4	589.8
130°	387.7	435.0	476.9	511.8	538.8	556.5	567.2	570.4
132.5°	376.9	421.2	459.3	492.9	519.8	537.5	547.4	551.1
135°	362.9	400.0	434.4	465.1	488.7	506.4	516.1	519.3
137.5°	351.1	381.1	409.7	435.7	456.9	473.1	481.9	485.5
140°	344.6	369.9	394.6	417.3	437.2	451.1	459.1	461.8
142.5°	339.0	360.4	381.7	401.3	418.2	430.0	437.6	439.9
145°	331.8	348.4	365.0	379.6	392.5	401.6	407.6	409.7
147.5°	324.9	338.4	351.2	362.1	372.4	379.7	383.1	384.1
150°	320.9	332.8	343.0	352.7	360.8	367.2	369.4	369.9
152.5°	316.7	327.3	336.6	344.1	350.9	356.0	358.2	358.7
155°	310.2	318.9	326.3	332.2	337.6	341.4	343.0	343.6
157.5°	303.8	310.9	316.7	321.3	325.5	328.6	330.1	330.0
160°	299.4	304.8	310.2	314.0	317.7	320.5	321.5	320.9
162.5°	294.7	299.7	304.2	307.6	310.5	312.7	312.9	312.8
165°	288.1	291.9	295.2	297.8	300.0	301.0	301.0	301.0
167.5°	281.9	284.5	286.9	288.8	289.9	290.9	290.4	290.3
170°	278.5	280.1	281.7	282.8	283.9	284.5	284.5	283.9
172.5°	274.7	276.3	277.4	278.1	278.3	279.3	278.4	277.9
175°	270.4	270.4	271.5	271.5	271.5	272.0	271.0	270.4
177.5°	267.5	268.0	268.0	268.0	267.5	268.0	266.6	266.6
180°	266.6	266.6	266.6	266.6	266.6	266.6	266.6	266.6

(END OF REPORT)