

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P333566-830

Luminaire Tested: **S125RDIP-S850D810U830-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333566-830
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S850D810U830-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5706.7 lumens
Efficiency: N/A
Efficacy: 124.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333566-830

CATALOG NUMBER: S125RDIP-S850D810U830-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

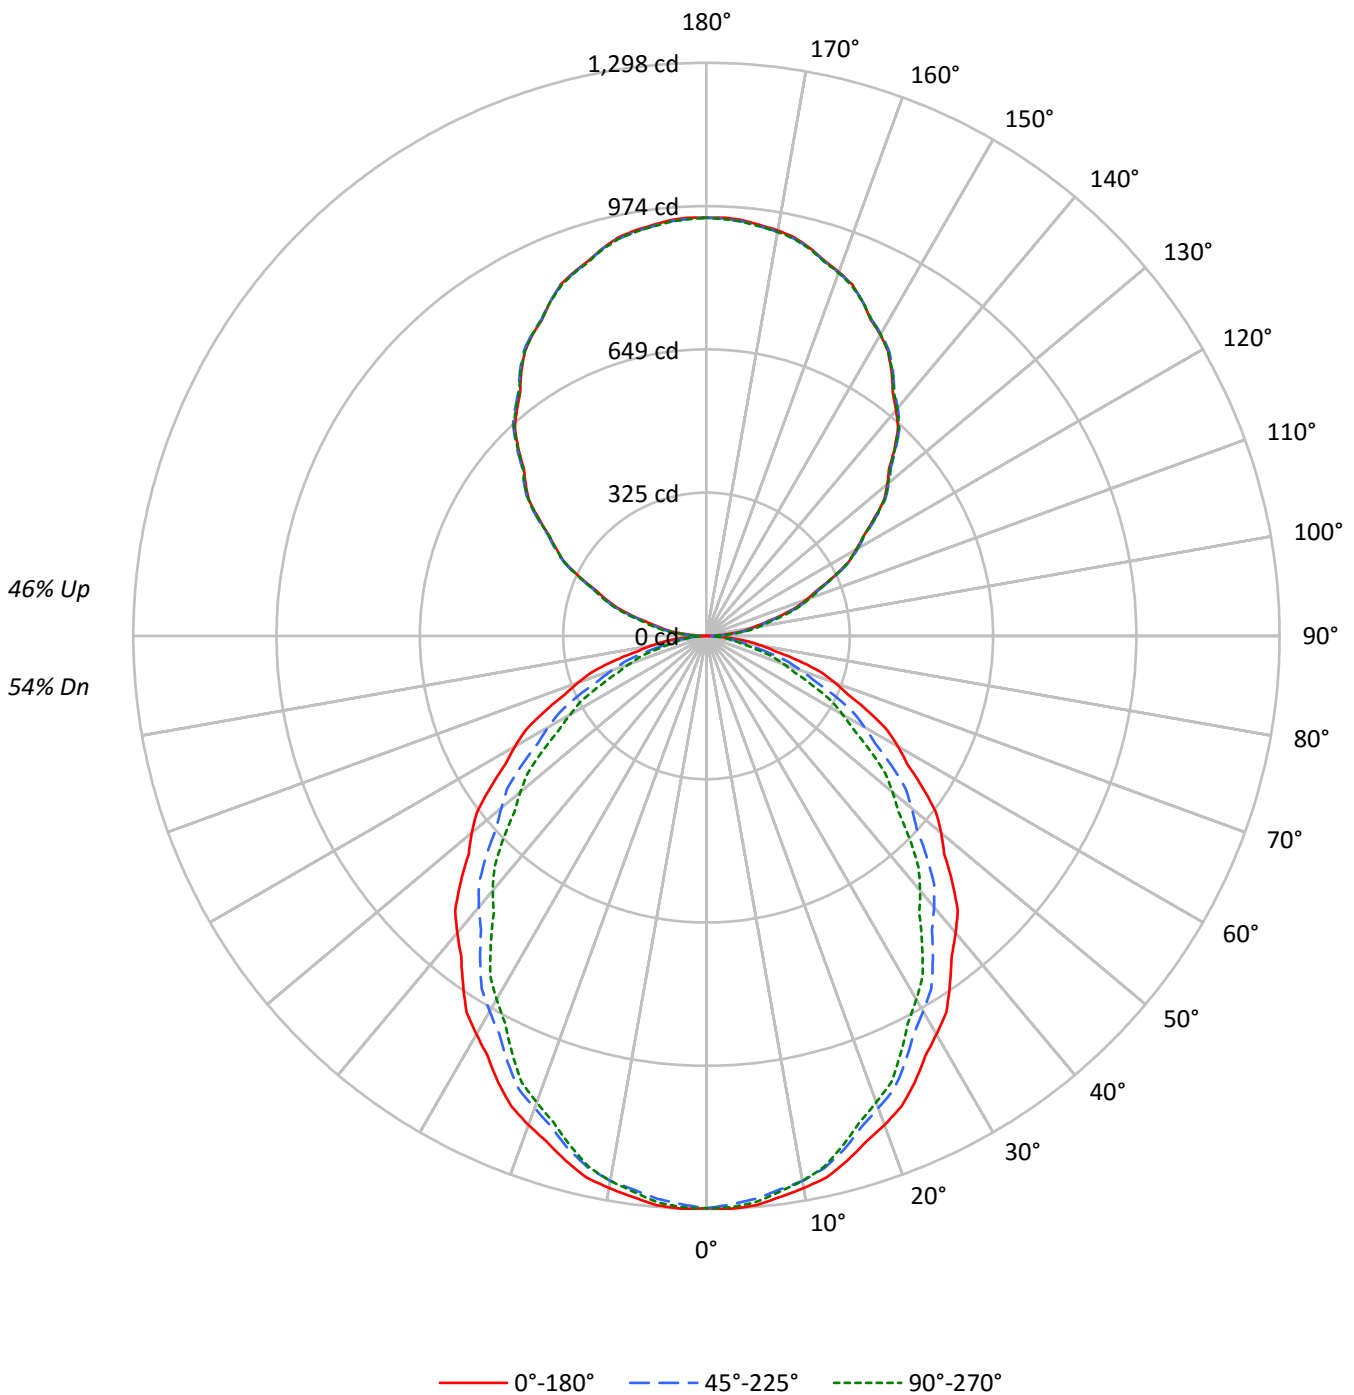



TEST NUMBER: P333566-830

CATALOG NUMBER: S125RDIP-S850D810U830-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	60	60	60	54
1	99	95	91	87	92	88	85	82	75	73	71	64	62	60	53	52	51	46
2	90	83	77	72	83	77	72	67	66	62	59	56	53	51	47	45	43	39
3	82	73	66	60	76	68	62	57	59	54	50	50	46	43	42	39	37	33
4	76	65	57	51	70	60	53	48	52	47	43	45	40	37	37	34	32	28
5	69	58	50	44	64	54	47	41	47	41	37	40	36	32	34	31	28	25
6	64	52	44	38	59	49	41	36	42	37	32	36	32	28	31	27	25	22
7	59	47	39	33	55	44	37	32	38	33	29	33	29	25	28	25	22	19
8	55	43	35	30	51	40	33	28	35	29	25	30	26	23	26	22	20	17
9	51	39	32	27	48	37	30	25	32	27	23	28	24	20	24	20	18	16
10	48	36	29	24	44	34	27	23	30	24	21	26	22	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8371	8371	8371
5°	8390	8294	8345
10°	8326	8217	8217
15°	8227	8050	7985
20°	8100	7818	7724
25°	7953	7590	7422
30°	7767	7322	7088
35°	7579	7046	6714
40°	7403	6759	6347
45°	7188	6437	5945
50°	6973	6089	5528
55°	6723	5754	5082
60°	6473	5349	4602
65°	6178	4876	4053
70°	5840	4288	3493
75°	5375	3616	2907
80°	4731	2838	2440
85°	3987	2319	2179



TEST NUMBER: P333566-830

CATALOG NUMBER: S125RDIP-S850D810U830-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	121.9	2.1
10°-20°	340.6	6.0
20°-30°	493.9	8.7
30°-40°	562.9	9.9
40°-50°	548.6	9.6
50°-60°	461.8	8.1
60°-70°	323.7	5.7
70°-80°	166.4	2.9
80°-90°	44.1	0.8
90°-100°	63.4	1.1
100°-110°	187.3	3.3
110°-120°	317.3	5.6
120°-130°	417.5	7.3
130°-140°	467.9	8.2
140°-150°	458.6	8.0
150°-160°	385.1	6.7
160°-170°	256.0	4.5
170°-180°	89.6	1.6
0°-30°	956.3	16.8
0°-40°	1519.2	26.6
0°-60°	2529.7	44.3
0°-90°	3063.9	53.7
90°-120°	568.0	10.0
90°-150°	1912.0	33.5
90°-180°	2643.0	46.3
0°-180°	5706.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1296	1296	1296	1296	1296	
5°	1294	1290	1279	1289	1287	123
15°	1230	1224	1204	1203	1194	347
25°	1116	1100	1065	1052	1042	513
35°	961	937	894	866	852	602
45°	787	757	705	667	651	607
55°	597	564	511	468	451	534
65°	404	370	319	281	265	400
75°	215	185	145	124	116	228
85°	54	37	31	30	29	60
90°	1	7	12	15	18	5
95°	48	50	57	62	63	51
105°	168	172	176	180	183	180
115°	318	320	322	321	321	314
125°	464	468	469	467	467	415
135°	603	607	608	608	605	465
145°	730	733	736	735	733	456
155°	836	836	836	839	836	385
165°	909	907	908	911	906	256
175°	945	942	942	946	941	90
180°	947	947	947	947	947	



TEST NUMBER: P333566-830

CATALOG NUMBER: S125RDIP-S850D810U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1298.4	1297.9	1297.3	1296.8	1296.3	1295.1	1293.5	1291.7	1290.0	1288.2	1290.0
5°	1294.1	1293.3	1292.3	1291.5	1290.6	1289.0	1286.6	1284.2	1281.8	1279.4	1281.6
7.5°	1281.4	1280.5	1279.7	1278.8	1278.1	1276.2	1273.4	1270.5	1267.6	1264.7	1266.2
10°	1269.6	1268.9	1268.3	1267.6	1267.0	1265.2	1262.2	1259.0	1256.0	1253.0	1253.6
12.5°	1256.3	1255.5	1254.6	1253.9	1253.0	1250.6	1246.4	1242.4	1238.3	1234.2	1234.6
15°	1230.5	1229.2	1227.9	1226.5	1225.2	1222.3	1217.8	1213.1	1208.6	1204.0	1203.8
17.5°	1201.3	1199.3	1197.3	1195.3	1193.3	1189.4	1183.6	1177.9	1172.1	1166.4	1165.4
20°	1178.6	1176.4	1174.2	1172.1	1169.9	1165.3	1158.4	1151.4	1144.4	1137.5	1136.4
22.5°	1153.5	1151.3	1149.1	1147.0	1144.8	1140.1	1132.7	1125.5	1118.1	1110.9	1108.7
25°	1116.0	1112.7	1109.4	1106.2	1102.9	1097.2	1089.2	1081.1	1073.1	1065.1	1062.2
27.5°	1072.9	1068.9	1065.0	1061.0	1057.1	1050.7	1042.2	1033.5	1024.9	1016.2	1012.3
30°	1041.5	1037.4	1033.3	1029.2	1025.0	1018.3	1009.3	1000.1	991.0	981.8	976.9
32.5°	1011.0	1006.2	1001.4	996.6	991.6	984.6	975.3	966.0	956.7	947.3	941.9
35°	961.3	956.0	950.8	945.6	940.4	932.8	923.1	913.3	903.5	893.7	887.4
37.5°	912.5	906.2	899.8	893.4	887.1	878.9	868.8	858.7	848.6	838.5	830.9
40°	878.1	871.6	865.0	858.5	852.0	843.5	833.0	822.6	812.2	801.7	793.4
42.5°	842.1	835.4	828.7	821.9	815.2	806.5	795.7	784.9	774.1	763.4	755.4
45°	787.0	780.7	774.4	768.1	761.8	752.6	740.6	728.8	716.8	704.8	696.1
47.5°	730.1	723.4	716.7	710.1	703.4	694.1	682.0	670.0	657.9	645.8	636.9
50°	694.0	686.8	679.7	672.5	665.3	655.5	643.1	630.7	618.3	606.0	596.8
52.5°	654.9	647.5	640.2	632.8	625.5	616.0	604.3	592.6	580.8	569.1	559.3
55°	597.1	590.1	583.2	576.3	569.3	559.7	547.5	535.4	523.2	511.0	501.1
57.5°	538.8	531.3	523.9	516.4	509.1	499.5	487.7	475.9	464.2	452.4	442.9
60°	501.1	493.6	486.0	478.3	470.7	461.1	449.3	437.5	425.8	414.1	404.5
62.5°	461.3	454.0	446.8	439.4	432.2	422.6	410.7	398.8	386.8	374.9	366.1
65°	404.3	396.9	389.5	382.1	374.7	365.2	353.7	342.1	330.6	319.1	310.4
67.5°	347.7	340.3	332.9	325.6	318.1	308.9	297.8	286.8	275.8	264.7	256.7
70°	309.3	301.9	294.5	287.1	279.7	270.6	259.8	248.8	238.0	227.1	220.4
72.5°	271.7	264.5	257.3	250.1	242.9	234.1	223.9	213.8	203.6	193.4	187.2
75°	215.4	208.9	202.3	195.8	189.3	181.4	172.3	163.2	154.0	144.9	140.1
77.5°	159.4	154.1	148.9	143.7	138.5	132.2	124.9	117.6	110.3	103.0	99.6
80°	127.2	122.1	116.8	111.6	106.4	100.8	94.6	88.5	82.5	76.3	74.4
82.5°	96.0	91.2	86.5	81.8	77.1	72.7	68.5	64.4	60.1	56.0	55.0
85°	53.8	50.0	46.0	42.1	38.2	35.6	34.6	33.5	32.4	31.3	31.1
87.5°	18.2	17.2	16.2	15.3	14.3	13.9	13.9	13.9	14.0	14.1	14.2
90°	0.8	2.1	3.4	4.7	5.9	7.2	8.4	9.5	10.7	11.8	12.6
92.5°	17.8	18.8	19.7	20.5	21.5	22.6	24.0	25.4	26.9	28.3	29.4
95°	47.9	48.3	48.5	48.9	49.2	50.2	51.8	53.4	55.1	56.7	57.9
97.5°	79.6	79.7	79.8	80.0	80.1	81.3	83.6	85.9	88.1	90.4	91.4
100°	103.2	103.2	103.2	103.2	103.2	104.2	106.4	108.5	110.7	112.7	114.2
102.5°	128.6	129.2	129.9	130.5	131.2	132.1	133.1	134.2	135.3	136.4	138.0
105°	168.1	168.9	169.7	170.5	171.4	172.2	173.2	174.2	175.1	176.2	177.1
107.5°	211.7	212.4	213.3	214.1	215.0	215.7	216.5	217.3	218.0	218.8	219.2
110°	241.8	242.6	243.4	244.2	245.1	245.7	246.2	246.7	247.1	247.6	248.2



TEST NUMBER: P333566-830

CATALOG NUMBER: S125RDIP-S850D810U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	272.4	272.9	273.2	273.7	274.1	274.7	275.2	275.9	276.5	277.1	277.4
115°	317.6	318.3	319.0	319.6	320.3	320.7	321.1	321.4	321.8	322.1	321.9
117.5°	363.1	363.4	363.6	363.9	364.2	364.6	364.9	365.1	365.4	365.7	365.8
120°	391.3	392.2	393.0	393.8	394.6	395.1	395.3	395.5	395.6	395.8	395.8
122.5°	422.0	422.4	422.6	422.9	423.2	423.6	424.0	424.4	424.8	425.3	425.1
125°	463.5	464.6	465.5	466.6	467.5	468.1	468.3	468.4	468.5	468.7	468.4
127.5°	507.8	508.4	508.9	509.4	510.0	510.4	510.6	510.8	511.0	511.2	511.0
130°	534.3	535.2	536.0	536.8	537.6	538.2	538.5	538.9	539.1	539.5	539.3
132.5°	560.9	562.2	563.5	564.9	566.3	566.8	566.8	566.8	566.7	566.7	566.5
135°	602.9	603.9	604.8	605.9	606.8	607.4	607.6	607.8	607.8	608.0	608.0
137.5°	642.4	643.4	644.3	645.3	646.2	646.9	647.2	647.5	647.9	648.3	648.5
140°	667.8	668.5	669.4	670.2	671.0	671.7	672.1	672.7	673.2	673.6	674.0
142.5°	693.1	693.8	694.5	695.1	695.9	696.5	697.1	697.8	698.3	699.0	699.2
145°	730.4	731.0	731.7	732.4	733.0	733.6	734.1	734.5	735.1	735.6	735.6
147.5°	764.9	765.3	765.6	766.0	766.3	766.7	767.1	767.5	767.9	768.3	768.6
150°	787.9	787.7	787.6	787.4	787.2	787.5	788.2	788.8	789.5	790.1	790.1
152.5°	806.7	807.0	807.2	807.5	807.7	807.9	808.1	808.4	808.7	809.0	809.4
155°	835.8	835.8	835.8	835.8	835.8	835.8	836.0	836.2	836.3	836.5	837.2
157.5°	861.8	861.4	861.0	860.6	860.3	860.2	860.4	860.5	860.6	860.8	861.5
160°	877.0	876.6	876.1	875.6	875.1	875.0	875.1	875.2	875.4	875.6	876.3
162.5°	890.6	890.2	889.9	889.6	889.2	889.0	889.0	889.1	889.1	889.2	889.9
165°	908.8	908.4	908.1	907.8	907.5	907.4	907.5	907.7	907.9	908.0	908.7
167.5°	924.1	923.4	922.7	922.1	921.4	921.1	921.1	921.1	921.1	921.1	922.1
170°	932.4	931.7	931.0	930.4	929.7	929.3	929.3	929.3	929.3	929.3	930.4
172.5°	938.2	937.5	936.9	936.2	935.6	935.3	935.3	935.3	935.3	935.3	936.2
175°	944.9	944.2	943.6	942.9	942.3	941.9	941.9	941.9	941.9	941.9	942.9
177.5°	948.3	947.7	947.3	946.7	946.1	945.8	945.7	945.6	945.5	945.3	946.1
180°	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1



TEST NUMBER: P333566-830

CATALOG NUMBER: S125RDIP-S850D810U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1	1296.1
2.5°	1291.7	1293.5	1295.1	1296.0	1295.8	1295.6	1295.4	1295.2
5°	1283.7	1285.9	1288.1	1289.0	1288.5	1288.1	1287.7	1287.2
7.5°	1267.8	1269.3	1270.8	1271.3	1270.8	1270.4	1269.9	1269.4
10°	1254.2	1254.9	1255.6	1255.6	1254.9	1254.2	1253.6	1253.0
12.5°	1235.1	1235.6	1236.1	1235.9	1234.8	1233.8	1232.8	1231.8
15°	1203.6	1203.3	1203.2	1202.1	1200.1	1198.2	1196.2	1194.2
17.5°	1164.2	1163.2	1162.1	1160.7	1159.1	1157.5	1155.9	1154.3
20°	1135.3	1134.2	1133.1	1131.6	1129.6	1127.7	1125.7	1123.8
22.5°	1106.5	1104.5	1102.3	1100.4	1098.8	1097.2	1095.6	1094.0
25°	1059.4	1056.6	1053.8	1051.1	1048.7	1046.3	1044.0	1041.5
27.5°	1008.3	1004.4	1000.4	997.3	995.0	992.7	990.4	988.1
30°	971.9	966.9	961.8	958.4	956.4	954.4	952.4	950.5
32.5°	936.3	930.8	925.3	921.2	918.8	916.3	913.8	911.3
35°	881.1	874.8	868.5	863.8	860.7	857.7	854.7	851.6
37.5°	823.4	815.8	808.2	803.0	800.0	797.0	794.1	791.2
40°	785.1	776.9	768.6	763.2	760.6	758.0	755.4	752.8
42.5°	747.5	739.6	731.7	725.8	722.0	718.1	714.3	710.5
45°	687.4	678.7	670.0	664.0	660.7	657.5	654.2	650.9
47.5°	627.9	619.0	610.0	603.7	600.1	596.5	592.9	589.3
50°	587.7	578.5	569.4	563.2	560.0	556.7	553.4	550.2
52.5°	549.5	539.6	529.8	523.2	520.0	516.7	513.5	510.2
55°	491.4	481.6	471.8	465.1	461.8	458.3	454.8	451.3
57.5°	433.3	423.8	414.2	407.8	404.7	401.6	398.6	395.5
60°	394.9	385.3	375.8	369.4	366.1	362.9	359.6	356.3
62.5°	357.1	348.3	339.4	333.4	330.1	326.8	323.6	320.3
65°	301.7	293.0	284.3	278.3	275.0	271.8	268.5	265.2
67.5°	248.7	240.8	232.8	227.5	225.0	222.3	219.7	217.2
70°	213.6	206.9	200.1	195.5	192.8	190.2	187.7	185.0
72.5°	181.0	174.7	168.5	164.6	162.8	161.1	159.4	157.6
75°	135.3	130.5	125.7	122.6	121.0	119.5	118.0	116.5
77.5°	96.2	92.9	89.5	87.4	86.2	85.1	84.0	82.8
80°	72.5	70.5	68.5	67.3	66.9	66.4	66.0	65.6
82.5°	54.2	53.3	52.3	51.7	51.5	51.3	51.0	50.7
85°	30.9	30.6	30.4	30.3	30.0	29.8	29.6	29.4
87.5°	14.4	14.6	14.8	14.8	14.7	14.6	14.6	14.5
90°	13.4	14.2	15.1	15.7	16.2	16.7	17.2	17.7
92.5°	30.4	31.6	32.6	33.4	33.7	34.0	34.4	34.8
95°	59.0	60.2	61.4	62.1	62.4	62.8	63.1	63.3
97.5°	92.6	93.6	94.7	95.3	95.5	95.7	96.0	96.1
100°	115.7	117.2	118.7	119.6	119.9	120.2	120.6	120.8
102.5°	139.6	141.2	142.8	143.8	144.3	144.7	145.2	145.6
105°	178.1	179.1	180.1	180.8	181.3	181.8	182.3	182.8
107.5°	219.7	220.2	220.7	220.9	220.9	220.8	220.8	220.8
110°	248.6	249.1	249.6	249.8	249.6	249.4	249.3	249.1



TEST NUMBER: P333566-830

CATALOG NUMBER: S125RDIP-S850D810U830-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	277.6	277.8	278.1	278.1	277.7	277.4	277.1	276.8
115°	321.8	321.6	321.4	321.2	321.1	320.9	320.7	320.7
117.5°	366.0	366.1	366.3	366.0	365.3	364.7	364.0	363.4
120°	395.8	395.8	395.8	395.5	394.8	394.2	393.5	392.9
122.5°	425.0	424.9	424.7	424.4	423.9	423.4	422.8	422.4
125°	468.1	467.8	467.4	467.2	467.0	466.8	466.7	466.6
127.5°	510.9	510.7	510.6	510.3	510.0	509.6	509.3	509.0
130°	539.1	539.0	538.9	538.6	538.3	537.9	537.6	537.2
132.5°	566.3	566.1	566.0	565.6	565.2	564.8	564.3	563.8
135°	608.0	608.0	608.0	607.8	607.1	606.4	605.8	605.1
137.5°	648.7	648.8	649.0	648.8	647.9	647.1	646.3	645.5
140°	674.3	674.6	675.0	674.7	673.9	673.1	672.2	671.5
142.5°	699.4	699.6	699.7	699.5	698.6	697.9	697.0	696.2
145°	735.6	735.6	735.6	735.3	734.8	734.3	733.9	733.3
147.5°	769.0	769.5	769.9	769.5	768.4	767.2	766.2	765.1
150°	790.1	790.1	790.1	789.9	789.6	789.3	788.9	788.6
152.5°	809.7	810.1	810.5	810.4	809.8	809.3	808.7	808.0
155°	837.8	838.5	839.1	839.1	838.2	837.4	836.6	835.8
157.5°	862.1	862.8	863.5	863.3	862.1	861.1	860.0	858.9
160°	876.9	877.5	878.2	878.2	877.3	876.5	875.6	874.9
162.5°	890.7	891.6	892.3	892.2	891.3	890.3	889.4	888.4
165°	909.4	910.0	910.6	910.5	909.5	908.5	907.5	906.5
167.5°	923.1	924.1	925.1	925.0	924.1	923.0	922.0	921.0
170°	931.3	932.4	933.3	933.2	932.1	930.9	929.8	928.7
172.5°	937.3	938.2	939.2	939.2	938.2	937.2	936.1	935.1
175°	943.9	944.9	945.8	945.7	944.6	943.5	942.4	941.2
177.5°	946.9	947.6	948.5	948.4	947.4	946.6	945.7	944.7
180°	947.1	947.1	947.1	947.1	947.1	947.1	947.1	947.1

(END OF REPORT)