

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333265-930

Luminaire Tested: **S125DIP-S1090D590U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333265-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIP-S1090D590U930-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 590 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5548.4 lumens  
Efficiency: N/A  
Efficacy: 113.7 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Direct  
  
Input Watts (W): 48.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333265-930  
CATALOG NUMBER: S125DIP-S1090D590U930-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

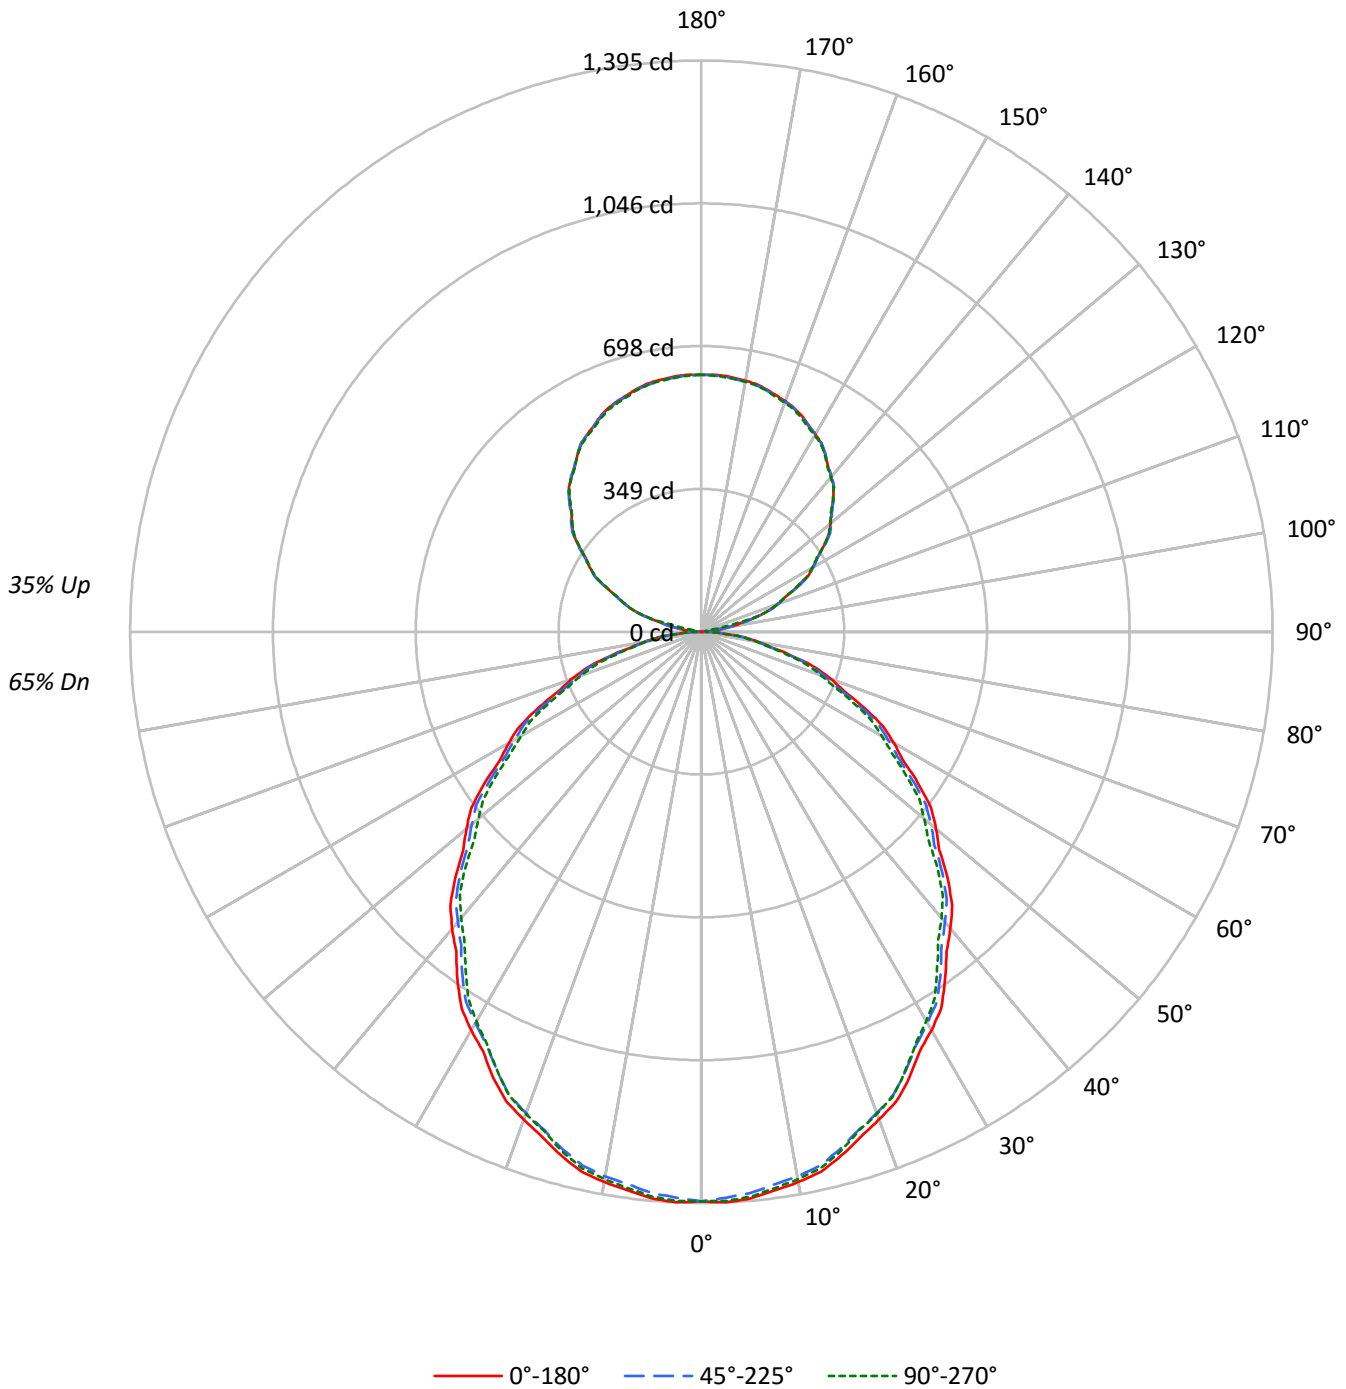



TEST NUMBER: P333265-930

CATALOG NUMBER: S125DIP-S1090D590U930-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	70	70	70	65
1	101	97	93	89	95	91	88	84	80	78	75	71	69	67	62	60	59	55
2	92	84	78	73	86	80	74	69	71	66	62	62	59	56	54	52	50	46
3	84	74	67	61	79	70	63	58	62	57	52	55	51	47	48	45	42	39
4	77	66	58	51	72	62	55	49	55	49	45	49	44	41	43	39	36	33
5	71	59	50	44	66	55	48	42	50	43	39	44	39	35	39	35	32	29
6	65	53	44	38	61	50	42	37	45	38	34	40	35	31	35	31	28	25
7	60	48	39	34	57	45	38	32	41	34	30	36	31	27	32	28	25	22
8	56	43	35	30	53	41	34	29	37	31	27	33	28	24	30	25	22	20
9	52	40	32	27	49	38	31	26	34	28	24	31	26	22	27	23	20	18
10	49	36	29	24	46	35	28	23	31	26	22	28	23	20	25	21	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8985	8985	8985
5°	9005	8919	8976
10°	8950	8857	8907
15°	8852	8750	8787
20°	8715	8601	8616
25°	8565	8424	8416
30°	8380	8232	8192
35°	8183	8027	7914
40°	7981	7804	7692
45°	7761	7600	7448
50°	7519	7354	7133
55°	7287	7076	6877
60°	7009	6795	6554
65°	6677	6460	6240
70°	6360	6069	5861
75°	5794	5602	5410
80°	5159	5077	4950
85°	4483	4565	4320



TEST NUMBER: P333265-930

CATALOG NUMBER: S125DIP-S1090D590U930-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	131.2	2.4
10°-20°	370.5	6.7
20°-30°	547.1	9.9
30°-40°	638.4	11.5
40°-50°	641.2	11.6
50°-60°	562.8	10.1
60°-70°	419.4	7.6
70°-80°	239.8	4.3
80°-90°	71.1	1.3
90°-100°	22.8	0.4
100°-110°	140.5	2.5
110°-120°	254.9	4.6
120°-130°	327.1	5.9
130°-140°	351.8	6.3
140°-150°	330.3	6.0
150°-160°	267.1	4.8
160°-170°	172.8	3.1
170°-180°	59.6	1.1
0°-30°	1048.8	18.9
0°-40°	1687.2	30.4
0°-60°	2891.2	52.1
0°-90°	3621.4	65.3
90°-120°	418.2	7.5
90°-150°	1427.4	25.7
90°-180°	1927.0	34.7
0°-180°	5548.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1391	1391	1391	1391	1391	
5°	1389	1386	1376	1385	1385	132
15°	1324	1320	1309	1314	1314	373
25°	1202	1196	1182	1184	1181	553
35°	1038	1033	1018	1012	1004	649
45°	850	845	832	819	816	655
55°	647	643	628	619	611	578
65°	437	434	423	413	408	433
75°	232	230	224	221	217	248
85°	60	62	62	60	58	68
90°	0	4	7	10	11	4
95°	26	24	7	10	10	34
105°	137	138	139	139	138	145
115°	257	259	260	258	255	254
125°	365	368	368	367	365	326
135°	455	458	457	456	454	351
145°	528	529	529	529	526	330
155°	582	579	580	581	577	268
165°	614	611	611	614	610	173
175°	628	625	625	628	625	60
180°	628	628	628	628	628	



TEST NUMBER: P333265-930

CATALOG NUMBER: S125DIP-S1090D590U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2
2.5°	1394.7	1394.2	1393.5	1392.9	1392.4	1391.1	1389.1	1387.2	1385.2	1383.2	1385.2
5°	1389.0	1388.5	1388.0	1387.6	1387.1	1385.6	1383.2	1380.7	1378.3	1375.8	1378.0
7.5°	1376.2	1375.7	1375.2	1374.8	1374.3	1372.6	1369.9	1367.3	1364.6	1361.9	1364.1
10°	1364.8	1364.3	1363.8	1363.3	1362.9	1361.2	1358.5	1355.8	1353.2	1350.5	1352.4
12.5°	1350.7	1349.8	1348.9	1348.0	1347.2	1345.5	1343.0	1340.5	1338.0	1335.5	1337.1
15°	1324.0	1323.3	1322.6	1321.8	1321.1	1319.4	1316.7	1314.0	1311.3	1308.6	1309.9
17.5°	1293.5	1292.4	1291.3	1290.2	1289.2	1287.2	1284.4	1281.7	1278.9	1276.0	1277.6
20°	1268.0	1267.5	1267.0	1266.5	1266.0	1264.1	1260.9	1257.8	1254.6	1251.4	1253.1
22.5°	1242.4	1241.5	1240.6	1239.7	1238.8	1236.9	1234.0	1230.9	1228.0	1225.0	1226.1
25°	1201.9	1200.7	1199.5	1198.2	1197.0	1194.8	1191.6	1188.5	1185.3	1182.1	1182.6
27.5°	1154.5	1153.8	1153.1	1152.3	1151.6	1149.7	1146.3	1143.0	1139.8	1136.5	1136.6
30°	1123.7	1123.0	1122.3	1121.5	1120.8	1118.6	1114.9	1111.3	1107.6	1103.9	1103.4
32.5°	1090.3	1089.2	1088.0	1086.9	1085.8	1083.6	1080.3	1077.0	1073.7	1070.5	1069.6
35°	1037.9	1036.9	1035.9	1034.9	1034.0	1031.8	1028.3	1024.9	1021.5	1018.1	1016.8
37.5°	983.5	982.3	981.0	979.8	978.6	976.4	973.1	970.0	966.7	963.5	961.6
40°	946.6	945.3	944.1	942.9	941.7	939.3	935.9	932.5	929.0	925.6	923.4
42.5°	906.9	905.9	904.9	903.8	902.8	900.6	897.2	893.7	890.3	886.9	884.8
45°	849.7	848.7	847.7	846.8	845.8	843.8	840.9	838.0	835.0	832.1	829.2
47.5°	788.1	788.1	788.1	788.2	788.2	786.5	783.0	779.4	775.9	772.4	769.4
50°	748.4	747.7	747.0	746.2	745.5	743.6	740.7	737.8	734.8	731.9	728.7
52.5°	707.9	707.4	706.9	706.3	705.8	703.9	700.8	697.7	694.6	691.4	688.6
55°	647.2	646.5	645.7	645.0	644.2	642.1	638.7	635.3	631.9	628.4	626.2
57.5°	583.1	582.7	582.4	582.0	581.6	579.9	577.0	574.1	571.3	568.3	565.5
60°	542.6	541.6	540.6	539.6	538.7	536.9	534.2	531.5	528.8	526.1	523.7
62.5°	500.3	499.5	498.8	498.0	497.3	495.7	493.3	491.1	488.8	486.5	483.8
65°	436.9	436.4	435.9	435.5	435.0	433.4	430.7	428.0	425.3	422.7	420.4
67.5°	375.5	374.5	373.5	372.4	371.5	369.9	367.9	365.9	363.9	361.9	360.0
70°	336.8	335.6	334.4	333.1	331.9	330.2	328.0	325.8	323.6	321.4	319.9
72.5°	294.6	293.7	292.9	292.0	291.2	290.1	288.7	287.2	285.8	284.4	282.7
75°	232.2	231.7	231.2	230.7	230.2	229.4	228.2	227.0	225.8	224.5	223.8
77.5°	174.8	174.6	174.4	174.2	174.0	173.6	172.8	172.2	171.5	170.8	170.4
80°	138.7	138.7	138.7	138.7	138.7	138.4	137.9	137.5	137.0	136.5	136.2
82.5°	107.0	106.6	106.2	105.8	105.4	105.2	105.1	105.0	104.8	104.8	104.4
85°	60.5	60.7	61.0	61.2	61.5	61.6	61.6	61.6	61.6	61.6	61.4
87.5°	23.9	24.1	24.2	24.4	24.5	24.6	24.5	24.5	24.5	24.4	24.5
90°	0.5	1.3	2.1	2.9	3.8	4.6	5.3	6.0	6.7	7.4	8.0
92.5°	7.2	6.6	6.0	5.5	4.8	4.9	5.5	6.2	6.8	7.4	8.0
95°	26.5	26.2	25.9	25.6	25.3	23.2	19.2	15.3	11.3	7.4	8.0
97.5°	55.4	55.9	56.5	57.0	57.6	54.0	46.2	38.4	30.7	22.9	20.0
100°	77.7	78.0	78.3	78.6	78.9	79.2	79.7	80.1	80.6	81.0	65.6
102.5°	100.4	100.8	101.2	101.6	101.9	102.2	102.5	102.8	103.1	103.3	100.4
105°	136.7	137.1	137.6	138.0	138.4	138.6	138.6	138.6	138.6	138.6	138.6
107.5°	174.6	174.6	174.6	174.6	174.6	174.6	174.8	175.0	175.3	175.5	175.5
110°	199.1	199.1	199.1	199.1	199.1	199.2	199.4	199.6	199.8	200.0	199.7



TEST NUMBER: P333265-930

CATALOG NUMBER: S125DIP-S1090D590U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	222.2	222.4	222.7	222.9	223.1	223.3	223.5	223.6	223.7	223.8	223.5
115°	256.7	257.3	257.8	258.3	258.9	259.2	259.3	259.3	259.4	259.6	259.2
117.5°	292.6	292.5	292.5	292.5	292.5	292.7	293.1	293.5	293.8	294.2	293.8
120°	315.0	314.8	314.7	314.6	314.5	314.6	315.0	315.2	315.5	315.8	315.6
122.5°	334.6	335.0	335.4	335.8	336.2	336.5	336.6	336.8	336.9	337.0	336.9
125°	365.2	365.9	366.6	367.3	368.0	368.4	368.4	368.4	368.4	368.4	368.0
127.5°	394.3	394.8	395.3	395.8	396.3	396.6	396.5	396.5	396.4	396.3	396.1
130°	412.1	412.6	413.2	413.7	414.2	414.5	414.6	414.7	414.8	414.9	414.6
132.5°	430.0	430.6	431.2	431.8	432.4	432.6	432.4	432.1	431.9	431.7	431.6
135°	455.4	456.0	456.6	457.2	457.9	458.1	457.9	457.6	457.5	457.2	457.1
137.5°	478.7	479.3	479.8	480.4	480.9	481.1	480.9	480.7	480.5	480.3	480.4
140°	494.0	494.2	494.4	494.6	494.8	494.9	494.8	494.6	494.6	494.5	494.6
142.5°	507.8	507.9	508.0	508.2	508.3	508.4	508.6	508.7	508.8	509.0	509.0
145°	528.0	528.2	528.4	528.6	528.8	528.9	528.9	528.9	528.9	528.9	529.0
147.5°	545.6	545.6	545.5	545.5	545.4	545.5	545.6	545.8	545.8	546.0	546.2
150°	556.8	556.6	556.4	556.2	556.0	556.0	556.2	556.4	556.6	556.8	557.0
152.5°	567.6	567.1	566.7	566.2	565.7	565.7	565.8	566.1	566.2	566.5	566.7
155°	581.5	580.8	580.2	579.6	578.9	578.8	578.9	579.2	579.4	579.6	579.9
157.5°	592.2	591.7	591.4	591.0	590.7	590.5	590.5	590.5	590.5	590.6	590.9
160°	599.6	599.0	598.3	597.7	597.1	596.9	597.0	597.0	597.1	597.3	597.7
162.5°	605.5	605.0	604.3	603.6	603.1	602.8	602.9	603.0	603.1	603.2	603.8
165°	613.5	612.9	612.3	611.7	611.1	610.8	610.9	611.0	611.1	611.2	611.8
167.5°	619.5	618.9	618.2	617.6	616.9	616.7	616.8	616.9	616.9	617.1	617.8
170°	622.9	622.2	621.4	620.7	620.0	619.6	619.7	619.9	620.0	620.0	620.9
172.5°	625.1	624.4	623.6	622.9	622.2	621.9	622.1	622.3	622.5	622.6	623.4
175°	627.5	626.9	626.2	625.7	625.0	624.8	624.8	625.0	625.1	625.2	626.0
177.5°	628.6	628.1	627.6	627.1	626.6	626.4	626.5	626.6	626.6	626.7	627.4
180°	627.5	627.5	627.5	627.5	627.5	627.5	627.5	627.5	627.5	627.5	627.5



TEST NUMBER: P333265-930

CATALOG NUMBER: S125DIP-S1090D590U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2	1391.2
2.5°	1387.2	1389.1	1391.1	1392.0	1391.8	1391.6	1391.4	1391.2
5°	1380.2	1382.4	1384.6	1385.6	1385.4	1385.1	1384.9	1384.6
7.5°	1366.2	1368.4	1370.5	1371.5	1371.3	1371.0	1370.8	1370.5
10°	1354.4	1356.3	1358.3	1359.2	1358.9	1358.7	1358.5	1358.2
12.5°	1338.6	1340.2	1341.7	1342.6	1342.5	1342.4	1342.4	1342.3
15°	1311.1	1312.3	1313.5	1314.2	1314.2	1314.2	1314.2	1314.2
17.5°	1279.1	1280.6	1282.1	1282.3	1281.1	1279.9	1278.6	1277.4
20°	1254.8	1256.5	1258.3	1258.5	1257.3	1256.1	1254.8	1253.6
22.5°	1227.3	1228.4	1229.5	1229.6	1228.8	1228.0	1227.2	1226.3
25°	1183.1	1183.6	1184.1	1183.9	1183.2	1182.4	1181.7	1181.0
27.5°	1136.7	1136.8	1136.9	1136.6	1135.9	1135.1	1134.4	1133.7
30°	1102.9	1102.4	1102.0	1101.4	1100.7	1099.9	1099.2	1098.5
32.5°	1068.7	1067.8	1067.0	1065.8	1064.5	1063.2	1061.8	1060.5
35°	1015.6	1014.4	1013.2	1011.6	1009.7	1007.7	1005.8	1003.8
37.5°	959.9	958.1	956.3	954.8	953.7	952.5	951.4	950.3
40°	921.2	919.0	916.8	915.3	914.6	913.9	913.1	912.4
42.5°	882.9	880.8	878.9	877.3	876.2	875.1	873.9	872.8
45°	826.2	823.3	820.4	818.5	817.7	817.0	816.3	815.5
47.5°	766.5	763.4	760.5	758.1	756.4	754.7	753.0	751.3
50°	725.5	722.4	719.2	716.7	715.0	713.3	711.6	709.9
52.5°	685.8	683.1	680.3	677.9	676.0	674.1	672.2	670.3
55°	624.0	621.8	619.6	617.7	616.0	614.2	612.5	610.8
57.5°	562.7	559.9	557.0	555.1	554.2	553.3	552.4	551.4
60°	521.2	518.8	516.3	514.2	512.5	510.8	509.1	507.4
62.5°	481.2	478.6	475.9	473.9	472.6	471.3	469.9	468.6
65°	418.2	416.0	413.8	412.2	411.2	410.3	409.3	408.3
67.5°	358.2	356.3	354.4	353.2	352.6	352.0	351.5	350.9
70°	318.5	317.0	315.5	314.3	313.3	312.3	311.4	310.4
72.5°	281.1	279.4	277.8	276.5	275.5	274.5	273.5	272.6
75°	223.1	222.3	221.6	220.7	219.7	218.7	217.8	216.8
77.5°	169.9	169.5	169.1	168.5	167.8	167.1	166.4	165.8
80°	136.0	135.7	135.5	135.1	134.6	134.1	133.6	133.1
82.5°	103.9	103.5	103.1	102.7	102.6	102.6	102.5	102.3
85°	61.1	60.9	60.7	60.3	59.8	59.3	58.8	58.3
87.5°	24.6	24.7	24.8	24.7	24.4	24.1	23.7	23.4
90°	8.5	9.0	9.5	9.9	10.3	10.5	10.8	11.2
92.5°	8.5	9.0	9.5	9.9	9.9	10.1	10.3	10.4
95°	8.5	9.0	9.5	9.8	9.8	9.8	9.8	9.8
97.5°	17.0	14.1	11.3	9.8	9.8	9.8	9.8	9.8
100°	50.1	34.7	19.3	11.4	11.0	10.6	10.2	9.8
102.5°	97.4	94.5	91.6	86.7	79.6	72.6	65.6	58.5
105°	138.6	138.6	138.6	138.6	138.4	138.4	138.3	138.1
107.5°	175.5	175.5	175.5	175.4	175.1	174.8	174.5	174.1
110°	199.4	199.1	198.8	198.7	198.8	198.9	199.0	199.1





TEST NUMBER: P333265-930

CATALOG NUMBER: S125DIP-S1090D590U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	223.1	222.7	222.3	222.0	221.8	221.7	221.6	221.4
115°	258.7	258.3	257.9	257.4	256.7	256.2	255.5	254.9
117.5°	293.2	292.6	292.1	291.7	291.5	291.1	290.9	290.7
120°	315.4	315.2	315.0	314.6	314.1	313.6	313.1	312.6
122.5°	336.6	336.5	336.2	335.8	335.3	334.6	334.0	333.5
125°	367.6	367.1	366.7	366.4	366.1	365.7	365.5	365.2
127.5°	395.8	395.7	395.4	394.9	394.1	393.4	392.6	391.8
130°	414.3	414.0	413.7	413.3	412.8	412.2	411.7	411.2
132.5°	431.5	431.5	431.5	431.1	430.6	430.1	429.6	429.1
135°	456.8	456.6	456.4	456.0	455.4	454.8	454.1	453.6
137.5°	480.4	480.5	480.5	480.2	479.7	479.2	478.7	478.1
140°	494.9	495.0	495.3	495.0	494.5	493.8	493.3	492.6
142.5°	509.1	509.1	509.2	508.8	508.3	507.6	507.0	506.4
145°	529.1	529.2	529.3	529.0	528.4	527.8	527.2	526.5
147.5°	546.3	546.4	546.5	546.2	545.4	544.7	544.0	543.2
150°	557.2	557.4	557.6	557.3	556.5	555.6	554.8	554.0
152.5°	566.9	567.1	567.3	567.0	566.3	565.6	564.8	564.0
155°	580.2	580.5	580.8	580.6	579.8	578.9	578.1	577.2
157.5°	591.3	591.6	591.9	591.7	590.8	590.0	589.1	588.3
160°	598.1	598.5	598.9	598.7	597.9	597.0	596.2	595.4
162.5°	604.4	605.0	605.5	605.4	604.5	603.6	602.7	601.7
165°	612.5	613.1	613.7	613.6	612.8	612.0	611.1	610.3
167.5°	618.6	619.3	620.0	620.0	619.1	618.1	617.2	616.2
170°	621.7	622.6	623.4	623.3	622.4	621.4	620.5	619.6
172.5°	624.1	624.9	625.7	625.6	624.6	623.7	622.7	621.8
175°	626.8	627.6	628.5	628.4	627.5	626.6	625.7	624.7
177.5°	627.9	628.5	629.1	629.0	628.4	627.7	627.0	626.4
180°	627.5	627.5	627.5	627.5	627.5	627.5	627.5	627.5

(END OF REPORT)