

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333320-930

Luminaire Tested: **S125DIP-S1270D810U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333320-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1270D810U930-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6468.8 lumens
Efficiency: N/A
Efficacy: 106.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333320-930

CATALOG NUMBER: S125DIP-S1270D810U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

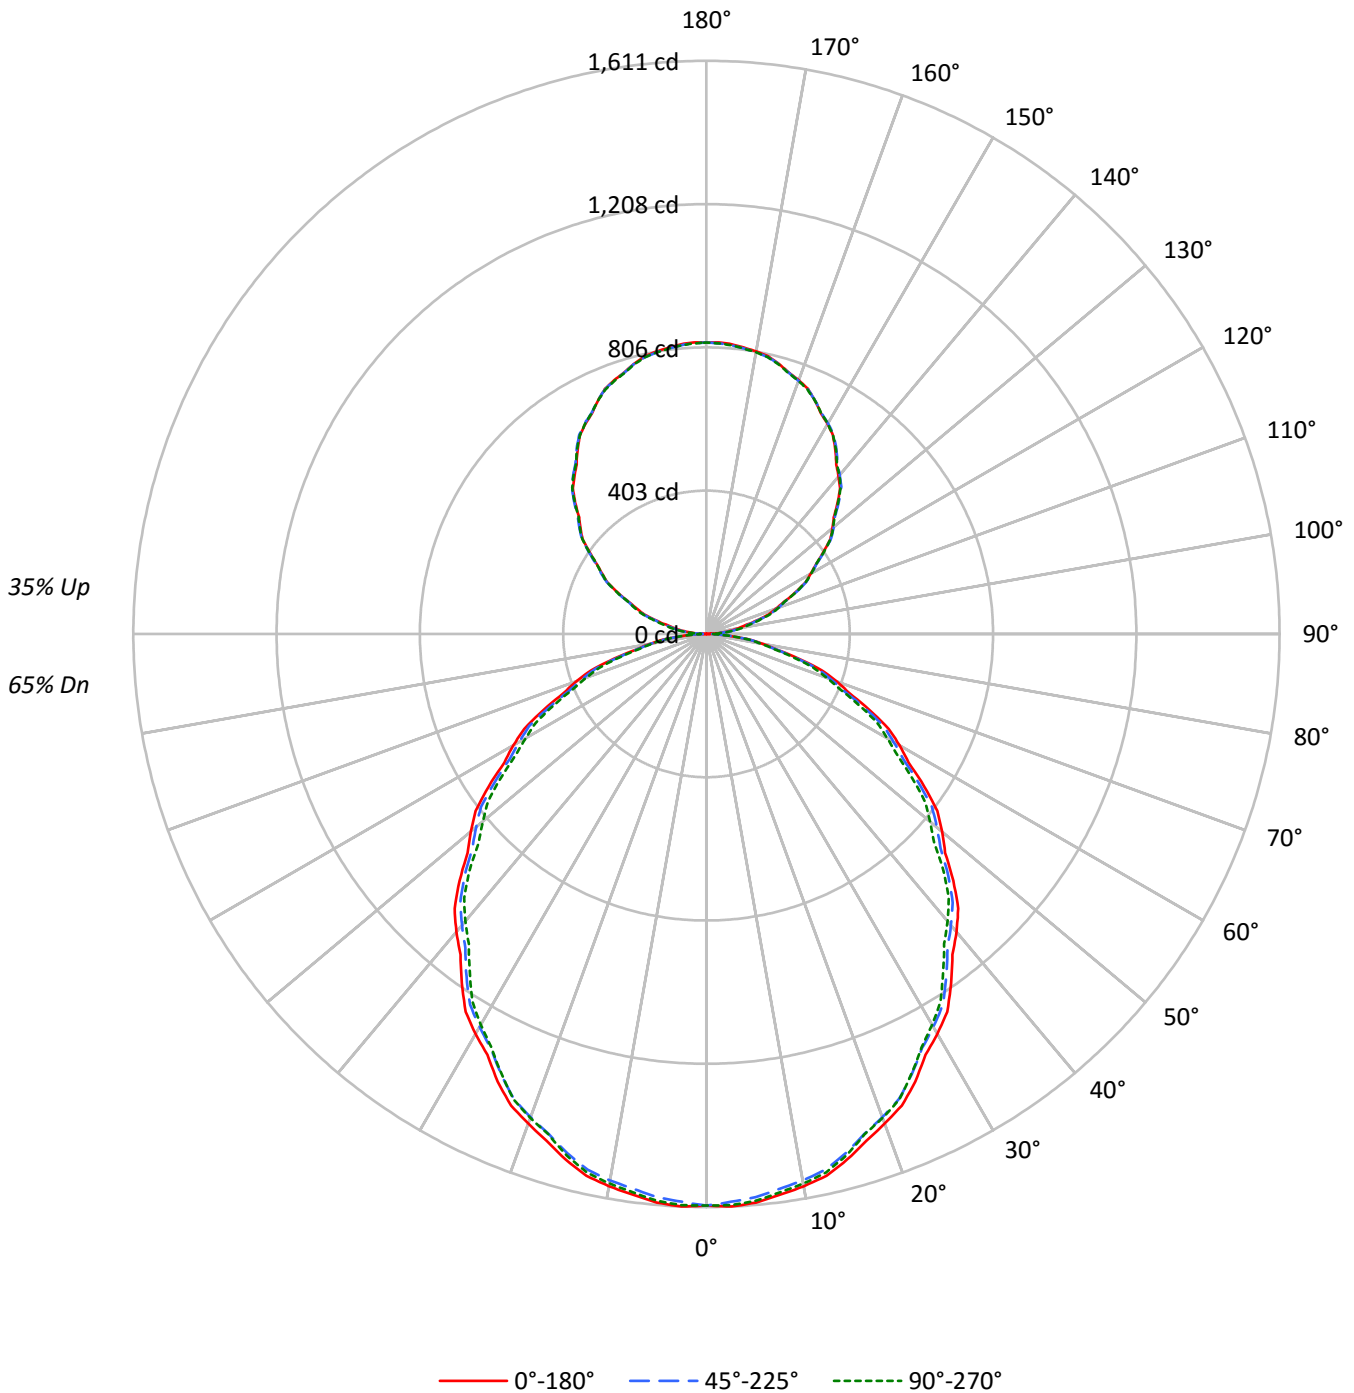



TEST NUMBER: P333320-930

CATALOG NUMBER: S125DIP-S1270D810U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	91	91	91	80	80	80	70	70	70	65
1	101	97	93	89	95	91	87	84	80	78	75	70	68	67	61	60	59	54
2	92	84	78	73	86	79	74	69	70	66	62	62	58	56	54	52	49	45
3	84	74	67	60	78	70	63	58	62	57	52	55	50	47	48	45	42	38
4	77	66	57	51	72	62	55	49	55	49	45	49	44	40	43	39	36	33
5	71	59	50	44	66	55	48	42	49	43	39	44	39	35	39	35	32	29
6	65	53	44	38	61	50	42	37	45	38	34	40	35	31	35	31	28	25
7	60	48	39	34	56	45	38	32	40	34	30	36	31	27	32	28	25	22
8	56	43	35	30	52	41	34	29	37	31	26	33	28	24	29	25	22	20
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	27	23	20	18
10	49	36	29	24	46	35	28	23	31	26	22	28	23	20	25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10377	10377	10377
5°	10400	10301	10367
10°	10337	10228	10287
15°	10224	10105	10148
20°	10065	9933	9950
25°	9892	9728	9719
30°	9679	9508	9461
35°	9451	9270	9140
40°	9217	9012	8884
45°	8963	8777	8603
50°	8685	8493	8238
55°	8417	8173	7944
60°	8094	7848	7569
65°	7713	7459	7207
70°	7345	7009	6770
75°	6692	6470	6248
80°	5954	5861	5720
85°	5187	5276	4987



TEST NUMBER: P333320-930

CATALOG NUMBER: S125DIP-S1270D810U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	151.5	2.3
10°-20°	427.9	6.6
20°-30°	631.9	9.8
30°-40°	737.3	11.4
40°-50°	740.5	11.4
50°-60°	650.0	10.0
60°-70°	484.3	7.5
70°-80°	276.9	4.3
80°-90°	82.4	1.3
90°-100°	54.9	0.8
100°-110°	162.0	2.5
110°-120°	274.4	4.2
120°-130°	361.2	5.6
130°-140°	404.7	6.3
140°-150°	396.7	6.1
150°-160°	333.1	5.2
160°-170°	221.5	3.4
170°-180°	77.5	1.2
0°-30°	1211.3	18.7
0°-40°	1948.6	30.1
0°-60°	3339.1	51.6
0°-90°	4182.8	64.7
90°-120°	491.4	7.6
90°-150°	1653.9	25.6
90°-180°	2286.0	35.3
0°-180°	6468.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1607	1607	1607	1607	1607	
5°	1604	1601	1589	1600	1599	152
15°	1529	1525	1511	1517	1518	431
25°	1388	1381	1365	1367	1364	638
35°	1199	1193	1176	1169	1159	749
45°	981	976	961	946	942	756
55°	748	743	726	715	706	667
65°	505	501	488	477	472	501
75°	268	266	259	255	250	286
85°	70	71	71	70	67	78
90°	1	6	10	13	15	6
95°	41	43	49	53	55	44
105°	145	149	152	156	158	155
115°	275	277	279	278	277	272
125°	401	405	405	404	404	359
135°	522	525	526	526	523	402
145°	632	634	636	636	634	395
155°	723	723	724	726	723	333
165°	786	785	786	788	784	222
175°	817	815	815	818	814	78
180°	819	819	819	819	819	



TEST NUMBER: P333320-930

CATALOG NUMBER: S125DIP-S1270D810U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7
2.5°	1610.8	1610.1	1609.5	1608.7	1608.1	1606.6	1604.3	1602.1	1599.9	1597.6	1599.9
5°	1604.2	1603.6	1603.0	1602.5	1601.9	1600.3	1597.4	1594.6	1591.8	1588.9	1591.5
7.5°	1589.4	1588.9	1588.3	1587.7	1587.1	1585.3	1582.3	1579.2	1576.1	1573.0	1575.4
10°	1576.2	1575.6	1575.1	1574.5	1573.9	1572.1	1569.0	1565.9	1562.8	1559.7	1562.0
12.5°	1559.9	1558.9	1558.0	1556.9	1555.9	1554.0	1551.0	1548.2	1545.3	1542.4	1544.3
15°	1529.2	1528.4	1527.5	1526.6	1525.8	1523.8	1520.7	1517.6	1514.5	1511.4	1512.8
17.5°	1493.9	1492.6	1491.3	1490.1	1488.9	1486.6	1483.4	1480.2	1477.0	1473.7	1475.5
20°	1464.4	1463.8	1463.2	1462.6	1462.1	1460.0	1456.3	1452.6	1448.9	1445.3	1447.2
22.5°	1434.8	1433.9	1432.8	1431.8	1430.8	1428.6	1425.1	1421.7	1418.2	1414.8	1416.1
25°	1388.1	1386.7	1385.3	1383.9	1382.4	1379.9	1376.2	1372.6	1368.9	1365.2	1365.8
27.5°	1333.4	1332.6	1331.7	1330.9	1330.1	1327.7	1324.0	1320.1	1316.4	1312.6	1312.7
30°	1297.9	1297.0	1296.2	1295.3	1294.5	1291.9	1287.7	1283.4	1279.2	1275.0	1274.4
32.5°	1259.2	1257.9	1256.6	1255.3	1254.0	1251.5	1247.7	1243.9	1240.1	1236.3	1235.3
35°	1198.7	1197.6	1196.5	1195.3	1194.2	1191.6	1187.6	1183.7	1179.7	1175.8	1174.4
37.5°	1135.9	1134.5	1133.1	1131.6	1130.2	1127.6	1124.0	1120.2	1116.5	1112.8	1110.7
40°	1093.2	1091.8	1090.4	1088.9	1087.5	1084.8	1080.9	1076.9	1073.0	1069.0	1066.5
42.5°	1047.4	1046.3	1045.1	1043.8	1042.7	1040.1	1036.2	1032.2	1028.3	1024.3	1022.0
45°	981.3	980.2	979.1	978.0	976.8	974.5	971.2	967.8	964.4	961.0	957.6
47.5°	910.1	910.2	910.3	910.3	910.4	908.3	904.3	900.3	896.2	892.1	888.7
50°	864.4	863.6	862.7	861.9	861.0	858.8	855.5	852.1	848.7	845.3	841.6
52.5°	817.6	817.0	816.4	815.7	815.1	813.0	809.3	805.8	802.2	798.5	795.3
55°	747.5	746.6	745.8	744.9	744.0	741.7	737.7	733.8	729.8	725.9	723.3
57.5°	673.4	673.0	672.5	672.1	671.6	669.8	666.4	663.1	659.7	656.4	653.1
60°	626.6	625.6	624.4	623.3	622.2	620.0	616.9	613.8	610.7	607.6	604.8
62.5°	577.9	577.0	576.1	575.1	574.2	572.5	569.8	567.1	564.5	561.8	558.8
65°	504.7	504.1	503.5	503.0	502.4	500.5	497.4	494.3	491.2	488.1	485.6
67.5°	433.7	432.5	431.4	430.2	429.0	427.2	424.9	422.6	420.3	417.9	415.8
70°	389.0	387.6	386.1	384.7	383.4	381.3	378.8	376.3	373.7	371.2	369.5
72.5°	340.1	339.2	338.3	337.3	336.3	335.0	333.4	331.7	330.1	328.5	326.5
75°	268.2	267.7	267.1	266.5	266.0	265.0	263.6	262.1	260.7	259.3	258.4
77.5°	201.9	201.6	201.4	201.2	201.0	200.5	199.7	198.9	198.0	197.3	196.8
80°	160.1	160.1	160.1	160.1	160.1	159.9	159.3	158.7	158.2	157.6	157.4
82.5°	123.5	123.1	122.6	122.2	121.7	121.5	121.3	121.2	121.2	121.0	120.5
85°	70.0	70.2	70.4	70.8	71.0	71.2	71.2	71.2	71.2	71.2	70.9
87.5°	27.6	27.8	28.0	28.3	28.5	28.6	28.5	28.5	28.5	28.5	28.6
90°	0.7	1.8	2.9	4.1	5.1	6.2	7.3	8.2	9.2	10.2	10.9
92.5°	15.4	16.2	17.0	17.8	18.6	19.6	20.8	22.0	23.2	24.5	25.4
95°	41.4	41.7	42.0	42.3	42.6	43.5	44.8	46.2	47.7	49.1	50.1
97.5°	68.9	69.0	69.1	69.2	69.3	70.4	72.3	74.3	76.2	78.2	79.1
100°	89.3	89.3	89.3	89.3	89.3	90.2	92.0	93.8	95.7	97.5	98.8
102.5°	111.2	111.8	112.3	112.9	113.5	114.2	115.1	116.1	117.0	118.0	119.4
105°	145.4	146.1	146.8	147.5	148.2	149.0	149.9	150.7	151.5	152.4	153.2
107.5°	183.1	183.8	184.5	185.2	186.0	186.6	187.3	187.9	188.6	189.2	189.6
110°	209.1	209.9	210.5	211.2	212.0	212.5	213.0	213.4	213.8	214.2	214.7



TEST NUMBER: P333320-930

CATALOG NUMBER: S125DIP-S1270D810U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	235.6	236.0	236.4	236.8	237.1	237.6	238.1	238.6	239.2	239.7	239.9
115°	274.8	275.3	275.9	276.5	277.0	277.4	277.8	278.0	278.3	278.6	278.4
117.5°	314.1	314.3	314.5	314.8	315.0	315.4	315.6	315.8	316.1	316.3	316.4
120°	338.5	339.2	340.0	340.6	341.4	341.8	341.9	342.1	342.2	342.3	342.3
122.5°	365.0	365.3	365.6	365.8	366.1	366.4	366.7	367.1	367.5	367.9	367.7
125°	401.0	401.9	402.7	403.6	404.4	404.9	405.0	405.2	405.3	405.4	405.2
127.5°	439.3	439.8	440.2	440.7	441.2	441.5	441.6	441.8	442.1	442.2	442.1
130°	462.2	462.9	463.7	464.3	465.0	465.5	465.8	466.1	466.4	466.7	466.5
132.5°	485.2	486.3	487.5	488.6	489.8	490.3	490.3	490.2	490.2	490.2	490.0
135°	521.5	522.4	523.2	524.1	524.9	525.4	525.5	525.7	525.8	525.9	525.9
137.5°	555.7	556.5	557.3	558.2	559.0	559.5	559.9	560.1	560.4	560.8	560.9
140°	577.6	578.3	579.0	579.8	580.4	581.0	581.4	581.9	582.3	582.7	583.0
142.5°	599.6	600.1	600.7	601.3	601.9	602.5	603.0	603.6	604.1	604.6	604.8
145°	631.8	632.3	632.9	633.5	634.1	634.5	635.0	635.4	635.9	636.3	636.3
147.5°	661.6	661.9	662.3	662.6	662.8	663.2	663.6	663.9	664.2	664.6	664.9
150°	681.5	681.3	681.3	681.1	680.9	681.2	681.8	682.3	682.9	683.5	683.5
152.5°	697.8	698.1	698.2	698.5	698.6	698.9	699.0	699.3	699.5	699.8	700.1
155°	722.9	722.9	722.9	722.9	722.9	723.0	723.2	723.3	723.4	723.6	724.1
157.5°	745.4	745.1	744.8	744.4	744.1	744.0	744.2	744.4	744.4	744.6	745.2
160°	758.6	758.2	757.8	757.4	756.9	756.8	756.9	757.1	757.2	757.4	758.0
162.5°	770.4	770.1	769.7	769.5	769.2	769.0	769.0	769.1	769.1	769.2	769.8
165°	786.1	785.8	785.5	785.2	785.0	784.9	785.0	785.1	785.3	785.5	786.0
167.5°	799.3	798.7	798.2	797.6	797.0	796.8	796.8	796.8	796.8	796.8	797.6
170°	806.5	805.9	805.4	804.8	804.2	803.9	803.9	803.9	803.9	803.9	804.8
172.5°	811.5	811.0	810.4	809.8	809.3	809.0	809.0	809.0	809.0	809.0	809.8
175°	817.3	816.8	816.2	815.6	815.1	814.7	814.7	814.7	814.7	814.7	815.6
177.5°	820.3	819.8	819.4	818.9	818.4	818.2	818.1	817.9	817.8	817.7	818.4
180°	819.2	819.2	819.2	819.2	819.2	819.2	819.2	819.2	819.2	819.2	819.2



TEST NUMBER: P333320-930

CATALOG NUMBER: S125DIP-S1270D810U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7	1606.7
2.5°	1602.1	1604.3	1606.6	1607.6	1607.4	1607.2	1607.0	1606.7
5°	1594.0	1596.6	1599.1	1600.3	1599.9	1599.7	1599.4	1599.1
7.5°	1577.8	1580.4	1582.8	1584.0	1583.7	1583.4	1583.1	1582.8
10°	1564.2	1566.5	1568.7	1569.7	1569.5	1569.1	1568.9	1568.6
12.5°	1546.1	1547.8	1549.6	1550.5	1550.5	1550.4	1550.4	1550.3
15°	1514.3	1515.6	1517.0	1517.8	1517.8	1517.8	1517.8	1517.8
17.5°	1477.2	1479.0	1480.7	1480.9	1479.5	1478.1	1476.7	1475.3
20°	1449.3	1451.2	1453.2	1453.5	1452.0	1450.7	1449.3	1447.8
22.5°	1417.4	1418.7	1420.0	1420.2	1419.2	1418.2	1417.2	1416.3
25°	1366.4	1366.9	1367.5	1367.3	1366.5	1365.6	1364.8	1363.9
27.5°	1312.8	1313.0	1313.0	1312.6	1311.8	1311.0	1310.1	1309.3
30°	1273.8	1273.3	1272.7	1272.0	1271.1	1270.3	1269.4	1268.6
32.5°	1234.3	1233.3	1232.2	1230.9	1229.5	1227.9	1226.4	1224.9
35°	1173.0	1171.6	1170.2	1168.3	1166.0	1163.8	1161.6	1159.3
37.5°	1108.6	1106.5	1104.4	1102.7	1101.4	1100.1	1098.8	1097.5
40°	1064.0	1061.4	1058.8	1057.2	1056.3	1055.5	1054.6	1053.8
42.5°	1019.7	1017.3	1015.0	1013.3	1011.9	1010.6	1009.3	1008.0
45°	954.2	950.8	947.5	945.3	944.4	943.6	942.7	941.9
47.5°	885.2	881.7	878.3	875.6	873.6	871.6	869.7	867.7
50°	838.0	834.3	830.6	827.8	825.8	823.9	821.9	819.9
52.5°	792.1	788.9	785.6	782.9	780.7	778.5	776.3	774.1
55°	720.7	718.2	715.7	713.4	711.4	709.5	707.4	705.5
57.5°	649.9	646.6	643.4	641.2	640.1	639.0	637.9	636.8
60°	601.9	599.2	596.3	593.9	591.9	590.0	588.0	586.0
62.5°	555.7	552.7	549.7	547.4	545.8	544.3	542.7	541.3
65°	483.1	480.5	477.9	476.1	475.0	473.9	472.7	471.6
67.5°	413.7	411.5	409.4	408.0	407.2	406.6	405.9	405.2
70°	367.8	366.1	364.4	363.0	361.8	360.7	359.6	358.5
72.5°	324.7	322.7	320.8	319.3	318.1	317.0	315.8	314.7
75°	257.6	256.7	255.9	254.9	253.8	252.7	251.5	250.4
77.5°	196.2	195.8	195.3	194.6	193.8	193.0	192.2	191.4
80°	157.0	156.8	156.5	156.0	155.5	154.9	154.3	153.8
82.5°	120.0	119.5	119.0	118.7	118.5	118.5	118.3	118.2
85°	70.6	70.4	70.0	69.6	69.1	68.5	67.9	67.3
87.5°	28.8	28.9	29.0	28.9	28.5	28.2	27.8	27.5
90°	11.6	12.3	13.0	13.6	14.0	14.4	14.8	15.3
92.5°	26.3	27.3	28.2	28.9	29.2	29.4	29.8	30.1
95°	51.0	52.1	53.1	53.7	54.0	54.3	54.5	54.8
97.5°	80.1	81.0	81.9	82.4	82.6	82.8	83.0	83.2
100°	100.1	101.3	102.6	103.5	103.7	104.0	104.3	104.5
102.5°	120.7	122.1	123.5	124.4	124.8	125.1	125.6	126.0
105°	154.1	154.9	155.8	156.4	156.9	157.3	157.7	158.1
107.5°	190.0	190.5	190.9	191.1	191.1	191.0	191.0	191.0
110°	215.1	215.5	215.9	216.1	215.9	215.7	215.6	215.5



TEST NUMBER: P333320-930

CATALOG NUMBER: S125DIP-S1270D810U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	240.1	240.3	240.5	240.5	240.2	239.9	239.7	239.5
115°	278.3	278.2	278.0	277.9	277.8	277.6	277.4	277.4
117.5°	316.6	316.7	316.8	316.6	316.0	315.4	314.9	314.3
120°	342.3	342.3	342.3	342.1	341.5	341.0	340.4	339.8
122.5°	367.6	367.5	367.4	367.1	366.6	366.2	365.7	365.3
125°	404.9	404.6	404.3	404.1	404.0	403.8	403.7	403.6
127.5°	441.9	441.7	441.6	441.4	441.2	440.8	440.6	440.3
130°	466.4	466.3	466.1	465.9	465.6	465.3	465.0	464.7
132.5°	489.8	489.7	489.6	489.3	488.9	488.5	488.1	487.7
135°	525.9	525.9	525.9	525.7	525.1	524.6	524.0	523.4
137.5°	561.1	561.3	561.4	561.2	560.4	559.8	559.1	558.3
140°	583.3	583.5	583.8	583.6	582.9	582.2	581.5	580.8
142.5°	605.0	605.1	605.3	605.0	604.3	603.6	602.9	602.2
145°	636.3	636.3	636.3	636.0	635.6	635.2	634.8	634.3
147.5°	665.2	665.6	665.9	665.6	664.6	663.7	662.8	661.8
150°	683.5	683.5	683.5	683.3	683.0	682.7	682.4	682.2
152.5°	700.4	700.7	701.1	701.0	700.5	700.0	699.5	699.0
155°	724.7	725.3	725.9	725.8	725.0	724.4	723.7	722.9
157.5°	745.8	746.3	746.9	746.7	745.8	744.9	743.9	743.0
160°	758.6	759.0	759.6	759.6	758.9	758.1	757.4	756.8
162.5°	770.5	771.2	771.8	771.8	770.9	770.1	769.3	768.5
165°	786.6	787.2	787.7	787.6	786.7	785.9	785.0	784.2
167.5°	798.5	799.3	800.2	800.1	799.3	798.4	797.5	796.6
170°	805.6	806.5	807.3	807.2	806.2	805.3	804.3	803.3
172.5°	810.7	811.5	812.4	812.4	811.5	810.7	809.8	808.9
175°	816.4	817.3	818.2	818.1	817.1	816.1	815.1	814.2
177.5°	819.0	819.7	820.4	820.4	819.5	818.8	818.0	817.2
180°	819.2	819.2	819.2	819.2	819.2	819.2	819.2	819.2

(END OF REPORT)