

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333186-930

Luminaire Tested: **S125DIP-S610D810U930-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333186-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S610D810U930-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 810 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4410.4 lumens
Efficiency: N/A
Efficacy: 114.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 38.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333186-930

CATALOG NUMBER: S125DIP-S610D810U930-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

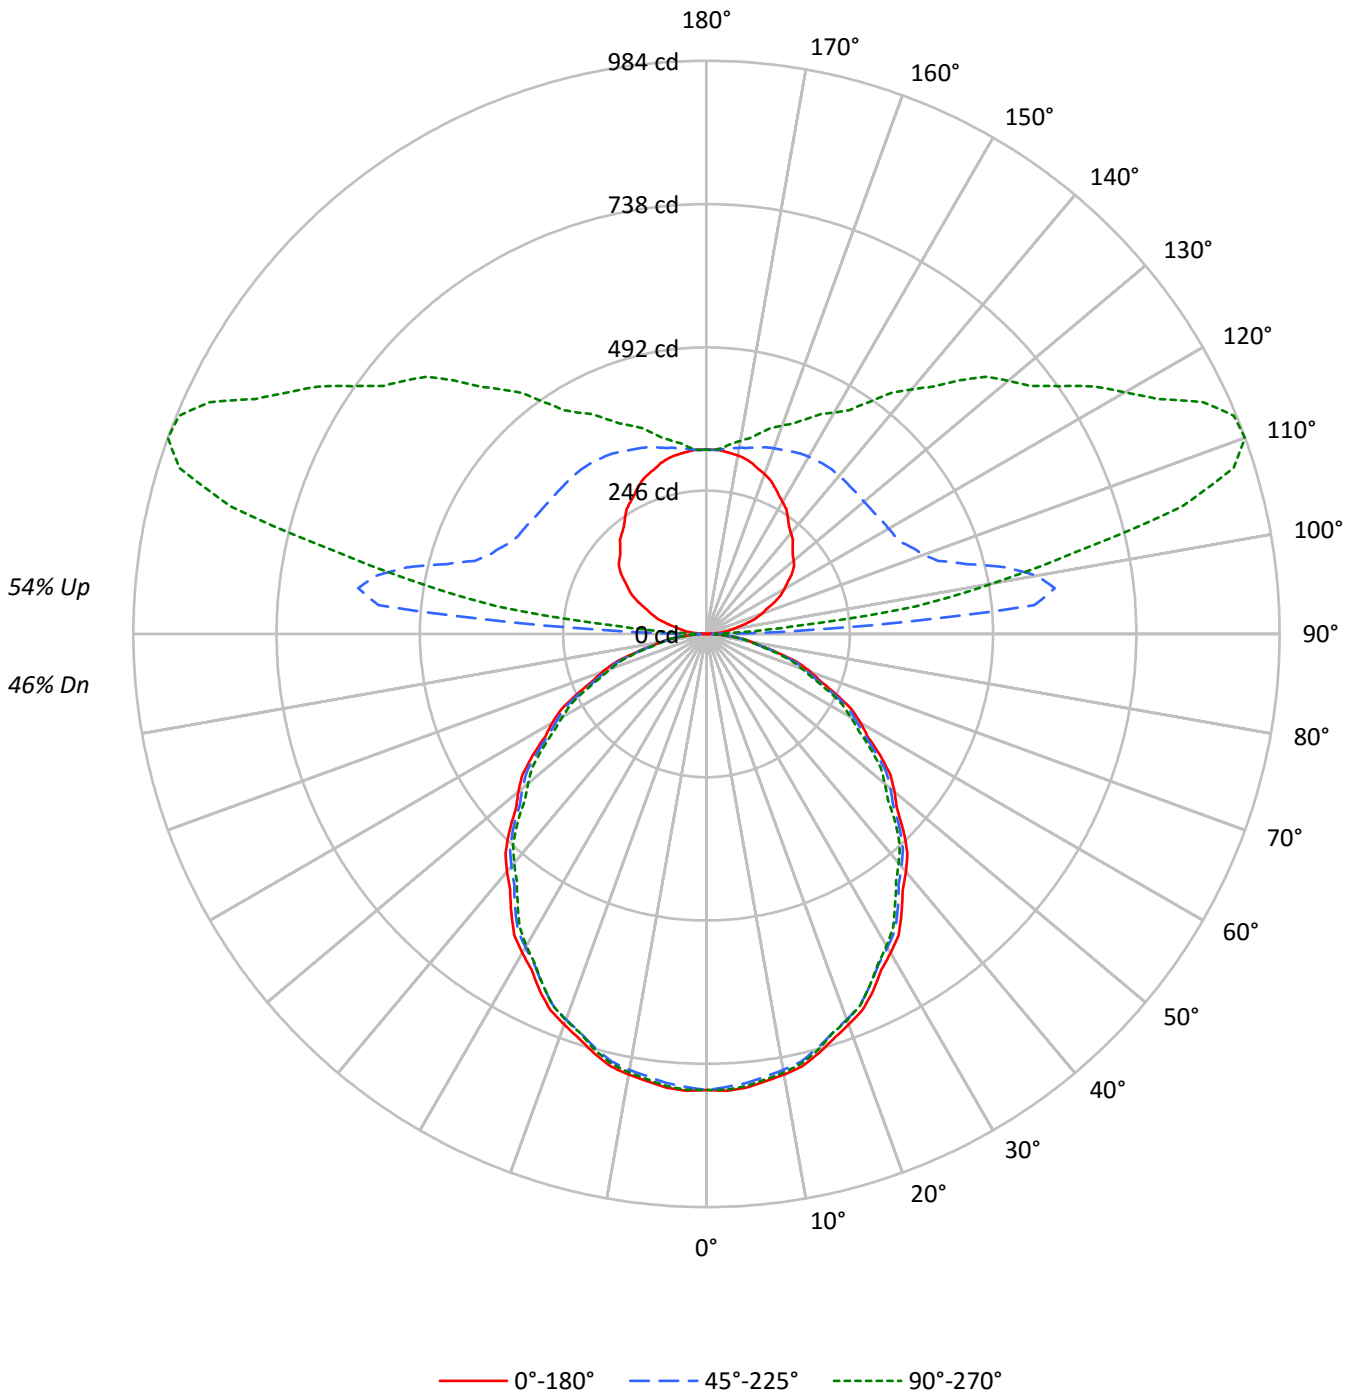



TEST NUMBER: P333186-930

CATALOG NUMBER: S125DIP-S610D810U930-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53	46
1	97	93	89	85	89	85	82	79	71	69	67	58	57	55	46	45	44	39
2	88	81	75	69	81	74	69	65	62	58	55	51	48	46	41	39	37	32
3	80	71	64	58	73	65	59	54	55	50	46	45	42	39	36	34	32	27
4	74	63	55	49	67	58	51	46	49	43	39	40	36	33	32	30	27	24
5	67	56	48	42	62	52	44	39	44	38	34	36	32	29	29	26	24	20
6	62	50	42	36	57	46	39	34	39	34	30	33	28	25	26	23	21	18
7	57	45	37	32	53	42	35	30	36	30	26	30	25	22	24	21	19	16
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	17	14
9	50	37	30	25	45	35	28	23	30	24	21	25	21	18	20	17	15	13
10	46	34	27	22	42	32	25	21	27	22	19	23	19	16	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5057	5057	5057
5°	5068	5020	5052
10°	5037	4985	5013
15°	4983	4924	4945
20°	4904	4841	4849
25°	4821	4741	4737
30°	4716	4633	4610
35°	4606	4518	4454
40°	4491	4392	4330
45°	4369	4277	4192
50°	4233	4140	4015
55°	4102	3983	3871
60°	3945	3825	3689
65°	3758	3636	3512
70°	3580	3416	3299
75°	3261	3154	3047
80°	2901	2856	2786
85°	2527	2571	2438



TEST NUMBER: P333186-930

CATALOG NUMBER: S125DIP-S610D810U930-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	73.8	1.7
10°-20°	208.5	4.7
20°-30°	307.9	7.0
30°-40°	359.3	8.1
40°-50°	360.9	8.2
50°-60°	316.8	7.2
60°-70°	236.0	5.4
70°-80°	135.0	3.1
80°-90°	41.0	0.9
90°-100°	229.2	5.2
100°-110°	492.7	11.2
110°-120°	462.4	10.5
120°-130°	374.7	8.5
130°-140°	300.7	6.8
140°-150°	226.9	5.1
150°-160°	159.7	3.6
160°-170°	94.2	2.1
170°-180°	30.6	0.7
0°-30°	590.3	13.4
0°-40°	949.6	21.5
0°-60°	1627.2	36.9
0°-90°	2039.2	46.2
90°-120°	1184.3	26.9
90°-150°	2086.6	47.3
90°-180°	2371.0	53.8
0°-180°	4410.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	783	783	783	783	783	
5°	782	780	774	780	779	74
15°	745	743	736	739	740	210
25°	676	673	665	666	665	311
35°	584	581	573	570	565	365
45°	478	476	468	461	459	368
55°	364	362	354	348	344	325
65°	246	244	238	232	230	244
75°	131	129	126	124	122	139
85°	34	35	35	34	33	38
90°	1	6	10	13	15	3
95°	21	62	565	256	150	22
105°	72	101	462	910	845	76
115°	129	155	371	800	941	127
125°	178	209	356	636	741	158
135°	209	252	353	533	616	162
145°	244	279	354	441	486	153
155°	278	299	346	390	407	128
165°	304	312	332	352	357	85
175°	316	316	318	322	321	30
180°	316	316	316	316	316	



TEST NUMBER: P333186-930

CATALOG NUMBER: S125DIP-S610D810U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	783.0	783.0	783.0	783.0	783.0	783.0	783.0	783.0	783.0	783.0	783.0
2.5°	785.0	784.6	784.3	784.0	783.7	782.9	781.9	780.7	779.7	778.5	779.7
5°	781.8	781.5	781.2	780.9	780.6	779.8	778.4	777.1	775.7	774.3	775.6
7.5°	774.5	774.3	774.0	773.7	773.5	772.6	771.0	769.6	768.0	766.5	767.7
10°	768.1	767.8	767.6	767.3	767.0	766.1	764.6	763.1	761.6	760.1	761.2
12.5°	760.2	759.7	759.2	758.7	758.2	757.2	755.9	754.5	753.0	751.6	752.5
15°	745.2	744.8	744.4	744.0	743.6	742.6	741.1	739.6	738.0	736.5	737.2
17.5°	728.0	727.4	726.8	726.2	725.5	724.5	722.9	721.3	719.7	718.2	719.0
20°	713.6	713.3	713.1	712.8	712.5	711.5	709.7	707.9	706.1	704.3	705.3
22.5°	699.2	698.7	698.2	697.7	697.2	696.2	694.5	692.8	691.1	689.4	690.1
25°	676.5	675.7	675.1	674.4	673.7	672.5	670.7	668.9	667.1	665.3	665.6
27.5°	649.8	649.4	649.0	648.6	648.2	647.0	645.1	643.4	641.5	639.7	639.7
30°	632.4	632.0	631.6	631.2	630.8	629.6	627.5	625.4	623.4	621.3	621.0
32.5°	613.6	613.0	612.4	611.7	611.1	609.8	608.1	606.2	604.3	602.5	602.0
35°	584.2	583.6	583.0	582.5	582.0	580.7	578.8	576.8	574.9	573.0	572.3
37.5°	553.5	552.9	552.2	551.5	550.8	549.5	547.7	545.9	544.0	542.3	541.3
40°	532.7	532.1	531.3	530.7	529.9	528.6	526.8	524.8	522.9	521.0	519.8
42.5°	510.5	509.9	509.2	508.7	508.1	506.9	504.9	503.0	501.1	499.1	498.1
45°	478.3	477.7	477.1	476.5	476.1	474.9	473.3	471.7	469.9	468.3	466.7
47.5°	443.5	443.5	443.6	443.6	443.6	442.6	440.7	438.7	436.8	434.7	433.1
50°	421.3	420.8	420.4	420.0	419.6	418.6	416.9	415.2	413.6	412.0	410.2
52.5°	398.4	398.1	397.9	397.5	397.2	396.2	394.4	392.6	390.9	389.1	387.6
55°	364.3	363.8	363.4	363.0	362.6	361.4	359.5	357.6	355.6	353.7	352.5
57.5°	328.2	328.0	327.8	327.5	327.3	326.4	324.7	323.1	321.5	319.9	318.3
60°	305.4	304.8	304.3	303.7	303.2	302.1	300.7	299.1	297.6	296.1	294.7
62.5°	281.6	281.2	280.7	280.3	279.8	279.0	277.7	276.4	275.1	273.8	272.3
65°	245.9	245.6	245.4	245.1	244.8	243.9	242.4	240.9	239.4	237.9	236.6
67.5°	211.3	210.8	210.2	209.6	209.0	208.2	207.1	205.9	204.8	203.7	202.6
70°	189.6	188.9	188.2	187.5	186.8	185.8	184.6	183.4	182.1	180.9	180.0
72.5°	165.8	165.3	164.9	164.4	163.9	163.2	162.5	161.7	160.9	160.0	159.1
75°	130.7	130.4	130.1	129.9	129.6	129.1	128.4	127.8	127.0	126.4	126.0
77.5°	98.4	98.2	98.2	98.0	97.9	97.7	97.3	96.9	96.5	96.1	95.9
80°	78.0	78.0	78.0	78.0	78.0	77.9	77.6	77.4	77.1	76.8	76.6
82.5°	60.3	60.0	59.8	59.5	59.4	59.2	59.1	59.1	59.0	58.9	58.7
85°	34.1	34.2	34.3	34.5	34.7	34.7	34.7	34.7	34.7	34.7	34.6
87.5°	13.5	13.6	13.9	14.1	14.4	14.6	14.6	14.8	14.8	14.9	15.1
90°	0.7	1.3	2.5	3.8	5.1	6.4	7.0	8.3	8.9	10.2	10.8
92.5°	7.7	9.5	14.8	22.7	33.7	52.3	87.1	145.4	208.8	205.5	166.4
95°	21.0	21.7	26.7	33.8	47.8	76.5	144.7	284.9	460.9	564.8	552.7
97.5°	34.9	35.7	39.3	46.3	58.9	79.6	124.7	227.5	411.6	603.2	699.3
100°	44.6	45.9	48.4	55.4	67.6	86.7	123.7	206.5	367.2	575.7	735.0
102.5°	55.4	56.1	58.1	65.6	76.7	95.4	128.2	197.9	333.5	527.2	713.6
105°	72.1	72.1	75.3	81.6	91.8	109.7	137.7	194.4	300.9	462.2	645.1
107.5°	88.4	89.6	92.7	97.9	108.5	124.6	151.7	200.3	287.1	417.4	575.3
110°	100.1	101.3	103.9	109.7	119.2	135.7	161.9	205.9	283.1	396.5	535.5



TEST NUMBER: P333186-930

CATALOG NUMBER: S125DIP-S610D810U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	111.8	113.1	115.1	120.8	130.4	146.5	171.6	213.0	283.1	384.3	505.9
115°	128.7	130.0	132.0	137.7	147.2	163.2	186.8	223.7	284.9	371.0	473.6
117.5°	144.1	146.0	148.1	153.8	164.6	180.0	202.4	236.0	289.2	364.5	454.4
120°	154.3	156.2	158.7	164.4	175.3	191.3	213.5	244.2	293.3	361.4	443.7
122.5°	165.0	166.4	168.4	174.1	186.1	201.9	224.3	253.3	296.8	358.9	434.5
125°	178.5	179.8	183.0	188.7	200.8	217.4	238.4	265.8	302.8	355.7	422.0
127.5°	189.1	191.0	195.1	202.4	215.2	231.8	252.1	277.3	309.6	354.2	410.5
130°	195.7	197.6	202.7	211.0	224.4	241.0	260.7	284.9	313.6	353.2	402.9
132.5°	200.8	203.3	209.4	218.7	232.5	249.2	268.9	291.6	318.2	353.2	396.8
135°	209.1	211.7	219.3	229.5	242.9	260.1	279.9	300.9	324.5	353.2	389.5
137.5°	219.6	221.4	228.6	238.8	251.9	269.6	287.6	307.8	330.2	353.9	383.0
140°	225.7	227.6	235.2	245.4	257.6	274.8	293.3	312.3	332.7	354.4	379.9
142.5°	232.8	234.2	241.3	251.5	263.2	279.3	296.8	315.0	334.3	355.0	377.4
145°	243.5	244.8	251.2	260.1	271.6	286.3	302.8	318.7	336.0	354.4	373.6
147.5°	254.7	255.5	261.0	269.3	279.2	292.1	306.6	321.1	336.6	352.8	369.6
150°	261.4	262.6	267.1	275.4	284.3	295.1	309.2	322.5	336.6	351.2	366.6
152.5°	268.5	269.3	273.2	280.5	288.9	298.7	311.7	323.6	336.1	349.2	363.0
155°	277.9	277.9	281.8	288.1	294.5	303.5	314.3	324.5	334.7	345.5	357.0
157.5°	286.3	286.3	289.3	294.7	300.4	307.1	316.4	325.1	333.0	341.7	351.4
160°	292.0	291.3	293.9	298.3	303.5	309.2	317.5	325.1	331.5	339.2	346.8
162.5°	296.5	296.0	298.5	302.4	306.5	311.2	318.5	324.6	330.0	336.1	342.7
165°	303.5	302.1	304.1	307.3	309.8	313.6	318.7	323.8	327.7	331.5	336.6
167.5°	308.0	307.4	308.5	310.3	312.1	314.5	318.7	322.3	324.1	327.0	330.6
170°	311.1	310.5	311.1	312.3	313.6	315.5	318.7	321.3	322.5	324.5	327.0
172.5°	313.2	312.0	312.6	313.9	314.6	315.5	318.2	320.2	320.5	321.4	323.4
175°	315.5	314.3	315.0	315.5	315.5	315.5	317.5	318.7	318.1	318.1	318.7
177.5°	316.7	315.7	315.7	316.2	315.7	315.7	316.7	317.2	316.2	316.2	316.7
180°	316.2	316.2	316.2	316.2	316.2	316.2	316.2	316.2	316.2	316.2	316.2



TEST NUMBER: P333186-930

CATALOG NUMBER: S125DIP-S610D810U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	783.0	783.0	783.0	783.0	783.0	783.0	783.0	783.0
2.5°	780.7	781.9	782.9	783.4	783.3	783.2	783.1	783.0
5°	776.8	778.0	779.3	779.8	779.7	779.6	779.4	779.3
7.5°	768.9	770.1	771.4	771.9	771.8	771.6	771.5	771.4
10°	762.3	763.4	764.5	765.0	764.8	764.7	764.5	764.4
12.5°	753.4	754.3	755.1	755.6	755.5	755.5	755.5	755.5
15°	737.9	738.6	739.3	739.6	739.6	739.6	739.6	739.6
17.5°	719.9	720.7	721.6	721.7	721.0	720.3	719.7	718.9
20°	706.2	707.2	708.2	708.3	707.6	706.9	706.2	705.6
22.5°	690.7	691.4	692.0	692.1	691.6	691.1	690.6	690.2
25°	665.9	666.1	666.4	666.3	665.9	665.5	665.1	664.7
27.5°	639.8	639.8	639.8	639.7	639.3	638.9	638.5	638.1
30°	620.8	620.5	620.2	619.9	619.5	619.1	618.6	618.2
32.5°	601.5	601.0	600.5	599.9	599.2	598.4	597.6	596.9
35°	571.6	571.0	570.2	569.3	568.3	567.1	566.1	564.9
37.5°	540.2	539.2	538.2	537.4	536.7	536.1	535.5	534.8
40°	518.4	517.2	516.0	515.2	514.8	514.4	514.0	513.6
42.5°	496.9	495.8	494.6	493.7	493.1	492.5	491.9	491.2
45°	465.0	463.3	461.7	460.6	460.2	459.8	459.4	459.0
47.5°	431.4	429.7	428.0	426.7	425.7	424.8	423.8	422.8
50°	408.4	406.6	404.8	403.4	402.4	401.5	400.5	399.6
52.5°	386.0	384.4	382.9	381.6	380.5	379.4	378.3	377.2
55°	351.2	350.0	348.8	347.6	346.7	345.7	344.8	343.8
57.5°	316.7	315.1	313.5	312.4	311.9	311.4	310.9	310.4
60°	293.3	292.0	290.6	289.4	288.5	287.5	286.5	285.6
62.5°	270.8	269.4	267.8	266.8	266.0	265.2	264.5	263.7
65°	235.4	234.2	232.9	232.0	231.5	230.9	230.4	229.8
67.5°	201.6	200.6	199.5	198.8	198.4	198.1	197.8	197.5
70°	179.2	178.4	177.6	176.9	176.3	175.8	175.2	174.7
72.5°	158.2	157.3	156.3	155.6	155.0	154.5	153.9	153.4
75°	125.6	125.1	124.7	124.3	123.7	123.1	122.6	122.1
77.5°	95.6	95.4	95.1	94.8	94.4	94.1	93.7	93.3
80°	76.6	76.4	76.2	76.1	75.7	75.5	75.3	74.9
82.5°	58.5	58.2	58.0	57.8	57.8	57.7	57.6	57.6
85°	34.4	34.2	34.2	33.9	33.7	33.3	33.1	32.9
87.5°	15.2	15.3	15.4	15.6	15.3	15.2	15.1	14.8
90°	11.5	12.1	12.7	14.0	14.0	14.0	14.7	14.7
92.5°	113.0	82.0	61.7	52.3	44.1	42.6	41.7	40.7
95°	458.4	361.4	283.1	229.5	184.3	165.1	160.0	149.8
97.5°	682.7	614.7	538.3	463.8	424.4	388.7	370.2	362.1
100°	784.1	752.8	687.2	620.9	576.9	531.0	507.4	497.3
102.5°	818.2	837.6	806.0	761.2	714.1	681.4	655.8	648.2
105°	798.1	885.5	913.5	906.5	886.1	865.0	852.3	844.7
107.5°	726.2	842.8	914.8	948.0	958.4	958.2	954.1	948.9
110°	673.2	794.3	884.2	938.3	967.0	979.2	983.7	983.7



TEST NUMBER: P333186-930

CATALOG NUMBER: S125DIP-S610D810U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	631.4	746.3	837.2	901.2	943.1	963.8	974.9	979.6
115°	578.9	677.7	765.0	834.5	884.2	914.8	932.6	940.9
117.5°	544.9	630.1	705.3	769.1	818.8	850.4	868.1	873.2
120°	526.5	603.1	673.2	729.3	776.4	807.1	824.3	829.3
122.5°	512.8	583.7	646.1	698.7	740.8	768.8	786.0	790.6
125°	492.8	557.8	613.3	659.2	694.9	721.0	735.0	741.4
127.5°	472.4	533.0	584.8	627.8	660.1	683.2	696.5	699.3
130°	459.6	515.8	565.4	606.9	638.8	659.8	672.5	676.4
132.5°	446.9	499.4	544.5	584.4	616.3	637.3	649.1	653.4
135°	430.3	474.3	515.1	551.4	579.4	600.5	612.0	615.8
137.5°	416.3	451.8	485.8	516.6	541.8	560.8	571.4	575.7
140°	408.6	438.5	467.9	494.6	518.3	534.8	544.4	547.6
142.5°	402.0	427.4	452.6	475.8	495.9	509.9	518.9	521.5
145°	393.3	413.1	432.8	450.0	465.4	476.2	483.2	485.8
147.5°	385.1	401.2	416.4	429.4	441.5	450.2	454.3	455.4
150°	380.6	394.6	406.7	418.2	427.8	435.4	438.0	438.5
152.5°	375.4	388.0	399.1	408.0	416.0	422.2	424.7	425.3
155°	367.9	378.1	386.9	394.0	400.3	404.8	406.7	407.3
157.5°	360.2	368.6	375.4	381.0	386.0	389.6	391.4	391.3
160°	355.1	361.4	367.9	372.3	376.7	379.9	381.2	380.6
162.5°	349.4	355.3	360.7	364.6	368.1	370.7	371.0	370.9
165°	341.7	346.2	350.0	353.2	355.7	357.0	357.0	357.0
167.5°	334.3	337.2	340.1	342.4	343.7	344.9	344.4	344.2
170°	330.2	332.2	334.0	335.3	336.6	337.2	337.2	336.6
172.5°	325.6	327.5	329.0	329.7	330.0	331.1	330.1	329.5
175°	320.7	320.7	322.0	322.0	322.0	322.5	321.3	320.7
177.5°	317.2	317.7	317.7	317.7	317.2	317.7	316.2	316.2
180°	316.2	316.2	316.2	316.2	316.2	316.2	316.2	316.2

(END OF REPORT)