

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333589-930

Luminaire Tested: **S125RDIP-S1090D590U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333589-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIP-S1090D590U930-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 590 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5370.9 lumens  
Efficiency: N/A  
Efficacy: 110.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 48.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333589-930

CATALOG NUMBER: S125RDIP-S1090D590U930-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

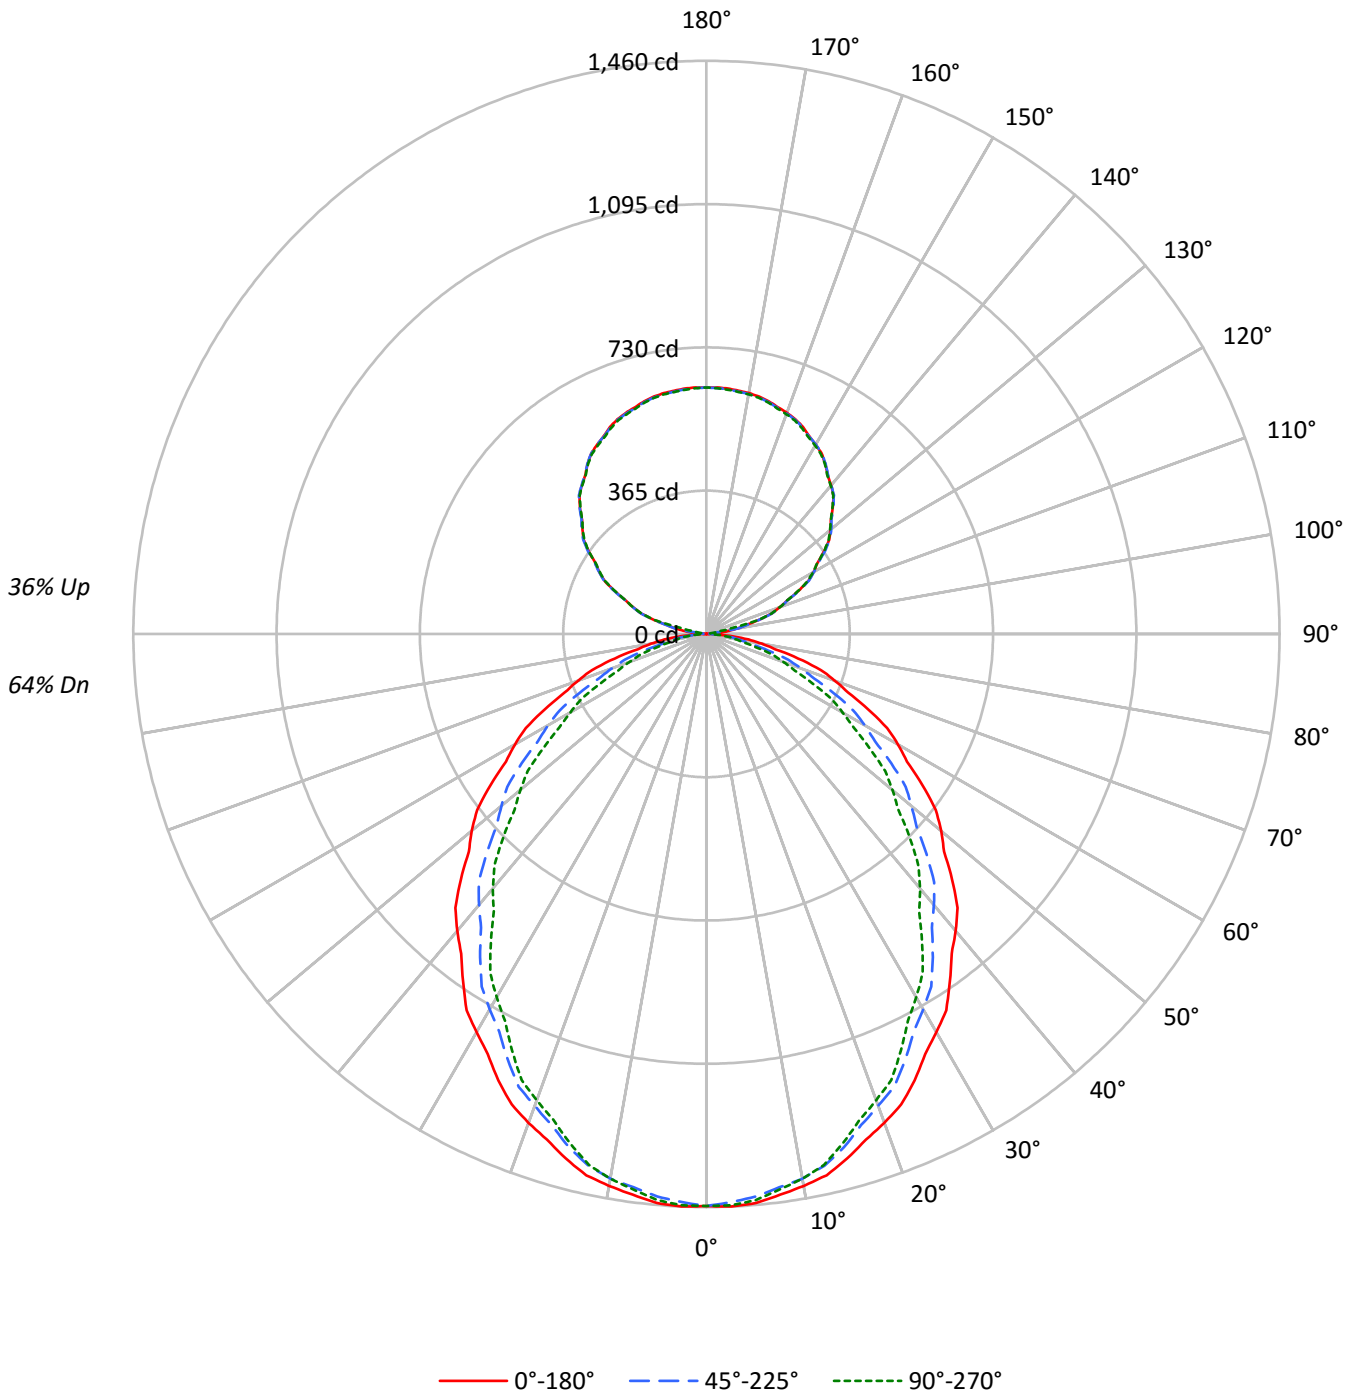



TEST NUMBER: P333589-930

CATALOG NUMBER: S125RDIP-S1090D590U930-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	91	91	91	80	80	80	69	69	69	64
1	101	97	93	90	95	91	88	85	80	78	76	71	69	67	62	60	59	55
2	92	85	79	74	87	80	75	70	71	67	63	62	59	56	54	52	50	46
3	84	75	68	62	79	71	64	59	63	58	53	55	51	48	49	45	43	39
4	77	67	59	52	73	63	56	50	56	50	46	50	45	41	44	40	37	34
5	71	60	51	45	67	56	49	43	50	44	40	45	40	36	39	36	33	30
6	66	54	45	39	62	51	43	38	45	39	35	40	36	32	36	32	29	26
7	61	49	40	35	57	46	39	33	41	35	31	37	32	28	33	29	26	23
8	57	44	36	31	53	42	35	30	38	32	28	34	29	25	30	26	23	21
9	53	40	33	28	50	38	32	27	35	29	25	31	26	23	28	24	21	19
10	49	37	30	25	47	35	29	24	32	26	22	29	24	21	26	22	19	17

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	9412	9412	9412
5°	9433	9326	9383
10°	9362	9239	9239
15°	9250	9052	8978
20°	9108	8790	8685
25°	8941	8533	8345
30°	8733	8232	7970
35°	8521	7923	7550
40°	8323	7599	7136
45°	8082	7238	6685
50°	7840	6845	6215
55°	7560	6469	5713
60°	7279	6013	5174
65°	6946	5483	4557
70°	6567	4823	3928
75°	6041	4065	3266
80°	5322	3195	2741
85°	4483	2608	2445



TEST NUMBER: P333589-930

CATALOG NUMBER: S125RDIP-S1090D590U930-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	137.0	2.6
10°-20°	382.9	7.1
20°-30°	555.3	10.3
30°-40°	632.9	11.8
40°-50°	616.9	11.5
50°-60°	519.3	9.7
60°-70°	364.0	6.8
70°-80°	187.1	3.5
80°-90°	48.6	0.9
90°-100°	22.8	0.4
100°-110°	140.5	2.6
110°-120°	254.9	4.7
120°-130°	327.1	6.1
130°-140°	351.8	6.6
140°-150°	330.3	6.1
150°-160°	267.1	5.0
160°-170°	172.8	3.2
170°-180°	59.6	1.1
0°-30°	1075.3	20.0
0°-40°	1708.1	31.8
0°-60°	2844.3	53.0
0°-90°	3443.9	64.1
90°-120°	418.2	7.8
90°-150°	1427.4	26.6
90°-180°	1927.0	35.9
0°-180°	5370.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1457	1457	1457	1457	1457	
5°	1455	1450	1438	1449	1447	138
15°	1384	1376	1354	1352	1343	390
25°	1255	1237	1198	1183	1171	577
35°	1081	1053	1005	974	958	676
45°	885	851	792	750	732	682
55°	671	635	574	527	507	600
65°	454	416	359	316	298	450
75°	242	208	163	140	131	256
85°	60	42	35	34	33	68
90°	0	4	7	10	11	4
95°	26	24	7	10	10	34
105°	137	138	139	139	138	145
115°	257	259	260	258	255	254
125°	365	368	368	367	365	326
135°	455	458	457	456	454	351
145°	528	529	529	529	526	330
155°	582	579	580	581	577	268
165°	614	611	611	614	610	173
175°	628	625	625	628	625	60
180°	628	628	628	628	628	



TEST NUMBER: P333589-930

CATALOG NUMBER: S125RDIP-S1090D590U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1457.3	1457.3	1457.3	1457.3	1457.3	1457.3	1457.3	1457.3	1457.3	1457.3	1457.3
2.5°	1459.9	1459.3	1458.7	1458.1	1457.5	1456.3	1454.3	1452.4	1450.4	1448.5	1450.4
5°	1455.1	1454.1	1453.1	1452.1	1451.2	1449.3	1446.6	1443.9	1441.2	1438.5	1441.0
7.5°	1440.7	1439.8	1438.8	1437.9	1437.0	1434.9	1431.7	1428.5	1425.2	1422.0	1423.8
10°	1427.5	1426.8	1426.0	1425.3	1424.6	1422.5	1419.1	1415.7	1412.3	1408.8	1409.6
12.5°	1412.5	1411.6	1410.7	1409.7	1408.8	1406.1	1401.5	1396.9	1392.3	1387.6	1388.2
15°	1383.5	1382.0	1380.5	1379.1	1377.6	1374.4	1369.2	1364.1	1358.9	1353.8	1353.6
17.5°	1350.7	1348.4	1346.2	1343.9	1341.7	1337.3	1330.9	1324.5	1317.9	1311.5	1310.3
20°	1325.2	1322.7	1320.3	1317.8	1315.4	1310.3	1302.4	1294.6	1286.8	1279.0	1277.7
22.5°	1297.0	1294.5	1292.1	1289.6	1287.2	1281.9	1273.7	1265.4	1257.2	1249.0	1246.6
25°	1254.7	1251.1	1247.4	1243.7	1240.1	1233.7	1224.7	1215.6	1206.6	1197.5	1194.3
27.5°	1206.3	1201.8	1197.3	1192.9	1188.5	1181.5	1171.7	1162.0	1152.3	1142.6	1138.2
30°	1171.1	1166.4	1161.8	1157.2	1152.5	1145.0	1134.7	1124.5	1114.2	1103.9	1098.3
32.5°	1136.7	1131.3	1125.8	1120.5	1115.0	1107.1	1096.6	1086.1	1075.6	1065.2	1059.0
35°	1080.8	1075.0	1069.1	1063.2	1057.4	1048.9	1037.9	1026.9	1015.9	1004.9	997.8
37.5°	1026.0	1018.9	1011.7	1004.6	997.4	988.2	976.8	965.5	954.1	942.8	934.3
40°	987.2	979.9	972.6	965.2	957.9	948.4	936.6	924.9	913.1	901.4	892.1
42.5°	946.7	939.2	931.7	924.1	916.6	906.8	894.6	882.6	870.4	858.3	849.4
45°	884.9	877.8	870.7	863.6	856.6	846.3	832.8	819.4	805.9	792.5	782.7
47.5°	820.8	813.3	805.8	798.4	790.9	780.4	766.9	753.3	739.7	726.2	716.1
50°	780.3	772.3	764.2	756.1	748.0	737.0	723.1	709.1	695.2	681.3	671.0
52.5°	736.3	728.1	719.7	711.5	703.3	692.5	679.4	666.2	653.1	639.9	628.8
55°	671.4	663.6	655.7	647.9	640.1	629.3	615.6	601.9	588.2	574.5	563.5
57.5°	605.8	597.5	589.1	580.7	572.3	561.6	548.4	535.2	522.0	508.7	498.0
60°	563.5	555.0	546.4	537.9	529.3	518.4	505.2	492.0	478.7	465.5	454.8
62.5°	518.6	510.5	502.3	494.1	485.9	475.2	461.8	448.3	435.0	421.5	411.6
65°	454.5	446.2	437.9	429.6	421.3	410.7	397.7	384.7	371.8	358.8	349.0
67.5°	390.9	382.6	374.3	366.0	357.7	347.3	334.8	322.5	310.1	297.6	288.7
70°	347.8	339.5	331.2	322.9	314.5	304.3	292.0	279.8	267.6	255.4	247.8
72.5°	305.6	297.4	289.3	281.2	273.0	263.3	251.8	240.4	228.9	217.5	210.5
75°	242.1	234.8	227.5	220.1	212.8	204.0	193.7	183.4	173.2	162.9	157.5
77.5°	179.2	173.3	167.5	161.6	155.7	148.6	140.5	132.2	124.0	115.8	112.0
80°	143.1	137.2	131.3	125.5	119.6	113.2	106.4	99.5	92.7	85.9	83.6
82.5°	107.9	102.6	97.3	92.0	86.7	81.8	77.0	72.3	67.7	62.9	62.0
85°	60.5	56.1	51.7	47.3	42.9	40.1	38.9	37.7	36.4	35.2	35.0
87.5°	20.4	19.2	17.9	16.7	15.5	14.9	14.8	14.8	14.8	14.7	14.8
90°	0.5	1.3	2.1	2.9	3.8	4.6	5.3	6.0	6.7	7.4	8.0
92.5°	7.2	6.6	6.0	5.5	4.8	4.9	5.5	6.2	6.8	7.4	8.0
95°	26.5	26.2	25.9	25.6	25.3	23.2	19.2	15.3	11.3	7.4	8.0
97.5°	55.4	55.9	56.5	57.0	57.6	54.0	46.2	38.4	30.7	22.9	20.0
100°	77.7	78.0	78.3	78.6	78.9	79.2	79.7	80.1	80.6	81.0	65.6
102.5°	100.4	100.8	101.2	101.6	101.9	102.2	102.5	102.8	103.1	103.3	100.4
105°	136.7	137.1	137.6	138.0	138.4	138.6	138.6	138.6	138.6	138.6	138.6
107.5°	174.6	174.6	174.6	174.6	174.6	174.6	174.8	175.0	175.3	175.5	175.5
110°	199.1	199.1	199.1	199.1	199.1	199.2	199.4	199.6	199.8	200.0	199.7



TEST NUMBER: P333589-930

CATALOG NUMBER: S125RDIP-S1090D590U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	222.2	222.4	222.7	222.9	223.1	223.3	223.5	223.6	223.7	223.8	223.5
115°	256.7	257.3	257.8	258.3	258.9	259.2	259.3	259.3	259.4	259.6	259.2
117.5°	292.6	292.5	292.5	292.5	292.5	292.7	293.1	293.5	293.8	294.2	293.8
120°	315.0	314.8	314.7	314.6	314.5	314.6	315.0	315.2	315.5	315.8	315.6
122.5°	334.6	335.0	335.4	335.8	336.2	336.5	336.6	336.8	336.9	337.0	336.9
125°	365.2	365.9	366.6	367.3	368.0	368.4	368.4	368.4	368.4	368.4	368.0
127.5°	394.3	394.8	395.3	395.8	396.3	396.6	396.5	396.5	396.4	396.3	396.1
130°	412.1	412.6	413.2	413.7	414.2	414.5	414.6	414.7	414.8	414.9	414.6
132.5°	430.0	430.6	431.2	431.8	432.4	432.6	432.4	432.1	431.9	431.7	431.6
135°	455.4	456.0	456.6	457.2	457.9	458.1	457.9	457.6	457.5	457.2	457.1
137.5°	478.7	479.3	479.8	480.4	480.9	481.1	480.9	480.7	480.5	480.3	480.4
140°	494.0	494.2	494.4	494.6	494.8	494.9	494.8	494.6	494.6	494.5	494.6
142.5°	507.8	507.9	508.0	508.2	508.3	508.4	508.6	508.7	508.8	509.0	509.0
145°	528.0	528.2	528.4	528.6	528.8	528.9	528.9	528.9	528.9	528.9	529.0
147.5°	545.6	545.6	545.5	545.5	545.4	545.5	545.6	545.8	545.8	546.0	546.2
150°	556.8	556.6	556.4	556.2	556.0	556.0	556.2	556.4	556.6	556.8	557.0
152.5°	567.6	567.1	566.7	566.2	565.7	565.7	565.8	566.1	566.2	566.5	566.7
155°	581.5	580.8	580.2	579.6	578.9	578.8	578.9	579.2	579.4	579.6	579.9
157.5°	592.2	591.7	591.4	591.0	590.7	590.5	590.5	590.5	590.5	590.6	590.9
160°	599.6	599.0	598.3	597.7	597.1	596.9	597.0	597.0	597.1	597.3	597.7
162.5°	605.5	605.0	604.3	603.6	603.1	602.8	602.9	603.0	603.1	603.2	603.8
165°	613.5	612.9	612.3	611.7	611.1	610.8	610.9	611.0	611.1	611.2	611.8
167.5°	619.5	618.9	618.2	617.6	616.9	616.7	616.8	616.9	616.9	617.1	617.8
170°	622.9	622.2	621.4	620.7	620.0	619.6	619.7	619.9	620.0	620.0	620.9
172.5°	625.1	624.4	623.6	622.9	622.2	621.9	622.1	622.3	622.5	622.6	623.4
175°	627.5	626.9	626.2	625.7	625.0	624.8	624.8	625.0	625.1	625.2	626.0
177.5°	628.6	628.1	627.6	627.1	626.6	626.4	626.5	626.6	626.6	626.7	627.4
180°	627.5	627.5	627.5	627.5	627.5	627.5	627.5	627.5	627.5	627.5	627.5



TEST NUMBER: P333589-930

CATALOG NUMBER: S125RDIP-S1090D590U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1457.3	1457.3	1457.3	1457.3	1457.3	1457.3	1457.3	1457.3
2.5°	1452.4	1454.3	1456.3	1457.1	1456.9	1456.8	1456.5	1456.4
5°	1443.4	1445.9	1448.3	1449.3	1448.8	1448.3	1447.8	1447.3
7.5°	1425.5	1427.2	1428.9	1429.5	1428.9	1428.4	1427.8	1427.3
10°	1410.3	1411.0	1411.8	1411.8	1411.0	1410.3	1409.6	1408.8
12.5°	1388.8	1389.3	1389.8	1389.5	1388.4	1387.3	1386.2	1385.0
15°	1353.3	1353.1	1352.8	1351.6	1349.4	1347.2	1345.0	1342.8
17.5°	1309.0	1307.8	1306.6	1305.1	1303.3	1301.5	1299.7	1297.9
20°	1276.5	1275.3	1274.1	1272.4	1270.2	1268.0	1265.8	1263.6
22.5°	1244.2	1241.8	1239.4	1237.3	1235.5	1233.7	1231.8	1230.0
25°	1191.2	1188.0	1184.8	1181.9	1179.2	1176.5	1173.8	1171.1
27.5°	1133.8	1129.4	1124.9	1121.4	1118.8	1116.1	1113.5	1111.0
30°	1092.7	1087.0	1081.4	1077.5	1075.3	1073.1	1070.9	1068.7
32.5°	1052.8	1046.5	1040.3	1035.8	1033.1	1030.3	1027.4	1024.7
35°	990.7	983.6	976.5	971.3	967.8	964.4	961.0	957.6
37.5°	925.8	917.3	908.7	902.9	899.5	896.2	892.8	889.5
40°	882.8	873.5	864.2	858.1	855.2	852.2	849.3	846.4
42.5°	840.5	831.5	822.6	816.0	811.7	807.5	803.2	798.8
45°	772.9	763.1	753.3	746.6	742.9	739.2	735.6	731.9
47.5°	706.0	695.9	685.9	678.8	674.7	670.7	666.7	662.6
50°	660.7	650.4	640.2	633.2	629.6	625.9	622.2	618.6
52.5°	617.8	606.7	595.7	588.3	584.7	581.0	577.3	573.6
55°	552.5	541.5	530.5	523.0	519.1	515.2	511.3	507.4
57.5°	487.2	476.5	465.7	458.5	455.1	451.6	448.1	444.7
60°	444.0	433.3	422.5	415.3	411.6	408.0	404.3	400.6
62.5°	401.6	391.6	381.6	374.8	371.1	367.5	363.8	360.1
65°	339.2	329.5	319.7	312.9	309.2	305.6	301.9	298.2
67.5°	279.7	270.8	261.8	255.8	252.9	250.0	247.0	244.1
70°	240.2	232.6	225.0	219.7	216.8	213.9	210.9	208.0
72.5°	203.5	196.5	189.5	185.0	183.0	181.1	179.1	177.2
75°	152.1	146.8	141.4	137.8	136.1	134.4	132.6	130.9
77.5°	108.3	104.5	100.7	98.2	96.9	95.6	94.4	93.1
80°	81.4	79.2	77.0	75.7	75.2	74.7	74.2	73.7
82.5°	60.9	59.8	58.9	58.2	57.9	57.6	57.3	57.0
85°	34.7	34.5	34.2	34.0	33.8	33.5	33.3	33.0
87.5°	14.9	15.0	15.1	15.1	14.9	14.8	14.7	14.6
90°	8.5	9.0	9.5	9.9	10.3	10.5	10.8	11.2
92.5°	8.5	9.0	9.5	9.9	9.9	10.1	10.3	10.4
95°	8.5	9.0	9.5	9.8	9.8	9.8	9.8	9.8
97.5°	17.0	14.1	11.3	9.8	9.8	9.8	9.8	9.8
100°	50.1	34.7	19.3	11.4	11.0	10.6	10.2	9.8
102.5°	97.4	94.5	91.6	86.7	79.6	72.6	65.6	58.5
105°	138.6	138.6	138.6	138.6	138.4	138.4	138.3	138.1
107.5°	175.5	175.5	175.5	175.4	175.1	174.8	174.5	174.1
110°	199.4	199.1	198.8	198.7	198.8	198.9	199.0	199.1





TEST NUMBER: P333589-930

CATALOG NUMBER: S125RDIP-S1090D590U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	223.1	222.7	222.3	222.0	221.8	221.7	221.6	221.4
115°	258.7	258.3	257.9	257.4	256.7	256.2	255.5	254.9
117.5°	293.2	292.6	292.1	291.7	291.5	291.1	290.9	290.7
120°	315.4	315.2	315.0	314.6	314.1	313.6	313.1	312.6
122.5°	336.6	336.5	336.2	335.8	335.3	334.6	334.0	333.5
125°	367.6	367.1	366.7	366.4	366.1	365.7	365.5	365.2
127.5°	395.8	395.7	395.4	394.9	394.1	393.4	392.6	391.8
130°	414.3	414.0	413.7	413.3	412.8	412.2	411.7	411.2
132.5°	431.5	431.5	431.5	431.1	430.6	430.1	429.6	429.1
135°	456.8	456.6	456.4	456.0	455.4	454.8	454.1	453.6
137.5°	480.4	480.5	480.5	480.2	479.7	479.2	478.7	478.1
140°	494.9	495.0	495.3	495.0	494.5	493.8	493.3	492.6
142.5°	509.1	509.1	509.2	508.8	508.3	507.6	507.0	506.4
145°	529.1	529.2	529.3	529.0	528.4	527.8	527.2	526.5
147.5°	546.3	546.4	546.5	546.2	545.4	544.7	544.0	543.2
150°	557.2	557.4	557.6	557.3	556.5	555.6	554.8	554.0
152.5°	566.9	567.1	567.3	567.0	566.3	565.6	564.8	564.0
155°	580.2	580.5	580.8	580.6	579.8	578.9	578.1	577.2
157.5°	591.3	591.6	591.9	591.7	590.8	590.0	589.1	588.3
160°	598.1	598.5	598.9	598.7	597.9	597.0	596.2	595.4
162.5°	604.4	605.0	605.5	605.4	604.5	603.6	602.7	601.7
165°	612.5	613.1	613.7	613.6	612.8	612.0	611.1	610.3
167.5°	618.6	619.3	620.0	620.0	619.1	618.1	617.2	616.2
170°	621.7	622.6	623.4	623.3	622.4	621.4	620.5	619.6
172.5°	624.1	624.9	625.7	625.6	624.6	623.7	622.7	621.8
175°	626.8	627.6	628.5	628.4	627.5	626.6	625.7	624.7
177.5°	627.9	628.5	629.1	629.0	628.4	627.7	627.0	626.4
180°	627.5	627.5	627.5	627.5	627.5	627.5	627.5	627.5

(END OF REPORT)