

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333639-930

Luminaire Tested: **S125RDIP-S1270D1205U930-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333639-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S1270D1205U930-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1205 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7502.3 lumens
Efficiency: N/A
Efficacy: 104.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333639-930

CATALOG NUMBER: S125RDIP-S1270D1205U930-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

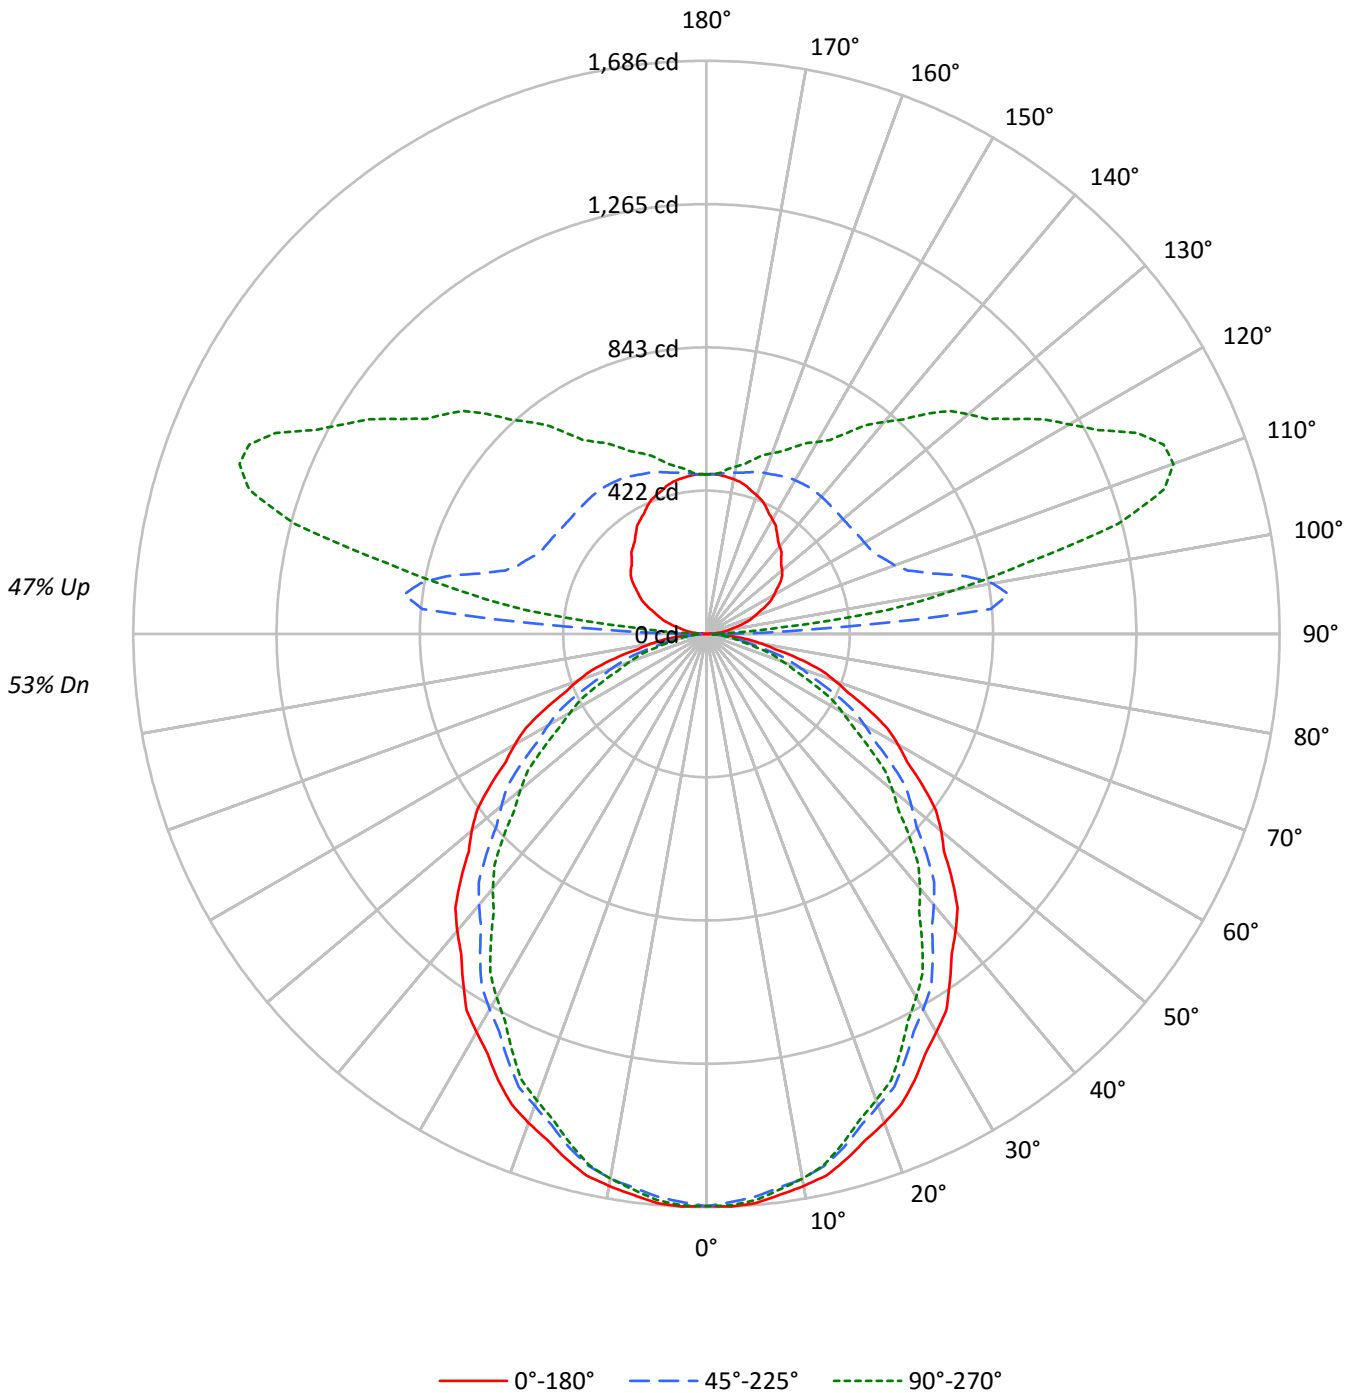



TEST NUMBER: P333639-930

CATALOG NUMBER: S125RDIP-S1270D1205U930-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53
1	99	94	91	87	91	88	84	81	75	73	70	63	62	60	52	51	50	45
2	90	83	77	72	83	77	72	67	66	62	59	56	53	50	46	44	43	38
3	82	73	66	60	76	68	61	56	58	53	50	49	46	43	41	39	37	33
4	75	65	57	51	70	60	53	48	52	47	42	44	40	37	37	34	32	28
5	69	58	50	44	64	54	47	41	47	41	37	40	35	32	33	30	28	25
6	64	52	44	38	59	48	41	36	42	36	32	36	32	28	30	27	24	22
7	59	47	39	33	55	44	37	32	38	33	28	33	28	25	28	24	22	19
8	55	43	35	30	51	40	33	28	35	29	25	30	26	22	26	22	20	17
9	51	39	32	26	47	37	30	25	32	27	23	28	23	20	24	20	18	16
10	48	36	29	24	44	34	27	23	30	24	20	26	21	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10869	10869	10869
5°	10895	10771	10836
10°	10812	10670	10670
15°	10683	10454	10369
20°	10519	10152	10030
25°	10326	9855	9638
30°	10086	9508	9205
35°	9842	9150	8719
40°	9613	8777	8241
45°	9334	8360	7721
50°	9055	7905	7178
55°	8731	7472	6598
60°	8407	6945	5977
65°	8023	6333	5265
70°	7585	5569	4538
75°	6977	4694	3773
80°	6148	3686	3169
85°	5187	3016	2831



TEST NUMBER: P333639-930

CATALOG NUMBER: S125RDIP-S1270D1205U930-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	158.3	2.1
10°-20°	442.3	5.9
20°-30°	641.3	8.5
30°-40°	730.9	9.7
40°-50°	712.5	9.5
50°-60°	599.7	8.0
60°-70°	420.4	5.6
70°-80°	216.1	2.9
80°-90°	57.2	0.8
90°-100°	340.6	4.5
100°-110°	732.2	9.8
110°-120°	687.1	9.2
120°-130°	556.9	7.4
130°-140°	446.9	6.0
140°-150°	337.2	4.5
150°-160°	237.4	3.2
160°-170°	139.9	1.9
170°-180°	45.5	0.6
0°-30°	1241.9	16.6
0°-40°	1972.8	26.3
0°-60°	3284.9	43.8
0°-90°	3978.6	53.0
90°-120°	1759.9	23.5
90°-150°	3100.9	41.3
90°-180°	3524.0	47.0
0°-180°	7502.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1683	1683	1683	1683	1683	
5°	1680	1675	1661	1673	1672	159
15°	1598	1589	1564	1562	1551	450
25°	1449	1428	1383	1367	1352	666
35°	1248	1216	1161	1125	1106	781
45°	1022	983	915	866	845	788
55°	775	733	664	608	586	693
65°	525	480	414	365	344	520
75°	280	241	188	161	151	296
85°	70	48	41	39	38	79
90°	1	9	15	20	22	5
95°	31	92	839	381	223	33
105°	107	150	687	1352	1255	113
115°	191	231	551	1188	1398	188
125°	265	311	529	945	1102	235
135°	311	374	525	792	915	241
145°	362	414	527	656	722	227
155°	413	444	514	580	605	190
165°	451	463	493	522	530	127
175°	469	469	473	478	476	45
180°	470	470	470	470	470	



TEST NUMBER: P333639-930

CATALOG NUMBER: S125RDIP-S1270D1205U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1683.0	1683.0	1683.0	1683.0	1683.0	1683.0	1683.0	1683.0	1683.0	1683.0	1683.0
2.5°	1686.0	1685.4	1684.7	1684.0	1683.3	1681.9	1679.6	1677.3	1675.1	1672.8	1675.1
5°	1680.5	1679.4	1678.2	1677.1	1675.9	1673.8	1670.7	1667.6	1664.5	1661.4	1664.2
7.5°	1663.9	1662.9	1661.8	1660.7	1659.6	1657.3	1653.5	1649.8	1646.1	1642.3	1644.3
10°	1648.7	1647.8	1647.0	1646.2	1645.3	1642.9	1638.9	1635.0	1631.0	1627.1	1627.9
12.5°	1631.4	1630.4	1629.2	1628.2	1627.1	1623.9	1618.6	1613.3	1607.9	1602.6	1603.3
15°	1597.8	1596.1	1594.5	1592.8	1591.1	1587.2	1581.3	1575.4	1569.5	1563.5	1563.3
17.5°	1559.9	1557.4	1554.8	1552.2	1549.6	1544.5	1537.1	1529.6	1522.2	1514.7	1513.3
20°	1530.5	1527.6	1524.8	1522.0	1519.1	1513.2	1504.2	1495.2	1486.1	1477.1	1475.7
22.5°	1497.9	1495.1	1492.2	1489.5	1486.6	1480.5	1471.0	1461.5	1452.0	1442.5	1439.7
25°	1449.1	1444.9	1440.6	1436.4	1432.2	1424.8	1414.4	1403.9	1393.4	1383.0	1379.3
27.5°	1393.2	1388.0	1382.9	1377.8	1372.6	1364.5	1353.2	1342.1	1330.9	1319.7	1314.6
30°	1352.5	1347.1	1341.7	1336.4	1331.1	1322.4	1310.5	1298.7	1286.8	1275.0	1268.4
32.5°	1312.9	1306.6	1300.3	1294.0	1287.8	1278.6	1266.5	1254.4	1242.3	1230.2	1223.0
35°	1248.3	1241.5	1234.7	1227.9	1221.2	1211.4	1198.7	1186.0	1173.3	1160.6	1152.3
37.5°	1185.0	1176.7	1168.5	1160.3	1151.9	1141.3	1128.2	1115.1	1102.0	1088.8	1079.0
40°	1140.2	1131.7	1123.2	1114.8	1106.4	1095.3	1081.7	1068.2	1054.6	1041.1	1030.4
42.5°	1093.5	1084.8	1076.0	1067.3	1058.7	1047.3	1033.3	1019.3	1005.3	991.2	981.0
45°	1022.0	1013.8	1005.6	997.4	989.2	977.4	961.8	946.3	930.7	915.3	903.9
47.5°	948.0	939.4	930.7	922.1	913.5	901.3	885.7	870.0	854.4	838.7	827.0
50°	901.2	891.9	882.6	873.3	864.0	851.3	835.1	819.0	802.9	786.8	774.9
52.5°	850.4	840.8	831.3	821.7	812.2	799.8	784.6	769.5	754.2	739.1	726.3
55°	775.4	766.4	757.3	748.3	739.2	726.8	711.0	695.2	679.4	663.6	650.9
57.5°	699.6	690.0	680.3	670.7	661.0	648.6	633.3	618.0	602.8	587.5	575.1
60°	650.9	640.9	631.0	621.2	611.3	598.7	583.4	568.2	552.9	537.7	525.3
62.5°	599.0	589.5	580.1	570.6	561.3	548.8	533.3	517.8	502.3	486.8	475.3
65°	525.0	515.4	505.8	496.2	486.6	474.3	459.3	444.3	429.3	414.4	403.1
67.5°	451.5	441.9	432.3	422.7	413.1	401.1	386.8	372.4	358.1	343.7	333.4
70°	401.7	392.1	382.5	372.8	363.3	351.4	337.3	323.2	309.0	294.9	286.2
72.5°	352.9	343.5	334.1	324.7	315.4	304.0	290.8	277.6	264.4	251.2	243.1
75°	279.6	271.2	262.7	254.2	245.7	235.6	223.7	211.9	200.0	188.1	181.9
77.5°	206.9	200.2	193.4	186.6	179.9	171.7	162.2	152.7	143.2	133.7	129.4
80°	165.3	158.5	151.7	144.9	138.1	130.8	122.9	115.0	107.0	99.1	96.6
82.5°	124.6	118.5	112.3	106.2	100.2	94.4	88.9	83.6	78.1	72.7	71.5
85°	70.0	64.8	59.8	54.6	49.6	46.3	44.9	43.5	42.1	40.7	40.4
87.5°	23.6	22.2	21.0	19.8	18.6	18.0	18.0	18.2	18.1	18.3	18.5
90°	1.0	1.9	3.8	5.7	7.6	9.5	10.4	12.3	13.3	15.2	16.1
92.5°	11.6	14.0	22.0	33.8	50.1	77.7	129.4	216.2	310.4	305.4	247.3
95°	31.2	32.2	39.8	50.2	71.0	113.7	215.1	423.5	684.9	839.4	821.3
97.5°	51.9	53.1	58.4	68.8	87.6	118.2	185.3	338.0	611.6	896.3	1039.3
100°	66.3	68.2	72.0	82.4	100.4	128.8	183.8	307.0	545.7	855.4	1092.3
102.5°	82.3	83.4	86.4	97.6	114.1	141.7	190.6	294.1	495.6	783.4	1060.5
105°	107.0	107.0	111.8	121.2	136.4	163.0	204.6	288.9	447.1	686.8	958.7
107.5°	131.3	133.2	137.7	145.5	161.3	185.1	225.4	297.7	426.6	620.3	854.9
110°	148.7	150.7	154.4	163.0	177.2	201.8	240.6	306.0	420.6	589.2	795.7



TEST NUMBER: P333639-930

CATALOG NUMBER: S125RDIP-S1270D1205U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	166.2	168.0	171.0	179.6	193.8	217.7	255.0	316.6	420.6	571.0	751.8
115°	191.4	193.2	196.1	204.6	218.8	242.6	277.6	332.5	423.5	551.4	703.8
117.5°	214.1	217.0	220.0	228.5	244.6	267.5	300.7	350.7	429.7	541.7	675.2
120°	229.3	232.1	235.9	244.4	260.5	284.2	317.4	362.8	435.8	537.1	659.3
122.5°	245.2	247.3	250.3	258.8	276.5	300.1	333.3	376.5	441.1	533.4	645.7
125°	265.2	267.2	271.9	280.4	298.4	323.0	354.3	395.0	450.0	528.6	627.1
127.5°	281.0	283.8	289.9	300.7	319.8	344.5	374.5	412.1	460.0	526.4	610.1
130°	290.8	293.7	301.3	313.6	333.5	358.1	387.4	423.5	466.1	524.8	598.8
132.5°	298.4	302.0	311.1	325.0	345.6	370.2	399.6	433.3	472.9	524.8	589.6
135°	310.7	314.5	325.9	341.0	360.9	386.5	415.9	447.1	482.2	524.8	578.9
137.5°	326.3	329.1	339.7	354.9	374.4	400.7	427.5	457.4	490.7	525.9	569.2
140°	335.3	338.2	349.6	364.8	382.7	408.3	435.8	464.2	494.5	526.7	564.6
142.5°	345.9	348.1	358.7	373.8	391.1	415.2	441.1	468.0	496.8	527.5	560.8
145°	361.9	363.8	373.2	386.5	403.6	425.3	450.0	473.7	499.3	526.7	555.1
147.5°	378.5	379.7	387.8	400.1	414.9	434.1	455.7	477.1	500.2	524.2	549.3
150°	388.4	390.3	397.0	409.3	422.5	438.6	459.4	479.4	500.2	522.0	544.7
152.5°	399.0	400.1	406.0	416.9	429.3	443.9	463.3	480.9	499.5	518.9	539.4
155°	413.0	413.0	418.7	428.2	437.7	450.9	467.0	482.2	497.3	513.5	530.5
157.5°	425.6	425.3	429.9	438.1	446.4	456.4	470.3	483.1	494.9	507.8	522.2
160°	433.9	432.9	436.8	443.4	450.9	459.4	471.8	483.1	492.6	504.0	515.4
162.5°	440.7	439.8	443.5	449.4	455.5	462.5	473.3	482.4	490.3	499.5	509.3
165°	450.9	449.1	451.9	456.6	460.4	466.1	473.7	481.3	486.9	492.6	500.2
167.5°	457.8	456.8	458.5	461.1	463.8	467.4	473.7	479.0	481.6	486.0	491.3
170°	462.3	461.4	462.3	464.2	466.1	469.0	473.7	477.4	479.4	482.2	486.0
172.5°	465.4	463.7	464.6	466.4	467.6	469.0	472.9	476.0	476.3	477.7	480.7
175°	469.0	467.0	468.0	469.0	469.0	469.0	471.8	473.7	472.7	472.7	473.7
177.5°	470.7	469.1	469.1	469.9	469.1	469.1	470.7	471.4	469.9	469.9	470.7
180°	469.9	469.9	469.9	469.9	469.9	469.9	469.9	469.9	469.9	469.9	469.9



TEST NUMBER: P333639-930

CATALOG NUMBER: S125RDIP-S1270D1205U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1683.0	1683.0	1683.0	1683.0	1683.0	1683.0	1683.0	1683.0
2.5°	1677.3	1679.6	1681.9	1682.9	1682.7	1682.5	1682.2	1682.0
5°	1667.0	1669.9	1672.7	1673.8	1673.2	1672.7	1672.1	1671.5
7.5°	1646.3	1648.3	1650.2	1650.9	1650.2	1649.7	1649.0	1648.5
10°	1628.7	1629.6	1630.4	1630.4	1629.6	1628.7	1627.9	1627.1
12.5°	1603.9	1604.5	1605.2	1604.8	1603.5	1602.2	1600.9	1599.6
15°	1562.9	1562.7	1562.4	1561.0	1558.4	1555.9	1553.3	1550.8
17.5°	1511.9	1510.4	1509.0	1507.3	1505.2	1503.1	1501.0	1498.9
20°	1474.2	1472.8	1471.5	1469.4	1466.9	1464.4	1461.8	1459.3
22.5°	1437.0	1434.2	1431.4	1429.0	1426.9	1424.8	1422.7	1420.7
25°	1375.7	1372.0	1368.3	1364.9	1361.8	1358.7	1355.6	1352.5
27.5°	1309.5	1304.3	1299.2	1295.1	1292.1	1289.1	1286.1	1283.1
30°	1262.0	1255.5	1249.0	1244.5	1241.9	1239.3	1236.8	1234.3
32.5°	1215.9	1208.7	1201.5	1196.3	1193.1	1189.8	1186.7	1183.4
35°	1144.2	1136.0	1127.8	1121.7	1117.8	1113.8	1109.9	1105.9
37.5°	1069.2	1059.4	1049.5	1042.7	1038.9	1035.0	1031.2	1027.4
40°	1019.6	1008.9	998.2	991.1	987.7	984.3	980.9	977.5
42.5°	970.7	960.4	950.1	942.5	937.5	932.5	927.6	922.6
45°	892.6	881.3	870.0	862.3	858.0	853.8	849.5	845.3
47.5°	815.5	803.8	792.1	784.0	779.3	774.6	769.9	765.2
50°	763.1	751.2	739.4	731.3	727.1	722.8	718.6	714.4
52.5°	713.5	700.7	687.9	679.5	675.2	671.0	666.8	662.5
55°	638.1	625.4	612.7	604.1	599.6	595.0	590.5	586.0
57.5°	562.6	550.2	537.8	529.6	525.5	521.5	517.6	513.6
60°	512.8	500.4	488.0	479.6	475.4	471.2	466.9	462.7
62.5°	463.8	452.2	440.8	432.8	428.6	424.4	420.1	415.9
65°	391.8	380.5	369.2	361.4	357.2	352.9	348.7	344.5
67.5°	323.0	312.7	302.4	295.5	292.1	288.7	285.4	281.9
70°	277.4	268.6	259.9	253.8	250.4	247.0	243.6	240.3
72.5°	235.1	227.0	218.8	213.7	211.4	209.2	206.9	204.6
75°	175.7	169.5	163.3	159.1	157.2	155.2	153.3	151.2
77.5°	125.0	120.7	116.3	113.4	111.9	110.5	109.0	107.5
80°	94.1	91.6	88.9	87.4	86.8	86.3	85.8	85.2
82.5°	70.4	69.1	68.0	67.2	66.9	66.5	66.2	65.9
85°	40.1	39.9	39.5	39.3	39.0	38.7	38.4	38.2
87.5°	18.7	18.8	19.1	19.3	19.1	18.8	18.8	18.6
90°	17.0	18.0	18.9	20.9	20.9	20.9	21.8	21.8
92.5°	167.9	121.8	91.7	77.7	65.6	63.3	62.0	60.4
95°	681.1	537.1	420.6	341.0	273.8	245.3	237.8	222.7
97.5°	1014.4	913.5	800.0	689.3	630.7	577.7	550.2	538.1
100°	1165.2	1118.8	1021.2	922.7	857.4	789.1	754.1	738.9
102.5°	1216.0	1244.6	1197.8	1131.1	1061.2	1012.7	974.6	963.3
105°	1186.1	1315.9	1357.6	1347.1	1316.8	1285.6	1266.6	1255.2
107.5°	1079.2	1252.4	1359.4	1408.9	1424.2	1424.1	1417.8	1410.2
110°	1000.4	1180.4	1313.9	1394.5	1437.1	1455.1	1461.8	1461.8



TEST NUMBER: P333639-930

CATALOG NUMBER: S125RDIP-S1270D1205U930-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	938.2	1109.1	1244.2	1339.1	1401.5	1432.4	1448.9	1455.7
115°	860.2	1007.1	1136.8	1240.1	1313.9	1359.4	1385.9	1398.2
117.5°	809.8	936.4	1048.1	1142.9	1216.8	1263.8	1290.1	1297.6
120°	782.5	896.2	1000.4	1083.8	1153.9	1199.3	1224.9	1232.5
122.5°	762.1	867.4	960.3	1038.3	1100.8	1142.5	1168.1	1174.9
125°	732.3	828.9	911.3	979.6	1032.6	1071.5	1092.3	1101.8
127.5°	702.0	792.1	869.1	932.9	981.0	1015.4	1035.1	1039.3
130°	683.1	766.4	840.3	901.9	949.3	980.5	999.5	1005.1
132.5°	664.1	742.2	809.2	868.5	915.9	947.1	964.6	971.0
135°	639.4	704.8	765.5	819.5	861.1	892.4	909.5	915.2
137.5°	618.6	671.5	721.9	767.8	805.0	833.5	849.2	855.4
140°	607.2	651.8	695.4	735.2	770.2	794.8	809.0	813.8
142.5°	597.4	635.1	672.6	707.1	736.9	757.7	771.1	775.1
145°	584.5	613.8	643.3	668.8	691.5	707.7	718.1	721.9
147.5°	572.4	596.2	618.8	638.1	656.2	669.0	675.1	676.8
150°	565.6	586.4	604.4	621.4	635.7	647.0	650.9	651.8
152.5°	558.0	576.6	593.0	606.3	618.2	627.3	631.1	632.1
155°	546.6	561.7	575.0	585.5	594.9	601.5	604.4	605.4
157.5°	535.2	547.7	558.0	566.1	573.5	579.0	581.6	581.5
160°	527.7	537.1	546.6	553.3	559.9	564.6	566.6	565.6
162.5°	519.3	528.1	536.0	541.8	547.0	551.0	551.4	551.1
165°	507.8	514.4	520.1	524.8	528.6	530.5	530.5	530.5
167.5°	496.8	501.2	505.5	508.9	510.8	512.5	511.8	511.6
170°	490.7	493.6	496.4	498.3	500.2	501.2	501.2	500.2
172.5°	483.9	486.7	488.9	490.0	490.3	492.0	490.6	489.6
175°	476.5	476.5	478.4	478.4	478.4	479.4	477.4	476.5
177.5°	471.4	472.1	472.1	472.1	471.4	472.1	469.9	469.9
180°	469.9	469.9	469.9	469.9	469.9	469.9	469.9	469.9

(END OF REPORT)