

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333535-930

Luminaire Tested: **S125RDIP-S610D810U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333535-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIP-S610D810U930-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 810 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4580.7 lumens  
Efficiency: N/A  
Efficacy: 119.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 38.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333535-930

CATALOG NUMBER: S125RDIP-S610D810U930-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

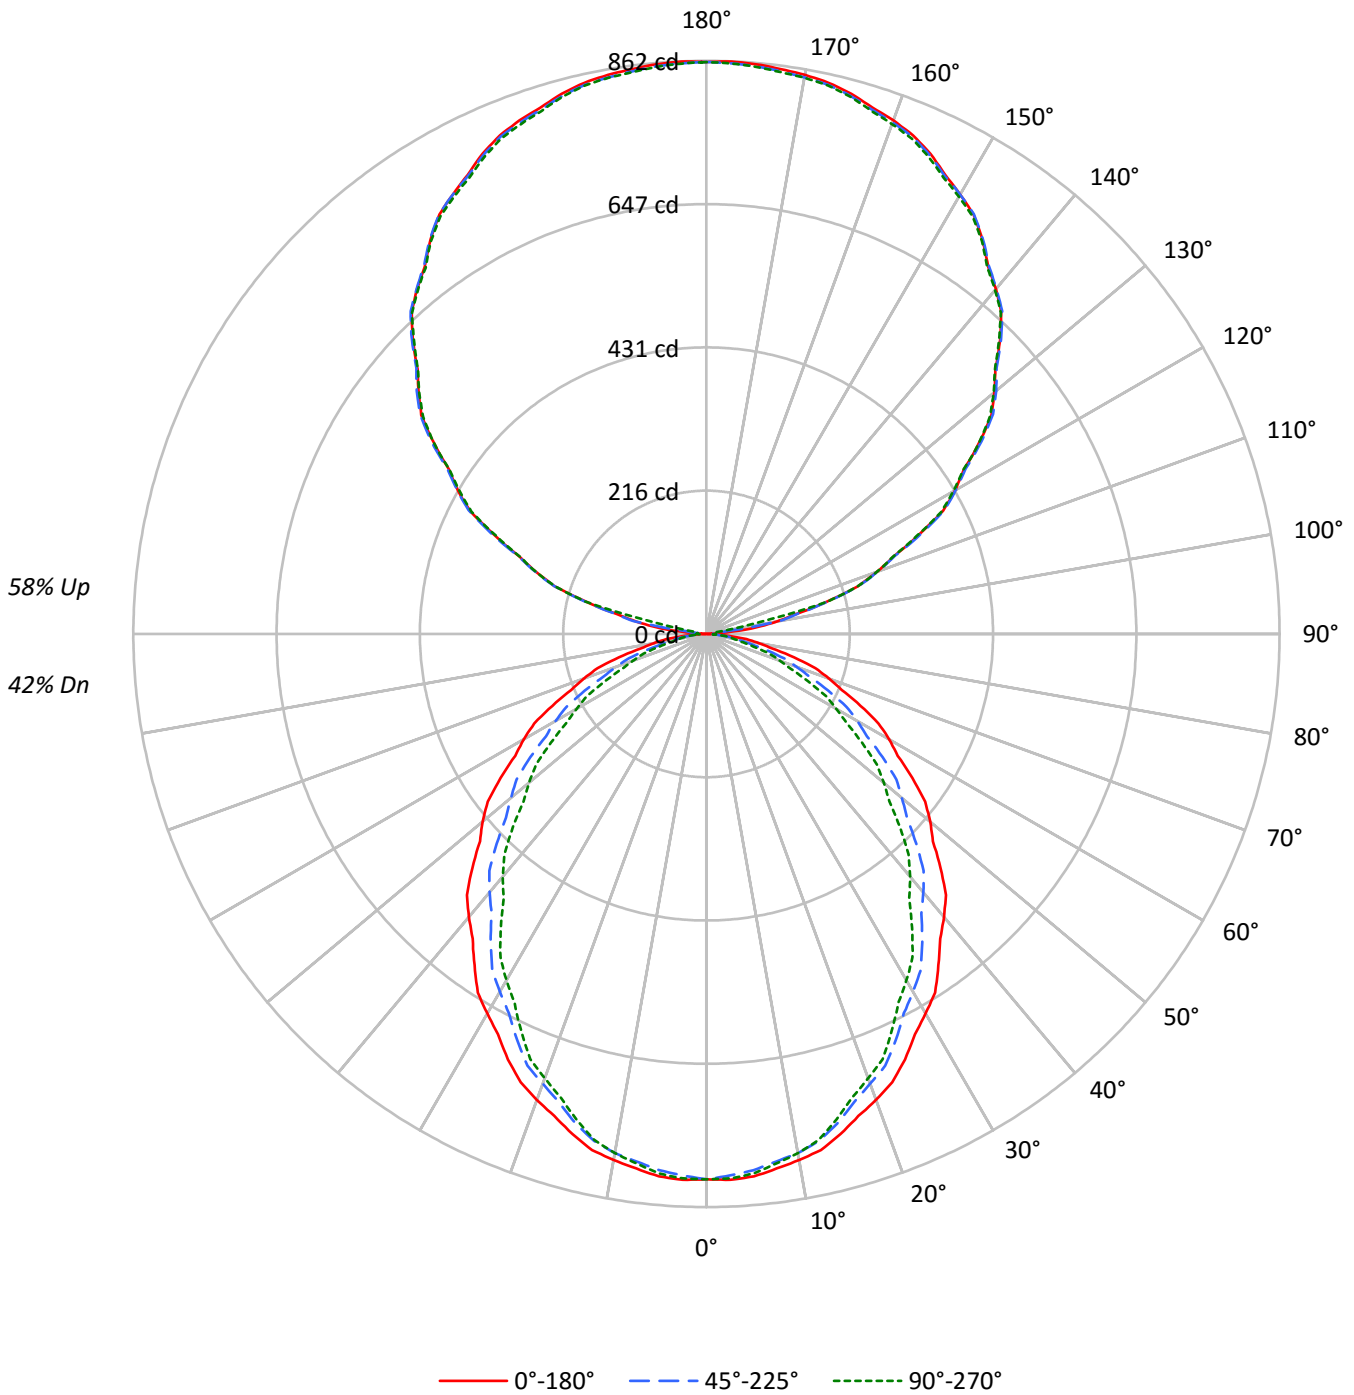



TEST NUMBER: P333535-930

CATALOG NUMBER: S125RDIP-S610D810U930-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	42
1	96	92	88	85	88	84	81	78	70	67	65	56	55	53	44	43	42	36
2	88	81	75	70	80	74	69	64	61	57	54	49	47	45	39	37	35	30
3	80	71	64	58	73	65	59	54	54	50	46	44	41	38	34	32	30	26
4	73	63	55	49	67	58	51	46	48	43	39	39	36	33	31	28	26	22
5	67	56	48	42	61	52	45	39	43	38	34	35	31	28	28	25	23	20
6	62	50	42	37	57	46	39	34	39	33	29	32	28	25	25	22	20	17
7	57	45	38	32	52	42	35	30	35	30	26	29	25	22	23	20	18	15
8	53	41	34	28	49	38	31	27	32	27	23	26	23	20	21	18	16	14
9	50	38	30	25	45	35	28	24	29	24	21	24	20	18	20	17	15	12
10	46	34	27	23	42	32	26	21	27	22	19	23	19	16	18	15	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5297	5297	5297
5°	5309	5249	5281
10°	5269	5200	5200
15°	5207	5094	5053
20°	5126	4947	4887
25°	5032	4802	4697
30°	4915	4633	4486
35°	4796	4459	4249
40°	4684	4278	4016
45°	4549	4074	3763
50°	4413	3852	3497
55°	4255	3640	3216
60°	4097	3384	2913
65°	3909	3085	2566
70°	3697	2713	2211
75°	3401	2286	1839
80°	2998	1796	1543
85°	2527	1467	1378



TEST NUMBER: P333535-930

CATALOG NUMBER: S125RDIP-S610D810U930-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	77.1	1.7
10°-20°	215.5	4.7
20°-30°	312.5	6.8
30°-40°	356.2	7.8
40°-50°	347.2	7.6
50°-60°	292.3	6.4
60°-70°	204.9	4.5
70°-80°	105.3	2.3
80°-90°	28.4	0.6
90°-100°	31.3	0.7
100°-110°	192.6	4.2
110°-120°	349.4	7.6
120°-130°	448.4	9.8
130°-140°	482.3	10.5
140°-150°	452.7	9.9
150°-160°	366.2	8.0
160°-170°	236.8	5.2
170°-180°	81.7	1.8
0°-30°	605.2	13.2
0°-40°	961.4	21.0
0°-60°	1600.8	34.9
0°-90°	1939.4	42.3
90°-120°	573.3	12.5
90°-150°	1956.6	42.7
90°-180°	2641.0	57.7
0°-180°	4580.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	820	820	820	820	820	
5°	819	816	810	815	815	78
15°	779	774	762	761	756	219
25°	706	696	674	666	659	325
35°	608	593	566	548	539	381
45°	498	479	446	422	412	384
55°	378	357	323	296	286	338
65°	256	234	202	178	168	253
75°	136	117	92	79	74	144
85°	34	23	20	19	19	38
90°	1	6	10	13	15	3
95°	36	33	10	13	13	46
105°	187	190	190	190	189	199
115°	352	355	356	353	349	349
125°	500	505	505	502	500	447
135°	624	628	627	625	622	481
145°	724	725	725	725	722	452
155°	797	793	794	796	791	367
165°	841	837	838	841	836	237
175°	860	857	857	861	856	82
180°	860	860	860	860	860	



TEST NUMBER: P333535-930

CATALOG NUMBER: S125RDIP-S610D810U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	820.2	820.2	820.2	820.2	820.2	820.2	820.2	820.2	820.2	820.2	820.2
2.5°	821.7	821.3	821.0	820.7	820.4	819.6	818.5	817.4	816.3	815.2	816.3
5°	818.9	818.4	817.8	817.3	816.7	815.7	814.2	812.7	811.1	809.6	811.0
7.5°	810.9	810.3	809.8	809.3	808.8	807.6	805.8	804.0	802.2	800.3	801.3
10°	803.4	803.0	802.6	802.2	801.8	800.6	798.7	796.8	794.8	792.9	793.3
12.5°	795.0	794.5	793.9	793.4	792.9	791.3	788.8	786.2	783.6	781.0	781.3
15°	778.7	777.8	777.0	776.2	775.3	773.5	770.6	767.7	764.8	761.9	761.8
17.5°	760.2	759.0	757.7	756.4	755.1	752.7	749.0	745.4	741.8	738.2	737.4
20°	745.8	744.4	743.1	741.7	740.3	737.4	733.0	728.6	724.2	719.8	719.1
22.5°	729.9	728.6	727.2	725.9	724.5	721.5	716.8	712.2	707.6	703.0	701.6
25°	706.2	704.1	702.1	700.0	697.9	694.3	689.3	684.1	679.1	673.9	672.2
27.5°	678.9	676.5	673.9	671.4	668.9	665.0	659.5	654.0	648.6	643.1	640.6
30°	659.1	656.5	653.9	651.3	648.7	644.4	638.6	632.9	627.1	621.3	618.2
32.5°	639.8	636.7	633.7	630.6	627.5	623.1	617.2	611.3	605.4	599.5	596.0
35°	608.3	605.0	601.7	598.4	595.1	590.4	584.2	578.0	571.8	565.6	561.6
37.5°	577.5	573.4	569.4	565.4	561.4	556.2	549.8	543.4	537.0	530.6	525.9
40°	555.6	551.5	547.4	543.2	539.2	533.8	527.2	520.6	514.0	507.4	502.1
42.5°	532.9	528.6	524.4	520.2	515.9	510.4	503.5	496.7	489.9	483.1	478.0
45°	498.1	494.1	490.1	486.1	482.1	476.3	468.7	461.1	453.6	446.0	440.5
47.5°	462.0	457.8	453.6	449.4	445.2	439.2	431.6	424.0	416.4	408.7	403.1
50°	439.2	434.6	430.1	425.6	421.0	414.8	407.0	399.2	391.3	383.4	377.6
52.5°	414.4	409.8	405.1	400.5	395.8	389.8	382.4	375.0	367.5	360.1	353.9
55°	377.9	373.5	369.1	364.7	360.3	354.2	346.5	338.8	331.1	323.3	317.2
57.5°	341.0	336.2	331.5	326.9	322.1	316.0	308.6	301.2	293.8	286.3	280.2
60°	317.2	312.3	307.5	302.7	297.9	291.8	284.3	276.9	269.5	262.0	256.0
62.5°	291.9	287.3	282.7	278.1	273.5	267.4	259.9	252.3	244.8	237.3	231.6
65°	255.8	251.2	246.5	241.8	237.1	231.1	223.8	216.5	209.2	201.9	196.4
67.5°	220.0	215.3	210.7	206.0	201.3	195.5	188.5	181.5	174.5	167.5	162.5
70°	195.8	191.1	186.4	181.7	177.0	171.2	164.4	157.5	150.6	143.7	139.4
72.5°	171.9	167.4	162.8	158.2	153.7	148.1	141.7	135.3	128.8	122.4	118.5
75°	136.3	132.2	128.0	123.9	119.8	114.8	109.0	103.2	97.4	91.6	88.6
77.5°	100.9	97.5	94.2	90.9	87.6	83.6	79.0	74.4	69.8	65.1	63.0
80°	80.6	77.2	73.9	70.6	67.3	63.8	59.8	56.0	52.2	48.3	47.0
82.5°	60.7	57.7	54.8	51.8	48.8	46.0	43.4	40.7	38.1	35.5	34.9
85°	34.1	31.6	29.1	26.7	24.1	22.6	21.9	21.2	20.5	19.8	19.6
87.5°	11.5	11.0	10.4	9.9	9.4	9.1	9.2	9.3	9.4	9.5	9.6
90°	0.7	1.8	2.9	4.1	5.1	6.2	7.3	8.2	9.2	10.2	10.9
92.5°	9.8	9.0	8.2	7.4	6.7	6.7	7.6	8.5	9.3	10.2	10.9
95°	36.4	36.0	35.5	35.1	34.7	31.7	26.3	21.0	15.6	10.2	10.9
97.5°	75.9	76.6	77.4	78.2	78.9	74.0	63.3	52.7	42.0	31.4	27.4
100°	106.5	106.9	107.3	107.8	108.2	108.7	109.3	109.8	110.4	111.0	89.8
102.5°	137.6	138.1	138.7	139.2	139.7	140.1	140.6	140.9	141.2	141.5	137.5
105°	187.4	188.0	188.6	189.1	189.7	190.0	190.0	190.0	190.0	190.0	190.0
107.5°	239.2	239.2	239.2	239.2	239.2	239.4	239.6	239.9	240.2	240.5	240.5
110°	272.9	272.9	272.9	272.9	272.9	273.0	273.3	273.6	273.9	274.2	273.8



TEST NUMBER: P333535-930

CATALOG NUMBER: S125RDIP-S610D810U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	304.5	304.8	305.2	305.6	305.9	306.1	306.3	306.5	306.6	306.8	306.3
115°	352.0	352.7	353.4	354.1	354.8	355.2	355.4	355.5	355.6	355.8	355.2
117.5°	401.0	401.0	401.0	401.0	401.0	401.2	401.7	402.3	402.8	403.3	402.6
120°	431.6	431.5	431.4	431.2	431.0	431.2	431.6	432.1	432.5	432.9	432.7
122.5°	458.7	459.3	459.7	460.3	460.8	461.2	461.4	461.6	461.8	462.0	461.7
125°	500.5	501.5	502.5	503.5	504.5	505.0	505.0	505.0	505.0	505.0	504.4
127.5°	540.5	541.1	541.8	542.6	543.2	543.6	543.5	543.4	543.3	543.2	542.9
130°	564.9	565.7	566.3	567.0	567.8	568.2	568.3	568.4	568.6	568.8	568.3
132.5°	589.4	590.2	591.0	591.8	592.7	593.0	592.6	592.3	592.0	591.7	591.6
135°	624.2	625.1	625.9	626.8	627.6	627.9	627.6	627.3	627.0	626.8	626.5
137.5°	656.2	657.0	657.7	658.4	659.2	659.4	659.2	658.9	658.7	658.4	658.4
140°	677.1	677.4	677.7	678.0	678.2	678.3	678.2	678.1	677.9	677.8	678.1
142.5°	696.0	696.2	696.3	696.5	696.7	696.8	697.1	697.2	697.5	697.7	697.7
145°	723.7	724.0	724.2	724.6	724.8	725.0	725.0	725.0	725.0	725.0	725.1
147.5°	747.9	747.9	747.8	747.7	747.7	747.7	747.9	748.0	748.3	748.4	748.6
150°	763.2	763.0	762.6	762.4	762.1	762.1	762.4	762.6	763.0	763.2	763.5
152.5°	778.0	777.4	776.7	776.2	775.5	775.3	775.6	775.9	776.2	776.5	776.7
155°	797.0	796.1	795.3	794.4	793.6	793.3	793.6	793.9	794.2	794.4	794.8
157.5°	811.6	811.1	810.7	810.2	809.6	809.3	809.4	809.4	809.4	809.5	809.9
160°	821.9	821.0	820.2	819.3	818.5	818.2	818.2	818.4	818.6	818.6	819.2
162.5°	830.1	829.2	828.3	827.4	826.6	826.3	826.4	826.6	826.7	826.9	827.6
165°	841.0	840.2	839.3	838.5	837.6	837.2	837.4	837.6	837.6	837.8	838.7
167.5°	849.1	848.3	847.4	846.5	845.6	845.3	845.4	845.5	845.7	845.9	846.9
170°	853.8	852.7	851.7	850.8	849.8	849.4	849.5	849.6	849.8	849.9	851.1
172.5°	856.8	855.8	854.8	853.9	852.8	852.5	852.7	853.0	853.2	853.5	854.5
175°	860.1	859.2	858.4	857.6	856.7	856.4	856.5	856.6	856.8	857.0	858.1
177.5°	861.7	861.0	860.3	859.7	858.9	858.7	858.8	858.8	859.0	859.1	859.9
180°	860.1	860.1	860.1	860.1	860.1	860.1	860.1	860.1	860.1	860.1	860.1



TEST NUMBER: P333535-930

CATALOG NUMBER: S125RDIP-S610D810U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	820.2	820.2	820.2	820.2	820.2	820.2	820.2	820.2
2.5°	817.4	818.5	819.6	820.1	820.0	819.9	819.8	819.7
5°	812.4	813.8	815.1	815.7	815.4	815.1	814.9	814.6
7.5°	802.3	803.2	804.2	804.5	804.2	803.9	803.6	803.3
10°	793.7	794.1	794.6	794.6	794.1	793.7	793.3	792.9
12.5°	781.6	782.0	782.2	782.0	781.4	780.8	780.2	779.5
15°	761.7	761.5	761.4	760.7	759.5	758.2	757.0	755.7
17.5°	736.8	736.1	735.4	734.5	733.5	732.5	731.5	730.4
20°	718.4	717.7	717.1	716.1	714.9	713.6	712.4	711.1
22.5°	700.3	698.9	697.6	696.3	695.4	694.3	693.3	692.3
25°	670.4	668.6	666.8	665.1	663.7	662.1	660.6	659.1
27.5°	638.1	635.6	633.1	631.1	629.7	628.2	626.7	625.3
30°	615.0	611.8	608.6	606.4	605.2	604.0	602.8	601.5
32.5°	592.5	589.1	585.5	583.0	581.4	579.8	578.3	576.7
35°	557.6	553.6	549.6	546.7	544.7	542.7	540.9	538.9
37.5°	521.1	516.2	511.4	508.1	506.2	504.4	502.6	500.7
40°	496.8	491.6	486.4	483.0	481.4	479.6	478.0	476.4
42.5°	473.0	468.0	463.0	459.3	456.9	454.4	452.0	449.6
45°	435.0	429.5	424.0	420.2	418.2	416.0	414.0	412.0
47.5°	397.4	391.7	386.0	382.0	379.8	377.5	375.2	372.9
50°	371.9	366.1	360.3	356.4	354.3	352.3	350.2	348.1
52.5°	347.7	341.4	335.3	331.1	329.1	327.0	324.9	322.9
55°	311.0	304.8	298.6	294.4	292.2	290.0	287.8	285.6
57.5°	274.2	268.2	262.1	258.0	256.1	254.1	252.3	250.3
60°	249.9	243.9	237.8	233.7	231.7	229.6	227.6	225.5
62.5°	226.0	220.4	214.7	210.9	208.9	206.8	204.7	202.7
65°	190.9	185.4	179.9	176.1	174.1	172.0	169.9	167.9
67.5°	157.4	152.4	147.3	144.0	142.4	140.7	139.0	137.4
70°	135.2	130.9	126.6	123.7	122.1	120.4	118.7	117.1
72.5°	114.5	110.6	106.6	104.1	103.1	101.9	100.9	99.7
75°	85.6	82.6	79.6	77.5	76.6	75.7	74.7	73.7
77.5°	60.9	58.8	56.7	55.3	54.5	53.8	53.2	52.4
80°	45.8	44.6	43.4	42.6	42.3	42.1	41.7	41.5
82.5°	34.2	33.7	33.1	32.8	32.6	32.4	32.3	32.1
85°	19.6	19.4	19.2	19.2	19.0	18.8	18.8	18.6
87.5°	9.8	9.9	10.0	10.1	10.1	10.0	10.0	10.0
90°	11.7	12.3	13.0	13.6	14.0	14.4	14.8	15.3
92.5°	11.7	12.3	13.0	13.5	13.7	13.9	14.1	14.3
95°	11.7	12.3	13.0	13.4	13.4	13.4	13.4	13.4
97.5°	23.4	19.4	15.4	13.4	13.4	13.4	13.4	13.4
100°	68.7	47.6	26.5	15.7	15.1	14.5	13.9	13.4
102.5°	133.5	129.6	125.6	118.8	109.1	99.5	89.8	80.2
105°	190.0	190.0	190.0	190.0	189.8	189.6	189.5	189.4
107.5°	240.6	240.6	240.6	240.4	240.0	239.5	239.1	238.7
110°	273.3	272.9	272.5	272.3	272.5	272.6	272.7	272.9





TEST NUMBER: P333535-930

CATALOG NUMBER: S125RDIP-S610D810U930-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	305.7	305.2	304.7	304.3	304.1	303.9	303.7	303.5
115°	354.7	354.1	353.5	352.8	352.0	351.1	350.3	349.4
117.5°	401.9	401.1	400.4	399.8	399.5	399.1	398.8	398.4
120°	432.4	432.1	431.8	431.3	430.6	429.9	429.2	428.4
122.5°	461.5	461.1	460.9	460.3	459.5	458.7	457.9	457.1
125°	503.9	503.3	502.7	502.2	501.8	501.3	500.9	500.5
127.5°	542.6	542.3	542.0	541.3	540.3	539.2	538.2	537.1
130°	567.9	567.4	567.0	566.5	565.7	565.1	564.4	563.6
132.5°	591.5	591.4	591.3	590.9	590.3	589.5	588.8	588.2
135°	626.2	625.9	625.7	625.1	624.2	623.4	622.5	621.7
137.5°	658.5	658.5	658.6	658.3	657.5	656.8	656.1	655.3
140°	678.3	678.7	678.9	678.7	677.8	676.9	676.0	675.2
142.5°	697.8	697.8	697.9	697.5	696.7	695.8	695.0	694.1
145°	725.2	725.4	725.5	725.1	724.3	723.5	722.6	721.8
147.5°	748.8	748.9	749.1	748.7	747.6	746.7	745.6	744.6
150°	763.8	764.1	764.3	763.9	762.8	761.7	760.5	759.4
152.5°	777.1	777.3	777.6	777.2	776.2	775.2	774.2	773.1
155°	795.3	795.7	796.1	795.8	794.7	793.5	792.4	791.2
157.5°	810.4	810.9	811.3	811.0	809.8	808.7	807.6	806.4
160°	819.8	820.4	820.9	820.7	819.5	818.4	817.3	816.1
162.5°	828.4	829.2	830.0	829.8	828.5	827.3	826.1	824.8
165°	839.5	840.3	841.2	841.1	839.9	838.8	837.6	836.5
167.5°	847.9	848.9	849.9	849.8	848.5	847.3	846.0	844.7
170°	852.2	853.3	854.4	854.4	853.1	851.8	850.5	849.3
172.5°	855.5	856.6	857.6	857.5	856.1	854.9	853.6	852.3
175°	859.2	860.3	861.4	861.4	860.1	858.8	857.6	856.3
177.5°	860.7	861.4	862.3	862.3	861.3	860.4	859.5	858.6
180°	860.1	860.1	860.1	860.1	860.1	860.1	860.1	860.1

(END OF REPORT)