

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333536-930

Luminaire Tested: **S125RDIP-S610D810U930-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333536-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S610D810U930-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4225.4 lumens
Efficiency: N/A
Efficacy: 110.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 38.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333536-930

CATALOG NUMBER: S125RDIP-S610D810U930-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

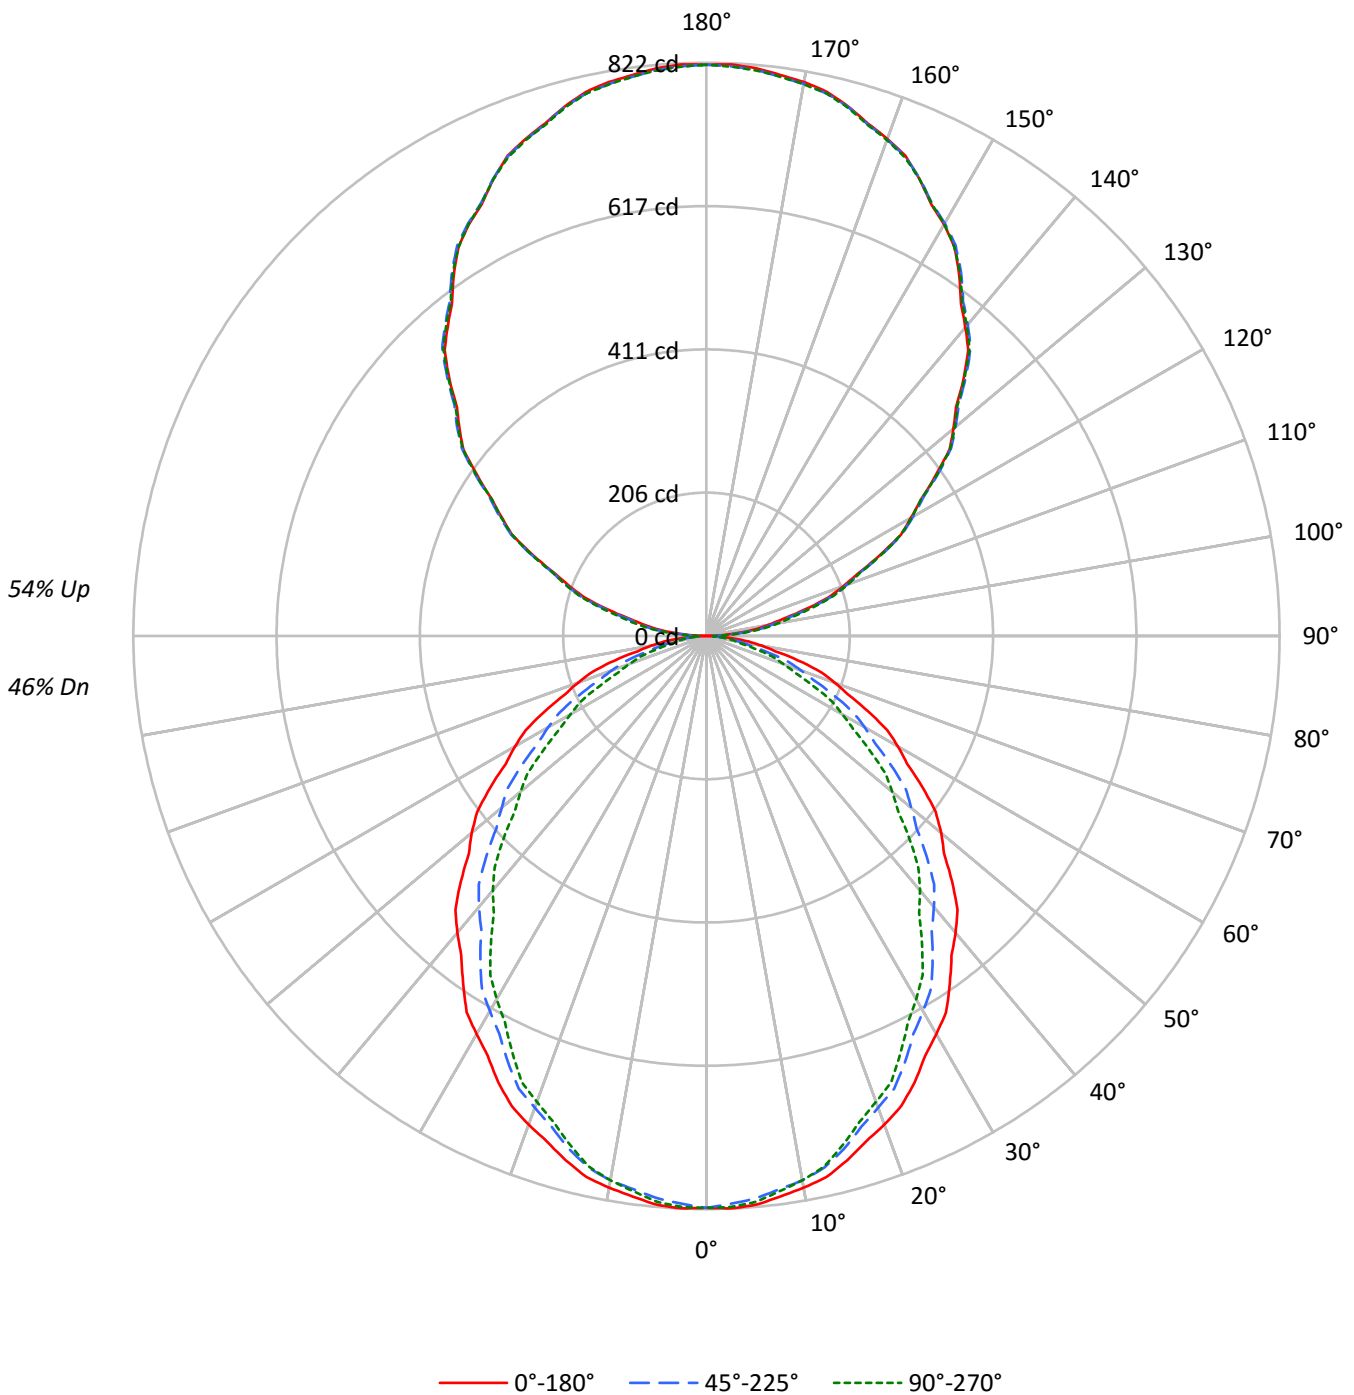



TEST NUMBER: P333536-930

CATALOG NUMBER: S125RDIP-S610D810U930-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	46
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	47	46	45	39
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	41	39	38	33
3	81	72	64	59	74	66	60	55	55	51	47	46	42	40	37	34	32	28
4	74	63	56	50	68	59	52	47	49	44	40	41	37	34	33	30	28	24
5	68	57	49	43	62	52	45	40	44	39	35	37	33	30	30	27	25	21
6	63	51	43	37	57	47	40	35	40	34	30	33	29	26	27	24	22	19
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	25	22	19	17
8	54	42	34	29	49	39	32	27	33	28	24	28	24	21	23	20	17	15
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	21	18	16	14
10	47	35	28	23	43	32	26	22	28	23	19	24	20	17	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5297	5297	5297
5°	5309	5249	5281
10°	5269	5200	5200
15°	5207	5094	5053
20°	5126	4947	4887
25°	5032	4802	4697
30°	4915	4633	4486
35°	4796	4459	4249
40°	4684	4278	4016
45°	4549	4074	3763
50°	4413	3852	3497
55°	4255	3640	3216
60°	4097	3384	2913
65°	3909	3085	2566
70°	3697	2713	2211
75°	3401	2286	1839
80°	2998	1796	1543
85°	2527	1467	1378



TEST NUMBER: P333536-930

CATALOG NUMBER: S125RDIP-S610D810U930-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	77.1	1.8
10°-20°	215.5	5.1
20°-30°	312.5	7.4
30°-40°	356.2	8.4
40°-50°	347.2	8.2
50°-60°	292.3	6.9
60°-70°	204.9	4.8
70°-80°	105.3	2.5
80°-90°	28.4	0.7
90°-100°	54.9	1.3
100°-110°	162.0	3.8
110°-120°	274.4	6.5
120°-130°	361.2	8.5
130°-140°	404.7	9.6
140°-150°	396.7	9.4
150°-160°	333.1	7.9
160°-170°	221.5	5.2
170°-180°	77.5	1.8
0°-30°	605.2	14.3
0°-40°	961.4	22.8
0°-60°	1600.8	37.9
0°-90°	1939.4	45.9
90°-120°	491.4	11.6
90°-150°	1653.9	39.1
90°-180°	2286.0	54.1
0°-180°	4225.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	820	820	820	820	820	
5°	819	816	810	815	815	78
15°	779	774	762	761	756	219
25°	706	696	674	666	659	325
35°	608	593	566	548	539	381
45°	498	479	446	422	412	384
55°	378	357	323	296	286	338
65°	256	234	202	178	168	253
75°	136	117	92	79	74	144
85°	34	23	20	19	19	38
90°	1	6	10	13	15	4
95°	41	43	49	53	55	44
105°	145	149	152	156	158	155
115°	275	277	279	278	277	272
125°	401	405	405	404	404	359
135°	522	525	526	526	523	402
145°	632	634	636	636	634	395
155°	723	723	724	726	723	333
165°	786	785	786	788	784	222
175°	817	815	815	818	814	78
180°	819	819	819	819	819	



TEST NUMBER: P333536-930

CATALOG NUMBER: S125RDIP-S610D810U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	820.2	820.2	820.2	820.2	820.2	820.2	820.2	820.2	820.2	820.2	820.2
2.5°	821.7	821.3	821.0	820.7	820.4	819.6	818.5	817.4	816.3	815.2	816.3
5°	818.9	818.4	817.8	817.3	816.7	815.7	814.2	812.7	811.1	809.6	811.0
7.5°	810.9	810.3	809.8	809.3	808.8	807.6	805.8	804.0	802.2	800.3	801.3
10°	803.4	803.0	802.6	802.2	801.8	800.6	798.7	796.8	794.8	792.9	793.3
12.5°	795.0	794.5	793.9	793.4	792.9	791.3	788.8	786.2	783.6	781.0	781.3
15°	778.7	777.8	777.0	776.2	775.3	773.5	770.6	767.7	764.8	761.9	761.8
17.5°	760.2	759.0	757.7	756.4	755.1	752.7	749.0	745.4	741.8	738.2	737.4
20°	745.8	744.4	743.1	741.7	740.3	737.4	733.0	728.6	724.2	719.8	719.1
22.5°	729.9	728.6	727.2	725.9	724.5	721.5	716.8	712.2	707.6	703.0	701.6
25°	706.2	704.1	702.1	700.0	697.9	694.3	689.3	684.1	679.1	673.9	672.2
27.5°	678.9	676.5	673.9	671.4	668.9	665.0	659.5	654.0	648.6	643.1	640.6
30°	659.1	656.5	653.9	651.3	648.7	644.4	638.6	632.9	627.1	621.3	618.2
32.5°	639.8	636.7	633.7	630.6	627.5	623.1	617.2	611.3	605.4	599.5	596.0
35°	608.3	605.0	601.7	598.4	595.1	590.4	584.2	578.0	571.8	565.6	561.6
37.5°	577.5	573.4	569.4	565.4	561.4	556.2	549.8	543.4	537.0	530.6	525.9
40°	555.6	551.5	547.4	543.2	539.2	533.8	527.2	520.6	514.0	507.4	502.1
42.5°	532.9	528.6	524.4	520.2	515.9	510.4	503.5	496.7	489.9	483.1	478.0
45°	498.1	494.1	490.1	486.1	482.1	476.3	468.7	461.1	453.6	446.0	440.5
47.5°	462.0	457.8	453.6	449.4	445.2	439.2	431.6	424.0	416.4	408.7	403.1
50°	439.2	434.6	430.1	425.6	421.0	414.8	407.0	399.2	391.3	383.4	377.6
52.5°	414.4	409.8	405.1	400.5	395.8	389.8	382.4	375.0	367.5	360.1	353.9
55°	377.9	373.5	369.1	364.7	360.3	354.2	346.5	338.8	331.1	323.3	317.2
57.5°	341.0	336.2	331.5	326.9	322.1	316.0	308.6	301.2	293.8	286.3	280.2
60°	317.2	312.3	307.5	302.7	297.9	291.8	284.3	276.9	269.5	262.0	256.0
62.5°	291.9	287.3	282.7	278.1	273.5	267.4	259.9	252.3	244.8	237.3	231.6
65°	255.8	251.2	246.5	241.8	237.1	231.1	223.8	216.5	209.2	201.9	196.4
67.5°	220.0	215.3	210.7	206.0	201.3	195.5	188.5	181.5	174.5	167.5	162.5
70°	195.8	191.1	186.4	181.7	177.0	171.2	164.4	157.5	150.6	143.7	139.4
72.5°	171.9	167.4	162.8	158.2	153.7	148.1	141.7	135.3	128.8	122.4	118.5
75°	136.3	132.2	128.0	123.9	119.8	114.8	109.0	103.2	97.4	91.6	88.6
77.5°	100.9	97.5	94.2	90.9	87.6	83.6	79.0	74.4	69.8	65.1	63.0
80°	80.6	77.2	73.9	70.6	67.3	63.8	59.8	56.0	52.2	48.3	47.0
82.5°	60.7	57.7	54.8	51.8	48.8	46.0	43.4	40.7	38.1	35.5	34.9
85°	34.1	31.6	29.1	26.7	24.1	22.6	21.9	21.2	20.5	19.8	19.6
87.5°	11.5	11.0	10.4	9.9	9.4	9.1	9.2	9.3	9.4	9.5	9.6
90°	0.7	1.8	2.9	4.1	5.1	6.2	7.3	8.2	9.2	10.2	10.9
92.5°	15.4	16.2	17.0	17.8	18.6	19.6	20.8	22.0	23.2	24.5	25.4
95°	41.4	41.7	42.0	42.3	42.6	43.5	44.8	46.2	47.7	49.1	50.1
97.5°	68.9	69.0	69.1	69.2	69.3	70.4	72.3	74.3	76.2	78.2	79.1
100°	89.3	89.3	89.3	89.3	89.3	90.2	92.0	93.8	95.7	97.5	98.8
102.5°	111.2	111.8	112.3	112.9	113.5	114.2	115.1	116.1	117.0	118.0	119.4
105°	145.4	146.1	146.8	147.5	148.2	149.0	149.9	150.7	151.5	152.4	153.2
107.5°	183.1	183.8	184.5	185.2	186.0	186.6	187.3	187.9	188.6	189.2	189.6
110°	209.1	209.9	210.5	211.2	212.0	212.5	213.0	213.4	213.8	214.2	214.7



TEST NUMBER: P333536-930

CATALOG NUMBER: S125RDIP-S610D810U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	235.6	236.0	236.4	236.8	237.1	237.6	238.1	238.6	239.2	239.7	239.9
115°	274.8	275.3	275.9	276.5	277.0	277.4	277.8	278.0	278.3	278.6	278.4
117.5°	314.1	314.3	314.5	314.8	315.0	315.4	315.6	315.8	316.1	316.3	316.4
120°	338.5	339.2	340.0	340.6	341.4	341.8	341.9	342.1	342.2	342.3	342.3
122.5°	365.0	365.3	365.6	365.8	366.1	366.4	366.7	367.1	367.5	367.9	367.7
125°	401.0	401.9	402.7	403.6	404.4	404.9	405.0	405.2	405.3	405.4	405.2
127.5°	439.3	439.8	440.2	440.7	441.2	441.5	441.6	441.8	442.1	442.2	442.1
130°	462.2	462.9	463.7	464.3	465.0	465.5	465.8	466.1	466.4	466.7	466.5
132.5°	485.2	486.3	487.5	488.6	489.8	490.3	490.3	490.2	490.2	490.2	490.0
135°	521.5	522.4	523.2	524.1	524.9	525.4	525.5	525.7	525.8	525.9	525.9
137.5°	555.7	556.5	557.3	558.2	559.0	559.5	559.9	560.1	560.4	560.8	560.9
140°	577.6	578.3	579.0	579.8	580.4	581.0	581.4	581.9	582.3	582.7	583.0
142.5°	599.6	600.1	600.7	601.3	601.9	602.5	603.0	603.6	604.1	604.6	604.8
145°	631.8	632.3	632.9	633.5	634.1	634.5	635.0	635.4	635.9	636.3	636.3
147.5°	661.6	661.9	662.3	662.6	662.8	663.2	663.6	663.9	664.2	664.6	664.9
150°	681.5	681.3	681.3	681.1	680.9	681.2	681.8	682.3	682.9	683.5	683.5
152.5°	697.8	698.1	698.2	698.5	698.6	698.9	699.0	699.3	699.5	699.8	700.1
155°	722.9	722.9	722.9	722.9	722.9	723.0	723.2	723.3	723.4	723.6	724.1
157.5°	745.4	745.1	744.8	744.4	744.1	744.0	744.2	744.4	744.4	744.6	745.2
160°	758.6	758.2	757.8	757.4	756.9	756.8	756.9	757.1	757.2	757.4	758.0
162.5°	770.4	770.1	769.7	769.5	769.2	769.0	769.0	769.1	769.1	769.2	769.8
165°	786.1	785.8	785.5	785.2	785.0	784.9	785.0	785.1	785.3	785.5	786.0
167.5°	799.3	798.7	798.2	797.6	797.0	796.8	796.8	796.8	796.8	796.8	797.6
170°	806.5	805.9	805.4	804.8	804.2	803.9	803.9	803.9	803.9	803.9	804.8
172.5°	811.5	811.0	810.4	809.8	809.3	809.0	809.0	809.0	809.0	809.0	809.8
175°	817.3	816.8	816.2	815.6	815.1	814.7	814.7	814.7	814.7	814.7	815.6
177.5°	820.3	819.8	819.4	818.9	818.4	818.2	818.1	817.9	817.8	817.7	818.4
180°	819.2	819.2	819.2	819.2	819.2	819.2	819.2	819.2	819.2	819.2	819.2



TEST NUMBER: P333536-930

CATALOG NUMBER: S125RDIP-S610D810U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	820.2	820.2	820.2	820.2	820.2	820.2	820.2	820.2
2.5°	817.4	818.5	819.6	820.1	820.0	819.9	819.8	819.7
5°	812.4	813.8	815.1	815.7	815.4	815.1	814.9	814.6
7.5°	802.3	803.2	804.2	804.5	804.2	803.9	803.6	803.3
10°	793.7	794.1	794.6	794.6	794.1	793.7	793.3	792.9
12.5°	781.6	782.0	782.2	782.0	781.4	780.8	780.2	779.5
15°	761.7	761.5	761.4	760.7	759.5	758.2	757.0	755.7
17.5°	736.8	736.1	735.4	734.5	733.5	732.5	731.5	730.4
20°	718.4	717.7	717.1	716.1	714.9	713.6	712.4	711.1
22.5°	700.3	698.9	697.6	696.3	695.4	694.3	693.3	692.3
25°	670.4	668.6	666.8	665.1	663.7	662.1	660.6	659.1
27.5°	638.1	635.6	633.1	631.1	629.7	628.2	626.7	625.3
30°	615.0	611.8	608.6	606.4	605.2	604.0	602.8	601.5
32.5°	592.5	589.1	585.5	583.0	581.4	579.8	578.3	576.7
35°	557.6	553.6	549.6	546.7	544.7	542.7	540.9	538.9
37.5°	521.1	516.2	511.4	508.1	506.2	504.4	502.6	500.7
40°	496.8	491.6	486.4	483.0	481.4	479.6	478.0	476.4
42.5°	473.0	468.0	463.0	459.3	456.9	454.4	452.0	449.6
45°	435.0	429.5	424.0	420.2	418.2	416.0	414.0	412.0
47.5°	397.4	391.7	386.0	382.0	379.8	377.5	375.2	372.9
50°	371.9	366.1	360.3	356.4	354.3	352.3	350.2	348.1
52.5°	347.7	341.4	335.3	331.1	329.1	327.0	324.9	322.9
55°	311.0	304.8	298.6	294.4	292.2	290.0	287.8	285.6
57.5°	274.2	268.2	262.1	258.0	256.1	254.1	252.3	250.3
60°	249.9	243.9	237.8	233.7	231.7	229.6	227.6	225.5
62.5°	226.0	220.4	214.7	210.9	208.9	206.8	204.7	202.7
65°	190.9	185.4	179.9	176.1	174.1	172.0	169.9	167.9
67.5°	157.4	152.4	147.3	144.0	142.4	140.7	139.0	137.4
70°	135.2	130.9	126.6	123.7	122.1	120.4	118.7	117.1
72.5°	114.5	110.6	106.6	104.1	103.1	101.9	100.9	99.7
75°	85.6	82.6	79.6	77.5	76.6	75.7	74.7	73.7
77.5°	60.9	58.8	56.7	55.3	54.5	53.8	53.2	52.4
80°	45.8	44.6	43.4	42.6	42.3	42.1	41.7	41.5
82.5°	34.2	33.7	33.1	32.8	32.6	32.4	32.3	32.1
85°	19.6	19.4	19.2	19.2	19.0	18.8	18.8	18.6
87.5°	9.8	9.9	10.0	10.1	10.1	10.0	10.0	10.0
90°	11.6	12.3	13.0	13.6	14.0	14.4	14.8	15.3
92.5°	26.3	27.3	28.2	28.9	29.2	29.4	29.8	30.1
95°	51.0	52.1	53.1	53.7	54.0	54.3	54.5	54.8
97.5°	80.1	81.0	81.9	82.4	82.6	82.8	83.0	83.2
100°	100.1	101.3	102.6	103.5	103.7	104.0	104.3	104.5
102.5°	120.7	122.1	123.5	124.4	124.8	125.1	125.6	126.0
105°	154.1	154.9	155.8	156.4	156.9	157.3	157.7	158.1
107.5°	190.0	190.5	190.9	191.1	191.1	191.0	191.0	191.0
110°	215.1	215.5	215.9	216.1	215.9	215.7	215.6	215.5



TEST NUMBER: P333536-930

CATALOG NUMBER: S125RDIP-S610D810U930-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	240.1	240.3	240.5	240.5	240.2	239.9	239.7	239.5
115°	278.3	278.2	278.0	277.9	277.8	277.6	277.4	277.4
117.5°	316.6	316.7	316.8	316.6	316.0	315.4	314.9	314.3
120°	342.3	342.3	342.3	342.1	341.5	341.0	340.4	339.8
122.5°	367.6	367.5	367.4	367.1	366.6	366.2	365.7	365.3
125°	404.9	404.6	404.3	404.1	404.0	403.8	403.7	403.6
127.5°	441.9	441.7	441.6	441.4	441.2	440.8	440.6	440.3
130°	466.4	466.3	466.1	465.9	465.6	465.3	465.0	464.7
132.5°	489.8	489.7	489.6	489.3	488.9	488.5	488.1	487.7
135°	525.9	525.9	525.9	525.7	525.1	524.6	524.0	523.4
137.5°	561.1	561.3	561.4	561.2	560.4	559.8	559.1	558.3
140°	583.3	583.5	583.8	583.6	582.9	582.2	581.5	580.8
142.5°	605.0	605.1	605.3	605.0	604.3	603.6	602.9	602.2
145°	636.3	636.3	636.3	636.0	635.6	635.2	634.8	634.3
147.5°	665.2	665.6	665.9	665.6	664.6	663.7	662.8	661.8
150°	683.5	683.5	683.5	683.3	683.0	682.7	682.4	682.2
152.5°	700.4	700.7	701.1	701.0	700.5	700.0	699.5	699.0
155°	724.7	725.3	725.9	725.8	725.0	724.4	723.7	722.9
157.5°	745.8	746.3	746.9	746.7	745.8	744.9	743.9	743.0
160°	758.6	759.0	759.6	759.6	758.9	758.1	757.4	756.8
162.5°	770.5	771.2	771.8	771.8	770.9	770.1	769.3	768.5
165°	786.6	787.2	787.7	787.6	786.7	785.9	785.0	784.2
167.5°	798.5	799.3	800.2	800.1	799.3	798.4	797.5	796.6
170°	805.6	806.5	807.3	807.2	806.2	805.3	804.3	803.3
172.5°	810.7	811.5	812.4	812.4	811.5	810.7	809.8	808.9
175°	816.4	817.3	818.2	818.1	817.1	816.1	815.1	814.2
177.5°	819.0	819.7	820.4	820.4	819.5	818.8	818.0	817.2
180°	819.2	819.2	819.2	819.2	819.2	819.2	819.2	819.2

(END OF REPORT)