

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333555-930

Luminaire Tested: **S125RDIP-S850D365U930-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333555-930  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIP-S850D365U930-4F0-1E-UDD-F4  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 365 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3721.1 lumens  
Efficiency: N/A  
Efficacy: 106.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 35  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333555-930

CATALOG NUMBER: S125RDIP-S850D365U930-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

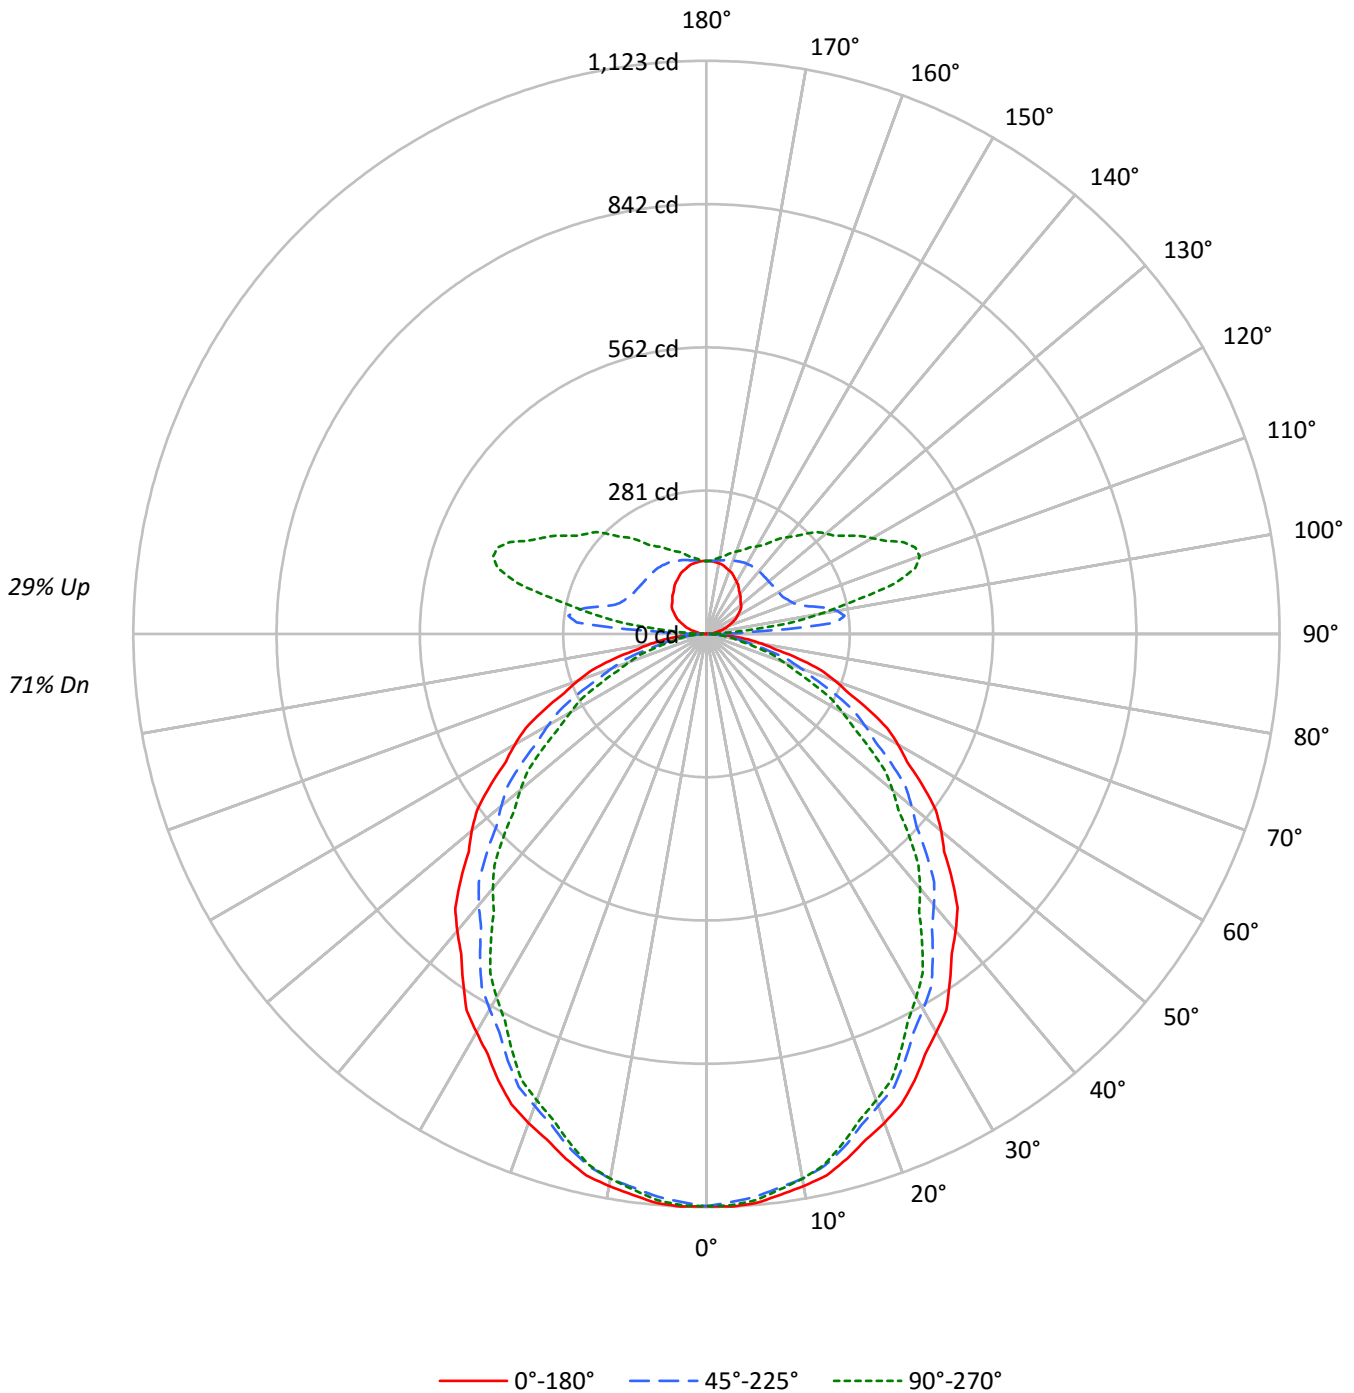



TEST NUMBER: P333555-930

CATALOG NUMBER: S125RDIP-S850D365U930-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	71
1	103	99	95	91	97	93	90	87	84	81	79	75	73	72	67	66	65	61
2	94	86	80	75	89	82	77	72	74	70	66	67	63	60	60	57	55	51
3	86	76	69	63	81	73	66	60	66	60	56	59	55	51	53	50	47	44
4	79	68	60	54	74	65	57	52	59	53	48	53	48	44	48	44	41	38
5	73	61	52	46	68	58	50	45	53	46	42	48	43	39	43	39	36	33
6	67	55	46	40	63	52	45	39	48	41	37	43	38	34	39	35	32	29
7	62	50	41	36	59	47	40	35	43	37	32	39	34	30	36	32	28	26
8	58	45	37	32	55	43	36	31	40	33	29	36	31	27	33	29	25	23
9	54	41	34	29	51	40	33	28	36	30	26	33	28	25	31	26	23	21
10	51	38	31	26	48	37	30	25	34	28	24	31	26	22	28	24	21	19

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	7240	7240	7240
5°	7257	7175	7219
10°	7202	7108	7108
15°	7117	6964	6907
20°	7007	6762	6681
25°	6879	6565	6420
30°	6718	6334	6131
35°	6556	6095	5807
40°	6403	5847	5490
45°	6218	5569	5142
50°	6031	5267	4782
55°	5816	4977	4396
60°	5599	4627	3981
65°	5344	4219	3506
70°	5053	3709	3021
75°	4649	3127	2515
80°	4095	2455	2109
85°	3453	2008	1882



TEST NUMBER: P333555-930

CATALOG NUMBER: S125RDIP-S850D365U930-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	105.4	2.8
10°-20°	294.6	7.9
20°-30°	427.2	11.5
30°-40°	486.9	13.1
40°-50°	474.6	12.8
50°-60°	399.5	10.7
60°-70°	280.0	7.5
70°-80°	143.9	3.9
80°-90°	37.2	1.0
90°-100°	103.6	2.8
100°-110°	222.7	6.0
110°-120°	209.0	5.6
120°-130°	169.4	4.6
130°-140°	135.9	3.7
140°-150°	102.6	2.8
150°-160°	72.2	1.9
160°-170°	42.6	1.1
170°-180°	13.8	0.4
0°-30°	827.2	22.2
0°-40°	1314.1	35.3
0°-60°	2188.2	58.8
0°-90°	2649.3	71.2
90°-120°	535.3	14.4
90°-150°	943.1	25.3
90°-180°	1072.0	28.8
0°-180°	3721.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1121	1121	1121	1121	1121	
5°	1119	1116	1107	1115	1114	106
15°	1064	1059	1042	1040	1033	300
25°	965	952	921	910	901	444
35°	832	810	773	749	737	520
45°	681	655	610	577	563	525
55°	516	488	442	405	390	462
65°	350	320	276	243	229	346
75°	186	160	125	107	101	197
85°	47	32	27	26	25	52
90°	0	3	5	6	7	3
95°	10	28	255	116	68	10
105°	32	46	209	411	382	34
115°	58	70	168	362	425	57
125°	81	94	161	288	335	72
135°	94	114	160	241	278	73
145°	110	126	160	200	220	69
155°	126	135	156	176	184	58
165°	137	141	150	159	161	39
175°	143	143	144	146	145	14
180°	143	143	143	143	143	



TEST NUMBER: P333555-930

CATALOG NUMBER: S125RDIP-S850D365U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1
2.5°	1123.1	1122.7	1122.2	1121.8	1121.3	1120.3	1118.8	1117.3	1115.8	1114.3	1115.8
5°	1119.4	1118.7	1117.9	1117.1	1116.4	1115.0	1112.9	1110.8	1108.7	1106.7	1108.6
7.5°	1108.4	1107.7	1106.9	1106.2	1105.5	1103.9	1101.5	1098.9	1096.5	1094.0	1095.3
10°	1098.2	1097.6	1097.1	1096.5	1095.9	1094.4	1091.8	1089.1	1086.5	1083.9	1084.3
12.5°	1086.7	1086.0	1085.2	1084.6	1083.9	1081.7	1078.2	1074.6	1071.1	1067.6	1068.0
15°	1064.4	1063.2	1062.1	1060.9	1059.8	1057.3	1053.4	1049.4	1045.5	1041.5	1041.3
17.5°	1039.1	1037.4	1035.7	1034.0	1032.2	1028.8	1023.9	1018.9	1013.9	1008.9	1008.0
20°	1019.5	1017.6	1015.7	1013.8	1011.9	1008.0	1002.0	996.0	989.9	983.9	983.0
22.5°	997.8	995.9	994.0	992.1	990.3	986.2	979.8	973.5	967.2	960.9	959.0
25°	965.3	962.5	959.6	956.8	954.0	949.1	942.2	935.1	928.2	921.3	918.8
27.5°	928.1	924.6	921.2	917.8	914.4	908.9	901.5	894.0	886.6	879.1	875.6
30°	900.9	897.3	893.8	890.2	886.6	880.8	873.0	865.1	857.2	849.3	845.0
32.5°	874.5	870.3	866.2	862.0	857.8	851.7	843.7	835.6	827.5	819.5	814.7
35°	831.5	827.0	822.5	817.9	813.4	806.9	798.5	790.0	781.5	773.1	767.6
37.5°	789.3	783.8	778.4	772.8	767.4	760.3	751.5	742.7	734.0	725.3	718.8
40°	759.5	753.9	748.2	742.6	736.9	729.6	720.6	711.5	702.5	693.5	686.3
42.5°	728.4	722.6	716.8	710.9	705.2	697.7	688.3	679.0	669.6	660.3	653.5
45°	680.8	675.3	669.8	664.4	658.9	651.0	640.7	630.4	620.0	609.7	602.1
47.5°	631.5	625.7	620.0	614.2	608.5	600.4	590.0	579.5	569.1	558.6	550.9
50°	600.3	594.1	587.9	581.7	575.5	567.0	556.3	545.6	534.8	524.2	516.2
52.5°	566.5	560.1	553.8	547.4	541.0	532.8	522.7	512.6	502.4	492.3	483.8
55°	516.5	510.5	504.5	498.5	492.4	484.1	473.6	463.1	452.6	442.0	433.5
57.5°	466.0	459.6	453.1	446.7	440.3	432.0	421.8	411.6	401.5	391.3	383.1
60°	433.5	427.0	420.4	413.8	407.2	398.8	388.7	378.5	368.4	358.2	349.9
62.5°	399.0	392.7	386.5	380.1	373.8	365.6	355.2	345.0	334.6	324.3	316.7
65°	349.7	343.3	336.9	330.5	324.1	315.9	306.0	296.0	286.0	276.1	268.5
67.5°	300.8	294.3	288.0	281.6	275.2	267.2	257.6	248.1	238.6	228.9	222.1
70°	267.6	261.1	254.8	248.3	242.0	234.1	224.7	215.2	205.9	196.4	190.6
72.5°	235.1	228.8	222.6	216.3	210.1	202.5	193.7	184.9	176.1	167.3	161.9
75°	186.3	180.7	175.0	169.3	163.7	156.9	149.0	141.1	133.2	125.3	121.2
77.5°	137.9	133.3	128.8	124.3	119.8	114.4	108.0	101.7	95.4	89.1	86.2
80°	110.1	105.6	101.0	96.5	92.0	87.2	81.9	76.6	71.3	66.0	64.3
82.5°	83.0	78.9	74.8	70.8	66.7	62.9	59.3	55.7	52.0	48.4	47.6
85°	46.6	43.2	39.8	36.4	33.0	30.8	29.9	28.9	28.0	27.1	26.9
87.5°	15.7	14.7	13.7	12.8	11.8	11.3	11.3	11.3	11.1	11.1	11.2
90°	0.3	0.6	1.1	1.7	2.3	2.9	3.2	3.8	4.0	4.6	4.9
92.5°	3.5	4.2	6.7	10.3	15.2	23.6	39.4	65.7	94.4	92.9	75.2
95°	9.5	9.8	12.1	15.2	21.6	34.6	65.4	128.8	208.3	255.3	249.8
97.5°	15.8	16.1	17.8	21.0	26.7	36.0	56.3	102.8	186.1	272.6	316.1
100°	20.1	20.7	21.9	25.0	30.6	39.2	55.9	93.4	166.0	260.2	332.2
102.5°	25.0	25.4	26.3	29.7	34.7	43.1	58.0	89.4	150.7	238.3	322.5
105°	32.5	32.5	34.0	36.9	41.5	49.6	62.2	87.9	136.0	208.9	291.6
107.5°	39.9	40.5	41.9	44.3	49.1	56.3	68.6	90.5	129.8	188.7	260.0
110°	45.2	45.8	47.0	49.6	53.9	61.4	73.2	93.1	127.9	179.2	242.1



TEST NUMBER: P333555-930

CATALOG NUMBER: S125RDIP-S850D365U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	50.5	51.1	52.0	54.6	58.9	66.2	77.5	96.3	127.9	173.7	228.7
115°	58.2	58.8	59.7	62.2	66.5	73.8	84.5	101.1	128.8	167.7	214.1
117.5°	65.1	66.0	66.9	69.5	74.4	81.4	91.5	106.6	130.7	164.8	205.4
120°	69.7	70.6	71.7	74.4	79.2	86.4	96.5	110.4	132.6	163.4	200.6
122.5°	74.6	75.2	76.1	78.8	84.1	91.3	101.3	114.5	134.1	162.2	196.4
125°	80.7	81.3	82.7	85.3	90.7	98.2	107.8	120.2	136.9	160.8	190.8
127.5°	85.4	86.3	88.1	91.5	97.3	104.8	113.9	125.3	139.9	160.1	185.6
130°	88.5	89.4	91.6	95.4	101.4	108.9	117.8	128.8	141.8	159.6	182.1
132.5°	90.7	91.9	94.7	98.8	105.1	112.6	121.6	131.8	143.8	159.6	179.4
135°	94.5	95.6	99.1	103.7	109.8	117.6	126.5	136.0	146.7	159.6	176.0
137.5°	99.2	100.1	103.3	107.9	113.9	121.9	130.0	139.1	149.3	160.0	173.1
140°	102.0	102.9	106.3	111.0	116.4	124.2	132.6	141.2	150.4	160.2	171.7
142.5°	105.3	105.8	109.1	113.7	119.0	126.3	134.1	142.4	151.1	160.5	170.6
145°	110.1	110.6	113.5	117.6	122.8	129.4	136.9	144.1	151.8	160.2	168.8
147.5°	115.1	115.4	118.0	121.7	126.2	132.0	138.6	145.1	152.1	159.5	167.1
150°	118.1	118.7	120.7	124.5	128.5	133.4	139.7	145.8	152.1	158.7	165.7
152.5°	121.4	121.7	123.5	126.8	130.6	135.0	140.9	146.3	151.9	157.8	164.0
155°	125.6	125.6	127.3	130.2	133.1	137.1	142.0	146.7	151.2	156.2	161.3
157.5°	129.5	129.4	130.8	133.2	135.7	138.8	143.0	146.9	150.5	154.4	158.8
160°	132.0	131.7	132.8	134.9	137.1	139.7	143.5	146.9	149.9	153.3	156.8
162.5°	134.0	133.8	134.9	136.7	138.5	140.6	144.0	146.8	149.1	151.9	154.9
165°	137.1	136.6	137.5	138.8	140.1	141.8	144.1	146.3	148.1	149.9	152.1
167.5°	139.3	138.9	139.5	140.2	141.0	142.2	144.1	145.7	146.5	147.8	149.4
170°	140.6	140.3	140.6	141.2	141.8	142.6	144.1	145.2	145.8	146.7	147.8
172.5°	141.5	141.0	141.3	141.9	142.2	142.6	143.8	144.8	144.9	145.3	146.2
175°	142.6	142.0	142.4	142.6	142.6	142.6	143.5	144.1	143.8	143.8	144.1
177.5°	143.2	142.7	142.7	142.9	142.7	142.7	143.2	143.4	142.9	142.9	143.2
180°	142.9	142.9	142.9	142.9	142.9	142.9	142.9	142.9	142.9	142.9	142.9



TEST NUMBER: P333555-930

CATALOG NUMBER: S125RDIP-S850D365U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1
2.5°	1117.3	1118.8	1120.3	1121.0	1120.9	1120.7	1120.5	1120.4
5°	1110.4	1112.3	1114.2	1115.0	1114.6	1114.2	1113.9	1113.5
7.5°	1096.7	1098.0	1099.3	1099.7	1099.3	1098.9	1098.5	1098.0
10°	1084.9	1085.5	1086.1	1086.1	1085.5	1084.9	1084.3	1083.9
12.5°	1068.4	1068.8	1069.2	1069.0	1068.1	1067.2	1066.4	1065.5
15°	1041.1	1040.9	1040.7	1039.8	1038.1	1036.4	1034.7	1033.0
17.5°	1007.1	1006.2	1005.2	1004.0	1002.7	1001.3	999.9	998.5
20°	982.0	981.0	980.2	978.8	977.1	975.4	973.7	972.1
22.5°	957.2	955.4	953.5	951.9	950.5	949.1	947.7	946.3
25°	916.4	914.0	911.5	909.2	907.1	905.1	903.0	900.9
27.5°	872.2	868.8	865.4	862.7	860.7	858.7	856.7	854.7
30°	840.7	836.3	831.9	829.0	827.3	825.6	823.9	822.1
32.5°	809.9	805.1	800.4	796.9	794.8	792.6	790.4	788.3
35°	762.1	756.7	751.2	747.2	744.5	741.9	739.3	736.6
37.5°	712.2	705.6	699.1	694.6	692.0	689.4	686.9	684.4
40°	679.1	672.1	664.9	660.1	657.9	655.7	653.4	651.2
42.5°	646.6	639.8	632.9	627.8	624.5	621.2	617.8	614.6
45°	594.6	587.1	579.5	574.4	571.5	568.8	565.9	563.0
47.5°	543.2	535.4	527.7	522.2	519.1	516.0	512.8	509.7
50°	508.3	500.4	492.5	487.1	484.4	481.5	478.7	475.9
52.5°	475.3	466.8	458.3	452.6	449.8	446.9	444.2	441.3
55°	425.1	416.6	408.1	402.4	399.4	396.4	393.4	390.4
57.5°	374.8	366.6	358.2	352.8	350.1	347.4	344.8	342.1
60°	341.6	333.3	325.1	319.5	316.7	313.9	311.0	308.2
62.5°	308.9	301.3	293.6	288.4	285.5	282.7	279.9	277.0
65°	261.0	253.5	245.9	240.8	237.9	235.1	232.3	229.4
67.5°	215.2	208.3	201.4	196.8	194.6	192.3	190.0	187.8
70°	184.7	179.0	173.1	169.1	166.8	164.5	162.3	160.0
72.5°	156.5	151.2	145.8	142.4	140.8	139.3	137.9	136.3
75°	117.1	112.9	108.8	106.1	104.7	103.4	102.1	100.8
77.5°	83.2	80.4	77.5	75.6	74.6	73.6	72.6	71.7
80°	62.7	61.0	59.3	58.2	57.9	57.5	57.1	56.7
82.5°	46.9	46.1	45.2	44.8	44.5	44.4	44.1	43.9
85°	26.7	26.5	26.3	26.2	25.9	25.8	25.6	25.4
87.5°	11.2	11.3	11.3	11.3	11.2	11.1	10.9	10.8
90°	5.2	5.5	5.8	6.4	6.4	6.4	6.6	6.6
92.5°	51.0	37.0	27.9	23.6	20.0	19.2	18.8	18.3
95°	207.2	163.4	127.9	103.7	83.2	74.6	72.3	67.8
97.5°	308.5	277.9	243.3	209.6	191.8	175.7	167.4	163.6
100°	354.4	340.3	310.6	280.6	260.7	240.0	229.3	224.8
102.5°	369.8	378.5	364.4	344.1	322.8	308.0	296.4	293.0
105°	360.8	400.2	412.9	409.8	400.5	391.0	385.2	381.8
107.5°	328.2	380.9	413.4	428.5	433.2	433.2	431.2	428.9
110°	304.3	359.1	399.7	424.1	437.1	442.5	444.6	444.6





TEST NUMBER: P333555-930

CATALOG NUMBER: S125RDIP-S850D365U930-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	285.4	337.4	378.5	407.3	426.2	435.7	440.7	442.8
115°	261.6	306.3	345.8	377.2	399.7	413.4	421.5	425.3
117.5°	246.3	284.8	318.8	347.6	370.1	384.4	392.4	394.7
120°	238.0	272.6	304.3	329.6	351.0	364.8	372.6	374.9
122.5°	231.8	263.8	292.0	315.8	334.8	347.5	355.3	357.3
125°	222.7	252.1	277.2	297.9	314.1	325.9	332.2	335.1
127.5°	213.5	240.9	264.3	283.7	298.4	308.8	314.8	316.1
130°	207.7	233.1	255.6	274.3	288.7	298.2	304.0	305.7
132.5°	201.9	225.8	246.1	264.2	278.6	288.0	293.3	295.3
135°	194.5	214.3	232.8	249.2	262.0	271.4	276.6	278.3
137.5°	188.2	204.2	219.6	233.5	244.8	253.5	258.3	260.2
140°	184.7	198.2	211.5	223.6	234.2	241.7	246.1	247.5
142.5°	181.7	193.1	204.6	215.1	224.1	230.5	234.6	235.8
145°	177.8	186.7	195.7	203.4	210.3	215.2	218.4	219.6
147.5°	174.1	181.3	188.3	194.1	199.6	203.5	205.3	205.9
150°	172.0	178.4	183.8	189.0	193.3	196.8	198.0	198.2
152.5°	169.7	175.4	180.3	184.4	188.0	190.8	191.9	192.2
155°	166.2	170.9	174.9	178.1	180.9	183.0	183.8	184.1
157.5°	162.8	166.6	169.7	172.2	174.5	176.1	176.9	176.8
160°	160.5	163.4	166.2	168.3	170.3	171.7	172.3	172.0
162.5°	157.9	160.6	163.1	164.9	166.4	167.5	167.7	167.6
165°	154.4	156.5	158.2	159.6	160.8	161.3	161.3	161.3
167.5°	151.1	152.5	153.8	154.8	155.4	155.9	155.6	155.6
170°	149.3	150.1	151.0	151.6	152.1	152.5	152.5	152.1
172.5°	147.2	148.1	148.7	149.0	149.1	149.7	149.2	148.9
175°	145.0	145.0	145.5	145.5	145.5	145.8	145.2	145.0
177.5°	143.4	143.6	143.6	143.6	143.4	143.6	142.9	142.9
180°	142.9	142.9	142.9	142.9	142.9	142.9	142.9	142.9

(END OF REPORT)