

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333565-930

Luminaire Tested: **S125RDIP-S850D810U930-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333565-930
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S850D810U930-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 810 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5291.6 lumens
Efficiency: N/A
Efficacy: 115.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333565-930

CATALOG NUMBER: S125RDIP-S850D810U930-4F0-1E-UDD-F

Luminous Intensity Polar Plot

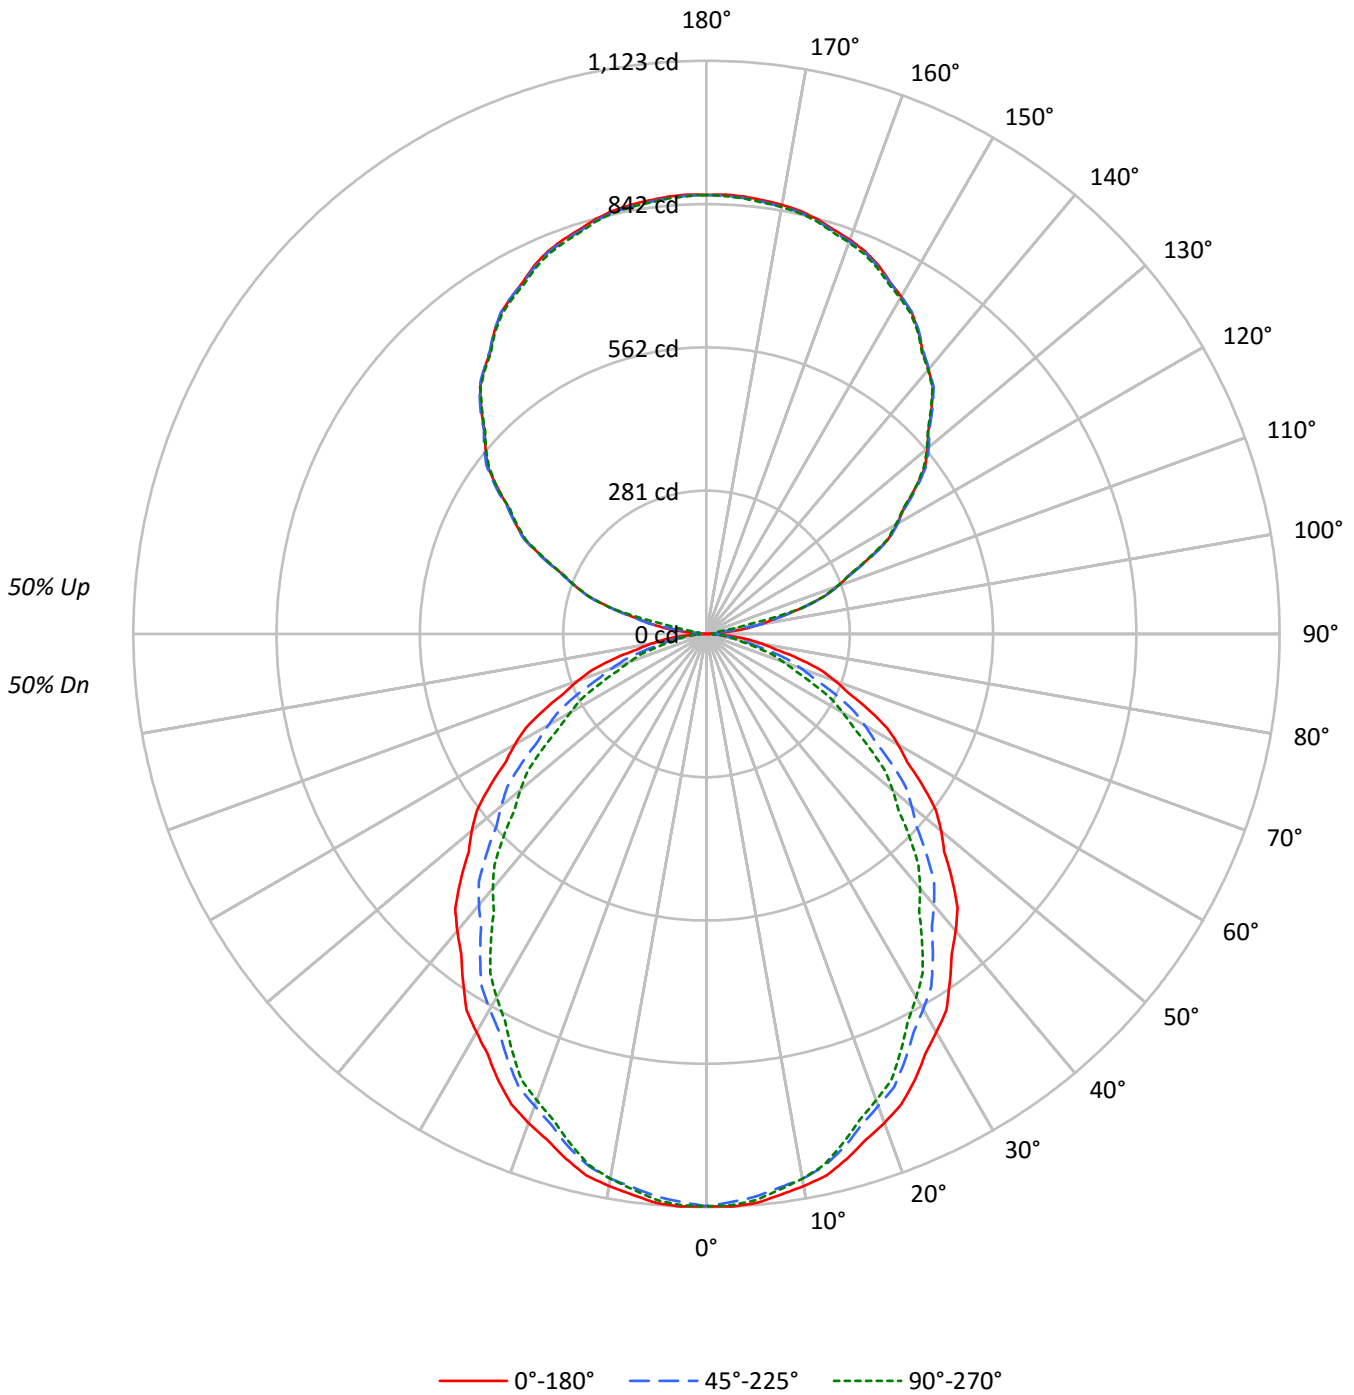



TEST NUMBER: P333565-930

CATALOG NUMBER: S125RDIP-S850D810U930-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	98	94	90	87	90	87	83	80	73	71	69	61	60	58	50	49	48	43
2	89	82	76	71	82	76	71	66	65	61	57	54	51	49	44	42	41	36
3	82	72	65	59	75	67	61	56	57	52	48	48	44	42	39	37	35	31
4	75	64	56	50	69	60	53	47	51	46	41	43	39	36	35	32	30	27
5	69	57	49	43	63	53	46	41	46	40	36	39	34	31	32	29	26	23
6	63	51	43	38	58	48	41	36	41	36	31	35	31	27	29	26	23	20
7	59	46	39	33	54	43	36	31	37	32	28	32	27	24	27	23	21	18
8	54	42	35	29	50	39	33	28	34	29	25	29	25	22	24	21	19	16
9	51	39	31	26	47	36	29	25	31	26	22	27	23	19	23	19	17	15
10	47	35	28	23	44	33	27	22	29	24	20	25	21	18	21	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7240	7240	7240
5°	7257	7175	7219
10°	7202	7108	7108
15°	7117	6964	6907
20°	7007	6762	6681
25°	6879	6565	6420
30°	6718	6334	6131
35°	6556	6095	5807
40°	6403	5847	5490
45°	6218	5569	5142
50°	6031	5267	4782
55°	5816	4977	4396
60°	5599	4627	3981
65°	5344	4219	3506
70°	5053	3709	3021
75°	4649	3127	2515
80°	4095	2455	2109
85°	3453	2008	1882



TEST NUMBER: P333565-930

CATALOG NUMBER: S125RDIP-S850D810U930-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	105.4	2.0
10°-20°	294.6	5.6
20°-30°	427.2	8.1
30°-40°	486.9	9.2
40°-50°	474.6	9.0
50°-60°	399.5	7.5
60°-70°	280.0	5.3
70°-80°	143.9	2.7
80°-90°	38.1	0.7
90°-100°	31.3	0.6
100°-110°	192.6	3.6
110°-120°	349.4	6.6
120°-130°	448.4	8.5
130°-140°	482.3	9.1
140°-150°	452.7	8.6
150°-160°	366.2	6.9
160°-170°	236.8	4.5
170°-180°	81.7	1.5
0°-30°	827.2	15.6
0°-40°	1314.1	24.8
0°-60°	2188.2	41.4
0°-90°	2650.3	50.1
90°-120°	573.3	10.8
90°-150°	1956.6	37.0
90°-180°	2641.0	49.9
0°-180°	5291.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1121	1121	1121	1121	1121	
5°	1119	1116	1107	1115	1114	106
15°	1064	1059	1042	1040	1033	300
25°	965	952	921	910	901	444
35°	832	810	773	749	737	520
45°	681	655	610	577	563	525
55°	516	488	442	405	390	462
65°	350	320	276	243	229	346
75°	186	160	125	107	101	197
85°	47	32	27	26	25	52
90°	1	6	10	13	15	4
95°	36	33	10	13	13	46
105°	187	190	190	190	189	199
115°	352	355	356	353	349	349
125°	500	505	505	502	500	447
135°	624	628	627	625	622	481
145°	724	725	725	725	722	452
155°	797	793	794	796	791	367
165°	841	837	838	841	836	237
175°	860	857	857	861	856	82
180°	860	860	860	860	860	



TEST NUMBER: P333565-930

CATALOG NUMBER: S125RDIP-S850D810U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1
2.5°	1123.1	1122.7	1122.2	1121.8	1121.3	1120.3	1118.8	1117.3	1115.8	1114.3	1115.8
5°	1119.4	1118.7	1117.9	1117.1	1116.4	1115.0	1112.9	1110.8	1108.7	1106.7	1108.6
7.5°	1108.4	1107.7	1106.9	1106.2	1105.5	1103.9	1101.5	1098.9	1096.5	1094.0	1095.3
10°	1098.2	1097.6	1097.1	1096.5	1095.9	1094.4	1091.8	1089.1	1086.5	1083.9	1084.3
12.5°	1086.7	1086.0	1085.2	1084.6	1083.9	1081.7	1078.2	1074.6	1071.1	1067.6	1068.0
15°	1064.4	1063.2	1062.1	1060.9	1059.8	1057.3	1053.4	1049.4	1045.5	1041.5	1041.3
17.5°	1039.1	1037.4	1035.7	1034.0	1032.2	1028.8	1023.9	1018.9	1013.9	1008.9	1008.0
20°	1019.5	1017.6	1015.7	1013.8	1011.9	1008.0	1002.0	996.0	989.9	983.9	983.0
22.5°	997.8	995.9	994.0	992.1	990.3	986.2	979.8	973.5	967.2	960.9	959.0
25°	965.3	962.5	959.6	956.8	954.0	949.1	942.2	935.1	928.2	921.3	918.8
27.5°	928.1	924.6	921.2	917.8	914.4	908.9	901.5	894.0	886.6	879.1	875.6
30°	900.9	897.3	893.8	890.2	886.6	880.8	873.0	865.1	857.2	849.3	845.0
32.5°	874.5	870.3	866.2	862.0	857.8	851.7	843.7	835.6	827.5	819.5	814.7
35°	831.5	827.0	822.5	817.9	813.4	806.9	798.5	790.0	781.5	773.1	767.6
37.5°	789.3	783.8	778.4	772.8	767.4	760.3	751.5	742.7	734.0	725.3	718.8
40°	759.5	753.9	748.2	742.6	736.9	729.6	720.6	711.5	702.5	693.5	686.3
42.5°	728.4	722.6	716.8	710.9	705.2	697.7	688.3	679.0	669.6	660.3	653.5
45°	680.8	675.3	669.8	664.4	658.9	651.0	640.7	630.4	620.0	609.7	602.1
47.5°	631.5	625.7	620.0	614.2	608.5	600.4	590.0	579.5	569.1	558.6	550.9
50°	600.3	594.1	587.9	581.7	575.5	567.0	556.3	545.6	534.8	524.2	516.2
52.5°	566.5	560.1	553.8	547.4	541.0	532.8	522.7	512.6	502.4	492.3	483.8
55°	516.5	510.5	504.5	498.5	492.4	484.1	473.6	463.1	452.6	442.0	433.5
57.5°	466.0	459.6	453.1	446.7	440.3	432.0	421.8	411.6	401.5	391.3	383.1
60°	433.5	427.0	420.4	413.8	407.2	398.8	388.7	378.5	368.4	358.2	349.9
62.5°	399.0	392.7	386.5	380.1	373.8	365.6	355.2	345.0	334.6	324.3	316.7
65°	349.7	343.3	336.9	330.5	324.1	315.9	306.0	296.0	286.0	276.1	268.5
67.5°	300.8	294.3	288.0	281.6	275.2	267.2	257.6	248.1	238.6	228.9	222.1
70°	267.6	261.1	254.8	248.3	242.0	234.1	224.7	215.2	205.9	196.4	190.6
72.5°	235.1	228.8	222.6	216.3	210.1	202.5	193.7	184.9	176.1	167.3	161.9
75°	186.3	180.7	175.0	169.3	163.7	156.9	149.0	141.1	133.2	125.3	121.2
77.5°	137.9	133.3	128.8	124.3	119.8	114.4	108.0	101.7	95.4	89.1	86.2
80°	110.1	105.6	101.0	96.5	92.0	87.2	81.9	76.6	71.3	66.0	64.3
82.5°	83.0	78.9	74.8	70.8	66.7	62.9	59.3	55.7	52.0	48.4	47.6
85°	46.6	43.2	39.8	36.4	33.0	30.8	29.9	28.9	28.0	27.1	26.9
87.5°	15.7	14.9	14.0	13.2	12.4	12.0	12.1	12.1	12.1	12.2	12.3
90°	0.7	1.8	2.9	4.1	5.1	6.2	7.3	8.2	9.2	10.2	10.9
92.5°	9.8	9.0	8.2	7.4	6.7	6.7	7.6	8.5	9.3	10.2	10.9
95°	36.4	36.0	35.5	35.1	34.7	31.7	26.3	21.0	15.6	10.2	10.9
97.5°	75.9	76.6	77.4	78.2	78.9	74.0	63.3	52.7	42.0	31.4	27.4
100°	106.5	106.9	107.3	107.8	108.2	108.7	109.3	109.8	110.4	111.0	89.8
102.5°	137.6	138.1	138.7	139.2	139.7	140.1	140.6	140.9	141.2	141.5	137.5
105°	187.4	188.0	188.6	189.1	189.7	190.0	190.0	190.0	190.0	190.0	190.0
107.5°	239.2	239.2	239.2	239.2	239.2	239.4	239.6	239.9	240.2	240.5	240.5
110°	272.9	272.9	272.9	272.9	272.9	273.0	273.3	273.6	273.9	274.2	273.8



TEST NUMBER: P333565-930

CATALOG NUMBER: S125RDIP-S850D810U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	304.5	304.8	305.2	305.6	305.9	306.1	306.3	306.5	306.6	306.8	306.3
115°	352.0	352.7	353.4	354.1	354.8	355.2	355.4	355.5	355.6	355.8	355.2
117.5°	401.0	401.0	401.0	401.0	401.0	401.2	401.7	402.3	402.8	403.3	402.6
120°	431.6	431.5	431.4	431.2	431.0	431.2	431.6	432.1	432.5	432.9	432.7
122.5°	458.7	459.3	459.7	460.3	460.8	461.2	461.4	461.6	461.8	462.0	461.7
125°	500.5	501.5	502.5	503.5	504.5	505.0	505.0	505.0	505.0	505.0	504.4
127.5°	540.5	541.1	541.8	542.6	543.2	543.6	543.5	543.4	543.3	543.2	542.9
130°	564.9	565.7	566.3	567.0	567.8	568.2	568.3	568.4	568.6	568.8	568.3
132.5°	589.4	590.2	591.0	591.8	592.7	593.0	592.6	592.3	592.0	591.7	591.6
135°	624.2	625.1	625.9	626.8	627.6	627.9	627.6	627.3	627.0	626.8	626.5
137.5°	656.2	657.0	657.7	658.4	659.2	659.4	659.2	658.9	658.7	658.4	658.4
140°	677.1	677.4	677.7	678.0	678.2	678.3	678.2	678.1	677.9	677.8	678.1
142.5°	696.0	696.2	696.3	696.5	696.7	696.8	697.1	697.2	697.5	697.7	697.7
145°	723.7	724.0	724.2	724.6	724.8	725.0	725.0	725.0	725.0	725.0	725.1
147.5°	747.9	747.9	747.8	747.7	747.7	747.7	747.9	748.0	748.3	748.4	748.6
150°	763.2	763.0	762.6	762.4	762.1	762.1	762.4	762.6	763.0	763.2	763.5
152.5°	778.0	777.4	776.7	776.2	775.5	775.3	775.6	775.9	776.2	776.5	776.7
155°	797.0	796.1	795.3	794.4	793.6	793.3	793.6	793.9	794.2	794.4	794.8
157.5°	811.6	811.1	810.7	810.2	809.6	809.3	809.4	809.4	809.4	809.5	809.9
160°	821.9	821.0	820.2	819.3	818.5	818.2	818.2	818.4	818.6	818.6	819.2
162.5°	830.1	829.2	828.3	827.4	826.6	826.3	826.4	826.6	826.7	826.9	827.6
165°	841.0	840.2	839.3	838.5	837.6	837.2	837.4	837.6	837.6	837.8	838.7
167.5°	849.1	848.3	847.4	846.5	845.6	845.3	845.4	845.5	845.7	845.9	846.9
170°	853.8	852.7	851.7	850.8	849.8	849.4	849.5	849.6	849.8	849.9	851.1
172.5°	856.8	855.8	854.8	853.9	852.8	852.5	852.7	853.0	853.2	853.5	854.5
175°	860.1	859.2	858.4	857.6	856.7	856.4	856.5	856.6	856.8	857.0	858.1
177.5°	861.7	861.0	860.3	859.7	858.9	858.7	858.8	858.8	859.0	859.1	859.9
180°	860.1	860.1	860.1	860.1	860.1	860.1	860.1	860.1	860.1	860.1	860.1



TEST NUMBER: P333565-930

CATALOG NUMBER: S125RDIP-S850D810U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1	1121.1
2.5°	1117.3	1118.8	1120.3	1121.0	1120.9	1120.7	1120.5	1120.4
5°	1110.4	1112.3	1114.2	1115.0	1114.6	1114.2	1113.9	1113.5
7.5°	1096.7	1098.0	1099.3	1099.7	1099.3	1098.9	1098.5	1098.0
10°	1084.9	1085.5	1086.1	1086.1	1085.5	1084.9	1084.3	1083.9
12.5°	1068.4	1068.8	1069.2	1069.0	1068.1	1067.2	1066.4	1065.5
15°	1041.1	1040.9	1040.7	1039.8	1038.1	1036.4	1034.7	1033.0
17.5°	1007.1	1006.2	1005.2	1004.0	1002.7	1001.3	999.9	998.5
20°	982.0	981.0	980.2	978.8	977.1	975.4	973.7	972.1
22.5°	957.2	955.4	953.5	951.9	950.5	949.1	947.7	946.3
25°	916.4	914.0	911.5	909.2	907.1	905.1	903.0	900.9
27.5°	872.2	868.8	865.4	862.7	860.7	858.7	856.7	854.7
30°	840.7	836.3	831.9	829.0	827.3	825.6	823.9	822.1
32.5°	809.9	805.1	800.4	796.9	794.8	792.6	790.4	788.3
35°	762.1	756.7	751.2	747.2	744.5	741.9	739.3	736.6
37.5°	712.2	705.6	699.1	694.6	692.0	689.4	686.9	684.4
40°	679.1	672.1	664.9	660.1	657.9	655.7	653.4	651.2
42.5°	646.6	639.8	632.9	627.8	624.5	621.2	617.8	614.6
45°	594.6	587.1	579.5	574.4	571.5	568.8	565.9	563.0
47.5°	543.2	535.4	527.7	522.2	519.1	516.0	512.8	509.7
50°	508.3	500.4	492.5	487.1	484.4	481.5	478.7	475.9
52.5°	475.3	466.8	458.3	452.6	449.8	446.9	444.2	441.3
55°	425.1	416.6	408.1	402.4	399.4	396.4	393.4	390.4
57.5°	374.8	366.6	358.2	352.8	350.1	347.4	344.8	342.1
60°	341.6	333.3	325.1	319.5	316.7	313.9	311.0	308.2
62.5°	308.9	301.3	293.6	288.4	285.5	282.7	279.9	277.0
65°	261.0	253.5	245.9	240.8	237.9	235.1	232.3	229.4
67.5°	215.2	208.3	201.4	196.8	194.6	192.3	190.0	187.8
70°	184.7	179.0	173.1	169.1	166.8	164.5	162.3	160.0
72.5°	156.5	151.2	145.8	142.4	140.8	139.3	137.9	136.3
75°	117.1	112.9	108.8	106.1	104.7	103.4	102.1	100.8
77.5°	83.2	80.4	77.5	75.6	74.6	73.6	72.6	71.7
80°	62.7	61.0	59.3	58.2	57.9	57.5	57.1	56.7
82.5°	46.9	46.1	45.2	44.8	44.5	44.4	44.1	43.9
85°	26.7	26.5	26.3	26.2	25.9	25.8	25.6	25.4
87.5°	12.5	12.6	12.8	12.8	12.7	12.6	12.6	12.6
90°	11.7	12.3	13.0	13.6	14.0	14.4	14.8	15.3
92.5°	11.7	12.3	13.0	13.5	13.7	13.9	14.1	14.3
95°	11.7	12.3	13.0	13.4	13.4	13.4	13.4	13.4
97.5°	23.4	19.4	15.4	13.4	13.4	13.4	13.4	13.4
100°	68.7	47.6	26.5	15.7	15.1	14.5	13.9	13.4
102.5°	133.5	129.6	125.6	118.8	109.1	99.5	89.8	80.2
105°	190.0	190.0	190.0	190.0	189.8	189.6	189.5	189.4
107.5°	240.6	240.6	240.6	240.4	240.0	239.5	239.1	238.7
110°	273.3	272.9	272.5	272.3	272.5	272.6	272.7	272.9



TEST NUMBER: P333565-930

CATALOG NUMBER: S125RDIP-S850D810U930-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	305.7	305.2	304.7	304.3	304.1	303.9	303.7	303.5
115°	354.7	354.1	353.5	352.8	352.0	351.1	350.3	349.4
117.5°	401.9	401.1	400.4	399.8	399.5	399.1	398.8	398.4
120°	432.4	432.1	431.8	431.3	430.6	429.9	429.2	428.4
122.5°	461.5	461.1	460.9	460.3	459.5	458.7	457.9	457.1
125°	503.9	503.3	502.7	502.2	501.8	501.3	500.9	500.5
127.5°	542.6	542.3	542.0	541.3	540.3	539.2	538.2	537.1
130°	567.9	567.4	567.0	566.5	565.7	565.1	564.4	563.6
132.5°	591.5	591.4	591.3	590.9	590.3	589.5	588.8	588.2
135°	626.2	625.9	625.7	625.1	624.2	623.4	622.5	621.7
137.5°	658.5	658.5	658.6	658.3	657.5	656.8	656.1	655.3
140°	678.3	678.7	678.9	678.7	677.8	676.9	676.0	675.2
142.5°	697.8	697.8	697.9	697.5	696.7	695.8	695.0	694.1
145°	725.2	725.4	725.5	725.1	724.3	723.5	722.6	721.8
147.5°	748.8	748.9	749.1	748.7	747.6	746.7	745.6	744.6
150°	763.8	764.1	764.3	763.9	762.8	761.7	760.5	759.4
152.5°	777.1	777.3	777.6	777.2	776.2	775.2	774.2	773.1
155°	795.3	795.7	796.1	795.8	794.7	793.5	792.4	791.2
157.5°	810.4	810.9	811.3	811.0	809.8	808.7	807.6	806.4
160°	819.8	820.4	820.9	820.7	819.5	818.4	817.3	816.1
162.5°	828.4	829.2	830.0	829.8	828.5	827.3	826.1	824.8
165°	839.5	840.3	841.2	841.1	839.9	838.8	837.6	836.5
167.5°	847.9	848.9	849.9	849.8	848.5	847.3	846.0	844.7
170°	852.2	853.3	854.4	854.4	853.1	851.8	850.5	849.3
172.5°	855.5	856.6	857.6	857.5	856.1	854.9	853.6	852.3
175°	859.2	860.3	861.4	861.4	860.1	858.8	857.6	856.3
177.5°	860.7	861.4	862.3	862.3	861.3	860.4	859.5	858.6
180°	860.1	860.1	860.1	860.1	860.1	860.1	860.1	860.1

(END OF REPORT)