

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333292

Luminaire Tested: **S125DIP-S1090D1205U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333292
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1090D1205U835-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1205 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9257.9 lumens
Efficiency: N/A
Efficacy: 141.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333292

CATALOG NUMBER: S125DIP-S1090D1205U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

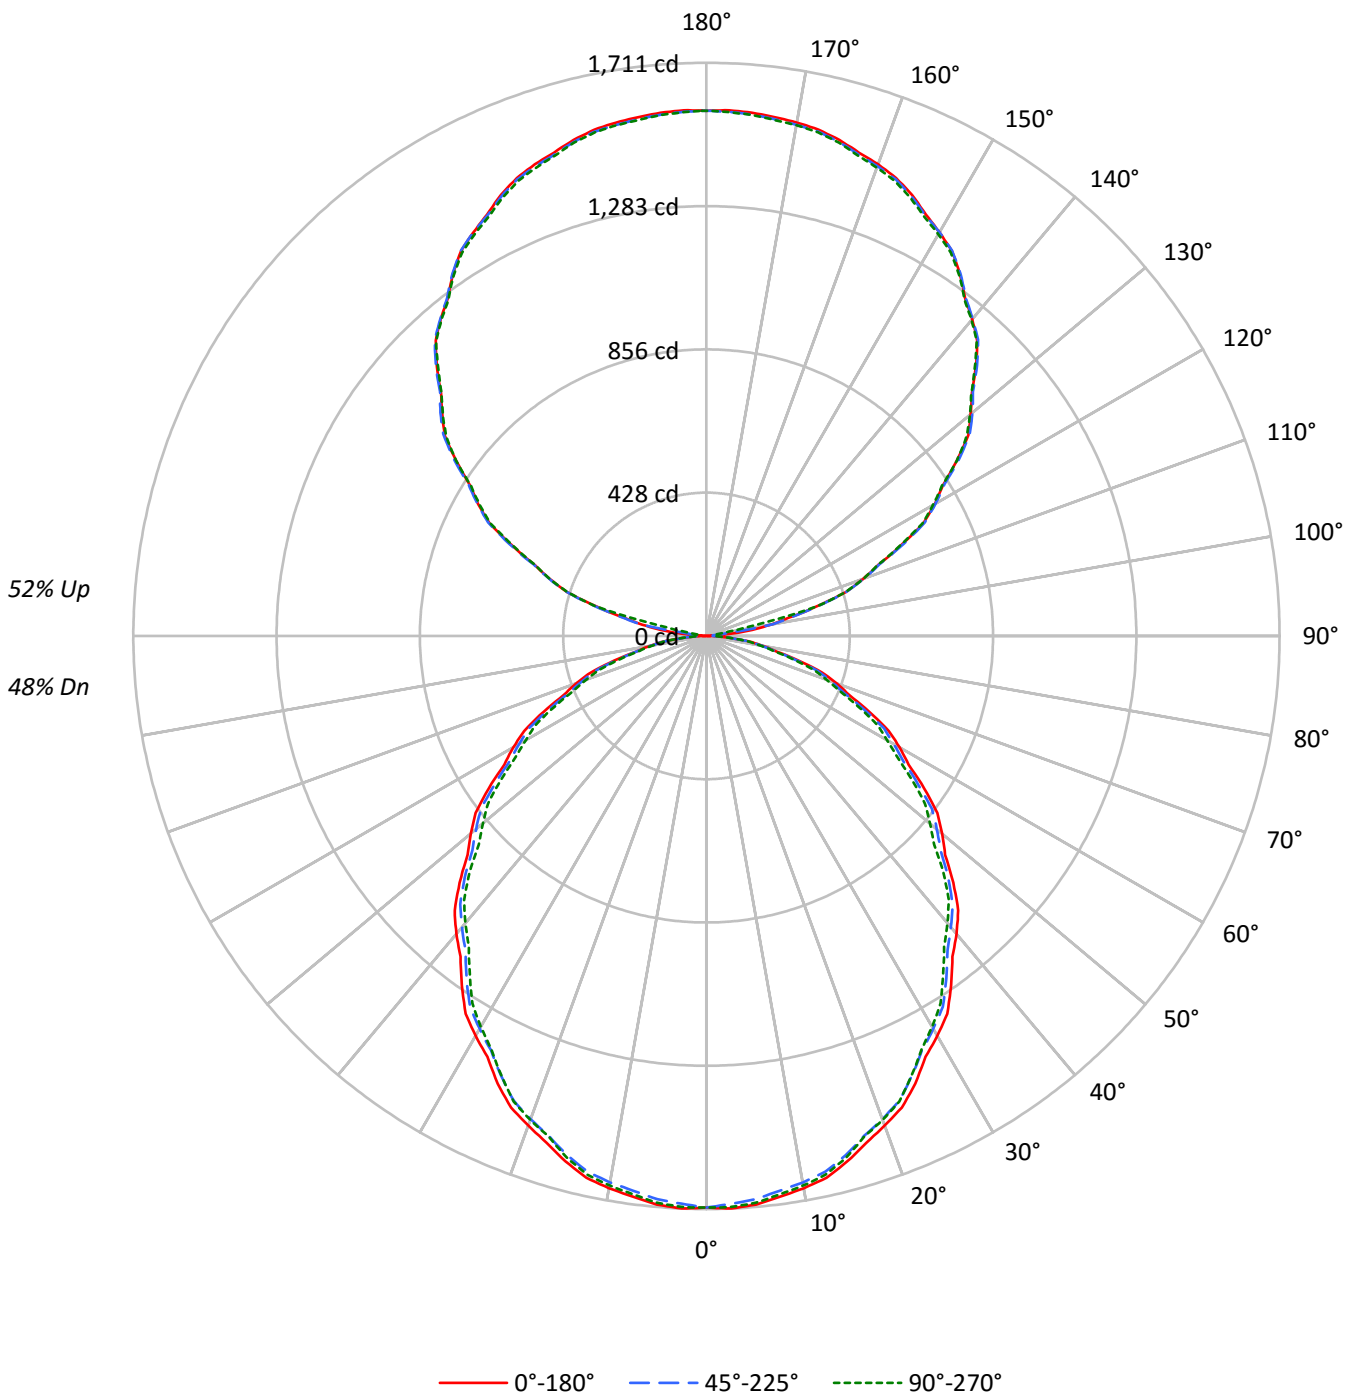



TEST NUMBER: P333292

CATALOG NUMBER: S125DIP-S1090D1205U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	54	54	54	48	48	48	48	48	48	48		
1	97	93	89	86	89	86	82	79	72	70	67	59	58	56	48	47	46	40	40	40	40	40	40	40		
2	89	81	75	70	81	75	69	65	63	59	56	52	49	47	42	40	38	34	34	34	34	34	34	34		
3	81	71	64	58	74	66	59	54	56	51	47	46	43	40	37	35	33	29	29	29	29	29	29	29		
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	30	28	24	24	24	24	24	24	24		
5	68	56	48	42	62	52	45	39	44	39	34	37	33	29	30	27	25	21	21	21	21	21	21	21		
6	62	50	42	36	57	47	39	34	40	34	30	33	29	26	27	24	22	19	19	19	19	19	19	19		
7	58	45	37	32	53	42	35	30	36	30	26	30	26	23	25	22	19	17	17	17	17	17	17	17		
8	54	41	33	28	49	38	31	27	33	27	23	28	23	20	23	20	17	15	15	15	15	15	15	15		
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15	13	13	13	13	13	13	13		
10	47	34	27	22	43	32	26	21	28	22	19	23	19	16	20	16	14	12	12	12	12	12	12	12		

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11021	11021	11021
5°	11045	10940	11010
10°	10978	10863	10925
15°	10858	10732	10777
20°	10689	10549	10568
25°	10505	10332	10322
30°	10279	10097	10047
35°	10037	9845	9707
40°	9788	9571	9435
45°	9519	9322	9136
50°	9224	9020	8748
55°	8938	8679	8436
60°	8596	8335	8038
65°	8189	7922	7653
70°	7801	7444	7189
75°	7107	6872	6635
80°	6326	6226	6073
85°	5498	5602	5298



TEST NUMBER: P333292

CATALOG NUMBER: S125DIP-S1090D1205U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	160.9	1.7
10°-20°	454.5	4.9
20°-30°	671.0	7.2
30°-40°	783.0	8.5
40°-50°	786.4	8.5
50°-60°	690.3	7.5
60°-70°	514.4	5.6
70°-80°	294.1	3.2
80°-90°	88.8	1.0
90°-100°	57.0	0.6
100°-110°	351.1	3.8
110°-120°	636.8	6.9
120°-130°	817.3	8.8
130°-140°	879.1	9.5
140°-150°	825.1	8.9
150°-160°	667.5	7.2
160°-170°	431.7	4.7
170°-180°	148.9	1.6
0°-30°	1286.4	13.9
0°-40°	2069.4	22.4
0°-60°	3546.2	38.3
0°-90°	4443.5	48.0
90°-120°	1044.9	11.3
90°-150°	3566.4	38.5
90°-180°	4814.0	52.0
0°-180°	9257.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1706	1706	1706	1706	1706	
5°	1704	1700	1688	1699	1698	162
15°	1624	1619	1605	1612	1612	458
25°	1474	1467	1450	1452	1448	678
35°	1273	1267	1249	1242	1231	796
45°	1042	1036	1021	1005	1000	803
55°	794	789	771	759	749	708
65°	536	533	518	507	501	532
75°	285	282	275	271	266	304
85°	74	76	76	74	72	83
90°	1	10	19	24	28	7
95°	66	60	19	24	24	84
105°	342	346	346	346	345	362
115°	642	647	648	644	637	636
125°	912	920	920	916	912	815
135°	1138	1144	1142	1140	1133	877
145°	1319	1321	1321	1322	1316	825
155°	1453	1446	1448	1451	1442	669
165°	1533	1526	1527	1533	1525	433
175°	1568	1561	1562	1570	1561	149
180°	1568	1568	1568	1568	1568	



TEST NUMBER: P333292

CATALOG NUMBER: S125DIP-S1090D1205U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4
2.5°	1710.7	1710.0	1709.2	1708.5	1707.8	1706.2	1703.8	1701.4	1699.0	1696.6	1699.0
5°	1703.7	1703.1	1702.5	1701.9	1701.3	1699.5	1696.5	1693.5	1690.5	1687.5	1690.2
7.5°	1688.0	1687.4	1686.8	1686.2	1685.6	1683.6	1680.3	1677.0	1673.7	1670.4	1673.1
10°	1674.0	1673.4	1672.8	1672.2	1671.6	1669.6	1666.3	1663.0	1659.7	1656.4	1658.8
12.5°	1656.7	1655.6	1654.5	1653.4	1652.4	1650.3	1647.2	1644.2	1641.1	1638.0	1640.0
15°	1624.0	1623.1	1622.2	1621.3	1620.4	1618.3	1615.0	1611.7	1608.4	1605.1	1606.6
17.5°	1586.5	1585.2	1583.8	1582.5	1581.2	1578.8	1575.4	1572.0	1568.6	1565.1	1567.0
20°	1555.2	1554.6	1554.0	1553.4	1552.8	1550.5	1546.6	1542.7	1538.8	1534.9	1537.0
22.5°	1523.8	1522.8	1521.7	1520.6	1519.5	1517.1	1513.5	1509.8	1506.2	1502.5	1503.9
25°	1474.2	1472.7	1471.2	1469.7	1468.2	1465.5	1461.6	1457.7	1453.8	1449.9	1450.5
27.5°	1416.1	1415.2	1414.3	1413.4	1412.5	1410.1	1406.0	1402.0	1398.0	1394.0	1394.1
30°	1378.3	1377.4	1376.5	1375.6	1374.7	1372.0	1367.5	1363.0	1358.5	1354.0	1353.4
32.5°	1337.3	1335.9	1334.5	1333.1	1331.8	1329.1	1325.0	1321.0	1317.0	1313.0	1311.9
35°	1273.0	1271.8	1270.6	1269.4	1268.2	1265.5	1261.3	1257.1	1252.9	1248.7	1247.2
37.5°	1206.3	1204.8	1203.3	1201.8	1200.3	1197.6	1193.6	1189.7	1185.7	1181.8	1179.5
40°	1161.0	1159.5	1158.0	1156.5	1155.0	1152.1	1147.9	1143.7	1139.5	1135.3	1132.6
42.5°	1112.4	1111.1	1109.9	1108.6	1107.3	1104.6	1100.4	1096.2	1092.0	1087.8	1085.3
45°	1042.2	1041.0	1039.8	1038.6	1037.4	1035.0	1031.4	1027.8	1024.2	1020.6	1017.0
47.5°	966.6	966.6	966.7	966.8	966.8	964.7	960.4	956.0	951.7	947.4	943.7
50°	918.0	917.1	916.2	915.3	914.4	912.1	908.5	904.9	901.3	897.7	893.8
52.5°	868.3	867.6	867.0	866.3	865.7	863.4	859.6	855.7	851.9	848.0	844.6
55°	793.8	792.9	792.0	791.1	790.2	787.6	783.4	779.2	775.0	770.8	768.1
57.5°	715.2	714.7	714.3	713.8	713.3	711.3	707.7	704.2	700.7	697.1	693.6
60°	665.5	664.3	663.1	661.9	660.7	658.5	655.2	651.9	648.6	645.3	642.3
62.5°	613.7	612.7	611.8	610.8	609.9	608.0	605.1	602.3	599.5	596.7	593.4
65°	535.9	535.3	534.7	534.1	533.5	531.6	528.3	525.0	521.7	518.4	515.7
67.5°	460.6	459.3	458.1	456.8	455.6	453.7	451.2	448.8	446.3	443.9	441.6
70°	413.1	411.6	410.1	408.6	407.1	405.0	402.3	399.6	396.9	394.2	392.4
72.5°	361.3	360.2	359.2	358.2	357.2	355.8	354.1	352.3	350.6	348.8	346.8
75°	284.8	284.2	283.6	283.0	282.4	281.4	279.9	278.4	276.9	275.4	274.5
77.5°	214.4	214.1	213.9	213.7	213.4	212.9	212.0	211.2	210.4	209.5	209.0
80°	170.1	170.1	170.1	170.1	170.1	169.8	169.2	168.6	168.0	167.4	167.1
82.5°	131.2	130.7	130.3	129.8	129.3	129.0	128.9	128.8	128.6	128.5	128.0
85°	74.2	74.5	74.8	75.1	75.4	75.6	75.6	75.6	75.6	75.6	75.3
87.5°	29.4	29.8	30.2	30.6	31.0	31.3	31.4	31.6	31.7	31.8	32.1
90°	1.2	3.2	5.3	7.4	9.4	11.4	13.2	15.0	16.8	18.6	19.9
92.5°	17.9	16.5	15.0	13.6	12.1	12.2	13.8	15.4	17.0	18.6	19.9
95°	66.2	65.5	64.7	63.9	63.1	57.9	48.0	38.2	28.4	18.6	19.9
97.5°	138.3	139.7	141.1	142.5	143.9	134.9	115.4	96.0	76.6	57.2	49.9
100°	194.1	194.9	195.6	196.4	197.2	198.1	199.1	200.2	201.2	202.2	163.7
102.5°	250.8	251.8	252.8	253.7	254.7	255.5	256.1	256.8	257.4	258.0	250.7
105°	341.7	342.7	343.7	344.8	345.8	346.3	346.3	346.3	346.3	346.3	346.3
107.5°	436.1	436.1	436.1	436.1	436.1	436.3	436.8	437.3	437.9	438.4	438.4
110°	497.4	497.4	497.4	497.4	497.4	497.7	498.2	498.7	499.2	499.7	499.0



TEST NUMBER: P333292

CATALOG NUMBER: S125DIP-S1090D1205U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	555.1	555.7	556.3	556.9	557.5	558.0	558.3	558.6	558.9	559.2	558.3
115°	641.5	642.8	644.1	645.4	646.7	647.5	647.7	648.0	648.2	648.5	647.5
117.5°	731.0	731.0	730.9	730.9	730.8	731.3	732.3	733.2	734.2	735.2	733.9
120°	786.8	786.5	786.3	786.0	785.8	786.0	786.8	787.6	788.3	789.1	788.6
122.5°	836.1	837.1	838.0	839.0	840.0	840.7	841.0	841.4	841.8	842.1	841.6
125°	912.3	914.1	915.9	917.7	919.5	920.4	920.4	920.4	920.4	920.4	919.4
127.5°	985.1	986.4	987.6	988.9	990.2	990.8	990.6	990.5	990.3	990.2	989.6
130°	1029.7	1031.0	1032.3	1033.6	1034.9	1035.6	1035.9	1036.2	1036.4	1036.7	1035.9
132.5°	1074.3	1075.8	1077.3	1078.8	1080.3	1080.8	1080.2	1079.6	1079.1	1078.5	1078.4
135°	1137.8	1139.3	1140.9	1142.4	1144.0	1144.5	1144.0	1143.5	1142.9	1142.4	1141.9
137.5°	1196.1	1197.5	1198.8	1200.1	1201.5	1201.9	1201.5	1201.0	1200.5	1200.1	1200.2
140°	1234.2	1234.8	1235.3	1235.8	1236.3	1236.4	1236.2	1235.9	1235.7	1235.4	1235.9
142.5°	1268.6	1268.9	1269.3	1269.6	1269.9	1270.2	1270.6	1270.9	1271.3	1271.7	1271.8
145°	1319.1	1319.6	1320.1	1320.6	1321.1	1321.4	1321.4	1321.4	1321.4	1321.4	1321.7
147.5°	1363.2	1363.1	1363.0	1362.9	1362.8	1362.9	1363.2	1363.5	1363.9	1364.2	1364.5
150°	1391.1	1390.6	1390.1	1389.6	1389.1	1389.1	1389.6	1390.1	1390.6	1391.1	1391.6
152.5°	1418.1	1417.0	1415.8	1414.7	1413.5	1413.2	1413.8	1414.3	1414.8	1415.3	1415.8
155°	1452.7	1451.2	1449.6	1448.1	1446.5	1446.0	1446.5	1447.0	1447.6	1448.1	1448.9
157.5°	1479.5	1478.5	1477.6	1476.7	1475.7	1475.3	1475.4	1475.4	1475.5	1475.5	1476.3
160°	1498.1	1496.5	1495.0	1493.4	1491.9	1491.2	1491.5	1491.7	1492.0	1492.2	1493.3
162.5°	1512.9	1511.4	1509.8	1508.3	1506.7	1506.1	1506.3	1506.6	1506.9	1507.1	1508.6
165°	1532.9	1531.4	1529.8	1528.3	1526.7	1526.1	1526.3	1526.6	1526.8	1527.1	1528.7
167.5°	1547.8	1546.2	1544.6	1543.0	1541.4	1540.7	1541.0	1541.2	1541.5	1541.8	1543.6
170°	1556.2	1554.4	1552.5	1550.7	1548.9	1548.2	1548.4	1548.7	1548.9	1549.2	1551.3
172.5°	1561.7	1559.9	1558.1	1556.3	1554.5	1553.8	1554.3	1554.8	1555.2	1555.7	1557.6
175°	1567.8	1566.2	1564.7	1563.1	1561.6	1560.9	1561.2	1561.5	1561.7	1562.0	1564.0
177.5°	1570.6	1569.3	1568.1	1566.9	1565.6	1565.1	1565.3	1565.5	1565.7	1565.9	1567.4
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8



TEST NUMBER: P333292

CATALOG NUMBER: S125DIP-S1090D1205U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4
2.5°	1701.4	1703.8	1706.2	1707.3	1707.1	1706.8	1706.6	1706.4
5°	1692.9	1695.6	1698.3	1699.5	1699.2	1698.9	1698.6	1698.3
7.5°	1675.7	1678.4	1681.0	1682.2	1681.9	1681.6	1681.3	1681.0
10°	1661.2	1663.6	1666.0	1667.1	1666.8	1666.5	1666.2	1665.9
12.5°	1641.9	1643.8	1645.7	1646.7	1646.6	1646.5	1646.5	1646.4
15°	1608.1	1609.6	1611.1	1611.9	1611.9	1611.9	1611.9	1611.9
17.5°	1568.9	1570.7	1572.6	1572.8	1571.3	1569.8	1568.3	1566.8
20°	1539.1	1541.2	1543.3	1543.6	1542.1	1540.6	1539.1	1537.6
22.5°	1505.3	1506.7	1508.0	1508.2	1507.2	1506.2	1505.2	1504.1
25°	1451.1	1451.7	1452.3	1452.1	1451.2	1450.3	1449.4	1448.5
27.5°	1394.2	1394.3	1394.5	1394.1	1393.2	1392.3	1391.4	1390.5
30°	1352.8	1352.2	1351.6	1350.9	1350.0	1349.1	1348.2	1347.3
32.5°	1310.8	1309.7	1308.7	1307.3	1305.7	1304.1	1302.4	1300.8
35°	1245.7	1244.2	1242.7	1240.8	1238.4	1236.0	1233.6	1231.2
37.5°	1177.3	1175.1	1172.9	1171.1	1169.7	1168.3	1166.9	1165.6
40°	1129.9	1127.2	1124.5	1122.7	1121.8	1120.9	1120.0	1119.1
42.5°	1082.9	1080.4	1078.0	1076.0	1074.7	1073.3	1071.9	1070.5
45°	1013.4	1009.8	1006.2	1003.9	1003.0	1002.1	1001.2	1000.3
47.5°	940.1	936.4	932.8	929.9	927.8	925.7	923.6	921.5
50°	889.9	886.0	882.1	879.1	877.0	874.9	872.8	870.7
52.5°	841.2	837.8	834.4	831.5	829.1	826.8	824.5	822.1
55°	765.4	762.7	760.0	757.6	755.5	753.4	751.3	749.2
57.5°	690.2	686.7	683.2	680.9	679.8	678.6	677.5	676.3
60°	639.3	636.3	633.3	630.7	628.6	626.5	624.4	622.3
62.5°	590.2	587.0	583.7	581.3	579.7	578.1	576.4	574.8
65°	513.0	510.3	507.6	505.6	504.4	503.2	502.0	500.8
67.5°	439.3	437.0	434.7	433.2	432.5	431.8	431.1	430.4
70°	390.6	388.8	387.0	385.5	384.3	383.1	381.9	380.7
72.5°	344.8	342.7	340.7	339.1	337.9	336.7	335.5	334.3
75°	273.6	272.7	271.8	270.7	269.5	268.3	267.1	265.9
77.5°	208.4	207.9	207.4	206.7	205.8	205.0	204.1	203.3
80°	166.8	166.5	166.2	165.7	165.1	164.5	163.9	163.3
82.5°	127.4	126.9	126.4	126.0	125.9	125.8	125.7	125.5
85°	75.0	74.7	74.4	73.9	73.3	72.7	72.1	71.5
87.5°	32.3	32.6	32.8	32.8	32.5	32.1	31.8	31.5
90°	21.2	22.5	23.8	24.8	25.6	26.3	27.1	27.9
92.5°	21.2	22.5	23.8	24.6	24.9	25.3	25.7	26.0
95°	21.2	22.5	23.8	24.4	24.4	24.4	24.4	24.4
97.5°	42.6	35.3	28.0	24.4	24.4	24.4	24.4	24.4
100°	125.3	86.8	48.3	28.5	27.5	26.5	25.4	24.4
102.5°	243.4	236.2	228.9	216.5	198.9	181.3	163.8	146.2
105°	346.3	346.3	346.3	346.2	345.9	345.7	345.4	345.2
107.5°	438.5	438.5	438.6	438.2	437.4	436.7	435.9	435.1
110°	498.2	497.4	496.6	496.4	496.6	496.9	497.2	497.4



TEST NUMBER: P333292

CATALOG NUMBER: S125DIP-S1090D1205U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	557.3	556.3	555.3	554.6	554.3	553.9	553.6	553.2
115°	646.4	645.4	644.4	643.1	641.5	640.0	638.4	636.9
117.5°	732.5	731.2	729.8	728.8	728.1	727.5	726.8	726.1
120°	788.1	787.6	787.1	786.2	784.9	783.6	782.3	781.0
122.5°	841.1	840.6	840.1	839.0	837.5	836.0	834.6	833.1
125°	918.4	917.3	916.3	915.4	914.6	913.9	913.1	912.3
127.5°	989.0	988.5	987.9	986.7	984.8	982.8	980.9	979.0
130°	1035.1	1034.3	1033.6	1032.5	1031.2	1030.0	1028.7	1027.4
132.5°	1078.2	1078.0	1077.9	1077.2	1075.9	1074.6	1073.3	1072.0
135°	1141.4	1140.9	1140.4	1139.3	1137.8	1136.2	1134.7	1133.1
137.5°	1200.3	1200.4	1200.5	1199.9	1198.5	1197.2	1195.8	1194.5
140°	1236.4	1236.9	1237.5	1236.9	1235.4	1233.9	1232.3	1230.8
142.5°	1271.9	1272.0	1272.1	1271.4	1269.8	1268.3	1266.7	1265.2
145°	1321.9	1322.2	1322.4	1321.8	1320.2	1318.7	1317.1	1315.6
147.5°	1364.8	1365.1	1365.4	1364.6	1362.8	1360.9	1359.1	1357.2
150°	1392.2	1392.7	1393.2	1392.4	1390.4	1388.3	1386.2	1384.2
152.5°	1416.3	1416.9	1417.4	1416.7	1414.8	1413.0	1411.1	1409.3
155°	1449.6	1450.4	1451.2	1450.5	1448.5	1446.4	1444.3	1442.3
157.5°	1477.2	1478.0	1478.8	1478.2	1476.1	1474.1	1472.0	1469.9
160°	1494.3	1495.3	1496.4	1495.9	1493.8	1491.7	1489.7	1487.6
162.5°	1510.0	1511.5	1512.9	1512.5	1510.2	1507.9	1505.7	1503.4
165°	1530.2	1531.8	1533.3	1533.0	1531.0	1528.9	1526.8	1524.8
167.5°	1545.5	1547.3	1549.2	1549.0	1546.6	1544.3	1542.0	1539.7
170°	1553.3	1555.4	1557.5	1557.3	1555.0	1552.7	1550.4	1548.0
172.5°	1559.4	1561.3	1563.1	1562.9	1560.6	1558.3	1555.9	1553.6
175°	1566.1	1568.2	1570.2	1570.1	1567.8	1565.5	1563.1	1560.8
177.5°	1568.8	1570.3	1571.7	1571.6	1570.0	1568.3	1566.6	1565.0
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8

(END OF REPORT)