

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P333267

Luminaire Tested: **S125DIP-S1090D590U835-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333267
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1090D590U835-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 590 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6563.6 lumens
Efficiency: N/A
Efficacy: 134.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 48.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333267

CATALOG NUMBER: S125DIP-S1090D590U835-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

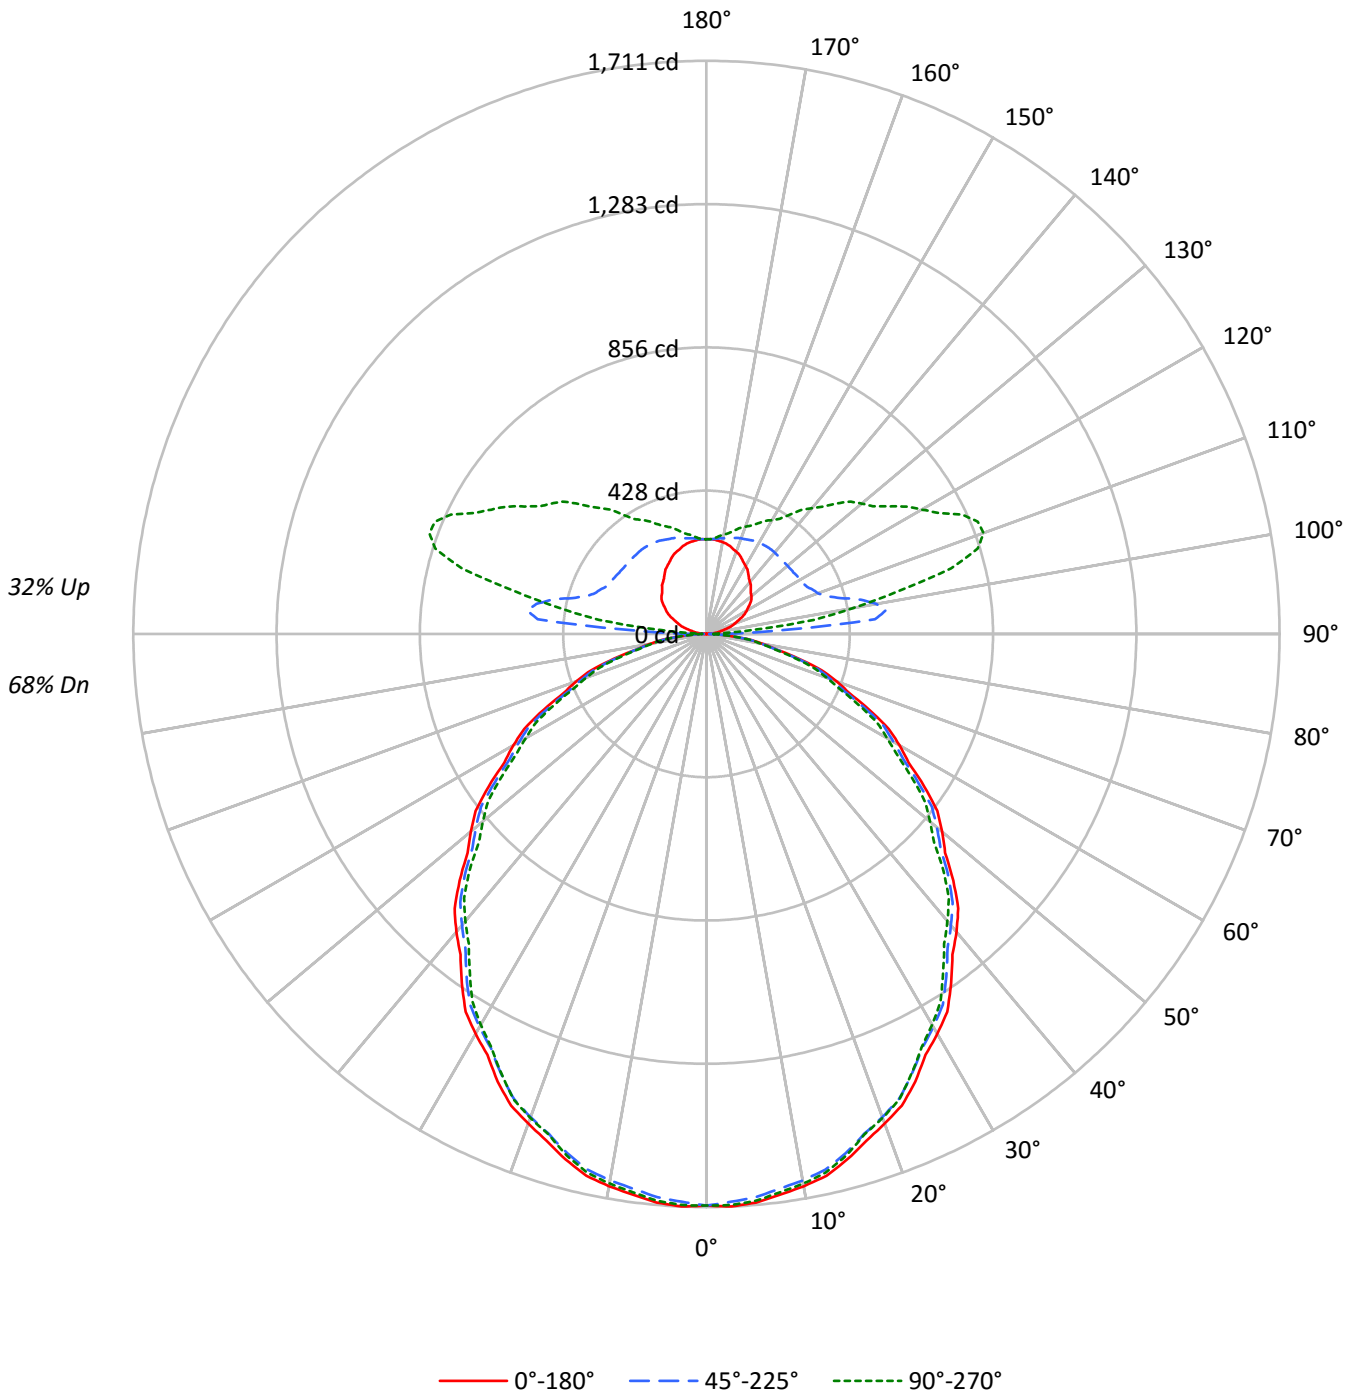



TEST NUMBER: P333267

CATALOG NUMBER: S125DIP-S1090D590U835-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72	68
1	102	97	93	90	96	92	88	85	82	79	77	72	70	69	64	62	61	57
2	93	85	78	73	87	80	75	70	72	67	63	64	60	57	56	54	51	48
3	84	75	67	61	79	71	64	58	63	58	53	56	52	48	50	46	44	40
4	77	66	58	52	73	63	55	50	56	50	45	50	45	41	44	41	38	34
5	71	59	51	44	67	56	48	43	50	44	39	45	40	36	40	36	33	30
6	66	53	45	39	62	50	43	37	45	39	34	41	36	32	36	32	29	26
7	61	48	40	34	57	46	38	33	41	35	30	37	32	28	33	29	26	23
8	56	44	36	30	53	42	34	29	38	31	27	34	29	25	31	26	23	21
9	53	40	32	27	50	38	31	26	35	29	24	31	26	23	28	24	21	19
10	49	37	29	24	46	35	28	24	32	26	22	29	24	20	26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11021	11021	11021
5°	11045	10940	11010
10°	10978	10863	10925
15°	10858	10732	10777
20°	10689	10549	10568
25°	10505	10332	10322
30°	10279	10097	10047
35°	10037	9845	9707
40°	9788	9571	9435
45°	9519	9322	9136
50°	9224	9020	8748
55°	8938	8679	8436
60°	8596	8335	8038
65°	8189	7922	7653
70°	7801	7444	7189
75°	7107	6872	6635
80°	6326	6226	6073
85°	5498	5602	5298



TEST NUMBER: P333267

CATALOG NUMBER: S125DIP-S1090D590U835-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	160.9	2.5
10°-20°	454.5	6.9
20°-30°	671.0	10.2
30°-40°	783.0	11.9
40°-50°	786.4	12.0
50°-60°	690.3	10.5
60°-70°	514.4	7.8
70°-80°	294.1	4.5
80°-90°	87.1	1.3
90°-100°	205.1	3.1
100°-110°	440.9	6.7
110°-120°	413.8	6.3
120°-130°	335.3	5.1
130°-140°	269.1	4.1
140°-150°	203.1	3.1
150°-160°	142.9	2.2
160°-170°	84.3	1.3
170°-180°	27.4	0.4
0°-30°	1286.4	19.6
0°-40°	2069.4	31.5
0°-60°	3546.2	54.0
0°-90°	4441.8	67.7
90°-120°	1059.7	16.1
90°-150°	1867.2	28.4
90°-180°	2122.0	32.3
0°-180°	6563.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1706	1706	1706	1706	1706	
5°	1704	1700	1688	1699	1698	162
15°	1624	1619	1605	1612	1612	458
25°	1474	1467	1450	1452	1448	678
35°	1273	1267	1249	1242	1231	796
45°	1042	1036	1021	1005	1000	803
55°	794	789	771	759	749	708
65°	536	533	518	507	501	532
75°	285	282	275	271	266	304
85°	74	76	76	74	72	83
90°	1	5	9	12	13	5
95°	19	56	505	229	134	20
105°	64	90	414	814	756	68
115°	115	139	332	716	842	113
125°	160	187	318	569	663	142
135°	187	225	316	477	551	145
145°	218	250	317	395	435	137
155°	249	268	309	349	364	114
165°	272	279	297	315	319	76
175°	282	282	285	288	287	27
180°	283	283	283	283	283	



TEST NUMBER: P333267

CATALOG NUMBER: S125DIP-S1090D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4
2.5°	1710.7	1710.0	1709.2	1708.5	1707.8	1706.2	1703.8	1701.4	1699.0	1696.6	1699.0
5°	1703.7	1703.1	1702.5	1701.9	1701.3	1699.5	1696.5	1693.5	1690.5	1687.5	1690.2
7.5°	1688.0	1687.4	1686.8	1686.2	1685.6	1683.6	1680.3	1677.0	1673.7	1670.4	1673.1
10°	1674.0	1673.4	1672.8	1672.2	1671.6	1669.6	1666.3	1663.0	1659.7	1656.4	1658.8
12.5°	1656.7	1655.6	1654.5	1653.4	1652.4	1650.3	1647.2	1644.2	1641.1	1638.0	1640.0
15°	1624.0	1623.1	1622.2	1621.3	1620.4	1618.3	1615.0	1611.7	1608.4	1605.1	1606.6
17.5°	1586.5	1585.2	1583.8	1582.5	1581.2	1578.8	1575.4	1572.0	1568.6	1565.1	1567.0
20°	1555.2	1554.6	1554.0	1553.4	1552.8	1550.5	1546.6	1542.7	1538.8	1534.9	1537.0
22.5°	1523.8	1522.8	1521.7	1520.6	1519.5	1517.1	1513.5	1509.8	1506.2	1502.5	1503.9
25°	1474.2	1472.7	1471.2	1469.7	1468.2	1465.5	1461.6	1457.7	1453.8	1449.9	1450.5
27.5°	1416.1	1415.2	1414.3	1413.4	1412.5	1410.1	1406.0	1402.0	1398.0	1394.0	1394.1
30°	1378.3	1377.4	1376.5	1375.6	1374.7	1372.0	1367.5	1363.0	1358.5	1354.0	1353.4
32.5°	1337.3	1335.9	1334.5	1333.1	1331.8	1329.1	1325.0	1321.0	1317.0	1313.0	1311.9
35°	1273.0	1271.8	1270.6	1269.4	1268.2	1265.5	1261.3	1257.1	1252.9	1248.7	1247.2
37.5°	1206.3	1204.8	1203.3	1201.8	1200.3	1197.6	1193.6	1189.7	1185.7	1181.8	1179.5
40°	1161.0	1159.5	1158.0	1156.5	1155.0	1152.1	1147.9	1143.7	1139.5	1135.3	1132.6
42.5°	1112.4	1111.1	1109.9	1108.6	1107.3	1104.6	1100.4	1096.2	1092.0	1087.8	1085.3
45°	1042.2	1041.0	1039.8	1038.6	1037.4	1035.0	1031.4	1027.8	1024.2	1020.6	1017.0
47.5°	966.6	966.6	966.7	966.8	966.8	964.7	960.4	956.0	951.7	947.4	943.7
50°	918.0	917.1	916.2	915.3	914.4	912.1	908.5	904.9	901.3	897.7	893.8
52.5°	868.3	867.6	867.0	866.3	865.7	863.4	859.6	855.7	851.9	848.0	844.6
55°	793.8	792.9	792.0	791.1	790.2	787.6	783.4	779.2	775.0	770.8	768.1
57.5°	715.2	714.7	714.3	713.8	713.3	711.3	707.7	704.2	700.7	697.1	693.6
60°	665.5	664.3	663.1	661.9	660.7	658.5	655.2	651.9	648.6	645.3	642.3
62.5°	613.7	612.7	611.8	610.8	609.9	608.0	605.1	602.3	599.5	596.7	593.4
65°	535.9	535.3	534.7	534.1	533.5	531.6	528.3	525.0	521.7	518.4	515.7
67.5°	460.6	459.3	458.1	456.8	455.6	453.7	451.2	448.8	446.3	443.9	441.6
70°	413.1	411.6	410.1	408.6	407.1	405.0	402.3	399.6	396.9	394.2	392.4
72.5°	361.3	360.2	359.2	358.2	357.2	355.8	354.1	352.3	350.6	348.8	346.8
75°	284.8	284.2	283.6	283.0	282.4	281.4	279.9	278.4	276.9	275.4	274.5
77.5°	214.4	214.1	213.9	213.7	213.4	212.9	212.0	211.2	210.4	209.5	209.0
80°	170.1	170.1	170.1	170.1	170.1	169.8	169.2	168.6	168.0	167.4	167.1
82.5°	131.2	130.7	130.3	129.8	129.3	129.0	128.9	128.8	128.6	128.5	128.0
85°	74.2	74.5	74.8	75.1	75.4	75.6	75.6	75.6	75.6	75.6	75.3
87.5°	29.3	29.4	29.6	29.8	30.1	30.2	30.1	30.0	29.9	29.9	30.0
90°	0.6	1.1	2.3	3.4	4.6	5.7	6.3	7.4	8.0	9.1	9.7
92.5°	7.0	8.4	13.2	20.3	30.1	46.8	77.9	130.2	186.9	183.9	148.9
95°	18.8	19.4	24.0	30.2	42.8	68.5	129.5	255.0	412.4	505.4	494.6
97.5°	31.3	31.9	35.1	41.4	52.7	71.2	111.6	203.5	368.3	539.7	625.8
100°	39.9	41.1	43.4	49.6	60.5	77.6	110.7	184.8	328.6	515.1	657.7
102.5°	49.5	50.2	52.0	58.8	68.7	85.3	114.8	177.1	298.4	471.7	638.5
105°	64.5	64.5	67.3	73.0	82.1	98.1	123.2	174.0	269.2	413.6	577.3
107.5°	79.1	80.2	82.9	87.6	97.1	111.5	135.8	179.2	256.9	373.5	514.8
110°	89.6	90.7	93.0	98.1	106.7	121.5	144.9	184.2	253.3	354.8	479.2



TEST NUMBER: P333267

CATALOG NUMBER: S125DIP-S1090D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	100.1	101.2	103.0	108.2	116.7	131.1	153.6	190.6	253.3	343.9	452.7
115°	115.2	116.4	118.1	123.2	131.8	146.0	167.1	200.2	255.0	332.0	423.8
117.5°	128.9	130.6	132.5	137.6	147.3	161.1	181.1	211.2	258.7	326.2	406.6
120°	138.0	139.8	142.0	147.2	156.9	171.1	191.1	218.5	262.4	323.4	397.0
122.5°	147.6	148.9	150.7	155.8	166.5	180.7	200.7	226.7	265.6	321.2	388.8
125°	159.7	160.9	163.7	168.8	179.7	194.5	213.3	237.9	271.0	318.3	377.6
127.5°	169.2	170.9	174.6	181.1	192.6	207.4	225.5	248.1	277.0	316.9	367.4
130°	175.1	176.8	181.4	188.8	200.8	215.6	233.3	255.0	280.7	316.0	360.5
132.5°	179.7	181.9	187.3	195.7	208.1	222.9	240.6	260.9	284.8	316.0	355.0
135°	187.1	189.4	196.2	205.4	217.3	232.7	250.4	269.2	290.3	316.0	348.5
137.5°	196.5	198.2	204.6	213.7	225.4	241.3	257.4	275.4	295.5	316.7	342.7
140°	201.9	203.6	210.5	219.6	230.5	245.9	262.4	279.5	297.8	317.2	340.0
142.5°	208.3	209.6	216.0	225.1	235.5	250.0	265.6	281.8	299.1	317.6	337.7
145°	217.9	219.0	224.7	232.7	243.0	256.1	271.0	285.2	300.6	317.2	334.3
147.5°	227.9	228.6	233.5	240.9	249.8	261.4	274.4	287.3	301.2	315.7	330.7
150°	233.9	235.0	239.0	246.4	254.4	264.1	276.7	288.6	301.2	314.3	328.0
152.5°	240.3	240.9	244.5	251.0	258.5	267.3	278.9	289.5	300.7	312.5	324.8
155°	248.7	248.7	252.1	257.8	263.5	271.5	281.2	290.3	299.5	309.2	319.4
157.5°	256.2	256.1	258.9	263.8	268.8	274.8	283.2	290.9	298.0	305.7	314.4
160°	261.3	260.7	263.0	267.0	271.5	276.7	284.1	290.9	296.6	303.5	310.3
162.5°	265.4	264.8	267.1	270.6	274.3	278.5	285.0	290.5	295.3	300.7	306.7
165°	271.5	270.4	272.1	274.9	277.2	280.7	285.2	289.8	293.2	296.6	301.2
167.5°	275.6	275.1	276.1	277.7	279.3	281.4	285.2	288.4	290.0	292.6	295.8
170°	278.4	277.8	278.4	279.5	280.7	282.4	285.2	287.5	288.6	290.3	292.6
172.5°	280.2	279.2	279.7	280.9	281.6	282.4	284.8	286.6	286.8	287.6	289.4
175°	282.4	281.2	281.8	282.4	282.4	282.4	284.1	285.2	284.6	284.6	285.2
177.5°	283.4	282.5	282.5	282.9	282.5	282.5	283.4	283.8	282.9	282.9	283.4
180°	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9



TEST NUMBER: P333267

CATALOG NUMBER: S125DIP-S1090D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4	1706.4
2.5°	1701.4	1703.8	1706.2	1707.3	1707.1	1706.8	1706.6	1706.4
5°	1692.9	1695.6	1698.3	1699.5	1699.2	1698.9	1698.6	1698.3
7.5°	1675.7	1678.4	1681.0	1682.2	1681.9	1681.6	1681.3	1681.0
10°	1661.2	1663.6	1666.0	1667.1	1666.8	1666.5	1666.2	1665.9
12.5°	1641.9	1643.8	1645.7	1646.7	1646.6	1646.5	1646.5	1646.4
15°	1608.1	1609.6	1611.1	1611.9	1611.9	1611.9	1611.9	1611.9
17.5°	1568.9	1570.7	1572.6	1572.8	1571.3	1569.8	1568.3	1566.8
20°	1539.1	1541.2	1543.3	1543.6	1542.1	1540.6	1539.1	1537.6
22.5°	1505.3	1506.7	1508.0	1508.2	1507.2	1506.2	1505.2	1504.1
25°	1451.1	1451.7	1452.3	1452.1	1451.2	1450.3	1449.4	1448.5
27.5°	1394.2	1394.3	1394.5	1394.1	1393.2	1392.3	1391.4	1390.5
30°	1352.8	1352.2	1351.6	1350.9	1350.0	1349.1	1348.2	1347.3
32.5°	1310.8	1309.7	1308.7	1307.3	1305.7	1304.1	1302.4	1300.8
35°	1245.7	1244.2	1242.7	1240.8	1238.4	1236.0	1233.6	1231.2
37.5°	1177.3	1175.1	1172.9	1171.1	1169.7	1168.3	1166.9	1165.6
40°	1129.9	1127.2	1124.5	1122.7	1121.8	1120.9	1120.0	1119.1
42.5°	1082.9	1080.4	1078.0	1076.0	1074.7	1073.3	1071.9	1070.5
45°	1013.4	1009.8	1006.2	1003.9	1003.0	1002.1	1001.2	1000.3
47.5°	940.1	936.4	932.8	929.9	927.8	925.7	923.6	921.5
50°	889.9	886.0	882.1	879.1	877.0	874.9	872.8	870.7
52.5°	841.2	837.8	834.4	831.5	829.1	826.8	824.5	822.1
55°	765.4	762.7	760.0	757.6	755.5	753.4	751.3	749.2
57.5°	690.2	686.7	683.2	680.9	679.8	678.6	677.5	676.3
60°	639.3	636.3	633.3	630.7	628.6	626.5	624.4	622.3
62.5°	590.2	587.0	583.7	581.3	579.7	578.1	576.4	574.8
65°	513.0	510.3	507.6	505.6	504.4	503.2	502.0	500.8
67.5°	439.3	437.0	434.7	433.2	432.5	431.8	431.1	430.4
70°	390.6	388.8	387.0	385.5	384.3	383.1	381.9	380.7
72.5°	344.8	342.7	340.7	339.1	337.9	336.7	335.5	334.3
75°	273.6	272.7	271.8	270.7	269.5	268.3	267.1	265.9
77.5°	208.4	207.9	207.4	206.7	205.8	205.0	204.1	203.3
80°	166.8	166.5	166.2	165.7	165.1	164.5	163.9	163.3
82.5°	127.4	126.9	126.4	126.0	125.9	125.8	125.7	125.5
85°	75.0	74.7	74.4	73.9	73.3	72.7	72.1	71.5
87.5°	30.1	30.2	30.4	30.3	29.9	29.4	29.0	28.5
90°	10.3	10.8	11.4	12.5	12.5	12.5	13.1	13.1
92.5°	101.1	73.4	55.2	46.8	39.5	38.1	37.3	36.4
95°	410.1	323.4	253.3	205.4	164.9	147.7	143.2	134.1
97.5°	610.8	550.0	481.7	415.0	379.8	347.8	331.3	324.0
100°	701.6	673.7	614.9	555.6	516.2	475.2	454.1	444.9
102.5°	732.2	749.4	721.2	681.1	639.0	609.8	586.9	580.0
105°	714.2	792.3	817.4	811.1	792.9	774.1	762.7	755.8
107.5°	649.8	754.1	818.6	848.3	857.6	857.5	853.7	849.1
110°	602.4	710.8	791.2	839.7	865.3	876.2	880.2	880.2



TEST NUMBER: P333267

CATALOG NUMBER: S125DIP-S1090D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	565.0	667.9	749.2	806.4	843.9	862.5	872.4	876.5
115°	517.9	606.4	684.5	746.7	791.2	818.6	834.5	842.0
117.5°	487.6	563.8	631.1	688.2	732.7	761.0	776.8	781.4
120°	471.2	539.6	602.4	652.6	694.8	722.2	737.6	742.1
122.5°	458.9	522.3	578.2	625.2	662.8	687.9	703.3	707.4
125°	440.9	499.1	548.8	589.8	621.8	645.2	657.7	663.4
127.5°	422.7	477.0	523.3	561.8	590.7	611.4	623.2	625.8
130°	411.3	461.5	506.0	543.0	571.6	590.4	601.8	605.2
132.5°	399.9	446.9	487.3	523.0	551.5	570.3	580.8	584.7
135°	385.0	424.4	460.9	493.4	518.5	537.3	547.6	551.0
137.5°	372.5	404.3	434.7	462.3	484.7	501.9	511.3	515.1
140°	365.6	392.5	418.7	442.7	463.8	478.6	487.1	490.0
142.5°	359.7	382.4	405.0	425.8	443.7	456.2	464.3	466.7
145°	352.0	369.6	387.3	402.7	416.4	426.1	432.4	434.7
147.5°	344.7	359.0	372.6	384.2	395.1	402.8	406.5	407.5
150°	340.5	353.1	363.9	374.2	382.8	389.6	391.9	392.5
152.5°	336.0	347.2	357.1	365.1	372.3	377.7	380.0	380.6
155°	329.1	338.3	346.2	352.5	358.2	362.2	363.9	364.5
157.5°	322.3	329.8	336.0	340.9	345.3	348.6	350.2	350.1
160°	317.7	323.4	329.1	333.1	337.1	340.0	341.1	340.5
162.5°	312.7	318.0	322.7	326.3	329.4	331.8	332.0	331.9
165°	305.7	309.7	313.2	316.0	318.3	319.4	319.4	319.4
167.5°	299.1	301.8	304.4	306.4	307.6	308.6	308.1	308.0
170°	295.5	297.2	298.9	300.0	301.2	301.8	301.8	301.2
172.5°	291.4	293.1	294.3	295.0	295.3	296.3	295.4	294.8
175°	286.9	286.9	288.1	288.1	288.1	288.6	287.5	286.9
177.5°	283.8	284.3	284.3	284.3	283.8	284.3	282.9	282.9
180°	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9

(END OF REPORT)