

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: NEO-RAY

Report Number: P333166

Luminaire Tested: **S125DIP-S610D365U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333166  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIP-S610D365U835-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 365 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3964.3 lumens  
Efficiency: N/A  
Efficacy: 144.2 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 27.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333166

CATALOG NUMBER: S125DIP-S610D365U835-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

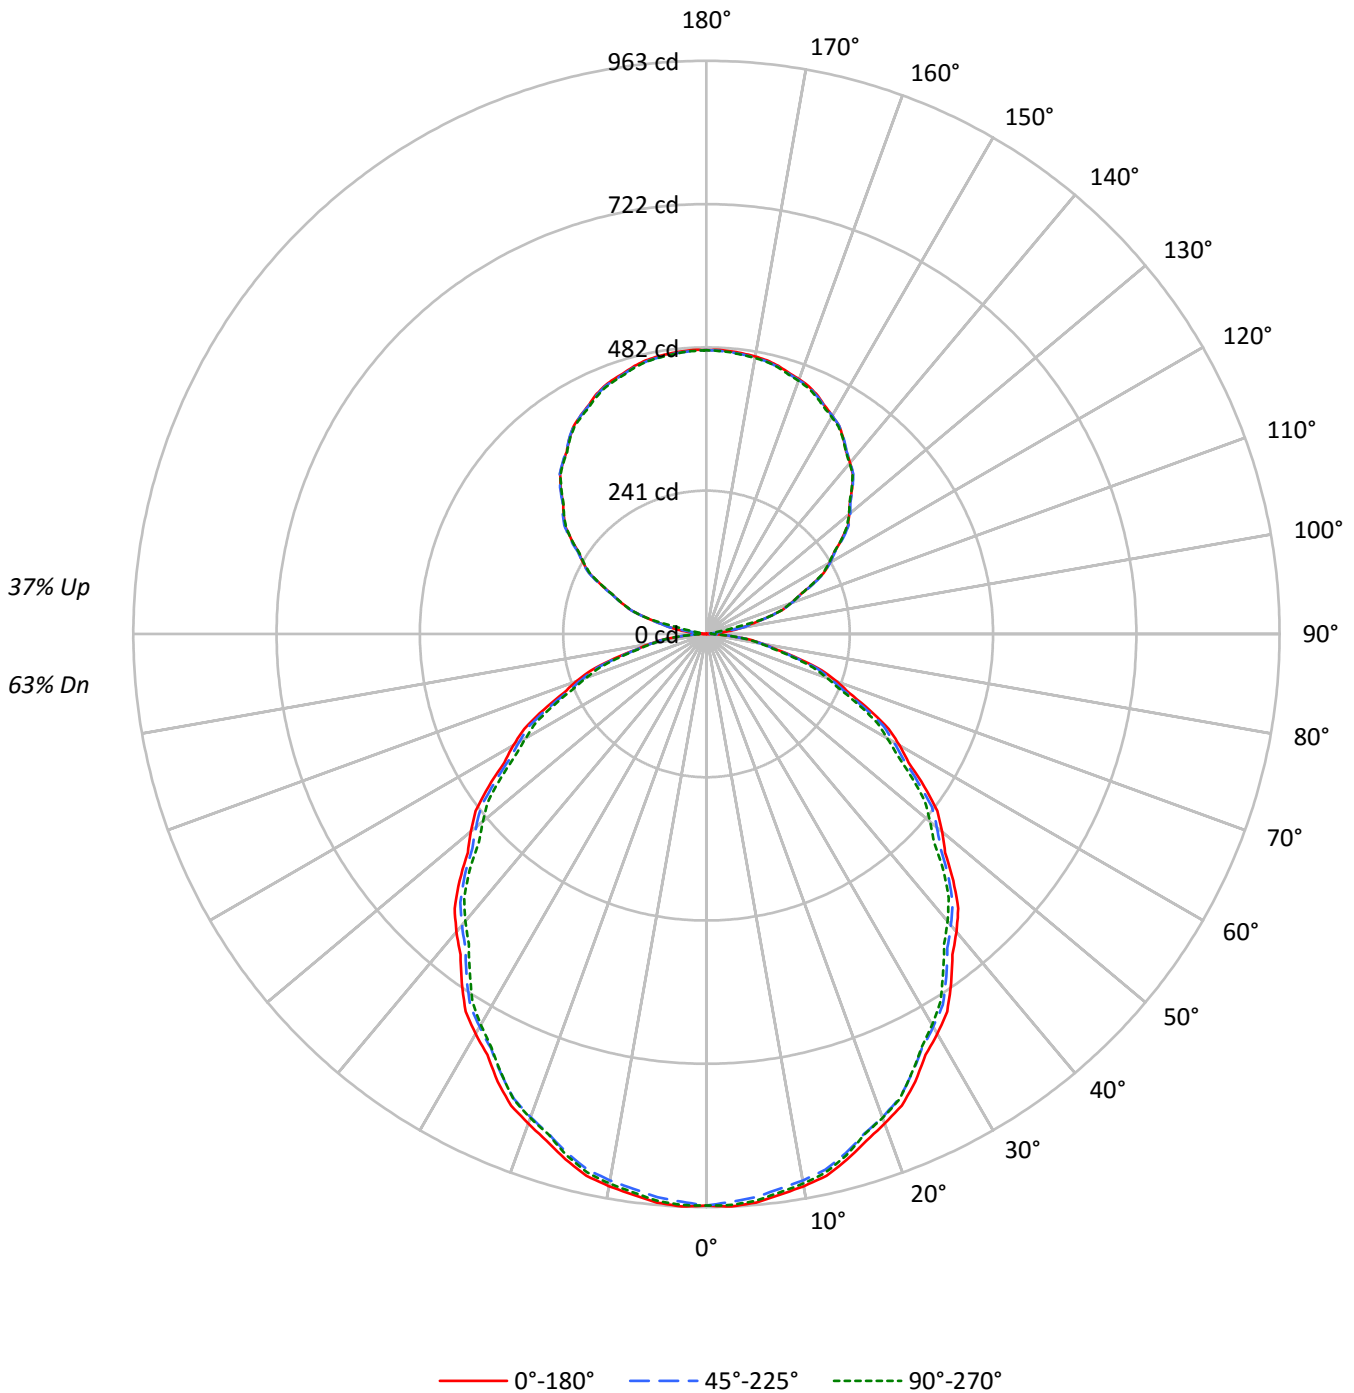



TEST NUMBER: P333166

CATALOG NUMBER: S125DIP-S610D365U835-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	91	91	91	79	79	79	68	68	68	63
1	101	96	92	89	94	90	87	84	79	77	74	69	67	66	60	59	57	53
2	92	84	78	72	86	79	73	69	70	65	62	61	58	55	53	50	48	44
3	84	74	66	60	78	69	63	57	61	56	52	54	50	46	47	44	41	37
4	76	65	57	51	71	62	54	49	55	49	44	48	43	40	42	38	35	32
5	70	58	50	44	66	55	48	42	49	43	38	43	38	34	38	34	31	28
6	65	52	44	38	61	50	42	36	44	38	33	39	34	30	34	30	27	24
7	60	47	39	33	56	45	37	32	40	34	29	35	30	27	31	27	24	22
8	56	43	35	30	52	41	34	29	37	31	26	33	28	24	29	25	22	19
9	52	39	32	27	49	37	30	26	34	28	24	30	25	22	27	23	20	17
10	49	36	29	24	46	34	28	23	31	25	21	28	23	20	25	21	18	16

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	6203	6203	6203
5°	6217	6157	6196
10°	6178	6114	6149
15°	6111	6040	6066
20°	6016	5937	5948
25°	5912	5815	5810
30°	5785	5683	5655
35°	5649	5541	5463
40°	5509	5387	5311
45°	5358	5246	5142
50°	5191	5077	4924
55°	5031	4884	4748
60°	4839	4691	4525
65°	4609	4459	4308
70°	4390	4190	4047
75°	4000	3868	3735
80°	3559	3503	3418
85°	3097	3149	2986



TEST NUMBER: P333166

CATALOG NUMBER: S125DIP-S610D365U835-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	90.6	2.3
10°-20°	255.8	6.5
20°-30°	377.7	9.5
30°-40°	440.7	11.1
40°-50°	442.6	11.2
50°-60°	388.5	9.8
60°-70°	289.5	7.3
70°-80°	165.5	4.2
80°-90°	49.1	1.2
90°-100°	17.3	0.4
100°-110°	106.8	2.7
110°-120°	193.7	4.9
120°-130°	248.6	6.3
130°-140°	267.4	6.7
140°-150°	251.0	6.3
150°-160°	203.0	5.1
160°-170°	131.3	3.3
170°-180°	45.3	1.1
0°-30°	724.0	18.3
0°-40°	1164.7	29.4
0°-60°	1995.9	50.3
0°-90°	2500.0	63.1
90°-120°	317.8	8.0
90°-150°	1084.7	27.4
90°-180°	1464.0	36.9
0°-180°	3964.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	960	960	960	960	960	
5°	959	957	950	956	956	91
15°	914	911	903	907	907	257
25°	830	826	816	817	815	382
35°	716	713	703	699	693	448
45°	587	583	574	566	563	452
55°	447	444	434	427	422	399
65°	302	300	292	285	282	299
75°	160	159	155	153	150	171
85°	42	42	42	42	40	47
90°	0	3	6	7	8	3
95°	20	18	6	7	7	26
105°	104	105	105	105	105	110
115°	195	197	197	196	194	193
125°	278	280	280	279	278	248
135°	346	348	348	347	345	267
145°	401	402	402	402	400	251
155°	442	440	440	441	439	203
165°	466	464	464	466	464	132
175°	477	475	475	478	475	45
180°	477	477	477	477	477	



TEST NUMBER: P333166

CATALOG NUMBER: S125DIP-S610D365U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	960.4	960.4	960.4	960.4	960.4	960.4	960.4	960.4	960.4	960.4	960.4
2.5°	962.8	962.4	962.0	961.6	961.2	960.3	959.0	957.6	956.3	954.9	956.3
5°	958.9	958.5	958.2	957.8	957.5	956.5	954.8	953.1	951.4	949.7	951.3
7.5°	950.0	949.7	949.4	949.0	948.7	947.6	945.7	943.9	942.0	940.2	941.6
10°	942.1	941.8	941.5	941.1	940.8	939.7	937.8	936.0	934.1	932.3	933.6
12.5°	932.4	931.8	931.2	930.6	930.0	928.8	927.1	925.4	923.6	921.9	923.0
15°	914.0	913.5	913.0	912.5	912.0	910.8	909.0	907.1	905.2	903.4	904.2
17.5°	892.9	892.2	891.4	890.7	889.9	888.6	886.7	884.7	882.8	880.9	881.9
20°	875.3	874.9	874.6	874.3	873.9	872.7	870.5	868.3	866.1	863.9	865.1
22.5°	857.6	857.0	856.4	855.8	855.2	853.9	851.8	849.8	847.7	845.6	846.4
25°	829.7	828.8	828.0	827.2	826.3	824.8	822.6	820.4	818.2	816.0	816.4
27.5°	797.0	796.5	796.0	795.5	795.0	793.6	791.3	789.1	786.8	784.6	784.6
30°	775.7	775.2	774.7	774.2	773.7	772.2	769.7	767.1	764.6	762.1	761.7
32.5°	752.6	751.9	751.1	750.3	749.5	748.0	745.8	743.5	741.2	739.0	738.4
35°	716.5	715.8	715.1	714.5	713.8	712.3	709.9	707.5	705.2	702.8	702.0
37.5°	678.9	678.1	677.3	676.4	675.6	674.0	671.8	669.6	667.3	665.1	663.9
40°	653.4	652.6	651.7	650.9	650.0	648.4	646.1	643.7	641.3	639.0	637.5
42.5°	626.1	625.4	624.6	623.9	623.2	621.7	619.3	617.0	614.6	612.2	610.9
45°	586.6	585.9	585.2	584.5	583.9	582.5	580.5	578.5	576.4	574.4	572.4
47.5°	544.0	544.0	544.1	544.1	544.1	542.9	540.5	538.1	535.7	533.2	531.2
50°	516.7	516.1	515.6	515.1	514.6	513.4	511.3	509.3	507.3	505.3	503.1
52.5°	488.7	488.3	488.0	487.6	487.2	485.9	483.8	481.6	479.5	477.3	475.4
55°	446.8	446.2	445.7	445.2	444.7	443.3	440.9	438.6	436.2	433.8	432.3
57.5°	402.5	402.3	402.0	401.7	401.5	400.3	398.3	396.3	394.3	392.4	390.4
60°	374.6	373.9	373.2	372.5	371.9	370.6	368.8	366.9	365.0	363.2	361.5
62.5°	345.4	344.9	344.3	343.8	343.2	342.2	340.6	339.0	337.4	335.8	334.0
65°	301.6	301.3	301.0	300.6	300.3	299.2	297.3	295.5	293.6	291.8	290.2
67.5°	259.2	258.5	257.8	257.1	256.4	255.4	254.0	252.6	251.2	249.8	248.5
70°	232.5	231.7	230.8	230.0	229.1	227.9	226.4	224.9	223.4	221.9	220.8
72.5°	203.3	202.7	202.2	201.6	201.0	200.2	199.3	198.3	197.3	196.3	195.2
75°	160.3	160.0	159.6	159.3	159.0	158.4	157.5	156.7	155.8	155.0	154.5
77.5°	120.7	120.5	120.4	120.2	120.1	119.8	119.3	118.9	118.4	117.9	117.6
80°	95.7	95.7	95.7	95.7	95.7	95.6	95.2	94.9	94.6	94.2	94.0
82.5°	73.9	73.6	73.3	73.0	72.8	72.6	72.5	72.5	72.4	72.3	72.0
85°	41.8	42.0	42.1	42.3	42.5	42.5	42.5	42.5	42.5	42.5	42.4
87.5°	16.5	16.6	16.7	16.9	17.0	17.0	17.0	17.0	17.0	16.9	17.0
90°	0.4	1.0	1.6	2.2	2.9	3.5	4.0	4.6	5.1	5.7	6.0
92.5°	5.4	5.0	4.6	4.1	3.7	3.7	4.2	4.7	5.2	5.7	6.0
95°	20.1	19.9	19.7	19.4	19.2	17.6	14.6	11.6	8.6	5.7	6.0
97.5°	42.1	42.5	42.9	43.3	43.8	41.0	35.1	29.2	23.3	17.4	15.2
100°	59.0	59.3	59.5	59.7	60.0	60.2	60.6	60.9	61.2	61.5	49.8
102.5°	76.3	76.6	76.9	77.2	77.5	77.7	77.9	78.1	78.3	78.5	76.3
105°	103.9	104.2	104.6	104.9	105.2	105.3	105.3	105.3	105.3	105.3	105.3
107.5°	132.6	132.6	132.6	132.6	132.6	132.7	132.9	133.0	133.2	133.3	133.3
110°	151.3	151.3	151.3	151.3	151.3	151.4	151.5	151.7	151.8	152.0	151.8



TEST NUMBER: P333166

CATALOG NUMBER: S125DIP-S610D365U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	168.8	169.0	169.2	169.4	169.6	169.7	169.8	169.9	170.0	170.1	169.8
115°	195.1	195.5	195.9	196.3	196.7	196.9	197.0	197.1	197.2	197.2	196.9
117.5°	222.3	222.3	222.3	222.3	222.3	222.4	222.7	223.0	223.3	223.6	223.2
120°	239.3	239.2	239.2	239.1	239.0	239.1	239.3	239.5	239.8	240.0	239.9
122.5°	254.3	254.6	254.9	255.2	255.5	255.7	255.8	255.9	256.0	256.1	256.0
125°	277.5	278.0	278.6	279.1	279.7	280.0	280.0	280.0	280.0	280.0	279.6
127.5°	299.6	300.0	300.4	300.8	301.2	301.4	301.3	301.3	301.2	301.2	301.0
130°	313.2	313.6	314.0	314.4	314.8	315.0	315.1	315.1	315.2	315.3	315.1
132.5°	326.8	327.2	327.7	328.1	328.6	328.7	328.6	328.4	328.2	328.0	328.0
135°	346.1	346.5	347.0	347.5	347.9	348.1	347.9	347.8	347.6	347.5	347.3
137.5°	363.8	364.2	364.6	365.0	365.4	365.6	365.4	365.3	365.1	365.0	365.0
140°	375.4	375.6	375.7	375.9	376.0	376.1	376.0	375.9	375.8	375.8	375.9
142.5°	385.9	386.0	386.1	386.1	386.2	386.3	386.5	386.6	386.7	386.8	386.8
145°	401.2	401.4	401.5	401.7	401.8	401.9	401.9	401.9	401.9	401.9	402.0
147.5°	414.6	414.6	414.6	414.5	414.5	414.5	414.6	414.7	414.8	414.9	415.0
150°	423.1	423.0	422.8	422.6	422.5	422.5	422.6	422.8	423.0	423.1	423.3
152.5°	431.3	431.0	430.6	430.3	429.9	429.8	430.0	430.2	430.3	430.5	430.6
155°	441.9	441.4	440.9	440.4	440.0	439.8	440.0	440.1	440.3	440.4	440.7
157.5°	450.0	449.7	449.4	449.1	448.9	448.7	448.7	448.8	448.8	448.8	449.0
160°	455.6	455.2	454.7	454.2	453.8	453.6	453.6	453.7	453.8	453.9	454.2
162.5°	460.2	459.7	459.2	458.7	458.3	458.1	458.2	458.2	458.3	458.4	458.8
165°	466.2	465.8	465.3	464.8	464.4	464.2	464.2	464.3	464.4	464.5	464.9
167.5°	470.8	470.3	469.8	469.3	468.8	468.6	468.7	468.8	468.9	468.9	469.5
170°	473.3	472.8	472.2	471.7	471.1	470.9	471.0	471.0	471.1	471.2	471.8
172.5°	475.0	474.5	473.9	473.4	472.8	472.6	472.7	472.9	473.0	473.2	473.7
175°	476.8	476.4	475.9	475.4	475.0	474.8	474.8	474.9	475.0	475.1	475.7
177.5°	477.7	477.3	476.9	476.6	476.2	476.0	476.1	476.2	476.2	476.3	476.7
180°	476.8	476.8	476.8	476.8	476.8	476.8	476.8	476.8	476.8	476.8	476.8



TEST NUMBER: P333166

CATALOG NUMBER: S125DIP-S610D365U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	960.4	960.4	960.4	960.4	960.4	960.4	960.4	960.4
2.5°	957.6	959.0	960.3	960.9	960.8	960.6	960.5	960.4
5°	952.8	954.3	955.8	956.5	956.3	956.2	956.0	955.8
7.5°	943.1	944.6	946.1	946.8	946.6	946.4	946.3	946.1
10°	935.0	936.3	937.7	938.3	938.1	937.9	937.7	937.6
12.5°	924.1	925.2	926.2	926.8	926.7	926.7	926.7	926.6
15°	905.1	905.9	906.8	907.2	907.2	907.2	907.2	907.2
17.5°	883.0	884.0	885.1	885.2	884.3	883.5	882.7	881.8
20°	866.2	867.4	868.6	868.8	867.9	867.1	866.2	865.4
22.5°	847.2	848.0	848.8	848.9	848.3	847.7	847.1	846.6
25°	816.7	817.0	817.4	817.3	816.8	816.3	815.8	815.3
27.5°	784.7	784.8	784.8	784.6	784.1	783.6	783.1	782.6
30°	761.4	761.1	760.7	760.3	759.8	759.3	758.8	758.3
32.5°	737.8	737.1	736.5	735.8	734.9	734.0	733.0	732.1
35°	701.1	700.3	699.4	698.3	697.0	695.6	694.3	692.9
37.5°	662.6	661.4	660.1	659.1	658.3	657.6	656.8	656.0
40°	635.9	634.4	632.9	631.9	631.4	630.9	630.4	629.9
42.5°	609.5	608.1	606.7	605.6	604.8	604.1	603.3	602.5
45°	570.3	568.3	566.3	565.0	564.5	564.0	563.5	563.0
47.5°	529.1	527.0	525.0	523.4	522.2	521.0	519.8	518.6
50°	500.9	498.7	496.5	494.8	493.6	492.4	491.2	490.1
52.5°	473.4	471.5	469.6	468.0	466.7	465.3	464.0	462.7
55°	430.8	429.3	427.8	426.4	425.2	424.0	422.9	421.7
57.5°	388.4	386.5	384.5	383.2	382.6	381.9	381.3	380.7
60°	359.8	358.1	356.4	355.0	353.8	352.6	351.4	350.3
62.5°	332.2	330.4	328.5	327.2	326.3	325.3	324.4	323.5
65°	288.7	287.2	285.7	284.6	283.9	283.2	282.6	281.9
67.5°	247.3	246.0	244.7	243.8	243.4	243.0	242.6	242.2
70°	219.8	218.8	217.8	217.0	216.3	215.6	214.9	214.3
72.5°	194.0	192.9	191.7	190.8	190.1	189.5	188.8	188.1
75°	154.0	153.5	153.0	152.4	151.7	151.0	150.4	149.7
77.5°	117.3	117.0	116.7	116.3	115.8	115.4	114.9	114.4
80°	93.9	93.7	93.5	93.3	92.9	92.6	92.3	91.9
82.5°	71.7	71.4	71.1	70.9	70.9	70.8	70.7	70.7
85°	42.2	42.0	41.9	41.6	41.3	40.9	40.6	40.3
87.5°	17.1	17.2	17.2	17.2	17.0	16.7	16.5	16.3
90°	6.4	6.8	7.2	7.5	7.8	8.0	8.2	8.5
92.5°	6.4	6.8	7.2	7.5	7.6	7.7	7.8	7.9
95°	6.4	6.8	7.2	7.4	7.4	7.4	7.4	7.4
97.5°	13.0	10.7	8.5	7.4	7.4	7.4	7.4	7.4
100°	38.1	26.4	14.7	8.7	8.4	8.1	7.7	7.4
102.5°	74.0	71.8	69.6	65.8	60.5	55.2	49.8	44.5
105°	105.3	105.3	105.3	105.3	105.2	105.1	105.1	105.0
107.5°	133.4	133.4	133.4	133.3	133.1	132.8	132.6	132.3
110°	151.5	151.3	151.1	151.0	151.1	151.1	151.2	151.3





TEST NUMBER: P333166

CATALOG NUMBER: S125DIP-S610D365U835-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	169.5	169.2	168.9	168.7	168.6	168.5	168.4	168.3
115°	196.6	196.3	196.0	195.6	195.1	194.7	194.2	193.7
117.5°	222.8	222.4	222.0	221.7	221.5	221.3	221.1	220.9
120°	239.7	239.5	239.4	239.1	238.7	238.3	237.9	237.5
122.5°	255.8	255.7	255.5	255.2	254.7	254.3	253.8	253.4
125°	279.3	279.0	278.7	278.4	278.2	278.0	277.7	277.5
127.5°	300.8	300.6	300.5	300.1	299.5	298.9	298.4	297.8
130°	314.8	314.6	314.4	314.0	313.7	313.3	312.9	312.5
132.5°	327.9	327.9	327.8	327.6	327.2	326.8	326.4	326.1
135°	347.2	347.0	346.8	346.5	346.1	345.6	345.1	344.6
137.5°	365.1	365.1	365.1	364.9	364.5	364.1	363.7	363.3
140°	376.1	376.2	376.4	376.2	375.8	375.3	374.8	374.3
142.5°	386.8	386.9	386.9	386.7	386.2	385.7	385.3	384.8
145°	402.1	402.1	402.2	402.0	401.6	401.1	400.6	400.1
147.5°	415.1	415.2	415.3	415.1	414.5	413.9	413.4	412.8
150°	423.4	423.6	423.7	423.5	422.9	422.3	421.6	421.0
152.5°	430.8	430.9	431.1	430.9	430.3	429.8	429.2	428.6
155°	440.9	441.1	441.4	441.2	440.6	439.9	439.3	438.7
157.5°	449.3	449.5	449.8	449.6	449.0	448.3	447.7	447.1
160°	454.5	454.8	455.1	455.0	454.3	453.7	453.1	452.5
162.5°	459.3	459.7	460.2	460.0	459.3	458.6	458.0	457.3
165°	465.4	465.9	466.4	466.3	465.7	465.0	464.4	463.8
167.5°	470.1	470.6	471.2	471.1	470.4	469.7	469.0	468.3
170°	472.4	473.1	473.7	473.7	473.0	472.3	471.5	470.8
172.5°	474.3	474.9	475.4	475.4	474.7	473.9	473.2	472.5
175°	476.3	477.0	477.6	477.6	476.8	476.1	475.4	474.7
177.5°	477.2	477.6	478.0	478.0	477.5	477.0	476.5	476.0
180°	476.8	476.8	476.8	476.8	476.8	476.8	476.8	476.8

(END OF REPORT)