

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions  
(formerly Eaton)

Brand: NEO-RAY

Report Number: P333241

Luminaire Tested: **S125DIP-S850D1205U835-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333241  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIP-S850D1205U835-4F0-1E-UDD-A  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 850 LUMENS PER FOOT, ASYMMETRIC DIFFUSER  
UPLIGHT 1205 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 8269.8 lumens  
Efficiency: N/A  
Efficacy: 145.3 lumens/watt  
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52  
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 56.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333241  
CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

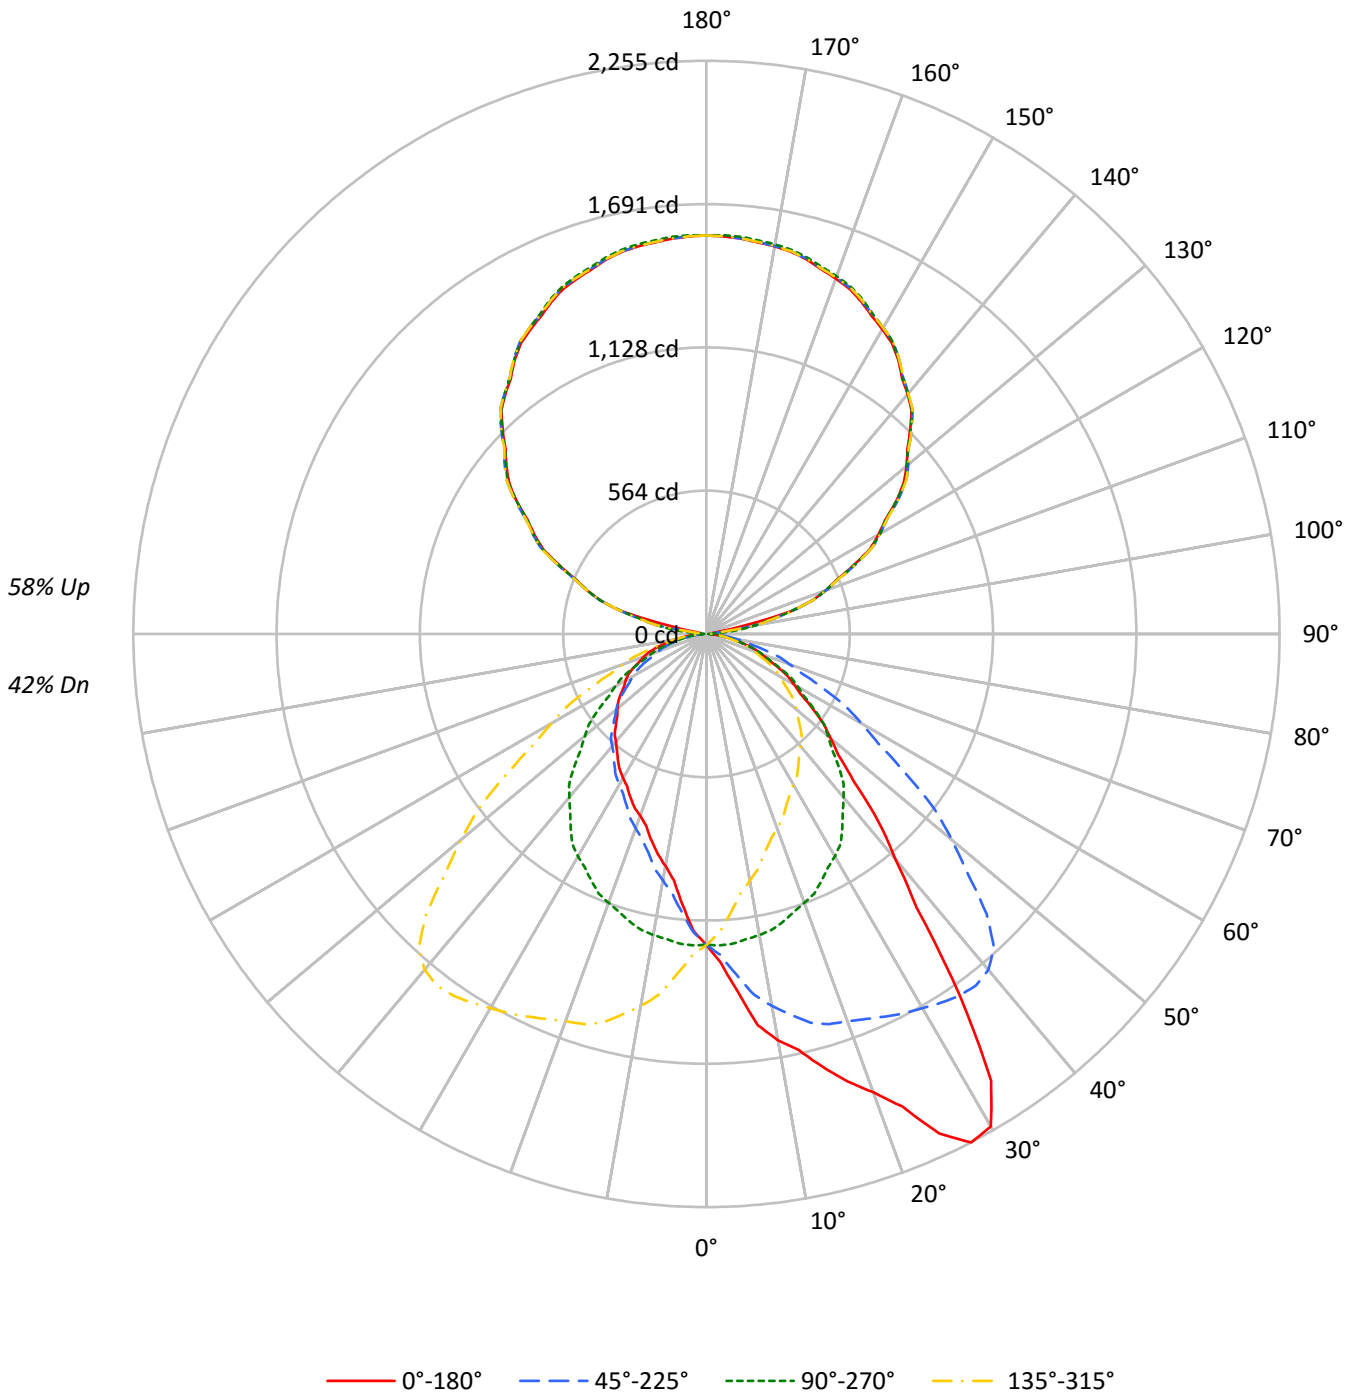



TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49	42																				
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	43	42	41	36																				
2	88	80	74	69	80	74	69	64	61	57	54	49	47	44	38	37	35	30																				
3	80	71	64	58	73	65	59	54	54	49	46	44	40	38	34	32	30	26																				
4	73	63	55	49	67	58	51	46	48	43	39	39	35	32	30	28	26	22																				
5	67	56	48	42	61	51	44	39	43	38	34	35	31	28	27	25	23	19																				
6	62	50	42	36	56	46	39	34	39	33	29	32	28	25	25	22	20	17																				
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	23	20	18	15																				
8	53	41	33	28	48	38	31	26	32	27	23	26	22	19	21	18	16	13																				
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	12																				
10	46	34	27	22	42	32	25	21	27	22	18	22	18	16	18	15	13	11																				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	7901	7901	7901	7901
5°	9149	7927	6941	7927
10°	10645	7887	6082	7887
15°	11784	7829	5610	7829
20°	13190	7737	5232	7737
25°	15452	7633	5047	7633
30°	16690	7532	4887	7532
35°	13722	7340	4782	7340
40°	9754	7074	4666	7074
45°	7493	6716	4601	6716
50°	6396	6271	4591	6271
55°	5695	5835	4631	5835
60°	5137	5359	4748	5359
65°	4745	4879	4872	4879
70°	4315	4383	4942	4383
75°	3810	3860	4898	3860
80°	3206	3146	4482	3146
85°	2542	2267	3616	2267



TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	117.8	1.4
10°-20°	350.7	4.2
20°-30°	569.4	6.9
30°-40°	694.5	8.4
40°-50°	631.8	7.6
50°-60°	503.3	6.1
60°-70°	350.5	4.2
70°-80°	186.9	2.3
80°-90°	50.4	0.6
90°-100°	57.0	0.7
100°-110°	351.1	4.2
110°-120°	636.8	7.7
120°-130°	817.3	9.9
130°-140°	879.1	10.6
140°-150°	825.1	10.0
150°-160°	667.5	8.1
160°-170°	431.7	5.2
170°-180°	148.9	1.8
0°-30°	1037.8	12.5
0°-40°	1732.4	20.9
0°-60°	2867.5	34.7
0°-90°	3455.4	41.8
90°-120°	1044.9	12.6
90°-150°	3566.4	43.1
90°-180°	4814.0	58.2
0°-180°	8269.8	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1223	1223	1223	1223	1223	
5°	1411	1223	1071	1223	1411	142
15°	1762	1171	839	1171	1762	504
25°	2168	1071	708	1071	2168	990
35°	1740	931	606	931	1740	1065
45°	820	735	504	735	820	657
55°	506	518	411	518	506	455
65°	310	319	319	319	310	308
75°	153	155	196	155	153	164
85°	34	31	49	31	34	40
90°	28	1	28	1	28	13
95°	24	66	24	66	24	20
105°	345	342	345	342	345	312
115°	637	642	637	642	637	632
125°	912	912	912	912	912	812
135°	1133	1138	1133	1138	1133	874
145°	1316	1319	1316	1319	1316	822
155°	1442	1453	1442	1453	1442	665
165°	1525	1533	1525	1533	1525	430
175°	1561	1568	1561	1568	1561	149
180°	1568	1568	1568	1568	1568	



TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1294.0	1292.3	1290.7	1287.3	1289.8	1282.8	1279.4	1273.6	1266.6	1264.1	1261.2
5°	1411.3	1413.9	1416.5	1405.6	1406.7	1399.4	1382.8	1369.3	1358.4	1344.4	1334.5
7.5°	1552.6	1546.4	1545.9	1538.9	1526.7	1517.0	1499.5	1477.3	1455.8	1431.3	1411.0
10°	1623.2	1623.7	1619.0	1610.7	1597.8	1588.4	1565.6	1543.7	1517.3	1486.1	1463.8
12.5°	1676.4	1678.5	1672.6	1661.4	1655.1	1634.1	1616.2	1590.3	1558.8	1533.9	1499.9
15°	1762.4	1756.6	1752.5	1738.5	1727.6	1705.8	1677.2	1650.2	1615.9	1584.2	1552.6
17.5°	1845.2	1849.8	1842.0	1829.2	1795.4	1769.9	1731.6	1694.6	1652.0	1609.5	1571.7
20°	1919.2	1923.3	1911.4	1889.1	1848.6	1823.1	1772.7	1725.0	1675.6	1621.1	1579.6
22.5°	2011.4	2008.1	1992.0	1958.0	1922.9	1875.9	1821.3	1763.2	1701.4	1639.8	1584.6
25°	2168.4	2146.6	2136.7	2094.7	2048.5	1979.4	1904.6	1819.5	1742.6	1661.1	1590.5
27.5°	2255.4	2248.6	2237.6	2208.3	2159.7	2085.9	1997.7	1893.9	1785.5	1682.6	1590.2
30°	2238.0	2239.0	2240.1	2230.7	2199.6	2144.0	2056.3	1944.6	1815.8	1700.0	1593.1
32.5°	2083.5	2102.4	2120.4	2141.8	2150.5	2139.9	2084.9	1984.1	1851.6	1720.0	1591.4
35°	1740.5	1746.3	1804.9	1863.1	1942.0	2003.3	2044.3	1999.7	1888.0	1736.9	1589.4
37.5°	1357.1	1385.2	1425.8	1491.5	1605.4	1707.4	1838.6	1898.9	1862.9	1742.4	1585.8
40°	1156.9	1182.9	1209.3	1276.3	1372.4	1496.0	1645.0	1772.2	1801.8	1725.0	1573.3
42.5°	1002.4	1022.9	1052.3	1102.7	1183.0	1292.4	1434.8	1601.1	1703.4	1674.3	1547.2
45°	820.4	833.4	856.3	896.2	954.4	1040.1	1165.7	1347.5	1505.8	1558.3	1485.1
47.5°	702.2	702.1	719.9	747.5	789.5	862.3	955.2	1097.6	1266.8	1391.9	1386.1
50°	636.6	634.0	648.0	671.9	705.1	753.4	842.2	955.9	1118.5	1260.2	1299.7
52.5°	580.1	580.4	589.0	606.7	634.5	675.8	742.1	844.6	983.5	1129.0	1203.3
55°	505.8	503.7	513.5	525.5	545.7	572.7	620.5	698.9	811.6	954.9	1051.5
57.5°	437.6	443.3	447.3	455.6	472.4	490.5	530.8	588.3	677.7	800.7	902.8
60°	397.7	403.5	406.6	414.9	428.4	444.0	475.1	521.9	597.1	703.1	804.3
62.5°	362.0	366.5	367.5	375.0	386.0	401.2	425.7	464.9	524.4	617.1	716.3
65°	310.5	310.5	312.6	320.4	325.6	339.1	357.8	386.3	434.1	506.3	590.9
67.5°	260.9	263.4	262.8	266.3	271.1	281.5	294.9	318.5	353.9	406.6	474.3
70°	228.5	230.5	230.0	232.6	237.8	244.6	255.5	277.8	303.2	348.4	406.6
72.5°	199.4	200.2	198.9	202.3	205.4	211.3	223.5	235.4	259.2	297.3	345.1
75°	152.7	153.7	154.7	156.8	159.9	163.0	169.3	181.2	196.8	225.4	256.0
77.5°	114.4	112.5	115.0	114.7	116.4	118.8	124.3	130.6	143.4	161.5	185.2
80°	86.2	86.7	86.7	87.2	89.8	91.4	96.1	100.7	110.6	124.1	140.7
82.5°	62.9	64.3	63.5	64.4	66.6	67.7	70.3	74.1	79.9	90.5	102.5
85°	34.3	31.7	32.7	33.8	33.8	34.3	36.3	37.9	41.0	45.2	49.8
87.5°	15.5	16.2	16.5	16.3	16.6	16.4	17.8	17.5	18.5	19.5	20.8
90°	27.9	27.1	26.3	25.6	24.8	23.8	22.5	21.2	19.9	18.6	16.8
92.5°	26.0	25.7	25.3	24.9	24.6	23.8	22.5	21.2	19.9	18.6	17.0
95°	24.4	24.4	24.4	24.4	24.4	23.8	22.5	21.2	19.9	18.6	28.4
97.5°	24.4	24.4	24.4	24.4	24.4	28.0	35.3	42.6	49.9	57.2	76.6
100°	24.4	25.4	26.5	27.5	28.5	48.3	86.8	125.3	163.7	202.2	201.2
102.5°	146.2	163.8	181.3	198.9	216.5	228.9	236.2	243.4	250.7	258.0	257.4
105°	345.2	345.4	345.7	345.9	346.2	346.3	346.3	346.3	346.3	346.3	346.3
107.5°	435.1	435.9	436.7	437.4	438.2	438.6	438.5	438.5	438.4	438.4	437.9
110°	497.4	497.2	496.9	496.6	496.4	496.6	497.4	498.2	499.0	499.7	499.2



TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	553.2	553.6	553.9	554.3	554.6	555.3	556.3	557.3	558.3	559.2	558.9
115°	636.9	638.4	640.0	641.5	643.1	644.4	645.4	646.4	647.5	648.5	648.2
117.5°	726.1	726.8	727.5	728.1	728.8	729.8	731.2	732.5	733.9	735.2	734.2
120°	781.0	782.3	783.6	784.9	786.2	787.1	787.6	788.1	788.6	789.1	788.3
122.5°	833.1	834.6	836.0	837.5	839.0	840.1	840.6	841.1	841.6	842.1	841.8
125°	912.3	913.1	913.9	914.6	915.4	916.3	917.3	918.4	919.4	920.4	920.4
127.5°	979.0	980.9	982.8	984.8	986.7	987.9	988.5	989.0	989.6	990.2	990.3
130°	1027.4	1028.7	1030.0	1031.2	1032.5	1033.6	1034.3	1035.1	1035.9	1036.7	1036.4
132.5°	1072.0	1073.3	1074.6	1075.9	1077.2	1077.9	1078.0	1078.2	1078.4	1078.5	1079.1
135°	1133.1	1134.7	1136.2	1137.8	1139.3	1140.4	1140.9	1141.4	1141.9	1142.4	1142.9
137.5°	1194.5	1195.8	1197.2	1198.5	1199.9	1200.5	1200.4	1200.3	1200.2	1200.1	1200.5
140°	1230.8	1232.3	1233.9	1235.4	1236.9	1237.5	1236.9	1236.4	1235.9	1235.4	1235.7
142.5°	1265.2	1266.7	1268.3	1269.8	1271.4	1272.1	1272.0	1271.9	1271.8	1271.7	1271.3
145°	1315.6	1317.1	1318.7	1320.2	1321.8	1322.4	1322.2	1321.9	1321.7	1321.4	1321.4
147.5°	1357.2	1359.1	1360.9	1362.8	1364.6	1365.4	1365.1	1364.8	1364.5	1364.2	1363.9
150°	1384.2	1386.2	1388.3	1390.4	1392.4	1393.2	1392.7	1392.2	1391.6	1391.1	1390.6
152.5°	1409.3	1411.1	1413.0	1414.8	1416.7	1417.4	1416.9	1416.3	1415.8	1415.3	1414.8
155°	1442.3	1444.3	1446.4	1448.5	1450.5	1451.2	1450.4	1449.6	1448.9	1448.1	1447.6
157.5°	1469.9	1472.0	1474.1	1476.1	1478.2	1478.8	1478.0	1477.2	1476.3	1475.5	1475.5
160°	1487.6	1489.7	1491.7	1493.8	1495.9	1496.4	1495.3	1494.3	1493.3	1492.2	1492.0
162.5°	1503.4	1505.7	1507.9	1510.2	1512.5	1512.9	1511.5	1510.0	1508.6	1507.1	1506.9
165°	1524.8	1526.8	1528.9	1531.0	1533.0	1533.3	1531.8	1530.2	1528.7	1527.1	1526.8
167.5°	1539.7	1542.0	1544.3	1546.6	1549.0	1549.2	1547.3	1545.5	1543.6	1541.8	1541.5
170°	1548.0	1550.4	1552.7	1555.0	1557.3	1557.5	1555.4	1553.3	1551.3	1549.2	1548.9
172.5°	1553.6	1555.9	1558.3	1560.6	1562.9	1563.1	1561.3	1559.4	1557.6	1555.7	1555.2
175°	1560.8	1563.1	1565.5	1567.8	1570.1	1570.2	1568.2	1566.1	1564.0	1562.0	1561.7
177.5°	1565.0	1566.6	1568.3	1570.0	1571.6	1571.7	1570.3	1568.8	1567.4	1565.9	1565.7
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8



TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1258.7	1255.8	1252.4	1246.6	1239.6	1235.8	1230.0	1226.3	1218.8	1212.6	1205.9
5°	1322.5	1309.0	1296.6	1280.5	1262.8	1251.4	1237.9	1222.8	1207.3	1191.2	1173.5
7.5°	1388.7	1364.8	1338.8	1310.9	1283.6	1258.5	1234.5	1210.9	1188.9	1162.3	1139.8
10°	1433.1	1403.0	1370.8	1332.9	1296.1	1263.9	1231.2	1202.6	1173.5	1142.4	1114.8
12.5°	1477.6	1437.5	1392.0	1350.4	1306.0	1267.2	1228.7	1192.2	1155.7	1121.2	1089.1
15°	1509.0	1473.6	1431.6	1372.4	1322.5	1269.1	1218.2	1170.9	1126.8	1088.4	1047.9
17.5°	1529.6	1484.1	1439.0	1382.2	1316.8	1257.0	1199.4	1145.3	1095.5	1046.8	1007.8
20°	1533.4	1486.6	1439.4	1383.8	1316.8	1248.3	1190.7	1125.7	1072.3	1021.9	974.1
22.5°	1532.1	1479.2	1427.7	1370.5	1305.2	1242.1	1172.4	1106.2	1048.2	998.6	948.8
25°	1520.4	1463.8	1399.4	1341.8	1277.4	1210.4	1139.8	1071.2	1012.0	955.4	906.1
27.5°	1510.6	1437.2	1364.3	1297.1	1234.9	1173.5	1105.9	1035.7	970.1	912.7	866.2
30°	1498.6	1418.1	1336.0	1265.9	1202.1	1142.4	1078.5	1010.0	941.4	885.3	835.5
32.5°	1487.8	1394.0	1307.4	1231.1	1163.4	1105.4	1046.5	981.3	914.0	857.1	807.2
35°	1466.9	1358.4	1259.2	1173.0	1100.8	1041.1	991.8	931.0	869.2	814.2	766.4
37.5°	1440.4	1311.6	1205.2	1114.8	1035.7	972.8	926.9	880.2	820.9	767.9	724.7
40°	1419.6	1278.4	1165.7	1073.3	991.3	925.8	883.3	839.1	789.8	740.5	694.8
42.5°	1393.5	1248.5	1125.9	1026.4	945.1	881.4	836.7	799.2	755.7	709.7	667.3
45°	1345.4	1194.3	1061.4	954.4	872.3	809.5	763.3	735.3	702.6	658.9	623.1
47.5°	1274.7	1129.2	991.7	881.3	796.6	738.4	695.1	668.2	645.1	612.7	580.2
50°	1211.9	1080.6	941.4	831.8	747.2	688.5	648.6	624.1	604.4	579.5	552.0
52.5°	1141.7	1019.5	892.0	783.7	699.9	642.0	602.9	581.4	565.0	547.1	520.0
55°	1030.2	926.4	808.0	705.1	627.8	571.2	536.9	518.2	504.7	491.2	474.6
57.5°	907.3	826.1	721.2	627.3	556.0	504.5	472.5	454.3	443.9	436.9	427.1
60°	820.9	751.4	661.0	575.3	505.8	460.1	428.9	414.9	406.1	400.3	393.1
62.5°	740.8	683.7	599.9	521.7	460.9	417.7	389.9	376.3	367.8	365.0	359.0
65°	622.6	578.5	509.4	444.5	392.6	355.7	332.3	319.3	314.1	311.0	311.6
67.5°	506.2	479.3	423.8	368.5	327.0	296.1	277.4	267.4	264.8	260.7	260.6
70°	435.1	414.9	368.2	319.9	283.0	259.1	242.5	232.1	229.5	227.4	226.9
72.5°	372.4	354.7	314.1	275.4	242.3	221.3	207.6	201.4	197.1	195.9	195.8
75°	279.9	270.0	237.8	207.2	184.3	169.8	160.5	154.7	151.6	151.1	151.6
77.5°	199.0	190.4	169.9	148.2	133.8	122.8	114.9	112.9	109.4	109.5	108.9
80°	149.5	143.8	130.9	113.7	101.8	92.4	88.3	84.6	83.6	82.0	83.6
82.5°	108.4	102.3	93.5	82.6	72.7	67.1	62.9	61.8	61.2	60.4	60.8
85°	53.5	54.0	48.8	40.5	36.3	33.2	30.6	30.6	30.1	29.6	30.1
87.5°	21.3	20.1	18.1	16.4	13.9	12.3	11.4	11.4	10.6	10.6	11.4
90°	15.0	13.2	11.4	9.4	7.4	5.3	3.2	1.2	3.2	5.3	7.4
92.5°	15.4	13.8	12.2	12.1	13.6	15.0	16.5	17.9	16.5	15.0	13.6
95°	38.2	48.0	57.9	63.1	63.9	64.7	65.5	66.2	65.5	64.7	63.9
97.5°	96.0	115.4	134.9	143.9	142.5	141.1	139.7	138.3	139.7	141.1	142.5
100°	200.2	199.1	198.1	197.2	196.4	195.6	194.9	194.1	194.9	195.6	196.4
102.5°	256.8	256.1	255.5	254.7	253.7	252.8	251.8	250.8	251.8	252.8	253.7
105°	346.3	346.3	346.3	345.8	344.8	343.7	342.7	341.7	342.7	343.7	344.8
107.5°	437.3	436.8	436.3	436.1	436.1	436.1	436.1	436.1	436.1	436.1	436.1
110°	498.7	498.2	497.7	497.4	497.4	497.4	497.4	497.4	497.4	497.4	497.4





TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	558.6	558.3	558.0	557.5	556.9	556.3	555.7	555.1	555.7	556.3	556.9
115°	648.0	647.7	647.5	646.7	645.4	644.1	642.8	641.5	642.8	644.1	645.4
117.5°	733.2	732.3	731.3	730.8	730.9	730.9	731.0	731.0	731.0	730.9	730.9
120°	787.6	786.8	786.0	785.8	786.0	786.3	786.5	786.8	786.5	786.3	786.0
122.5°	841.4	841.0	840.7	840.0	839.0	838.0	837.1	836.1	837.1	838.0	839.0
125°	920.4	920.4	920.4	919.5	917.7	915.9	914.1	912.3	914.1	915.9	917.7
127.5°	990.5	990.6	990.8	990.2	988.9	987.6	986.4	985.1	986.4	987.6	988.9
130°	1036.2	1035.9	1035.6	1034.9	1033.6	1032.3	1031.0	1029.7	1031.0	1032.3	1033.6
132.5°	1079.6	1080.2	1080.8	1080.3	1078.8	1077.3	1075.8	1074.3	1075.8	1077.3	1078.8
135°	1143.5	1144.0	1144.5	1144.0	1142.4	1140.9	1139.3	1137.8	1139.3	1140.9	1142.4
137.5°	1201.0	1201.5	1201.9	1201.5	1200.1	1198.8	1197.5	1196.1	1197.5	1198.8	1200.1
140°	1235.9	1236.2	1236.4	1236.3	1235.8	1235.3	1234.8	1234.2	1234.8	1235.3	1235.8
142.5°	1270.9	1270.6	1270.2	1269.9	1269.6	1269.3	1268.9	1268.6	1268.9	1269.3	1269.6
145°	1321.4	1321.4	1321.4	1321.1	1320.6	1320.1	1319.6	1319.1	1319.6	1320.1	1320.6
147.5°	1363.5	1363.2	1362.9	1362.8	1362.9	1363.0	1363.1	1363.2	1363.1	1363.0	1362.9
150°	1390.1	1389.6	1389.1	1389.1	1389.6	1390.1	1390.6	1391.1	1390.6	1390.1	1389.6
152.5°	1414.3	1413.8	1413.2	1413.5	1414.7	1415.8	1417.0	1418.1	1417.0	1415.8	1414.7
155°	1447.0	1446.5	1446.0	1446.5	1448.1	1449.6	1451.2	1452.7	1451.2	1449.6	1448.1
157.5°	1475.4	1475.4	1475.3	1475.7	1476.7	1477.6	1478.5	1479.5	1478.5	1477.6	1476.7
160°	1491.7	1491.5	1491.2	1491.9	1493.4	1495.0	1496.5	1498.1	1496.5	1495.0	1493.4
162.5°	1506.6	1506.3	1506.1	1506.7	1508.3	1509.8	1511.4	1512.9	1511.4	1509.8	1508.3
165°	1526.6	1526.3	1526.1	1526.7	1528.3	1529.8	1531.4	1532.9	1531.4	1529.8	1528.3
167.5°	1541.2	1541.0	1540.7	1541.4	1543.0	1544.6	1546.2	1547.8	1546.2	1544.6	1543.0
170°	1548.7	1548.4	1548.2	1548.9	1550.7	1552.5	1554.4	1556.2	1554.4	1552.5	1550.7
172.5°	1554.8	1554.3	1553.8	1554.5	1556.3	1558.1	1559.9	1561.7	1559.9	1558.1	1556.3
175°	1561.5	1561.2	1560.9	1561.6	1563.1	1564.7	1566.2	1567.8	1566.2	1564.7	1563.1
177.5°	1565.5	1565.3	1565.1	1565.6	1566.9	1568.1	1569.3	1570.6	1569.3	1568.1	1566.9
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8



TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1202.2	1197.6	1193.9	1185.6	1181.0	1174.8	1169.8	1175.2	1169.4	1171.9	1168.1
5°	1164.7	1150.2	1139.8	1124.7	1111.7	1099.8	1091.0	1089.4	1085.2	1083.2	1076.9
7.5°	1119.6	1101.4	1083.6	1063.9	1047.2	1030.3	1019.5	1010.6	1004.7	996.9	991.6
10°	1093.0	1068.6	1047.9	1024.0	1003.2	985.0	970.5	963.2	956.5	946.6	943.0
12.5°	1060.2	1035.0	1009.6	984.1	964.2	943.9	931.4	920.4	915.8	904.6	903.5
15°	1020.9	983.0	958.0	932.1	904.5	887.9	877.5	865.6	860.4	852.6	846.9
17.5°	973.9	940.1	908.9	882.0	858.4	844.4	831.5	823.3	814.4	809.3	800.0
20°	939.9	907.7	876.5	847.9	829.8	813.7	803.3	795.5	786.2	783.6	774.2
22.5°	911.2	875.7	845.8	821.8	801.9	783.8	772.5	767.3	760.8	752.8	750.9
25°	864.6	827.7	802.3	778.4	760.7	744.1	736.3	729.6	723.3	717.6	715.5
27.5°	824.3	791.3	761.1	739.5	724.2	709.0	702.1	693.9	689.4	684.8	679.2
30°	796.0	762.3	735.8	715.0	698.4	684.9	677.6	671.9	667.8	663.6	660.5
32.5°	766.9	735.7	710.0	689.7	673.1	662.9	656.4	652.4	647.8	642.8	638.9
35°	728.5	694.2	669.3	651.7	638.7	630.9	623.6	620.0	614.8	614.8	610.6
37.5°	685.2	655.6	633.6	617.5	605.9	598.9	591.0	588.5	585.2	583.0	581.6
40°	659.5	631.9	611.2	595.1	582.6	576.9	570.7	566.5	564.4	561.8	560.8
42.5°	632.9	606.6	586.7	571.8	561.0	556.1	550.3	547.4	543.2	539.8	539.2
45°	592.5	567.0	548.9	536.9	527.6	521.9	518.2	512.0	509.9	505.8	505.2
47.5°	554.1	529.7	511.9	502.1	493.9	489.2	483.5	477.3	474.9	472.8	472.6
50°	525.5	503.2	486.5	477.2	469.4	462.7	456.9	452.8	451.2	451.2	452.3
52.5°	496.4	477.4	463.3	451.9	444.5	437.3	432.0	429.5	427.1	429.6	431.5
55°	453.8	434.6	424.2	413.3	406.1	397.7	395.2	394.1	392.6	396.7	398.8
57.5°	408.8	395.3	383.1	372.3	365.8	361.0	357.5	356.8	359.7	361.7	368.5
60°	380.1	364.5	353.6	345.3	337.5	334.4	333.4	332.3	334.4	340.1	348.9
62.5°	348.5	335.9	324.1	317.9	312.2	307.0	306.8	307.4	311.6	318.1	326.9
65°	302.2	291.3	283.5	276.2	271.6	268.5	269.5	271.6	276.2	285.1	294.9
67.5°	255.2	247.7	240.7	234.8	230.3	230.3	231.4	234.5	240.0	250.2	259.2
70°	224.8	216.5	210.8	208.2	204.6	202.5	205.6	210.8	215.5	224.8	232.6
72.5°	194.5	187.5	183.0	181.2	179.7	178.0	179.0	184.6	191.0	200.3	209.4
75°	149.5	146.9	143.8	141.8	140.2	141.2	142.3	147.5	152.7	162.5	172.9
77.5°	109.1	106.4	104.6	104.1	103.2	103.7	106.7	110.5	115.6	122.8	130.6
80°	82.6	81.5	80.5	80.0	80.0	80.5	84.6	87.2	91.9	98.7	104.9
82.5°	60.1	59.5	59.3	59.2	59.6	59.7	62.2	65.6	69.5	74.6	80.0
85°	31.7	30.6	32.2	32.7	31.7	33.2	34.3	36.3	37.9	40.5	43.1
87.5°	12.3	13.5	13.4	14.2	14.6	15.8	15.6	17.5	18.6	19.7	19.5
90°	9.4	11.4	13.2	15.0	16.8	18.6	19.9	21.2	22.5	23.8	24.8
92.5°	12.1	12.2	13.8	15.4	17.0	18.6	19.9	21.2	22.5	23.8	24.6
95°	63.1	57.9	48.0	38.2	28.4	18.6	19.9	21.2	22.5	23.8	24.4
97.5°	143.9	134.9	115.4	96.0	76.6	57.2	49.9	42.6	35.3	28.0	24.4
100°	197.2	198.1	199.1	200.2	201.2	202.2	163.7	125.3	86.8	48.3	28.5
102.5°	254.7	255.5	256.1	256.8	257.4	258.0	250.7	243.4	236.2	228.9	216.5
105°	345.8	346.3	346.3	346.3	346.3	346.3	346.3	346.3	346.3	346.3	346.2
107.5°	436.1	436.3	436.8	437.3	437.9	438.4	438.4	438.5	438.5	438.6	438.2
110°	497.4	497.7	498.2	498.7	499.2	499.7	499.0	498.2	497.4	496.6	496.4



TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	557.5	558.0	558.3	558.6	558.9	559.2	558.3	557.3	556.3	555.3	554.6
115°	646.7	647.5	647.7	648.0	648.2	648.5	647.5	646.4	645.4	644.4	643.1
117.5°	730.8	731.3	732.3	733.2	734.2	735.2	733.9	732.5	731.2	729.8	728.8
120°	785.8	786.0	786.8	787.6	788.3	789.1	788.6	788.1	787.6	787.1	786.2
122.5°	840.0	840.7	841.0	841.4	841.8	842.1	841.6	841.1	840.6	840.1	839.0
125°	919.5	920.4	920.4	920.4	920.4	920.4	919.4	918.4	917.3	916.3	915.4
127.5°	990.2	990.8	990.6	990.5	990.3	990.2	989.6	989.0	988.5	987.9	986.7
130°	1034.9	1035.6	1035.9	1036.2	1036.4	1036.7	1035.9	1035.1	1034.3	1033.6	1032.5
132.5°	1080.3	1080.8	1080.2	1079.6	1079.1	1078.5	1078.4	1078.2	1078.0	1077.9	1077.2
135°	1144.0	1144.5	1144.0	1143.5	1142.9	1142.4	1141.9	1141.4	1140.9	1140.4	1139.3
137.5°	1201.5	1201.9	1201.5	1201.0	1200.5	1200.1	1200.2	1200.3	1200.4	1200.5	1199.9
140°	1236.3	1236.4	1236.2	1235.9	1235.7	1235.4	1235.9	1236.4	1236.9	1237.5	1236.9
142.5°	1269.9	1270.2	1270.6	1270.9	1271.3	1271.7	1271.8	1271.9	1272.0	1272.1	1271.4
145°	1321.1	1321.4	1321.4	1321.4	1321.4	1321.4	1321.7	1321.9	1322.2	1322.4	1321.8
147.5°	1362.8	1362.9	1363.2	1363.5	1363.9	1364.2	1364.5	1364.8	1365.1	1365.4	1364.6
150°	1389.1	1389.1	1389.6	1390.1	1390.6	1391.1	1391.6	1392.2	1392.7	1393.2	1392.4
152.5°	1413.5	1413.2	1413.8	1414.3	1414.8	1415.3	1415.8	1416.3	1416.9	1417.4	1416.7
155°	1446.5	1446.0	1446.5	1447.0	1447.6	1448.1	1448.9	1449.6	1450.4	1451.2	1450.5
157.5°	1475.7	1475.3	1475.4	1475.4	1475.5	1475.5	1476.3	1477.2	1478.0	1478.8	1478.2
160°	1491.9	1491.2	1491.5	1491.7	1492.0	1492.2	1493.3	1494.3	1495.3	1496.4	1495.9
162.5°	1506.7	1506.1	1506.3	1506.6	1506.9	1507.1	1508.6	1510.0	1511.5	1512.9	1512.5
165°	1526.7	1526.1	1526.3	1526.6	1526.8	1527.1	1528.7	1530.2	1531.8	1533.3	1533.0
167.5°	1541.4	1540.7	1541.0	1541.2	1541.5	1541.8	1543.6	1545.5	1547.3	1549.2	1549.0
170°	1548.9	1548.2	1548.4	1548.7	1548.9	1549.2	1551.3	1553.3	1555.4	1557.5	1557.3
172.5°	1554.5	1553.8	1554.3	1554.8	1555.2	1555.7	1557.6	1559.4	1561.3	1563.1	1562.9
175°	1561.6	1560.9	1561.2	1561.5	1561.7	1562.0	1564.0	1566.1	1568.2	1570.2	1570.1
177.5°	1565.6	1565.1	1565.3	1565.5	1565.7	1565.9	1567.4	1568.8	1570.3	1571.7	1571.6
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8



TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1165.6	1168.5	1166.0	1169.4	1166.0	1168.5	1165.6	1168.1	1171.9	1169.4	1175.2
5°	1074.3	1069.7	1072.8	1070.7	1072.8	1069.7	1074.3	1076.9	1083.2	1085.2	1089.4
7.5°	990.0	985.5	980.5	978.1	980.5	985.5	990.0	991.6	996.9	1004.7	1010.6
10°	937.3	931.5	931.0	927.4	931.0	931.5	937.3	943.0	946.6	956.5	963.2
12.5°	898.6	893.3	887.4	885.9	887.4	893.3	898.6	903.5	904.6	915.8	920.4
15°	843.8	839.6	836.0	839.1	836.0	839.6	843.8	846.9	852.6	860.4	865.6
17.5°	798.2	794.8	794.1	790.3	794.1	794.8	798.2	800.0	809.3	814.4	823.3
20°	769.5	766.9	768.0	761.2	768.0	766.9	769.5	774.2	783.6	786.2	795.5
22.5°	746.7	741.6	741.0	739.6	741.0	741.6	746.7	750.9	752.8	760.8	767.3
25°	710.9	708.3	705.7	708.3	705.7	708.3	710.9	715.5	717.6	723.3	729.6
27.5°	679.6	676.5	675.8	676.1	675.8	676.5	679.6	679.2	684.8	689.4	693.9
30°	660.5	655.3	655.8	655.3	655.8	655.3	660.5	660.5	663.6	667.8	671.9
32.5°	639.7	636.2	635.5	634.5	635.5	636.2	639.7	638.9	642.8	647.8	652.4
35°	609.1	609.1	606.5	606.5	606.5	609.1	609.1	610.6	614.8	614.8	620.0
37.5°	580.3	579.8	578.2	578.5	578.2	579.8	580.3	581.6	583.0	585.2	588.5
40°	558.7	558.2	556.6	553.5	556.6	558.2	558.7	560.8	561.8	564.4	566.5
42.5°	537.9	536.2	535.5	534.4	535.5	536.2	537.9	539.2	539.8	543.2	547.4
45°	505.2	505.2	504.2	503.7	504.2	505.2	505.2	505.2	505.8	509.9	512.0
47.5°	473.5	474.4	476.4	476.1	476.4	474.4	473.5	472.6	472.8	474.9	477.3
50°	454.3	454.9	456.4	456.9	456.4	454.9	454.3	452.3	451.2	451.2	452.8
52.5°	433.2	436.2	438.1	437.8	438.1	436.2	433.2	431.5	429.6	427.1	429.5
55°	403.5	407.1	410.7	411.3	410.7	407.1	403.5	398.8	396.7	392.6	394.1
57.5°	374.1	379.2	383.0	384.2	383.0	379.2	374.1	368.5	361.7	359.7	356.8
60°	354.1	360.9	365.6	367.6	365.6	360.9	354.1	348.9	340.1	334.4	332.3
62.5°	335.0	342.6	347.3	347.7	347.3	342.6	335.0	326.9	318.1	311.6	307.4
65°	303.8	311.6	315.7	318.8	315.7	311.6	303.8	294.9	285.1	276.2	271.6
67.5°	270.1	277.9	282.5	285.0	282.5	277.9	270.1	259.2	250.2	240.0	234.5
70°	245.6	253.4	259.6	261.7	259.6	253.4	245.6	232.6	224.8	215.5	210.8
72.5°	221.5	228.5	233.5	235.9	233.5	228.5	221.5	209.4	200.3	191.0	184.6
75°	179.7	189.0	193.7	196.3	193.7	189.0	179.7	172.9	162.5	152.7	147.5
77.5°	138.5	147.1	149.9	151.2	149.9	147.1	138.5	130.6	122.8	115.6	110.5
80°	111.1	116.3	119.9	120.5	119.9	116.3	111.1	104.9	98.7	91.9	87.2
82.5°	85.4	89.7	90.9	92.2	90.9	89.7	85.4	80.0	74.6	69.5	65.6
85°	46.7	48.8	49.3	48.8	49.3	48.8	46.7	43.1	40.5	37.9	36.3
87.5°	20.5	20.2	20.4	21.4	20.4	20.2	20.5	19.5	19.7	18.6	17.5
90°	25.6	26.3	27.1	27.9	27.1	26.3	25.6	24.8	23.8	22.5	21.2
92.5°	24.9	25.3	25.7	26.0	25.7	25.3	24.9	24.6	23.8	22.5	21.2
95°	24.4	24.4	24.4	24.4	24.4	24.4	24.4	24.4	23.8	22.5	21.2
97.5°	24.4	24.4	24.4	24.4	24.4	24.4	24.4	24.4	28.0	35.3	42.6
100°	27.5	26.5	25.4	24.4	25.4	26.5	27.5	28.5	48.3	86.8	125.3
102.5°	198.9	181.3	163.8	146.2	163.8	181.3	198.9	216.5	228.9	236.2	243.4
105°	345.9	345.7	345.4	345.2	345.4	345.7	345.9	346.2	346.3	346.3	346.3
107.5°	437.4	436.7	435.9	435.1	435.9	436.7	437.4	438.2	438.6	438.5	438.5
110°	496.6	496.9	497.2	497.4	497.2	496.9	496.6	496.4	496.6	497.4	498.2



TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	554.3	553.9	553.6	553.2	553.6	553.9	554.3	554.6	555.3	556.3	557.3
115°	641.5	640.0	638.4	636.9	638.4	640.0	641.5	643.1	644.4	645.4	646.4
117.5°	728.1	727.5	726.8	726.1	726.8	727.5	728.1	728.8	729.8	731.2	732.5
120°	784.9	783.6	782.3	781.0	782.3	783.6	784.9	786.2	787.1	787.6	788.1
122.5°	837.5	836.0	834.6	833.1	834.6	836.0	837.5	839.0	840.1	840.6	841.1
125°	914.6	913.9	913.1	912.3	913.1	913.9	914.6	915.4	916.3	917.3	918.4
127.5°	984.8	982.8	980.9	979.0	980.9	982.8	984.8	986.7	987.9	988.5	989.0
130°	1031.2	1030.0	1028.7	1027.4	1028.7	1030.0	1031.2	1032.5	1033.6	1034.3	1035.1
132.5°	1075.9	1074.6	1073.3	1072.0	1073.3	1074.6	1075.9	1077.2	1077.9	1078.0	1078.2
135°	1137.8	1136.2	1134.7	1133.1	1134.7	1136.2	1137.8	1139.3	1140.4	1140.9	1141.4
137.5°	1198.5	1197.2	1195.8	1194.5	1195.8	1197.2	1198.5	1199.9	1200.5	1200.4	1200.3
140°	1235.4	1233.9	1232.3	1230.8	1232.3	1233.9	1235.4	1236.9	1237.5	1236.9	1236.4
142.5°	1269.8	1268.3	1266.7	1265.2	1266.7	1268.3	1269.8	1271.4	1272.1	1272.0	1271.9
145°	1320.2	1318.7	1317.1	1315.6	1317.1	1318.7	1320.2	1321.8	1322.4	1322.2	1321.9
147.5°	1362.8	1360.9	1359.1	1357.2	1359.1	1360.9	1362.8	1364.6	1365.4	1365.1	1364.8
150°	1390.4	1388.3	1386.2	1384.2	1386.2	1388.3	1390.4	1392.4	1393.2	1392.7	1392.2
152.5°	1414.8	1413.0	1411.1	1409.3	1411.1	1413.0	1414.8	1416.7	1417.4	1416.9	1416.3
155°	1448.5	1446.4	1444.3	1442.3	1444.3	1446.4	1448.5	1450.5	1451.2	1450.4	1449.6
157.5°	1476.1	1474.1	1472.0	1469.9	1472.0	1474.1	1476.1	1478.2	1478.8	1478.0	1477.2
160°	1493.8	1491.7	1489.7	1487.6	1489.7	1491.7	1493.8	1495.9	1496.4	1495.3	1494.3
162.5°	1510.2	1507.9	1505.7	1503.4	1505.7	1507.9	1510.2	1512.5	1512.9	1511.5	1510.0
165°	1531.0	1528.9	1526.8	1524.8	1526.8	1528.9	1531.0	1533.0	1533.3	1531.8	1530.2
167.5°	1546.6	1544.3	1542.0	1539.7	1542.0	1544.3	1546.6	1549.0	1549.2	1547.3	1545.5
170°	1555.0	1552.7	1550.4	1548.0	1550.4	1552.7	1555.0	1557.3	1557.5	1555.4	1553.3
172.5°	1560.6	1558.3	1555.9	1553.6	1555.9	1558.3	1560.6	1562.9	1563.1	1561.3	1559.4
175°	1567.8	1565.5	1563.1	1560.8	1563.1	1565.5	1567.8	1570.1	1570.2	1568.2	1566.1
177.5°	1570.0	1568.3	1566.6	1565.0	1566.6	1568.3	1570.0	1571.6	1571.7	1570.3	1568.8
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8



TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1169.8	1174.8	1181.0	1185.6	1193.9	1197.6	1202.2	1205.9	1212.6	1218.8	1226.3
5°	1091.0	1099.8	1111.7	1124.7	1139.8	1150.2	1164.7	1173.5	1191.2	1207.3	1222.8
7.5°	1019.5	1030.3	1047.2	1063.9	1083.6	1101.4	1119.6	1139.8	1162.3	1188.9	1210.9
10°	970.5	985.0	1003.2	1024.0	1047.9	1068.6	1093.0	1114.8	1142.4	1173.5	1202.6
12.5°	931.4	943.9	964.2	984.1	1009.6	1035.0	1060.2	1089.1	1121.2	1155.7	1192.2
15°	877.5	887.9	904.5	932.1	958.0	983.0	1020.9	1047.9	1088.4	1126.8	1170.9
17.5°	831.5	844.4	858.4	882.0	908.9	940.1	973.9	1007.8	1046.8	1095.5	1145.3
20°	803.3	813.7	829.8	847.9	876.5	907.7	939.9	974.1	1021.9	1072.3	1125.7
22.5°	772.5	783.8	801.9	821.8	845.8	875.7	911.2	948.8	998.6	1048.2	1106.2
25°	736.3	744.1	760.7	778.4	802.3	827.7	864.6	906.1	955.4	1012.0	1071.2
27.5°	702.1	709.0	724.2	739.5	761.1	791.3	824.3	866.2	912.7	970.1	1035.7
30°	677.6	684.9	698.4	715.0	735.8	762.3	796.0	835.5	885.3	941.4	1010.0
32.5°	656.4	662.9	673.1	689.7	710.0	735.7	766.9	807.2	857.1	914.0	981.3
35°	623.6	630.9	638.7	651.7	669.3	694.2	728.5	766.4	814.2	869.2	931.0
37.5°	591.0	598.9	605.9	617.5	633.6	655.6	685.2	724.7	767.9	820.9	880.2
40°	570.7	576.9	582.6	595.1	611.2	631.9	659.5	694.8	740.5	789.8	839.1
42.5°	550.3	556.1	561.0	571.8	586.7	606.6	632.9	667.3	709.7	755.7	799.2
45°	518.2	521.9	527.6	536.9	548.9	567.0	592.5	623.1	658.9	702.6	735.3
47.5°	483.5	489.2	493.9	502.1	511.9	529.7	554.1	580.2	612.7	645.1	668.2
50°	456.9	462.7	469.4	477.2	486.5	503.2	525.5	552.0	579.5	604.4	624.1
52.5°	432.0	437.3	444.5	451.9	463.3	477.4	496.4	520.0	547.1	565.0	581.4
55°	395.2	397.7	406.1	413.3	424.2	434.6	453.8	474.6	491.2	504.7	518.2
57.5°	357.5	361.0	365.8	372.3	383.1	395.3	408.8	427.1	436.9	443.9	454.3
60°	333.4	334.4	337.5	345.3	353.6	364.5	380.1	393.1	400.3	406.1	414.9
62.5°	306.8	307.0	312.2	317.9	324.1	335.9	348.5	359.0	365.0	367.8	376.3
65°	269.5	268.5	271.6	276.2	283.5	291.3	302.2	311.6	311.0	314.1	319.3
67.5°	231.4	230.3	230.3	234.8	240.7	247.7	255.2	260.6	260.7	264.8	267.4
70°	205.6	202.5	204.6	208.2	210.8	216.5	224.8	226.9	227.4	229.5	232.1
72.5°	179.0	178.0	179.7	181.2	183.0	187.5	194.5	195.8	195.9	197.1	201.4
75°	142.3	141.2	140.2	141.8	143.8	146.9	149.5	151.6	151.1	151.6	154.7
77.5°	106.7	103.7	103.2	104.1	104.6	106.4	109.1	108.9	109.5	109.4	112.9
80°	84.6	80.5	80.0	80.0	80.5	81.5	82.6	83.6	82.0	83.6	84.6
82.5°	62.2	59.7	59.6	59.2	59.3	59.5	60.1	60.8	60.4	61.2	61.8
85°	34.3	33.2	31.7	32.7	32.2	30.6	31.7	30.1	29.6	30.1	30.6
87.5°	15.6	15.8	14.6	14.2	13.4	13.5	12.3	11.4	10.6	10.6	11.4
90°	19.9	18.6	16.8	15.0	13.2	11.4	9.4	7.4	5.3	3.2	1.2
92.5°	19.9	18.6	17.0	15.4	13.8	12.2	12.1	13.6	15.0	16.5	17.9
95°	19.9	18.6	28.4	38.2	48.0	57.9	63.1	63.9	64.7	65.5	66.2
97.5°	49.9	57.2	76.6	96.0	115.4	134.9	143.9	142.5	141.1	139.7	138.3
100°	163.7	202.2	201.2	200.2	199.1	198.1	197.2	196.4	195.6	194.9	194.1
102.5°	250.7	258.0	257.4	256.8	256.1	255.5	254.7	253.7	252.8	251.8	250.8
105°	346.3	346.3	346.3	346.3	346.3	346.3	345.8	344.8	343.7	342.7	341.7
107.5°	438.4	438.4	437.9	437.3	436.8	436.3	436.1	436.1	436.1	436.1	436.1
110°	499.0	499.7	499.2	498.7	498.2	497.7	497.4	497.4	497.4	497.4	497.4



TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	558.3	559.2	558.9	558.6	558.3	558.0	557.5	556.9	556.3	555.7	555.1
115°	647.5	648.5	648.2	648.0	647.7	647.5	646.7	645.4	644.1	642.8	641.5
117.5°	733.9	735.2	734.2	733.2	732.3	731.3	730.8	730.9	730.9	731.0	731.0
120°	788.6	789.1	788.3	787.6	786.8	786.0	785.8	786.0	786.3	786.5	786.8
122.5°	841.6	842.1	841.8	841.4	841.0	840.7	840.0	839.0	838.0	837.1	836.1
125°	919.4	920.4	920.4	920.4	920.4	920.4	919.5	917.7	915.9	914.1	912.3
127.5°	989.6	990.2	990.3	990.5	990.6	990.8	990.2	988.9	987.6	986.4	985.1
130°	1035.9	1036.7	1036.4	1036.2	1035.9	1035.6	1034.9	1033.6	1032.3	1031.0	1029.7
132.5°	1078.4	1078.5	1079.1	1079.6	1080.2	1080.8	1080.3	1078.8	1077.3	1075.8	1074.3
135°	1141.9	1142.4	1142.9	1143.5	1144.0	1144.5	1144.0	1142.4	1140.9	1139.3	1137.8
137.5°	1200.2	1200.1	1200.5	1201.0	1201.5	1201.9	1201.5	1200.1	1198.8	1197.5	1196.1
140°	1235.9	1235.4	1235.7	1235.9	1236.2	1236.4	1236.3	1235.8	1235.3	1234.8	1234.2
142.5°	1271.8	1271.7	1271.3	1270.9	1270.6	1270.2	1269.9	1269.6	1269.3	1268.9	1268.6
145°	1321.7	1321.4	1321.4	1321.4	1321.4	1321.4	1321.1	1320.6	1320.1	1319.6	1319.1
147.5°	1364.5	1364.2	1363.9	1363.5	1363.2	1362.9	1362.8	1362.9	1363.0	1363.1	1363.2
150°	1391.6	1391.1	1390.6	1390.1	1389.6	1389.1	1389.1	1389.6	1390.1	1390.6	1391.1
152.5°	1415.8	1415.3	1414.8	1414.3	1413.8	1413.2	1413.5	1414.7	1415.8	1417.0	1418.1
155°	1448.9	1448.1	1447.6	1447.0	1446.5	1446.0	1446.5	1448.1	1449.6	1451.2	1452.7
157.5°	1476.3	1475.5	1475.5	1475.4	1475.4	1475.3	1475.7	1476.7	1477.6	1478.5	1479.5
160°	1493.3	1492.2	1492.0	1491.7	1491.5	1491.2	1491.9	1493.4	1495.0	1496.5	1498.1
162.5°	1508.6	1507.1	1506.9	1506.6	1506.3	1506.1	1506.7	1508.3	1509.8	1511.4	1512.9
165°	1528.7	1527.1	1526.8	1526.6	1526.3	1526.1	1526.7	1528.3	1529.8	1531.4	1532.9
167.5°	1543.6	1541.8	1541.5	1541.2	1541.0	1540.7	1541.4	1543.0	1544.6	1546.2	1547.8
170°	1551.3	1549.2	1548.9	1548.7	1548.4	1548.2	1548.9	1550.7	1552.5	1554.4	1556.2
172.5°	1557.6	1555.7	1555.2	1554.8	1554.3	1553.8	1554.5	1556.3	1558.1	1559.9	1561.7
175°	1564.0	1562.0	1561.7	1561.5	1561.2	1560.9	1561.6	1563.1	1564.7	1566.2	1567.8
177.5°	1567.4	1565.9	1565.7	1565.5	1565.3	1565.1	1565.6	1566.9	1568.1	1569.3	1570.6
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8



TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1230.0	1235.8	1239.6	1246.6	1252.4	1255.8	1258.7	1261.2	1264.1	1266.6	1273.6
5°	1237.9	1251.4	1262.8	1280.5	1296.6	1309.0	1322.5	1334.5	1344.4	1358.4	1369.3
7.5°	1234.5	1258.5	1283.6	1310.9	1338.8	1364.8	1388.7	1411.0	1431.3	1455.8	1477.3
10°	1231.2	1263.9	1296.1	1332.9	1370.8	1403.0	1433.1	1463.8	1486.1	1517.3	1543.7
12.5°	1228.7	1267.2	1306.0	1350.4	1392.0	1437.5	1477.6	1499.9	1533.9	1558.8	1590.3
15°	1218.2	1269.1	1322.5	1372.4	1431.6	1473.6	1509.0	1552.6	1584.2	1615.9	1650.2
17.5°	1199.4	1257.0	1316.8	1382.2	1439.0	1484.1	1529.6	1571.7	1609.5	1652.0	1694.6
20°	1190.7	1248.3	1316.8	1383.8	1439.4	1486.6	1533.4	1579.6	1621.1	1675.6	1725.0
22.5°	1172.4	1242.1	1305.2	1370.5	1427.7	1479.2	1532.1	1584.6	1639.8	1701.4	1763.2
25°	1139.8	1210.4	1277.4	1341.8	1399.4	1463.8	1520.4	1590.5	1661.1	1742.6	1819.5
27.5°	1105.9	1173.5	1234.9	1297.1	1364.3	1437.2	1510.6	1590.2	1682.6	1785.5	1893.9
30°	1078.5	1142.4	1202.1	1265.9	1336.0	1418.1	1498.6	1593.1	1700.0	1815.8	1944.6
32.5°	1046.5	1105.4	1163.4	1231.1	1307.4	1394.0	1487.8	1591.4	1720.0	1851.6	1984.1
35°	991.8	1041.1	1100.8	1173.0	1259.2	1358.4	1466.9	1589.4	1736.9	1888.0	1999.7
37.5°	926.9	972.8	1035.7	1114.8	1205.2	1311.6	1440.4	1585.8	1742.4	1862.9	1898.9
40°	883.3	925.8	991.3	1073.3	1165.7	1278.4	1419.6	1573.3	1725.0	1801.8	1772.2
42.5°	836.7	881.4	945.1	1026.4	1125.9	1248.5	1393.5	1547.2	1674.3	1703.4	1601.1
45°	763.3	809.5	872.3	954.4	1061.4	1194.3	1345.4	1485.1	1558.3	1505.8	1347.5
47.5°	695.1	738.4	796.6	881.3	991.7	1129.2	1274.7	1386.1	1391.9	1266.8	1097.6
50°	648.6	688.5	747.2	831.8	941.4	1080.6	1211.9	1299.7	1260.2	1118.5	955.9
52.5°	602.9	642.0	699.9	783.7	892.0	1019.5	1141.7	1203.3	1129.0	983.5	844.6
55°	536.9	571.2	627.8	705.1	808.0	926.4	1030.2	1051.5	954.9	811.6	698.9
57.5°	472.5	504.5	556.0	627.3	721.2	826.1	907.3	902.8	800.7	677.7	588.3
60°	428.9	460.1	505.8	575.3	661.0	751.4	820.9	804.3	703.1	597.1	521.9
62.5°	389.9	417.7	460.9	521.7	599.9	683.7	740.8	716.3	617.1	524.4	464.9
65°	332.3	355.7	392.6	444.5	509.4	578.5	622.6	590.9	506.3	434.1	386.3
67.5°	277.4	296.1	327.0	368.5	423.8	479.3	506.2	474.3	406.6	353.9	318.5
70°	242.5	259.1	283.0	319.9	368.2	414.9	435.1	406.6	348.4	303.2	277.8
72.5°	207.6	221.3	242.3	275.4	314.1	354.7	372.4	345.1	297.3	259.2	235.4
75°	160.5	169.8	184.3	207.2	237.8	270.0	279.9	256.0	225.4	196.8	181.2
77.5°	114.9	122.8	133.8	148.2	169.9	190.4	199.0	185.2	161.5	143.4	130.6
80°	88.3	92.4	101.8	113.7	130.9	143.8	149.5	140.7	124.1	110.6	100.7
82.5°	62.9	67.1	72.7	82.6	93.5	102.3	108.4	102.5	90.5	79.9	74.1
85°	30.6	33.2	36.3	40.5	48.8	54.0	53.5	49.8	45.2	41.0	37.9
87.5°	11.4	12.3	13.9	16.4	18.1	20.1	21.3	20.8	19.5	18.5	17.5
90°	3.2	5.3	7.4	9.4	11.4	13.2	15.0	16.8	18.6	19.9	21.2
92.5°	16.5	15.0	13.6	12.1	12.2	13.8	15.4	17.0	18.6	19.9	21.2
95°	65.5	64.7	63.9	63.1	57.9	48.0	38.2	28.4	18.6	19.9	21.2
97.5°	139.7	141.1	142.5	143.9	134.9	115.4	96.0	76.6	57.2	49.9	42.6
100°	194.9	195.6	196.4	197.2	198.1	199.1	200.2	201.2	202.2	163.7	125.3
102.5°	251.8	252.8	253.7	254.7	255.5	256.1	256.8	257.4	258.0	250.7	243.4
105°	342.7	343.7	344.8	345.8	346.3	346.3	346.3	346.3	346.3	346.3	346.3
107.5°	436.1	436.1	436.1	436.1	436.3	436.8	437.3	437.9	438.4	438.4	438.5
110°	497.4	497.4	497.4	497.4	497.7	498.2	498.7	499.2	499.7	499.0	498.2





TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	555.7	556.3	556.9	557.5	558.0	558.3	558.6	558.9	559.2	558.3	557.3
115°	642.8	644.1	645.4	646.7	647.5	647.7	648.0	648.2	648.5	647.5	646.4
117.5°	731.0	730.9	730.9	730.8	731.3	732.3	733.2	734.2	735.2	733.9	732.5
120°	786.5	786.3	786.0	785.8	786.0	786.8	787.6	788.3	789.1	788.6	788.1
122.5°	837.1	838.0	839.0	840.0	840.7	841.0	841.4	841.8	842.1	841.6	841.1
125°	914.1	915.9	917.7	919.5	920.4	920.4	920.4	920.4	920.4	919.4	918.4
127.5°	986.4	987.6	988.9	990.2	990.8	990.6	990.5	990.3	990.2	989.6	989.0
130°	1031.0	1032.3	1033.6	1034.9	1035.6	1035.9	1036.2	1036.4	1036.7	1035.9	1035.1
132.5°	1075.8	1077.3	1078.8	1080.3	1080.8	1080.2	1079.6	1079.1	1078.5	1078.4	1078.2
135°	1139.3	1140.9	1142.4	1144.0	1144.5	1144.0	1143.5	1142.9	1142.4	1141.9	1141.4
137.5°	1197.5	1198.8	1200.1	1201.5	1201.9	1201.5	1201.0	1200.5	1200.1	1200.2	1200.3
140°	1234.8	1235.3	1235.8	1236.3	1236.4	1236.2	1235.9	1235.7	1235.4	1235.9	1236.4
142.5°	1268.9	1269.3	1269.6	1269.9	1270.2	1270.6	1270.9	1271.3	1271.7	1271.8	1271.9
145°	1319.6	1320.1	1320.6	1321.1	1321.4	1321.4	1321.4	1321.4	1321.4	1321.7	1321.9
147.5°	1363.1	1363.0	1362.9	1362.8	1362.9	1363.2	1363.5	1363.9	1364.2	1364.5	1364.8
150°	1390.6	1390.1	1389.6	1389.1	1389.1	1389.6	1390.1	1390.6	1391.1	1391.6	1392.2
152.5°	1417.0	1415.8	1414.7	1413.5	1413.2	1413.8	1414.3	1414.8	1415.3	1415.8	1416.3
155°	1451.2	1449.6	1448.1	1446.5	1446.0	1446.5	1447.0	1447.6	1448.1	1448.9	1449.6
157.5°	1478.5	1477.6	1476.7	1475.7	1475.3	1475.4	1475.4	1475.5	1475.5	1476.3	1477.2
160°	1496.5	1495.0	1493.4	1491.9	1491.2	1491.5	1491.7	1492.0	1492.2	1493.3	1494.3
162.5°	1511.4	1509.8	1508.3	1506.7	1506.1	1506.3	1506.6	1506.9	1507.1	1508.6	1510.0
165°	1531.4	1529.8	1528.3	1526.7	1526.1	1526.3	1526.6	1526.8	1527.1	1528.7	1530.2
167.5°	1546.2	1544.6	1543.0	1541.4	1540.7	1541.0	1541.2	1541.5	1541.8	1543.6	1545.5
170°	1554.4	1552.5	1550.7	1548.9	1548.2	1548.4	1548.7	1548.9	1549.2	1551.3	1553.3
172.5°	1559.9	1558.1	1556.3	1554.5	1553.8	1554.3	1554.8	1555.2	1555.7	1557.6	1559.4
175°	1566.2	1564.7	1563.1	1561.6	1560.9	1561.2	1561.5	1561.7	1562.0	1564.0	1566.1
177.5°	1569.3	1568.1	1566.9	1565.6	1565.1	1565.3	1565.5	1565.7	1565.9	1567.4	1568.8
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8



TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1279.4	1282.8	1289.8	1287.3	1290.7	1292.3	1294.0
5°	1382.8	1399.4	1406.7	1405.6	1416.5	1413.9	1411.3
7.5°	1499.5	1517.0	1526.7	1538.9	1545.9	1546.4	1552.6
10°	1565.6	1588.4	1597.8	1610.7	1619.0	1623.7	1623.2
12.5°	1616.2	1634.1	1655.1	1661.4	1672.6	1678.5	1676.4
15°	1677.2	1705.8	1727.6	1738.5	1752.5	1756.6	1762.4
17.5°	1731.6	1769.9	1795.4	1829.2	1842.0	1849.8	1845.2
20°	1772.7	1823.1	1848.6	1889.1	1911.4	1923.3	1919.2
22.5°	1821.3	1875.9	1922.9	1958.0	1992.0	2008.1	2011.4
25°	1904.6	1979.4	2048.5	2094.7	2136.7	2146.6	2168.4
27.5°	1997.7	2085.9	2159.7	2208.3	2237.6	2248.6	2255.4
30°	2056.3	2144.0	2199.6	2230.7	2240.1	2239.0	2238.0
32.5°	2084.9	2139.9	2150.5	2141.8	2120.4	2102.4	2083.5
35°	2044.3	2003.3	1942.0	1863.1	1804.9	1746.3	1740.5
37.5°	1838.6	1707.4	1605.4	1491.5	1425.8	1385.2	1357.1
40°	1645.0	1496.0	1372.4	1276.3	1209.3	1182.9	1156.9
42.5°	1434.8	1292.4	1183.0	1102.7	1052.3	1022.9	1002.4
45°	1165.7	1040.1	954.4	896.2	856.3	833.4	820.4
47.5°	955.2	862.3	789.5	747.5	719.9	702.1	702.2
50°	842.2	753.4	705.1	671.9	648.0	634.0	636.6
52.5°	742.1	675.8	634.5	606.7	589.0	580.4	580.1
55°	620.5	572.7	545.7	525.5	513.5	503.7	505.8
57.5°	530.8	490.5	472.4	455.6	447.3	443.3	437.6
60°	475.1	444.0	428.4	414.9	406.6	403.5	397.7
62.5°	425.7	401.2	386.0	375.0	367.5	366.5	362.0
65°	357.8	339.1	325.6	320.4	312.6	310.5	310.5
67.5°	294.9	281.5	271.1	266.3	262.8	263.4	260.9
70°	255.5	244.6	237.8	232.6	230.0	230.5	228.5
72.5°	223.5	211.3	205.4	202.3	198.9	200.2	199.4
75°	169.3	163.0	159.9	156.8	154.7	153.7	152.7
77.5°	124.3	118.8	116.4	114.7	115.0	112.5	114.4
80°	96.1	91.4	89.8	87.2	86.7	86.7	86.2
82.5°	70.3	67.7	66.6	64.4	63.5	64.3	62.9
85°	36.3	34.3	33.8	33.8	32.7	31.7	34.3
87.5°	17.8	16.4	16.6	16.3	16.5	16.2	15.5
90°	22.5	23.8	24.8	25.6	26.3	27.1	27.9
92.5°	22.5	23.8	24.6	24.9	25.3	25.7	26.0
95°	22.5	23.8	24.4	24.4	24.4	24.4	24.4
97.5°	35.3	28.0	24.4	24.4	24.4	24.4	24.4
100°	86.8	48.3	28.5	27.5	26.5	25.4	24.4
102.5°	236.2	228.9	216.5	198.9	181.3	163.8	146.2
105°	346.3	346.3	346.2	345.9	345.7	345.4	345.2
107.5°	438.5	438.6	438.2	437.4	436.7	435.9	435.1
110°	497.4	496.6	496.4	496.6	496.9	497.2	497.4



TEST NUMBER: P333241

CATALOG NUMBER: S125DIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	556.3	555.3	554.6	554.3	553.9	553.6	553.2
115°	645.4	644.4	643.1	641.5	640.0	638.4	636.9
117.5°	731.2	729.8	728.8	728.1	727.5	726.8	726.1
120°	787.6	787.1	786.2	784.9	783.6	782.3	781.0
122.5°	840.6	840.1	839.0	837.5	836.0	834.6	833.1
125°	917.3	916.3	915.4	914.6	913.9	913.1	912.3
127.5°	988.5	987.9	986.7	984.8	982.8	980.9	979.0
130°	1034.3	1033.6	1032.5	1031.2	1030.0	1028.7	1027.4
132.5°	1078.0	1077.9	1077.2	1075.9	1074.6	1073.3	1072.0
135°	1140.9	1140.4	1139.3	1137.8	1136.2	1134.7	1133.1
137.5°	1200.4	1200.5	1199.9	1198.5	1197.2	1195.8	1194.5
140°	1236.9	1237.5	1236.9	1235.4	1233.9	1232.3	1230.8
142.5°	1272.0	1272.1	1271.4	1269.8	1268.3	1266.7	1265.2
145°	1322.2	1322.4	1321.8	1320.2	1318.7	1317.1	1315.6
147.5°	1365.1	1365.4	1364.6	1362.8	1360.9	1359.1	1357.2
150°	1392.7	1393.2	1392.4	1390.4	1388.3	1386.2	1384.2
152.5°	1416.9	1417.4	1416.7	1414.8	1413.0	1411.1	1409.3
155°	1450.4	1451.2	1450.5	1448.5	1446.4	1444.3	1442.3
157.5°	1478.0	1478.8	1478.2	1476.1	1474.1	1472.0	1469.9
160°	1495.3	1496.4	1495.9	1493.8	1491.7	1489.7	1487.6
162.5°	1511.5	1512.9	1512.5	1510.2	1507.9	1505.7	1503.4
165°	1531.8	1533.3	1533.0	1531.0	1528.9	1526.8	1524.8
167.5°	1547.3	1549.2	1549.0	1546.6	1544.3	1542.0	1539.7
170°	1555.4	1557.5	1557.3	1555.0	1552.7	1550.4	1548.0
172.5°	1561.3	1563.1	1562.9	1560.6	1558.3	1555.9	1553.6
175°	1568.2	1570.2	1570.1	1567.8	1565.5	1563.1	1560.8
177.5°	1570.3	1571.7	1571.6	1570.0	1568.3	1566.6	1565.0
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8

(END OF REPORT)