

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333214

Luminaire Tested: **S125DIP-S850D590U835-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333214
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S850D590U835-4F0-1E-UDD-A
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 590 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5817.2 lumens
Efficiency: N/A
Efficacy: 144.3 lumens/watt
Spacing Criteria (0/90/45): 1.43 / 1.23 / 1.52
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 40.3
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

Luminous Intensity Polar Plot

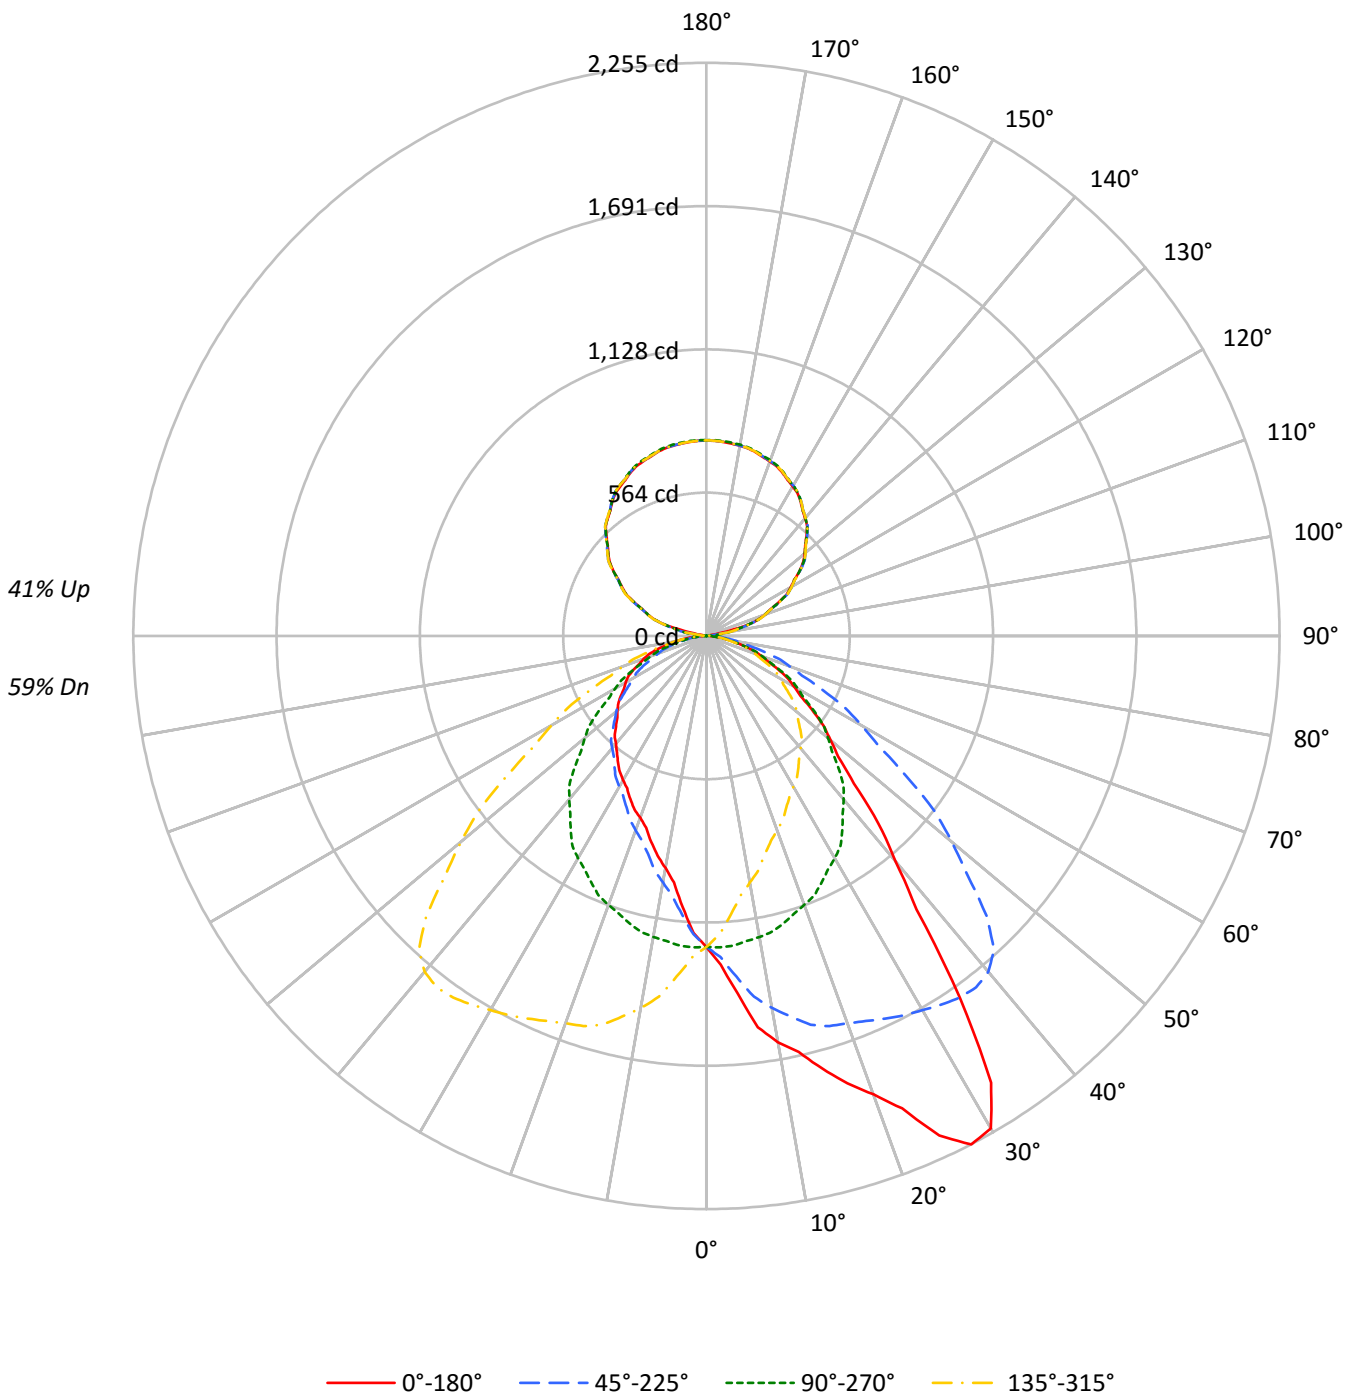



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	89	89	89	76	76	76	65	65	65	59
1	100	96	92	89	93	90	86	83	78	76	73	67	66	64	58	56	55	51
2	91	84	78	73	85	79	73	69	69	65	61	60	57	54	51	49	47	43
3	84	74	67	61	78	69	63	58	61	56	52	53	49	46	45	43	40	36
4	77	66	58	52	71	62	55	49	54	49	44	47	43	39	41	37	35	31
5	70	59	50	44	65	55	48	42	49	43	38	42	38	34	37	33	30	27
6	65	53	45	39	60	50	42	37	44	38	33	38	34	30	33	30	27	24
7	60	48	40	34	56	45	38	33	40	34	30	35	30	27	30	27	24	21
8	56	43	35	30	52	41	34	29	36	30	26	32	27	24	28	24	21	19
9	52	40	32	27	48	37	31	26	33	28	24	29	25	21	26	22	19	17
10	49	36	29	24	45	34	28	23	31	25	21	27	23	19	24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	7901	7901	7901	7901
5°	9149	7927	6941	7927
10°	10645	7887	6082	7887
15°	11784	7829	5610	7829
20°	13190	7737	5232	7737
25°	15452	7633	5047	7633
30°	16690	7532	4887	7532
35°	13722	7340	4782	7340
40°	9754	7074	4666	7074
45°	7493	6716	4601	6716
50°	6396	6271	4591	6271
55°	5695	5835	4631	5835
60°	5137	5359	4748	5359
65°	4745	4879	4872	4879
70°	4315	4383	4942	4383
75°	3810	3860	4898	3860
80°	3206	3146	4482	3146
85°	2542	2267	3616	2267



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	117.8	2.0
10°-20°	350.7	6.0
20°-30°	569.4	9.8
30°-40°	694.5	11.9
40°-50°	631.8	10.9
50°-60°	503.3	8.7
60°-70°	350.5	6.0
70°-80°	186.9	3.2
80°-90°	48.8	0.8
90°-100°	28.0	0.5
100°-110°	172.4	3.0
110°-120°	312.6	5.4
120°-130°	401.2	6.9
130°-140°	431.5	7.4
140°-150°	405.1	7.0
150°-160°	327.7	5.6
160°-170°	211.9	3.6
170°-180°	73.1	1.3
0°-30°	1037.8	17.8
0°-40°	1732.4	29.8
0°-60°	2867.5	49.3
0°-90°	3453.7	59.4
90°-120°	513.0	8.8
90°-150°	1750.8	30.1
90°-180°	2364.0	40.6
0°-180°	5817.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1223	1223	1223	1223	1223	
5°	1411	1223	1071	1223	1411	142
15°	1762	1171	839	1171	1762	504
25°	2168	1071	708	1071	2168	990
35°	1740	931	606	931	1740	1065
45°	820	735	504	735	820	657
55°	506	518	411	518	506	455
65°	310	319	319	319	310	308
75°	153	155	196	155	153	164
85°	34	31	49	31	34	40
90°	14	1	14	1	14	7
95°	12	32	12	32	12	10
105°	169	168	169	168	169	153
115°	313	315	313	315	313	310
125°	448	448	448	448	448	398
135°	556	559	556	559	556	429
145°	646	648	646	648	646	403
155°	708	713	708	713	708	326
165°	748	752	748	752	748	211
175°	766	770	766	770	766	73
180°	770	770	770	770	770	



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1294.0	1292.3	1290.7	1287.3	1289.8	1282.8	1279.4	1273.6	1266.6	1264.1	1261.2
5°	1411.3	1413.9	1416.5	1405.6	1406.7	1399.4	1382.8	1369.3	1358.4	1344.4	1334.5
7.5°	1552.6	1546.4	1545.9	1538.9	1526.7	1517.0	1499.5	1477.3	1455.8	1431.3	1411.0
10°	1623.2	1623.7	1619.0	1610.7	1597.8	1588.4	1565.6	1543.7	1517.3	1486.1	1463.8
12.5°	1676.4	1678.5	1672.6	1661.4	1655.1	1634.1	1616.2	1590.3	1558.8	1533.9	1499.9
15°	1762.4	1756.6	1752.5	1738.5	1727.6	1705.8	1677.2	1650.2	1615.9	1584.2	1552.6
17.5°	1845.2	1849.8	1842.0	1829.2	1795.4	1769.9	1731.6	1694.6	1652.0	1609.5	1571.7
20°	1919.2	1923.3	1911.4	1889.1	1848.6	1823.1	1772.7	1725.0	1675.6	1621.1	1579.6
22.5°	2011.4	2008.1	1992.0	1958.0	1922.9	1875.9	1821.3	1763.2	1701.4	1639.8	1584.6
25°	2168.4	2146.6	2136.7	2094.7	2048.5	1979.4	1904.6	1819.5	1742.6	1661.1	1590.5
27.5°	2255.4	2248.6	2237.6	2208.3	2159.7	2085.9	1997.7	1893.9	1785.5	1682.6	1590.2
30°	2238.0	2239.0	2240.1	2230.7	2199.6	2144.0	2056.3	1944.6	1815.8	1700.0	1593.1
32.5°	2083.5	2102.4	2120.4	2141.8	2150.5	2139.9	2084.9	1984.1	1851.6	1720.0	1591.4
35°	1740.5	1746.3	1804.9	1863.1	1942.0	2003.3	2044.3	1999.7	1888.0	1736.9	1589.4
37.5°	1357.1	1385.2	1425.8	1491.5	1605.4	1707.4	1838.6	1898.9	1862.9	1742.4	1585.8
40°	1156.9	1182.9	1209.3	1276.3	1372.4	1496.0	1645.0	1772.2	1801.8	1725.0	1573.3
42.5°	1002.4	1022.9	1052.3	1102.7	1183.0	1292.4	1434.8	1601.1	1703.4	1674.3	1547.2
45°	820.4	833.4	856.3	896.2	954.4	1040.1	1165.7	1347.5	1505.8	1558.3	1485.1
47.5°	702.2	702.1	719.9	747.5	789.5	862.3	955.2	1097.6	1266.8	1391.9	1386.1
50°	636.6	634.0	648.0	671.9	705.1	753.4	842.2	955.9	1118.5	1260.2	1299.7
52.5°	580.1	580.4	589.0	606.7	634.5	675.8	742.1	844.6	983.5	1129.0	1203.3
55°	505.8	503.7	513.5	525.5	545.7	572.7	620.5	698.9	811.6	954.9	1051.5
57.5°	437.6	443.3	447.3	455.6	472.4	490.5	530.8	588.3	677.7	800.7	902.8
60°	397.7	403.5	406.6	414.9	428.4	444.0	475.1	521.9	597.1	703.1	804.3
62.5°	362.0	366.5	367.5	375.0	386.0	401.2	425.7	464.9	524.4	617.1	716.3
65°	310.5	310.5	312.6	320.4	325.6	339.1	357.8	386.3	434.1	506.3	590.9
67.5°	260.9	263.4	262.8	266.3	271.1	281.5	294.9	318.5	353.9	406.6	474.3
70°	228.5	230.5	230.0	232.6	237.8	244.6	255.5	277.8	303.2	348.4	406.6
72.5°	199.4	200.2	198.9	202.3	205.4	211.3	223.5	235.4	259.2	297.3	345.1
75°	152.7	153.7	154.7	156.8	159.9	163.0	169.3	181.2	196.8	225.4	256.0
77.5°	114.4	112.5	115.0	114.7	116.4	118.8	124.3	130.6	143.4	161.5	185.2
80°	86.2	86.7	86.7	87.2	89.8	91.4	96.1	100.7	110.6	124.1	140.7
82.5°	62.9	64.3	63.5	64.4	66.6	67.7	70.3	74.1	79.9	90.5	102.5
85°	34.3	31.7	32.7	33.8	33.8	34.3	36.3	37.9	41.0	45.2	49.8
87.5°	12.7	13.5	13.8	13.7	14.1	14.0	15.5	15.4	16.5	17.6	19.1
90°	13.7	13.3	12.9	12.6	12.2	11.7	11.0	10.4	9.8	9.1	8.2
92.5°	12.8	12.6	12.4	12.2	12.1	11.7	11.0	10.4	9.8	9.1	8.3
95°	12.0	12.0	12.0	12.0	12.0	11.7	11.0	10.4	9.8	9.1	13.9
97.5°	12.0	12.0	12.0	12.0	12.0	13.8	17.3	20.9	24.5	28.1	37.6
100°	12.0	12.5	13.0	13.5	14.0	23.7	42.6	61.5	80.4	99.3	98.8
102.5°	71.8	80.4	89.0	97.6	106.3	112.4	115.9	119.5	123.1	126.7	126.4
105°	169.4	169.6	169.7	169.8	170.0	170.0	170.0	170.0	170.0	170.0	170.0
107.5°	213.6	214.0	214.4	214.8	215.1	215.3	215.3	215.3	215.2	215.2	215.0
110°	244.2	244.1	243.9	243.8	243.7	243.8	244.2	244.6	245.0	245.3	245.1



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	271.6	271.8	271.9	272.1	272.3	272.6	273.1	273.6	274.1	274.5	274.4
115°	312.7	313.4	314.2	314.9	315.7	316.3	316.8	317.3	317.9	318.4	318.2
117.5°	356.5	356.8	357.1	357.5	357.8	358.3	358.9	359.6	360.3	360.9	360.4
120°	383.4	384.0	384.7	385.3	385.9	386.4	386.6	386.9	387.1	387.4	387.0
122.5°	409.0	409.7	410.4	411.2	411.9	412.4	412.7	412.9	413.2	413.4	413.2
125°	447.9	448.3	448.6	449.0	449.4	449.8	450.3	450.9	451.4	451.9	451.9
127.5°	480.6	481.6	482.5	483.4	484.4	485.0	485.3	485.5	485.8	486.1	486.2
130°	504.4	505.0	505.6	506.3	506.9	507.4	507.8	508.2	508.5	508.9	508.8
132.5°	526.3	526.9	527.5	528.2	528.8	529.2	529.2	529.3	529.4	529.5	529.7
135°	556.3	557.0	557.8	558.6	559.3	559.8	560.1	560.3	560.6	560.8	561.1
137.5°	586.4	587.1	587.7	588.4	589.0	589.3	589.3	589.2	589.2	589.1	589.4
140°	604.2	605.0	605.7	606.5	607.2	607.5	607.2	607.0	606.7	606.5	606.6
142.5°	621.1	621.8	622.6	623.4	624.1	624.5	624.4	624.4	624.3	624.3	624.1
145°	645.8	646.6	647.4	648.1	648.9	649.2	649.1	649.0	648.8	648.7	648.7
147.5°	666.3	667.2	668.1	669.0	669.9	670.3	670.2	670.0	669.9	669.7	669.5
150°	679.5	680.5	681.5	682.6	683.6	683.9	683.7	683.4	683.2	682.9	682.7
152.5°	691.8	692.7	693.7	694.6	695.5	695.8	695.6	695.3	695.1	694.8	694.5
155°	708.0	709.1	710.1	711.1	712.1	712.4	712.0	711.7	711.3	710.9	710.6
157.5°	721.6	722.6	723.6	724.7	725.7	726.0	725.6	725.2	724.8	724.4	724.3
160°	730.3	731.3	732.3	733.3	734.3	734.6	734.1	733.6	733.1	732.6	732.4
162.5°	738.0	739.2	740.3	741.4	742.5	742.7	742.0	741.3	740.6	739.9	739.7
165°	748.5	749.6	750.6	751.6	752.6	752.7	752.0	751.2	750.4	749.7	749.6
167.5°	755.8	757.0	758.1	759.3	760.4	760.5	759.6	758.7	757.8	756.9	756.7
170°	760.0	761.1	762.2	763.4	764.5	764.6	763.6	762.6	761.5	760.5	760.4
172.5°	762.7	763.8	765.0	766.1	767.3	767.4	766.5	765.5	764.6	763.7	763.5
175°	766.2	767.4	768.5	769.7	770.8	770.9	769.8	768.8	767.8	766.8	766.7
177.5°	768.3	769.1	769.9	770.7	771.5	771.6	770.9	770.2	769.5	768.7	768.6
180°	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1258.7	1255.8	1252.4	1246.6	1239.6	1235.8	1230.0	1226.3	1218.8	1212.6	1205.9
5°	1322.5	1309.0	1296.6	1280.5	1262.8	1251.4	1237.9	1222.8	1207.3	1191.2	1173.5
7.5°	1388.7	1364.8	1338.8	1310.9	1283.6	1258.5	1234.5	1210.9	1188.9	1162.3	1139.8
10°	1433.1	1403.0	1370.8	1332.9	1296.1	1263.9	1231.2	1202.6	1173.5	1142.4	1114.8
12.5°	1477.6	1437.5	1392.0	1350.4	1306.0	1267.2	1228.7	1192.2	1155.7	1121.2	1089.1
15°	1509.0	1473.6	1431.6	1372.4	1322.5	1269.1	1218.2	1170.9	1126.8	1088.4	1047.9
17.5°	1529.6	1484.1	1439.0	1382.2	1316.8	1257.0	1199.4	1145.3	1095.5	1046.8	1007.8
20°	1533.4	1486.6	1439.4	1383.8	1316.8	1248.3	1190.7	1125.7	1072.3	1021.9	974.1
22.5°	1532.1	1479.2	1427.7	1370.5	1305.2	1242.1	1172.4	1106.2	1048.2	998.6	948.8
25°	1520.4	1463.8	1399.4	1341.8	1277.4	1210.4	1139.8	1071.2	1012.0	955.4	906.1
27.5°	1510.6	1437.2	1364.3	1297.1	1234.9	1173.5	1105.9	1035.7	970.1	912.7	866.2
30°	1498.6	1418.1	1336.0	1265.9	1202.1	1142.4	1078.5	1010.0	941.4	885.3	835.5
32.5°	1487.8	1394.0	1307.4	1231.1	1163.4	1105.4	1046.5	981.3	914.0	857.1	807.2
35°	1466.9	1358.4	1259.2	1173.0	1100.8	1041.1	991.8	931.0	869.2	814.2	766.4
37.5°	1440.4	1311.6	1205.2	1114.8	1035.7	972.8	926.9	880.2	820.9	767.9	724.7
40°	1419.6	1278.4	1165.7	1073.3	991.3	925.8	883.3	839.1	789.8	740.5	694.8
42.5°	1393.5	1248.5	1125.9	1026.4	945.1	881.4	836.7	799.2	755.7	709.7	667.3
45°	1345.4	1194.3	1061.4	954.4	872.3	809.5	763.3	735.3	702.6	658.9	623.1
47.5°	1274.7	1129.2	991.7	881.3	796.6	738.4	695.1	668.2	645.1	612.7	580.2
50°	1211.9	1080.6	941.4	831.8	747.2	688.5	648.6	624.1	604.4	579.5	552.0
52.5°	1141.7	1019.5	892.0	783.7	699.9	642.0	602.9	581.4	565.0	547.1	520.0
55°	1030.2	926.4	808.0	705.1	627.8	571.2	536.9	518.2	504.7	491.2	474.6
57.5°	907.3	826.1	721.2	627.3	556.0	504.5	472.5	454.3	443.9	436.9	427.1
60°	820.9	751.4	661.0	575.3	505.8	460.1	428.9	414.9	406.1	400.3	393.1
62.5°	740.8	683.7	599.9	521.7	460.9	417.7	389.9	376.3	367.8	365.0	359.0
65°	622.6	578.5	509.4	444.5	392.6	355.7	332.3	319.3	314.1	311.0	311.6
67.5°	506.2	479.3	423.8	368.5	327.0	296.1	277.4	267.4	264.8	260.7	260.6
70°	435.1	414.9	368.2	319.9	283.0	259.1	242.5	232.1	229.5	227.4	226.9
72.5°	372.4	354.7	314.1	275.4	242.3	221.3	207.6	201.4	197.1	195.9	195.8
75°	279.9	270.0	237.8	207.2	184.3	169.8	160.5	154.7	151.6	151.1	151.6
77.5°	199.0	190.4	169.9	148.2	133.8	122.8	114.9	112.9	109.4	109.5	108.9
80°	149.5	143.8	130.9	113.7	101.8	92.4	88.3	84.6	83.6	82.0	83.6
82.5°	108.4	102.3	93.5	82.6	72.7	67.1	62.9	61.8	61.2	60.4	60.8
85°	53.5	54.0	48.8	40.5	36.3	33.2	30.6	30.6	30.1	29.6	30.1
87.5°	19.7	18.7	16.9	15.5	13.2	11.7	11.1	11.3	10.3	10.1	10.7
90°	7.4	6.5	5.6	4.6	3.6	2.6	1.6	0.6	1.6	2.6	3.6
92.5°	7.6	6.8	6.0	5.9	6.7	7.4	8.1	8.8	8.1	7.4	6.7
95°	18.8	23.6	28.4	31.0	31.4	31.8	32.1	32.5	32.1	31.8	31.4
97.5°	47.1	56.7	66.2	70.6	69.9	69.3	68.6	67.9	68.6	69.3	69.9
100°	98.3	97.8	97.2	96.8	96.4	96.0	95.7	95.3	95.7	96.0	96.4
102.5°	126.1	125.7	125.4	125.0	124.6	124.1	123.6	123.1	123.6	124.1	124.6
105°	170.0	170.0	170.0	169.8	169.3	168.8	168.2	167.7	168.2	168.8	169.3
107.5°	214.7	214.4	214.2	214.1	214.1	214.1	214.1	214.1	214.1	214.1	214.1
110°	244.8	244.6	244.3	244.2	244.2	244.2	244.2	244.2	244.2	244.2	244.2



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	274.2	274.1	273.9	273.7	273.4	273.1	272.8	272.5	272.8	273.1	273.4
115°	318.1	318.0	317.9	317.5	316.8	316.2	315.6	314.9	315.6	316.2	316.8
117.5°	360.0	359.5	359.0	358.8	358.8	358.8	358.8	358.9	358.8	358.8	358.8
120°	386.6	386.3	385.9	385.7	385.9	386.0	386.1	386.3	386.1	386.0	385.9
122.5°	413.1	412.9	412.7	412.4	411.9	411.4	410.9	410.4	410.9	411.4	411.9
125°	451.9	451.9	451.9	451.4	450.5	449.6	448.8	447.9	448.8	449.6	450.5
127.5°	486.3	486.3	486.4	486.1	485.5	484.9	484.2	483.6	484.2	484.9	485.5
130°	508.7	508.5	508.4	508.0	507.4	506.8	506.1	505.5	506.1	506.8	507.4
132.5°	530.0	530.3	530.6	530.3	529.6	528.9	528.1	527.4	528.1	528.9	529.6
135°	561.3	561.6	561.9	561.6	560.8	560.1	559.3	558.6	559.3	560.1	560.8
137.5°	589.6	589.8	590.1	589.8	589.2	588.5	587.9	587.2	587.9	588.5	589.2
140°	606.7	606.9	607.0	606.9	606.7	606.4	606.2	605.9	606.2	606.4	606.7
142.5°	623.9	623.8	623.6	623.4	623.3	623.1	623.0	622.8	623.0	623.1	623.3
145°	648.7	648.7	648.7	648.6	648.3	648.1	647.8	647.6	647.8	648.1	648.3
147.5°	669.4	669.2	669.1	669.0	669.1	669.1	669.2	669.2	669.2	669.1	669.1
150°	682.4	682.2	681.9	681.9	682.2	682.4	682.7	682.9	682.7	682.4	682.2
152.5°	694.3	694.0	693.8	693.9	694.5	695.1	695.6	696.2	695.6	695.1	694.5
155°	710.4	710.1	709.9	710.1	710.9	711.7	712.4	713.2	712.4	711.7	710.9
157.5°	724.3	724.3	724.3	724.5	724.9	725.4	725.8	726.3	725.8	725.4	724.9
160°	732.3	732.2	732.1	732.4	733.1	733.9	734.7	735.4	734.7	733.9	733.1
162.5°	739.6	739.5	739.4	739.7	740.4	741.2	742.0	742.7	742.0	741.2	740.4
165°	749.4	749.3	749.2	749.5	750.3	751.0	751.8	752.5	751.8	751.0	750.3
167.5°	756.6	756.5	756.4	756.7	757.5	758.3	759.1	759.8	759.1	758.3	757.5
170°	760.3	760.1	760.0	760.4	761.3	762.2	763.1	764.0	763.1	762.2	761.3
172.5°	763.3	763.0	762.8	763.1	764.0	764.9	765.8	766.7	765.8	764.9	764.0
175°	766.6	766.4	766.3	766.6	767.4	768.1	768.9	769.7	768.9	768.1	767.4
177.5°	768.5	768.4	768.3	768.6	769.2	769.8	770.4	771.0	770.4	769.8	769.2
180°	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1202.2	1197.6	1193.9	1185.6	1181.0	1174.8	1169.8	1175.2	1169.4	1171.9	1168.1
5°	1164.7	1150.2	1139.8	1124.7	1111.7	1099.8	1091.0	1089.4	1085.2	1083.2	1076.9
7.5°	1119.6	1101.4	1083.6	1063.9	1047.2	1030.3	1019.5	1010.6	1004.7	996.9	991.6
10°	1093.0	1068.6	1047.9	1024.0	1003.2	985.0	970.5	963.2	956.5	946.6	943.0
12.5°	1060.2	1035.0	1009.6	984.1	964.2	943.9	931.4	920.4	915.8	904.6	903.5
15°	1020.9	983.0	958.0	932.1	904.5	887.9	877.5	865.6	860.4	852.6	846.9
17.5°	973.9	940.1	908.9	882.0	858.4	844.4	831.5	823.3	814.4	809.3	800.0
20°	939.9	907.7	876.5	847.9	829.8	813.7	803.3	795.5	786.2	783.6	774.2
22.5°	911.2	875.7	845.8	821.8	801.9	783.8	772.5	767.3	760.8	752.8	750.9
25°	864.6	827.7	802.3	778.4	760.7	744.1	736.3	729.6	723.3	717.6	715.5
27.5°	824.3	791.3	761.1	739.5	724.2	709.0	702.1	693.9	689.4	684.8	679.2
30°	796.0	762.3	735.8	715.0	698.4	684.9	677.6	671.9	667.8	663.6	660.5
32.5°	766.9	735.7	710.0	689.7	673.1	662.9	656.4	652.4	647.8	642.8	638.9
35°	728.5	694.2	669.3	651.7	638.7	630.9	623.6	620.0	614.8	614.8	610.6
37.5°	685.2	655.6	633.6	617.5	605.9	598.9	591.0	588.5	585.2	583.0	581.6
40°	659.5	631.9	611.2	595.1	582.6	576.9	570.7	566.5	564.4	561.8	560.8
42.5°	632.9	606.6	586.7	571.8	561.0	556.1	550.3	547.4	543.2	539.8	539.2
45°	592.5	567.0	548.9	536.9	527.6	521.9	518.2	512.0	509.9	505.8	505.2
47.5°	554.1	529.7	511.9	502.1	493.9	489.2	483.5	477.3	474.9	472.8	472.6
50°	525.5	503.2	486.5	477.2	469.4	462.7	456.9	452.8	451.2	451.2	452.3
52.5°	496.4	477.4	463.3	451.9	444.5	437.3	432.0	429.5	427.1	429.6	431.5
55°	453.8	434.6	424.2	413.3	406.1	397.7	395.2	394.1	392.6	396.7	398.8
57.5°	408.8	395.3	383.1	372.3	365.8	361.0	357.5	356.8	359.7	361.7	368.5
60°	380.1	364.5	353.6	345.3	337.5	334.4	333.4	332.3	334.4	340.1	348.9
62.5°	348.5	335.9	324.1	317.9	312.2	307.0	306.8	307.4	311.6	318.1	326.9
65°	302.2	291.3	283.5	276.2	271.6	268.5	269.5	271.6	276.2	285.1	294.9
67.5°	255.2	247.7	240.7	234.8	230.3	230.3	231.4	234.5	240.0	250.2	259.2
70°	224.8	216.5	210.8	208.2	204.6	202.5	205.6	210.8	215.5	224.8	232.6
72.5°	194.5	187.5	183.0	181.2	179.7	178.0	179.0	184.6	191.0	200.3	209.4
75°	149.5	146.9	143.8	141.8	140.2	141.2	142.3	147.5	152.7	162.5	172.9
77.5°	109.1	106.4	104.6	104.1	103.2	103.7	106.7	110.5	115.6	122.8	130.6
80°	82.6	81.5	80.5	80.0	80.0	80.5	84.6	87.2	91.9	98.7	104.9
82.5°	60.1	59.5	59.3	59.2	59.6	59.7	62.2	65.6	69.5	74.6	80.0
85°	31.7	30.6	32.2	32.7	31.7	33.2	34.3	36.3	37.9	40.5	43.1
87.5°	11.3	12.3	12.1	12.7	12.9	13.9	13.6	15.4	16.3	17.3	17.0
90°	4.6	5.6	6.5	7.4	8.2	9.1	9.8	10.4	11.0	11.7	12.2
92.5°	5.9	6.0	6.8	7.6	8.3	9.1	9.8	10.4	11.0	11.7	12.1
95°	31.0	28.4	23.6	18.8	13.9	9.1	9.8	10.4	11.0	11.7	12.0
97.5°	70.6	66.2	56.7	47.1	37.6	28.1	24.5	20.9	17.3	13.8	12.0
100°	96.8	97.2	97.8	98.3	98.8	99.3	80.4	61.5	42.6	23.7	14.0
102.5°	125.0	125.4	125.7	126.1	126.4	126.7	123.1	119.5	115.9	112.4	106.3
105°	169.8	170.0	170.0	170.0	170.0	170.0	170.0	170.0	170.0	170.0	170.0
107.5°	214.1	214.2	214.4	214.7	215.0	215.2	215.2	215.3	215.3	215.3	215.1
110°	244.2	244.3	244.6	244.8	245.1	245.3	245.0	244.6	244.2	243.8	243.7



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	273.7	273.9	274.1	274.2	274.4	274.5	274.1	273.6	273.1	272.6	272.3
115°	317.5	317.9	318.0	318.1	318.2	318.4	317.9	317.3	316.8	316.3	315.7
117.5°	358.8	359.0	359.5	360.0	360.4	360.9	360.3	359.6	358.9	358.3	357.8
120°	385.7	385.9	386.3	386.6	387.0	387.4	387.1	386.9	386.6	386.4	385.9
122.5°	412.4	412.7	412.9	413.1	413.2	413.4	413.2	412.9	412.7	412.4	411.9
125°	451.4	451.9	451.9	451.9	451.9	451.9	451.4	450.9	450.3	449.8	449.4
127.5°	486.1	486.4	486.3	486.3	486.2	486.1	485.8	485.5	485.3	485.0	484.4
130°	508.0	508.4	508.5	508.7	508.8	508.9	508.5	508.2	507.8	507.4	506.9
132.5°	530.3	530.6	530.3	530.0	529.7	529.5	529.4	529.3	529.2	529.2	528.8
135°	561.6	561.9	561.6	561.3	561.1	560.8	560.6	560.3	560.1	559.8	559.3
137.5°	589.8	590.1	589.8	589.6	589.4	589.1	589.2	589.2	589.3	589.3	589.0
140°	606.9	607.0	606.9	606.7	606.6	606.5	606.7	607.0	607.2	607.5	607.2
142.5°	623.4	623.6	623.8	623.9	624.1	624.3	624.3	624.4	624.4	624.5	624.1
145°	648.6	648.7	648.7	648.7	648.7	648.7	648.8	649.0	649.1	649.2	648.9
147.5°	669.0	669.1	669.2	669.4	669.5	669.7	669.9	670.0	670.2	670.3	669.9
150°	681.9	681.9	682.2	682.4	682.7	682.9	683.2	683.4	683.7	683.9	683.6
152.5°	693.9	693.8	694.0	694.3	694.5	694.8	695.1	695.3	695.6	695.8	695.5
155°	710.1	709.9	710.1	710.4	710.6	710.9	711.3	711.7	712.0	712.4	712.1
157.5°	724.5	724.3	724.3	724.3	724.3	724.4	724.8	725.2	725.6	726.0	725.7
160°	732.4	732.1	732.2	732.3	732.4	732.6	733.1	733.6	734.1	734.6	734.3
162.5°	739.7	739.4	739.5	739.6	739.7	739.9	740.6	741.3	742.0	742.7	742.5
165°	749.5	749.2	749.3	749.4	749.6	749.7	750.4	751.2	752.0	752.7	752.6
167.5°	756.7	756.4	756.5	756.6	756.7	756.9	757.8	758.7	759.6	760.5	760.4
170°	760.4	760.0	760.1	760.3	760.4	760.5	761.5	762.6	763.6	764.6	764.5
172.5°	763.1	762.8	763.0	763.3	763.5	763.7	764.6	765.5	766.5	767.4	767.3
175°	766.6	766.3	766.4	766.6	766.7	766.8	767.8	768.8	769.8	770.9	770.8
177.5°	768.6	768.3	768.4	768.5	768.6	768.7	769.5	770.2	770.9	771.6	771.5
180°	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1165.6	1168.5	1166.0	1169.4	1166.0	1168.5	1165.6	1168.1	1171.9	1169.4	1175.2
5°	1074.3	1069.7	1072.8	1070.7	1072.8	1069.7	1074.3	1076.9	1083.2	1085.2	1089.4
7.5°	990.0	985.5	980.5	978.1	980.5	985.5	990.0	991.6	996.9	1004.7	1010.6
10°	937.3	931.5	931.0	927.4	931.0	931.5	937.3	943.0	946.6	956.5	963.2
12.5°	898.6	893.3	887.4	885.9	887.4	893.3	898.6	903.5	904.6	915.8	920.4
15°	843.8	839.6	836.0	839.1	836.0	839.6	843.8	846.9	852.6	860.4	865.6
17.5°	798.2	794.8	794.1	790.3	794.1	794.8	798.2	800.0	809.3	814.4	823.3
20°	769.5	766.9	768.0	761.2	768.0	766.9	769.5	774.2	783.6	786.2	795.5
22.5°	746.7	741.6	741.0	739.6	741.0	741.6	746.7	750.9	752.8	760.8	767.3
25°	710.9	708.3	705.7	708.3	705.7	708.3	710.9	715.5	717.6	723.3	729.6
27.5°	679.6	676.5	675.8	676.1	675.8	676.5	679.6	679.2	684.8	689.4	693.9
30°	660.5	655.3	655.8	655.3	655.8	655.3	660.5	660.5	663.6	667.8	671.9
32.5°	639.7	636.2	635.5	634.5	635.5	636.2	639.7	638.9	642.8	647.8	652.4
35°	609.1	609.1	606.5	606.5	606.5	609.1	609.1	610.6	614.8	614.8	620.0
37.5°	580.3	579.8	578.2	578.5	578.2	579.8	580.3	581.6	583.0	585.2	588.5
40°	558.7	558.2	556.6	553.5	556.6	558.2	558.7	560.8	561.8	564.4	566.5
42.5°	537.9	536.2	535.5	534.4	535.5	536.2	537.9	539.2	539.8	543.2	547.4
45°	505.2	505.2	504.2	503.7	504.2	505.2	505.2	505.2	505.8	509.9	512.0
47.5°	473.5	474.4	476.4	476.1	476.4	474.4	473.5	472.6	472.8	474.9	477.3
50°	454.3	454.9	456.4	456.9	456.4	454.9	454.3	452.3	451.2	451.2	452.8
52.5°	433.2	436.2	438.1	437.8	438.1	436.2	433.2	431.5	429.6	427.1	429.5
55°	403.5	407.1	410.7	411.3	410.7	407.1	403.5	398.8	396.7	392.6	394.1
57.5°	374.1	379.2	383.0	384.2	383.0	379.2	374.1	368.5	361.7	359.7	356.8
60°	354.1	360.9	365.6	367.6	365.6	360.9	354.1	348.9	340.1	334.4	332.3
62.5°	335.0	342.6	347.3	347.7	347.3	342.6	335.0	326.9	318.1	311.6	307.4
65°	303.8	311.6	315.7	318.8	315.7	311.6	303.8	294.9	285.1	276.2	271.6
67.5°	270.1	277.9	282.5	285.0	282.5	277.9	270.1	259.2	250.2	240.0	234.5
70°	245.6	253.4	259.6	261.7	259.6	253.4	245.6	232.6	224.8	215.5	210.8
72.5°	221.5	228.5	233.5	235.9	233.5	228.5	221.5	209.4	200.3	191.0	184.6
75°	179.7	189.0	193.7	196.3	193.7	189.0	179.7	172.9	162.5	152.7	147.5
77.5°	138.5	147.1	149.9	151.2	149.9	147.1	138.5	130.6	122.8	115.6	110.5
80°	111.1	116.3	119.9	120.5	119.9	116.3	111.1	104.9	98.7	91.9	87.2
82.5°	85.4	89.7	90.9	92.2	90.9	89.7	85.4	80.0	74.6	69.5	65.6
85°	46.7	48.8	49.3	48.8	49.3	48.8	46.7	43.1	40.5	37.9	36.3
87.5°	17.9	17.5	17.6	18.5	17.6	17.5	17.9	17.0	17.3	16.3	15.4
90°	12.6	12.9	13.3	13.7	13.3	12.9	12.6	12.2	11.7	11.0	10.4
92.5°	12.2	12.4	12.6	12.8	12.6	12.4	12.2	12.1	11.7	11.0	10.4
95°	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	11.7	11.0	10.4
97.5°	12.0	12.0	12.0	12.0	12.0	12.0	12.0	12.0	13.8	17.3	20.9
100°	13.5	13.0	12.5	12.0	12.5	13.0	13.5	14.0	23.7	42.6	61.5
102.5°	97.6	89.0	80.4	71.8	80.4	89.0	97.6	106.3	112.4	115.9	119.5
105°	169.8	169.7	169.6	169.4	169.6	169.7	169.8	170.0	170.0	170.0	170.0
107.5°	214.8	214.4	214.0	213.6	214.0	214.4	214.8	215.1	215.3	215.3	215.3
110°	243.8	243.9	244.1	244.2	244.1	243.9	243.8	243.7	243.8	244.2	244.6



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	272.1	271.9	271.8	271.6	271.8	271.9	272.1	272.3	272.6	273.1	273.6
115°	314.9	314.2	313.4	312.7	313.4	314.2	314.9	315.7	316.3	316.8	317.3
117.5°	357.5	357.1	356.8	356.5	356.8	357.1	357.5	357.8	358.3	358.9	359.6
120°	385.3	384.7	384.0	383.4	384.0	384.7	385.3	385.9	386.4	386.6	386.9
122.5°	411.2	410.4	409.7	409.0	409.7	410.4	411.2	411.9	412.4	412.7	412.9
125°	449.0	448.6	448.3	447.9	448.3	448.6	449.0	449.4	449.8	450.3	450.9
127.5°	483.4	482.5	481.6	480.6	481.6	482.5	483.4	484.4	485.0	485.3	485.5
130°	506.3	505.6	505.0	504.4	505.0	505.6	506.3	506.9	507.4	507.8	508.2
132.5°	528.2	527.5	526.9	526.3	526.9	527.5	528.2	528.8	529.2	529.2	529.3
135°	558.6	557.8	557.0	556.3	557.0	557.8	558.6	559.3	559.8	560.1	560.3
137.5°	588.4	587.7	587.1	586.4	587.1	587.7	588.4	589.0	589.3	589.3	589.2
140°	606.5	605.7	605.0	604.2	605.0	605.7	606.5	607.2	607.5	607.2	607.0
142.5°	623.4	622.6	621.8	621.1	621.8	622.6	623.4	624.1	624.5	624.4	624.4
145°	648.1	647.4	646.6	645.8	646.6	647.4	648.1	648.9	649.2	649.1	649.0
147.5°	669.0	668.1	667.2	666.3	667.2	668.1	669.0	669.9	670.3	670.2	670.0
150°	682.6	681.5	680.5	679.5	680.5	681.5	682.6	683.6	683.9	683.7	683.4
152.5°	694.6	693.7	692.7	691.8	692.7	693.7	694.6	695.5	695.8	695.6	695.3
155°	711.1	710.1	709.1	708.0	709.1	710.1	711.1	712.1	712.4	712.0	711.7
157.5°	724.7	723.6	722.6	721.6	722.6	723.6	724.7	725.7	726.0	725.6	725.2
160°	733.3	732.3	731.3	730.3	731.3	732.3	733.3	734.3	734.6	734.1	733.6
162.5°	741.4	740.3	739.2	738.0	739.2	740.3	741.4	742.5	742.7	742.0	741.3
165°	751.6	750.6	749.6	748.5	749.6	750.6	751.6	752.6	752.7	752.0	751.2
167.5°	759.3	758.1	757.0	755.8	757.0	758.1	759.3	760.4	760.5	759.6	758.7
170°	763.4	762.2	761.1	760.0	761.1	762.2	763.4	764.5	764.6	763.6	762.6
172.5°	766.1	765.0	763.8	762.7	763.8	765.0	766.1	767.3	767.4	766.5	765.5
175°	769.7	768.5	767.4	766.2	767.4	768.5	769.7	770.8	770.9	769.8	768.8
177.5°	770.7	769.9	769.1	768.3	769.1	769.9	770.7	771.5	771.6	770.9	770.2
180°	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1169.8	1174.8	1181.0	1185.6	1193.9	1197.6	1202.2	1205.9	1212.6	1218.8	1226.3
5°	1091.0	1099.8	1111.7	1124.7	1139.8	1150.2	1164.7	1173.5	1191.2	1207.3	1222.8
7.5°	1019.5	1030.3	1047.2	1063.9	1083.6	1101.4	1119.6	1139.8	1162.3	1188.9	1210.9
10°	970.5	985.0	1003.2	1024.0	1047.9	1068.6	1093.0	1114.8	1142.4	1173.5	1202.6
12.5°	931.4	943.9	964.2	984.1	1009.6	1035.0	1060.2	1089.1	1121.2	1155.7	1192.2
15°	877.5	887.9	904.5	932.1	958.0	983.0	1020.9	1047.9	1088.4	1126.8	1170.9
17.5°	831.5	844.4	858.4	882.0	908.9	940.1	973.9	1007.8	1046.8	1095.5	1145.3
20°	803.3	813.7	829.8	847.9	876.5	907.7	939.9	974.1	1021.9	1072.3	1125.7
22.5°	772.5	783.8	801.9	821.8	845.8	875.7	911.2	948.8	998.6	1048.2	1106.2
25°	736.3	744.1	760.7	778.4	802.3	827.7	864.6	906.1	955.4	1012.0	1071.2
27.5°	702.1	709.0	724.2	739.5	761.1	791.3	824.3	866.2	912.7	970.1	1035.7
30°	677.6	684.9	698.4	715.0	735.8	762.3	796.0	835.5	885.3	941.4	1010.0
32.5°	656.4	662.9	673.1	689.7	710.0	735.7	766.9	807.2	857.1	914.0	981.3
35°	623.6	630.9	638.7	651.7	669.3	694.2	728.5	766.4	814.2	869.2	931.0
37.5°	591.0	598.9	605.9	617.5	633.6	655.6	685.2	724.7	767.9	820.9	880.2
40°	570.7	576.9	582.6	595.1	611.2	631.9	659.5	694.8	740.5	789.8	839.1
42.5°	550.3	556.1	561.0	571.8	586.7	606.6	632.9	667.3	709.7	755.7	799.2
45°	518.2	521.9	527.6	536.9	548.9	567.0	592.5	623.1	658.9	702.6	735.3
47.5°	483.5	489.2	493.9	502.1	511.9	529.7	554.1	580.2	612.7	645.1	668.2
50°	456.9	462.7	469.4	477.2	486.5	503.2	525.5	552.0	579.5	604.4	624.1
52.5°	432.0	437.3	444.5	451.9	463.3	477.4	496.4	520.0	547.1	565.0	581.4
55°	395.2	397.7	406.1	413.3	424.2	434.6	453.8	474.6	491.2	504.7	518.2
57.5°	357.5	361.0	365.8	372.3	383.1	395.3	408.8	427.1	436.9	443.9	454.3
60°	333.4	334.4	337.5	345.3	353.6	364.5	380.1	393.1	400.3	406.1	414.9
62.5°	306.8	307.0	312.2	317.9	324.1	335.9	348.5	359.0	365.0	367.8	376.3
65°	269.5	268.5	271.6	276.2	283.5	291.3	302.2	311.6	311.0	314.1	319.3
67.5°	231.4	230.3	230.3	234.8	240.7	247.7	255.2	260.6	260.7	264.8	267.4
70°	205.6	202.5	204.6	208.2	210.8	216.5	224.8	226.9	227.4	229.5	232.1
72.5°	179.0	178.0	179.7	181.2	183.0	187.5	194.5	195.8	195.9	197.1	201.4
75°	142.3	141.2	140.2	141.8	143.8	146.9	149.5	151.6	151.1	151.6	154.7
77.5°	106.7	103.7	103.2	104.1	104.6	106.4	109.1	108.9	109.5	109.4	112.9
80°	84.6	80.5	80.0	80.0	80.5	81.5	82.6	83.6	82.0	83.6	84.6
82.5°	62.2	59.7	59.6	59.2	59.3	59.5	60.1	60.8	60.4	61.2	61.8
85°	34.3	33.2	31.7	32.7	32.2	30.6	31.7	30.1	29.6	30.1	30.6
87.5°	13.6	13.9	12.9	12.7	12.1	12.3	11.3	10.7	10.1	10.3	11.3
90°	9.8	9.1	8.2	7.4	6.5	5.6	4.6	3.6	2.6	1.6	0.6
92.5°	9.8	9.1	8.3	7.6	6.8	6.0	5.9	6.7	7.4	8.1	8.8
95°	9.8	9.1	13.9	18.8	23.6	28.4	31.0	31.4	31.8	32.1	32.5
97.5°	24.5	28.1	37.6	47.1	56.7	66.2	70.6	69.9	69.3	68.6	67.9
100°	80.4	99.3	98.8	98.3	97.8	97.2	96.8	96.4	96.0	95.7	95.3
102.5°	123.1	126.7	126.4	126.1	125.7	125.4	125.0	124.6	124.1	123.6	123.1
105°	170.0	170.0	170.0	170.0	170.0	170.0	169.8	169.3	168.8	168.2	167.7
107.5°	215.2	215.2	215.0	214.7	214.4	214.2	214.1	214.1	214.1	214.1	214.1
110°	245.0	245.3	245.1	244.8	244.6	244.3	244.2	244.2	244.2	244.2	244.2



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	274.1	274.5	274.4	274.2	274.1	273.9	273.7	273.4	273.1	272.8	272.5
115°	317.9	318.4	318.2	318.1	318.0	317.9	317.5	316.8	316.2	315.6	314.9
117.5°	360.3	360.9	360.4	360.0	359.5	359.0	358.8	358.8	358.8	358.8	358.9
120°	387.1	387.4	387.0	386.6	386.3	385.9	385.7	385.9	386.0	386.1	386.3
122.5°	413.2	413.4	413.2	413.1	412.9	412.7	412.4	411.9	411.4	410.9	410.4
125°	451.4	451.9	451.9	451.9	451.9	451.9	451.4	450.5	449.6	448.8	447.9
127.5°	485.8	486.1	486.2	486.3	486.3	486.4	486.1	485.5	484.9	484.2	483.6
130°	508.5	508.9	508.8	508.7	508.5	508.4	508.0	507.4	506.8	506.1	505.5
132.5°	529.4	529.5	529.7	530.0	530.3	530.6	530.3	529.6	528.9	528.1	527.4
135°	560.6	560.8	561.1	561.3	561.6	561.9	561.6	560.8	560.1	559.3	558.6
137.5°	589.2	589.1	589.4	589.6	589.8	590.1	589.8	589.2	588.5	587.9	587.2
140°	606.7	606.5	606.6	606.7	606.9	607.0	606.9	606.7	606.4	606.2	605.9
142.5°	624.3	624.3	624.1	623.9	623.8	623.6	623.4	623.3	623.1	623.0	622.8
145°	648.8	648.7	648.7	648.7	648.7	648.7	648.6	648.3	648.1	647.8	647.6
147.5°	669.9	669.7	669.5	669.4	669.2	669.1	669.0	669.1	669.1	669.2	669.2
150°	683.2	682.9	682.7	682.4	682.2	681.9	681.9	682.2	682.4	682.7	682.9
152.5°	695.1	694.8	694.5	694.3	694.0	693.8	693.9	694.5	695.1	695.6	696.2
155°	711.3	710.9	710.6	710.4	710.1	709.9	710.1	710.9	711.7	712.4	713.2
157.5°	724.8	724.4	724.3	724.3	724.3	724.3	724.5	724.9	725.4	725.8	726.3
160°	733.1	732.6	732.4	732.3	732.2	732.1	732.4	733.1	733.9	734.7	735.4
162.5°	740.6	739.9	739.7	739.6	739.5	739.4	739.7	740.4	741.2	742.0	742.7
165°	750.4	749.7	749.6	749.4	749.3	749.2	749.5	750.3	751.0	751.8	752.5
167.5°	757.8	756.9	756.7	756.6	756.5	756.4	756.7	757.5	758.3	759.1	759.8
170°	761.5	760.5	760.4	760.3	760.1	760.0	760.4	761.3	762.2	763.1	764.0
172.5°	764.6	763.7	763.5	763.3	763.0	762.8	763.1	764.0	764.9	765.8	766.7
175°	767.8	766.8	766.7	766.6	766.4	766.3	766.6	767.4	768.1	768.9	769.7
177.5°	769.5	768.7	768.6	768.5	768.4	768.3	768.6	769.2	769.8	770.4	771.0
180°	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1230.0	1235.8	1239.6	1246.6	1252.4	1255.8	1258.7	1261.2	1264.1	1266.6	1273.6
5°	1237.9	1251.4	1262.8	1280.5	1296.6	1309.0	1322.5	1334.5	1344.4	1358.4	1369.3
7.5°	1234.5	1258.5	1283.6	1310.9	1338.8	1364.8	1388.7	1411.0	1431.3	1455.8	1477.3
10°	1231.2	1263.9	1296.1	1332.9	1370.8	1403.0	1433.1	1463.8	1486.1	1517.3	1543.7
12.5°	1228.7	1267.2	1306.0	1350.4	1392.0	1437.5	1477.6	1499.9	1533.9	1558.8	1590.3
15°	1218.2	1269.1	1322.5	1372.4	1431.6	1473.6	1509.0	1552.6	1584.2	1615.9	1650.2
17.5°	1199.4	1257.0	1316.8	1382.2	1439.0	1484.1	1529.6	1571.7	1609.5	1652.0	1694.6
20°	1190.7	1248.3	1316.8	1383.8	1439.4	1486.6	1533.4	1579.6	1621.1	1675.6	1725.0
22.5°	1172.4	1242.1	1305.2	1370.5	1427.7	1479.2	1532.1	1584.6	1639.8	1701.4	1763.2
25°	1139.8	1210.4	1277.4	1341.8	1399.4	1463.8	1520.4	1590.5	1661.1	1742.6	1819.5
27.5°	1105.9	1173.5	1234.9	1297.1	1364.3	1437.2	1510.6	1590.2	1682.6	1785.5	1893.9
30°	1078.5	1142.4	1202.1	1265.9	1336.0	1418.1	1498.6	1593.1	1700.0	1815.8	1944.6
32.5°	1046.5	1105.4	1163.4	1231.1	1307.4	1394.0	1487.8	1591.4	1720.0	1851.6	1984.1
35°	991.8	1041.1	1100.8	1173.0	1259.2	1358.4	1466.9	1589.4	1736.9	1888.0	1999.7
37.5°	926.9	972.8	1035.7	1114.8	1205.2	1311.6	1440.4	1585.8	1742.4	1862.9	1898.9
40°	883.3	925.8	991.3	1073.3	1165.7	1278.4	1419.6	1573.3	1725.0	1801.8	1772.2
42.5°	836.7	881.4	945.1	1026.4	1125.9	1248.5	1393.5	1547.2	1674.3	1703.4	1601.1
45°	763.3	809.5	872.3	954.4	1061.4	1194.3	1345.4	1485.1	1558.3	1505.8	1347.5
47.5°	695.1	738.4	796.6	881.3	991.7	1129.2	1274.7	1386.1	1391.9	1266.8	1097.6
50°	648.6	688.5	747.2	831.8	941.4	1080.6	1211.9	1299.7	1260.2	1118.5	955.9
52.5°	602.9	642.0	699.9	783.7	892.0	1019.5	1141.7	1203.3	1129.0	983.5	844.6
55°	536.9	571.2	627.8	705.1	808.0	926.4	1030.2	1051.5	954.9	811.6	698.9
57.5°	472.5	504.5	556.0	627.3	721.2	826.1	907.3	902.8	800.7	677.7	588.3
60°	428.9	460.1	505.8	575.3	661.0	751.4	820.9	804.3	703.1	597.1	521.9
62.5°	389.9	417.7	460.9	521.7	599.9	683.7	740.8	716.3	617.1	524.4	464.9
65°	332.3	355.7	392.6	444.5	509.4	578.5	622.6	590.9	506.3	434.1	386.3
67.5°	277.4	296.1	327.0	368.5	423.8	479.3	506.2	474.3	406.6	353.9	318.5
70°	242.5	259.1	283.0	319.9	368.2	414.9	435.1	406.6	348.4	303.2	277.8
72.5°	207.6	221.3	242.3	275.4	314.1	354.7	372.4	345.1	297.3	259.2	235.4
75°	160.5	169.8	184.3	207.2	237.8	270.0	279.9	256.0	225.4	196.8	181.2
77.5°	114.9	122.8	133.8	148.2	169.9	190.4	199.0	185.2	161.5	143.4	130.6
80°	88.3	92.4	101.8	113.7	130.9	143.8	149.5	140.7	124.1	110.6	100.7
82.5°	62.9	67.1	72.7	82.6	93.5	102.3	108.4	102.5	90.5	79.9	74.1
85°	30.6	33.2	36.3	40.5	48.8	54.0	53.5	49.8	45.2	41.0	37.9
87.5°	11.1	11.7	13.2	15.5	16.9	18.7	19.7	19.1	17.6	16.5	15.4
90°	1.6	2.6	3.6	4.6	5.6	6.5	7.4	8.2	9.1	9.8	10.4
92.5°	8.1	7.4	6.7	5.9	6.0	6.8	7.6	8.3	9.1	9.8	10.4
95°	32.1	31.8	31.4	31.0	28.4	23.6	18.8	13.9	9.1	9.8	10.4
97.5°	68.6	69.3	69.9	70.6	66.2	56.7	47.1	37.6	28.1	24.5	20.9
100°	95.7	96.0	96.4	96.8	97.2	97.8	98.3	98.8	99.3	80.4	61.5
102.5°	123.6	124.1	124.6	125.0	125.4	125.7	126.1	126.4	126.7	123.1	119.5
105°	168.2	168.8	169.3	169.8	170.0	170.0	170.0	170.0	170.0	170.0	170.0
107.5°	214.1	214.1	214.1	214.1	214.2	214.4	214.7	215.0	215.2	215.2	215.3
110°	244.2	244.2	244.2	244.2	244.3	244.6	244.8	245.1	245.3	245.0	244.6



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	272.8	273.1	273.4	273.7	273.9	274.1	274.2	274.4	274.5	274.1	273.6
115°	315.6	316.2	316.8	317.5	317.9	318.0	318.1	318.2	318.4	317.9	317.3
117.5°	358.8	358.8	358.8	358.8	359.0	359.5	360.0	360.4	360.9	360.3	359.6
120°	386.1	386.0	385.9	385.7	385.9	386.3	386.6	387.0	387.4	387.1	386.9
122.5°	410.9	411.4	411.9	412.4	412.7	412.9	413.1	413.2	413.4	413.2	412.9
125°	448.8	449.6	450.5	451.4	451.9	451.9	451.9	451.9	451.9	451.4	450.9
127.5°	484.2	484.9	485.5	486.1	486.4	486.3	486.3	486.2	486.1	485.8	485.5
130°	506.1	506.8	507.4	508.0	508.4	508.5	508.7	508.8	508.9	508.5	508.2
132.5°	528.1	528.9	529.6	530.3	530.6	530.3	530.0	529.7	529.5	529.4	529.3
135°	559.3	560.1	560.8	561.6	561.9	561.6	561.3	561.1	560.8	560.6	560.3
137.5°	587.9	588.5	589.2	589.8	590.1	589.8	589.6	589.4	589.1	589.2	589.2
140°	606.2	606.4	606.7	606.9	607.0	606.9	606.7	606.6	606.5	606.7	607.0
142.5°	623.0	623.1	623.3	623.4	623.6	623.8	623.9	624.1	624.3	624.3	624.4
145°	647.8	648.1	648.3	648.6	648.7	648.7	648.7	648.7	648.7	648.8	649.0
147.5°	669.2	669.1	669.1	669.0	669.1	669.2	669.4	669.5	669.7	669.9	670.0
150°	682.7	682.4	682.2	681.9	681.9	682.2	682.4	682.7	682.9	683.2	683.4
152.5°	695.6	695.1	694.5	693.9	693.8	694.0	694.3	694.5	694.8	695.1	695.3
155°	712.4	711.7	710.9	710.1	709.9	710.1	710.4	710.6	710.9	711.3	711.7
157.5°	725.8	725.4	724.9	724.5	724.3	724.3	724.3	724.3	724.4	724.8	725.2
160°	734.7	733.9	733.1	732.4	732.1	732.2	732.3	732.4	732.6	733.1	733.6
162.5°	742.0	741.2	740.4	739.7	739.4	739.5	739.6	739.7	739.9	740.6	741.3
165°	751.8	751.0	750.3	749.5	749.2	749.3	749.4	749.6	749.7	750.4	751.2
167.5°	759.1	758.3	757.5	756.7	756.4	756.5	756.6	756.7	756.9	757.8	758.7
170°	763.1	762.2	761.3	760.4	760.0	760.1	760.3	760.4	760.5	761.5	762.6
172.5°	765.8	764.9	764.0	763.1	762.8	763.0	763.3	763.5	763.7	764.6	765.5
175°	768.9	768.1	767.4	766.6	766.3	766.4	766.6	766.7	766.8	767.8	768.8
177.5°	770.4	769.8	769.2	768.6	768.3	768.4	768.5	768.6	768.7	769.5	770.2
180°	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7	769.7



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4	1223.4
2.5°	1279.4	1282.8	1289.8	1287.3	1290.7	1292.3	1294.0
5°	1382.8	1399.4	1406.7	1405.6	1416.5	1413.9	1411.3
7.5°	1499.5	1517.0	1526.7	1538.9	1545.9	1546.4	1552.6
10°	1565.6	1588.4	1597.8	1610.7	1619.0	1623.7	1623.2
12.5°	1616.2	1634.1	1655.1	1661.4	1672.6	1678.5	1676.4
15°	1677.2	1705.8	1727.6	1738.5	1752.5	1756.6	1762.4
17.5°	1731.6	1769.9	1795.4	1829.2	1842.0	1849.8	1845.2
20°	1772.7	1823.1	1848.6	1889.1	1911.4	1923.3	1919.2
22.5°	1821.3	1875.9	1922.9	1958.0	1992.0	2008.1	2011.4
25°	1904.6	1979.4	2048.5	2094.7	2136.7	2146.6	2168.4
27.5°	1997.7	2085.9	2159.7	2208.3	2237.6	2248.6	2255.4
30°	2056.3	2144.0	2199.6	2230.7	2240.1	2239.0	2238.0
32.5°	2084.9	2139.9	2150.5	2141.8	2120.4	2102.4	2083.5
35°	2044.3	2003.3	1942.0	1863.1	1804.9	1746.3	1740.5
37.5°	1838.6	1707.4	1605.4	1491.5	1425.8	1385.2	1357.1
40°	1645.0	1496.0	1372.4	1276.3	1209.3	1182.9	1156.9
42.5°	1434.8	1292.4	1183.0	1102.7	1052.3	1022.9	1002.4
45°	1165.7	1040.1	954.4	896.2	856.3	833.4	820.4
47.5°	955.2	862.3	789.5	747.5	719.9	702.1	702.2
50°	842.2	753.4	705.1	671.9	648.0	634.0	636.6
52.5°	742.1	675.8	634.5	606.7	589.0	580.4	580.1
55°	620.5	572.7	545.7	525.5	513.5	503.7	505.8
57.5°	530.8	490.5	472.4	455.6	447.3	443.3	437.6
60°	475.1	444.0	428.4	414.9	406.6	403.5	397.7
62.5°	425.7	401.2	386.0	375.0	367.5	366.5	362.0
65°	357.8	339.1	325.6	320.4	312.6	310.5	310.5
67.5°	294.9	281.5	271.1	266.3	262.8	263.4	260.9
70°	255.5	244.6	237.8	232.6	230.0	230.5	228.5
72.5°	223.5	211.3	205.4	202.3	198.9	200.2	199.4
75°	169.3	163.0	159.9	156.8	154.7	153.7	152.7
77.5°	124.3	118.8	116.4	114.7	115.0	112.5	114.4
80°	96.1	91.4	89.8	87.2	86.7	86.7	86.2
82.5°	70.3	67.7	66.6	64.4	63.5	64.3	62.9
85°	36.3	34.3	33.8	33.8	32.7	31.7	34.3
87.5°	15.5	14.0	14.1	13.7	13.8	13.5	12.7
90°	11.0	11.7	12.2	12.6	12.9	13.3	13.7
92.5°	11.0	11.7	12.1	12.2	12.4	12.6	12.8
95°	11.0	11.7	12.0	12.0	12.0	12.0	12.0
97.5°	17.3	13.8	12.0	12.0	12.0	12.0	12.0
100°	42.6	23.7	14.0	13.5	13.0	12.5	12.0
102.5°	115.9	112.4	106.3	97.6	89.0	80.4	71.8
105°	170.0	170.0	170.0	169.8	169.7	169.6	169.4
107.5°	215.3	215.3	215.1	214.8	214.4	214.0	213.6
110°	244.2	243.8	243.7	243.8	243.9	244.1	244.2



TEST NUMBER: P333214

CATALOG NUMBER: S125DIP-S850D590U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	273.1	272.6	272.3	272.1	271.9	271.8	271.6
115°	316.8	316.3	315.7	314.9	314.2	313.4	312.7
117.5°	358.9	358.3	357.8	357.5	357.1	356.8	356.5
120°	386.6	386.4	385.9	385.3	384.7	384.0	383.4
122.5°	412.7	412.4	411.9	411.2	410.4	409.7	409.0
125°	450.3	449.8	449.4	449.0	448.6	448.3	447.9
127.5°	485.3	485.0	484.4	483.4	482.5	481.6	480.6
130°	507.8	507.4	506.9	506.3	505.6	505.0	504.4
132.5°	529.2	529.2	528.8	528.2	527.5	526.9	526.3
135°	560.1	559.8	559.3	558.6	557.8	557.0	556.3
137.5°	589.3	589.3	589.0	588.4	587.7	587.1	586.4
140°	607.2	607.5	607.2	606.5	605.7	605.0	604.2
142.5°	624.4	624.5	624.1	623.4	622.6	621.8	621.1
145°	649.1	649.2	648.9	648.1	647.4	646.6	645.8
147.5°	670.2	670.3	669.9	669.0	668.1	667.2	666.3
150°	683.7	683.9	683.6	682.6	681.5	680.5	679.5
152.5°	695.6	695.8	695.5	694.6	693.7	692.7	691.8
155°	712.0	712.4	712.1	711.1	710.1	709.1	708.0
157.5°	725.6	726.0	725.7	724.7	723.6	722.6	721.6
160°	734.1	734.6	734.3	733.3	732.3	731.3	730.3
162.5°	742.0	742.7	742.5	741.4	740.3	739.2	738.0
165°	752.0	752.7	752.6	751.6	750.6	749.6	748.5
167.5°	759.6	760.5	760.4	759.3	758.1	757.0	755.8
170°	763.6	764.6	764.5	763.4	762.2	761.1	760.0
172.5°	766.5	767.4	767.3	766.1	765.0	763.8	762.7
175°	769.8	770.9	770.8	769.7	768.5	767.4	766.2
177.5°	770.9	771.6	771.5	770.7	769.9	769.1	768.3
180°	769.7	769.7	769.7	769.7	769.7	769.7	769.7

(END OF REPORT)