

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333591

Luminaire Tested: **S125RDIP-S1090D590U835-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333591
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S1090D590U835-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 590 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6345.9 lumens
Efficiency: N/A
Efficacy: 130.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 48.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333591

CATALOG NUMBER: S125RDIP-S1090D590U835-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

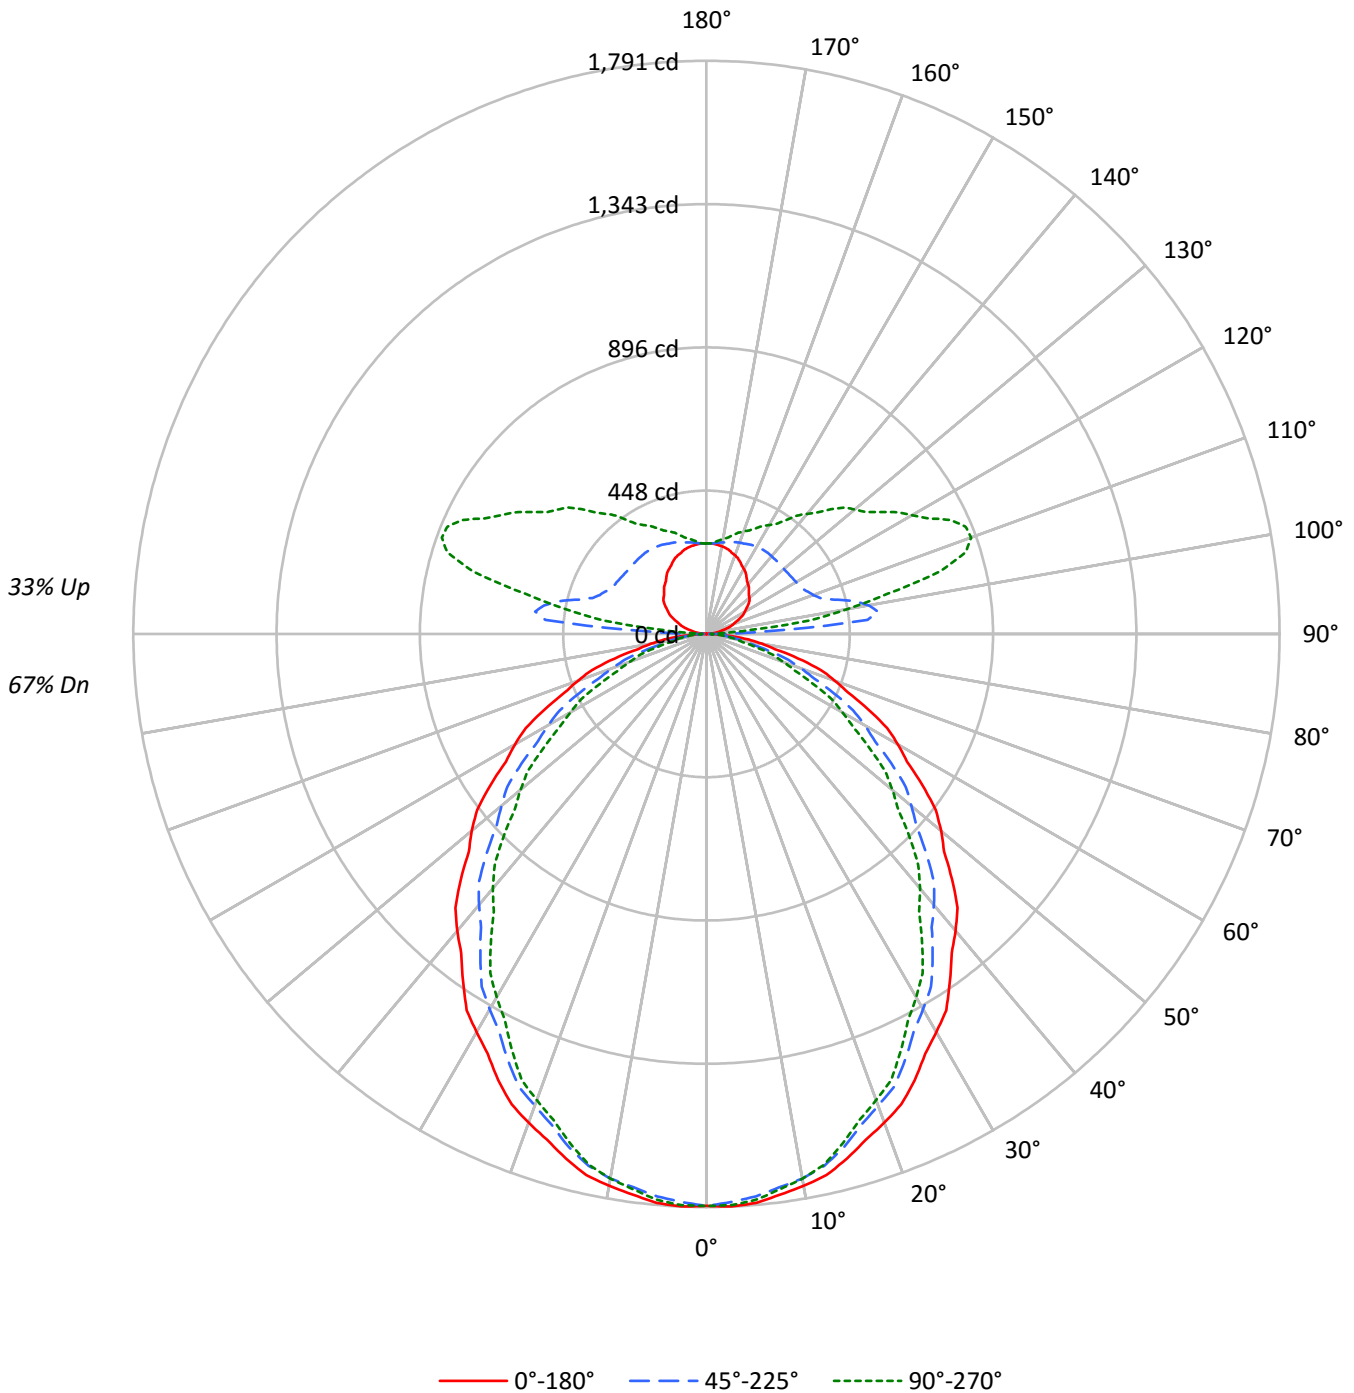



TEST NUMBER: P333591

CATALOG NUMBER: S125RDIP-S1090D590U835-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	105	105	105	105	93	93	93	81	81	81	71	71	71	67
1	102	97	94	90	96	92	89	86	82	79	77	72	70	69	64	62	61	57
2	93	85	79	74	87	81	75	71	72	68	64	64	61	58	56	54	52	48
3	85	75	68	62	80	71	65	59	64	58	54	57	53	49	50	47	44	41
4	78	67	59	53	73	63	56	51	57	51	46	51	46	42	45	41	38	35
5	72	60	52	46	67	57	49	44	51	45	40	46	41	37	41	37	34	31
6	66	54	46	40	62	51	44	38	46	40	35	41	36	33	37	33	30	27
7	61	49	41	35	58	46	39	34	42	36	31	38	33	29	34	30	27	24
8	57	45	37	31	54	42	35	30	38	32	28	35	30	26	31	27	24	22
9	53	41	33	28	50	39	32	27	35	29	25	32	27	23	29	25	22	20
10	50	38	30	25	47	36	29	24	33	27	23	30	25	21	27	23	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11544	11544	11544
5°	11570	11439	11509
10°	11482	11332	11332
15°	11346	11102	11012
20°	11171	10781	10652
25°	10967	10467	10236
30°	10712	10097	9775
35°	10452	9717	9260
40°	10209	9321	8752
45°	9913	8878	8199
50°	9616	8396	7623
55°	9272	7935	7007
60°	8928	7375	6347
65°	8520	6725	5590
70°	8055	5914	4817
75°	7411	4986	4007
80°	6527	3916	3362
85°	5498	3201	3001



TEST NUMBER: P333591

CATALOG NUMBER: S125RDIP-S1090D590U835-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	168.1	2.6
10°-20°	469.7	7.4
20°-30°	681.1	10.7
30°-40°	776.2	12.2
40°-50°	756.6	11.9
50°-60°	636.9	10.0
60°-70°	446.5	7.0
70°-80°	229.5	3.6
80°-90°	59.5	0.9
90°-100°	205.1	3.2
100°-110°	440.9	6.9
110°-120°	413.8	6.5
120°-130°	335.3	5.3
130°-140°	269.1	4.2
140°-150°	203.1	3.2
150°-160°	142.9	2.3
160°-170°	84.3	1.3
170°-180°	27.4	0.4
0°-30°	1318.9	20.8
0°-40°	2095.1	33.0
0°-60°	3488.6	55.0
0°-90°	4224.1	66.6
90°-120°	1059.7	16.7
90°-150°	1867.2	29.4
90°-180°	2122.0	33.4
0°-180°	6345.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1787	1787	1787	1787	1787	
5°	1785	1779	1764	1777	1775	169
15°	1697	1688	1660	1659	1647	478
25°	1539	1517	1469	1451	1436	708
35°	1326	1292	1232	1194	1174	830
45°	1085	1044	972	920	898	837
55°	824	778	705	646	622	736
65°	558	510	440	388	366	552
75°	297	256	200	171	161	314
85°	74	51	43	42	40	83
90°	1	5	9	12	13	5
95°	19	56	505	229	134	20
105°	64	90	414	814	756	68
115°	115	139	332	716	842	113
125°	160	187	318	569	663	142
135°	187	225	316	477	551	145
145°	218	250	317	395	435	137
155°	249	268	309	349	364	114
165°	272	279	297	315	319	76
175°	282	282	285	288	287	27
180°	283	283	283	283	283	



TEST NUMBER: P333591

CATALOG NUMBER: S125RDIP-S1090D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1787.4	1787.4	1787.4	1787.4	1787.4	1787.4	1787.4	1787.4	1787.4	1787.4	1787.4
2.5°	1790.6	1789.9	1789.2	1788.4	1787.7	1786.2	1783.8	1781.4	1779.0	1776.6	1779.0
5°	1784.7	1783.5	1782.3	1781.1	1779.9	1777.6	1774.3	1771.0	1767.7	1764.4	1767.4
7.5°	1767.1	1766.0	1764.8	1763.7	1762.5	1760.0	1756.0	1752.1	1748.1	1744.2	1746.3
10°	1750.9	1750.0	1749.1	1748.2	1747.3	1744.8	1740.6	1736.4	1732.2	1728.0	1728.9
12.5°	1732.5	1731.4	1730.3	1729.1	1728.0	1724.6	1719.0	1713.3	1707.7	1702.0	1702.7
15°	1696.9	1695.1	1693.3	1691.5	1689.7	1685.7	1679.4	1673.1	1666.8	1660.5	1660.2
17.5°	1656.7	1653.9	1651.2	1648.4	1645.6	1640.3	1632.4	1624.5	1616.5	1608.6	1607.1
20°	1625.4	1622.4	1619.4	1616.4	1613.4	1607.1	1597.5	1587.9	1578.3	1568.7	1567.2
22.5°	1590.8	1587.8	1584.8	1581.8	1578.8	1572.3	1562.2	1552.1	1542.0	1531.9	1529.0
25°	1539.0	1534.5	1530.0	1525.5	1521.0	1513.2	1502.1	1491.0	1479.9	1468.8	1464.9
27.5°	1479.6	1474.1	1468.6	1463.2	1457.7	1449.1	1437.2	1425.3	1413.4	1401.5	1396.1
30°	1436.4	1430.7	1425.0	1419.3	1413.6	1404.4	1391.8	1379.2	1366.6	1354.0	1347.1
32.5°	1394.2	1387.6	1380.9	1374.3	1367.6	1357.9	1345.0	1332.2	1319.3	1306.5	1298.9
35°	1325.7	1318.5	1311.3	1304.1	1296.9	1286.5	1273.0	1259.5	1246.0	1232.5	1223.8
37.5°	1258.4	1249.7	1240.9	1232.2	1223.4	1212.1	1198.1	1184.2	1170.3	1156.4	1145.9
40°	1210.9	1201.9	1192.9	1183.9	1174.9	1163.2	1148.8	1134.4	1120.0	1105.6	1094.2
42.5°	1161.2	1152.0	1142.8	1133.5	1124.3	1112.2	1097.3	1082.5	1067.6	1052.7	1041.8
45°	1085.4	1076.7	1068.0	1059.3	1050.6	1038.0	1021.5	1005.0	988.5	972.0	960.0
47.5°	1006.8	997.6	988.4	979.3	970.1	957.2	940.6	923.9	907.3	890.7	878.3
50°	957.1	947.2	937.3	927.4	917.5	904.0	886.9	869.8	852.7	835.6	823.0
52.5°	903.1	893.0	882.8	872.7	862.6	849.4	833.3	817.1	801.0	784.9	771.3
55°	823.5	813.9	804.3	794.7	785.1	771.9	755.1	738.3	721.5	704.7	691.2
57.5°	743.0	732.8	722.5	712.2	702.0	688.8	672.6	656.4	640.2	624.0	610.8
60°	691.2	680.7	670.2	659.7	649.2	635.8	619.6	603.4	587.2	571.0	557.8
62.5°	636.1	626.1	616.1	606.0	596.0	582.8	566.4	549.9	533.5	517.0	504.8
65°	557.5	547.3	537.1	526.9	516.7	503.7	487.8	471.9	456.0	440.1	428.1
67.5°	479.5	469.3	459.1	448.9	438.7	426.0	410.7	395.5	380.3	365.0	354.1
70°	426.6	416.4	406.2	396.0	385.8	373.2	358.2	343.2	328.2	313.2	303.9
72.5°	374.8	364.8	354.8	344.9	334.9	322.9	308.9	294.8	280.8	266.8	258.2
75°	297.0	288.0	279.0	270.0	261.0	250.2	237.6	225.0	212.4	199.8	193.2
77.5°	219.8	212.6	205.4	198.2	191.0	182.3	172.3	162.2	152.1	142.0	137.4
80°	175.5	168.3	161.1	153.9	146.7	138.9	130.5	122.1	113.7	105.3	102.6
82.5°	132.3	125.8	119.3	112.9	106.4	100.3	94.5	88.7	83.0	77.2	76.0
85°	74.2	68.8	63.4	58.0	52.6	49.2	47.7	46.2	44.7	43.2	42.9
87.5°	25.0	23.4	21.9	20.5	19.0	18.3	18.2	18.2	18.0	18.0	18.1
90°	0.6	1.1	2.3	3.4	4.6	5.7	6.3	7.4	8.0	9.1	9.7
92.5°	7.0	8.4	13.2	20.3	30.1	46.8	77.9	130.2	186.9	183.9	148.9
95°	18.8	19.4	24.0	30.2	42.8	68.5	129.5	255.0	412.4	505.4	494.6
97.5°	31.3	31.9	35.1	41.4	52.7	71.2	111.6	203.5	368.3	539.7	625.8
100°	39.9	41.1	43.4	49.6	60.5	77.6	110.7	184.8	328.6	515.1	657.7
102.5°	49.5	50.2	52.0	58.8	68.7	85.3	114.8	177.1	298.4	471.7	638.5
105°	64.5	64.5	67.3	73.0	82.1	98.1	123.2	174.0	269.2	413.6	577.3
107.5°	79.1	80.2	82.9	87.6	97.1	111.5	135.8	179.2	256.9	373.5	514.8
110°	89.6	90.7	93.0	98.1	106.7	121.5	144.9	184.2	253.3	354.8	479.2



TEST NUMBER: P333591

CATALOG NUMBER: S125RDIP-S1090D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	100.1	101.2	103.0	108.2	116.7	131.1	153.6	190.6	253.3	343.9	452.7
115°	115.2	116.4	118.1	123.2	131.8	146.0	167.1	200.2	255.0	332.0	423.8
117.5°	128.9	130.6	132.5	137.6	147.3	161.1	181.1	211.2	258.7	326.2	406.6
120°	138.0	139.8	142.0	147.2	156.9	171.1	191.1	218.5	262.4	323.4	397.0
122.5°	147.6	148.9	150.7	155.8	166.5	180.7	200.7	226.7	265.6	321.2	388.8
125°	159.7	160.9	163.7	168.8	179.7	194.5	213.3	237.9	271.0	318.3	377.6
127.5°	169.2	170.9	174.6	181.1	192.6	207.4	225.5	248.1	277.0	316.9	367.4
130°	175.1	176.8	181.4	188.8	200.8	215.6	233.3	255.0	280.7	316.0	360.5
132.5°	179.7	181.9	187.3	195.7	208.1	222.9	240.6	260.9	284.8	316.0	355.0
135°	187.1	189.4	196.2	205.4	217.3	232.7	250.4	269.2	290.3	316.0	348.5
137.5°	196.5	198.2	204.6	213.7	225.4	241.3	257.4	275.4	295.5	316.7	342.7
140°	201.9	203.6	210.5	219.6	230.5	245.9	262.4	279.5	297.8	317.2	340.0
142.5°	208.3	209.6	216.0	225.1	235.5	250.0	265.6	281.8	299.1	317.6	337.7
145°	217.9	219.0	224.7	232.7	243.0	256.1	271.0	285.2	300.6	317.2	334.3
147.5°	227.9	228.6	233.5	240.9	249.8	261.4	274.4	287.3	301.2	315.7	330.7
150°	233.9	235.0	239.0	246.4	254.4	264.1	276.7	288.6	301.2	314.3	328.0
152.5°	240.3	240.9	244.5	251.0	258.5	267.3	278.9	289.5	300.7	312.5	324.8
155°	248.7	248.7	252.1	257.8	263.5	271.5	281.2	290.3	299.5	309.2	319.4
157.5°	256.2	256.1	258.9	263.8	268.8	274.8	283.2	290.9	298.0	305.7	314.4
160°	261.3	260.7	263.0	267.0	271.5	276.7	284.1	290.9	296.6	303.5	310.3
162.5°	265.4	264.8	267.1	270.6	274.3	278.5	285.0	290.5	295.3	300.7	306.7
165°	271.5	270.4	272.1	274.9	277.2	280.7	285.2	289.8	293.2	296.6	301.2
167.5°	275.6	275.1	276.1	277.7	279.3	281.4	285.2	288.4	290.0	292.6	295.8
170°	278.4	277.8	278.4	279.5	280.7	282.4	285.2	287.5	288.6	290.3	292.6
172.5°	280.2	279.2	279.7	280.9	281.6	282.4	284.8	286.6	286.8	287.6	289.4
175°	282.4	281.2	281.8	282.4	282.4	282.4	284.1	285.2	284.6	284.6	285.2
177.5°	283.4	282.5	282.5	282.9	282.5	282.5	283.4	283.8	282.9	282.9	283.4
180°	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9



TEST NUMBER: P333591

CATALOG NUMBER: S125RDIP-S1090D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1787.4	1787.4	1787.4	1787.4	1787.4	1787.4	1787.4	1787.4
2.5°	1781.4	1783.8	1786.2	1787.2	1787.0	1786.8	1786.5	1786.3
5°	1770.4	1773.4	1776.4	1777.6	1777.0	1776.4	1775.8	1775.2
7.5°	1748.4	1750.5	1752.6	1753.3	1752.6	1752.0	1751.3	1750.6
10°	1729.8	1730.7	1731.6	1731.6	1730.7	1729.8	1728.9	1728.0
12.5°	1703.4	1704.0	1704.7	1704.3	1702.9	1701.6	1700.2	1698.8
15°	1659.9	1659.6	1659.3	1657.8	1655.1	1652.4	1649.7	1647.0
17.5°	1605.6	1604.1	1602.6	1600.8	1598.5	1596.3	1594.1	1591.9
20°	1565.7	1564.2	1562.7	1560.6	1557.9	1555.2	1552.5	1549.8
22.5°	1526.1	1523.1	1520.2	1517.6	1515.4	1513.2	1510.9	1508.7
25°	1461.0	1457.1	1453.2	1449.6	1446.3	1443.0	1439.7	1436.4
27.5°	1390.6	1385.2	1379.7	1375.4	1372.2	1369.0	1365.8	1362.7
30°	1340.2	1333.3	1326.4	1321.6	1318.9	1316.2	1313.5	1310.8
32.5°	1291.3	1283.6	1276.0	1270.5	1267.1	1263.7	1260.2	1256.8
35°	1215.1	1206.4	1197.7	1191.3	1187.1	1182.9	1178.7	1174.5
37.5°	1135.5	1125.1	1114.6	1107.4	1103.3	1099.2	1095.1	1091.0
40°	1082.8	1071.4	1060.0	1052.5	1048.9	1045.3	1041.7	1038.1
42.5°	1030.9	1019.9	1009.0	1000.9	995.6	990.4	985.1	979.8
45°	948.0	936.0	924.0	915.7	911.2	906.7	902.2	897.7
47.5°	866.0	853.6	841.3	832.6	827.6	822.6	817.7	812.7
50°	810.4	797.8	785.2	776.7	772.2	767.7	763.2	758.7
52.5°	757.8	744.2	730.6	721.6	717.1	712.6	708.1	703.6
55°	677.7	664.2	650.7	641.5	636.7	631.9	627.1	622.3
57.5°	597.6	584.4	571.2	562.4	558.2	553.9	549.6	545.4
60°	544.6	531.4	518.2	509.4	504.9	500.4	495.9	491.4
62.5°	492.6	480.3	468.1	459.7	455.2	450.7	446.2	441.7
65°	416.1	404.1	392.1	383.8	379.3	374.8	370.3	365.8
67.5°	343.1	332.1	321.1	313.8	310.2	306.6	303.0	299.4
70°	294.6	285.3	276.0	269.5	265.9	262.3	258.7	255.1
72.5°	249.6	241.0	232.4	226.9	224.5	222.1	219.7	217.3
75°	186.6	180.0	173.4	169.0	166.9	164.8	162.7	160.6
77.5°	132.8	128.2	123.5	120.4	118.9	117.3	115.8	114.2
80°	99.9	97.2	94.5	92.8	92.2	91.6	91.0	90.4
82.5°	74.7	73.4	72.2	71.4	71.0	70.6	70.3	69.9
85°	42.6	42.3	42.0	41.7	41.4	41.1	40.8	40.5
87.5°	18.3	18.4	18.5	18.6	18.3	18.1	18.0	17.7
90°	10.3	10.8	11.4	12.5	12.5	12.5	13.1	13.1
92.5°	101.1	73.4	55.2	46.8	39.5	38.1	37.3	36.4
95°	410.1	323.4	253.3	205.4	164.9	147.7	143.2	134.1
97.5°	610.8	550.0	481.7	415.0	379.8	347.8	331.3	324.0
100°	701.6	673.7	614.9	555.6	516.2	475.2	454.1	444.9
102.5°	732.2	749.4	721.2	681.1	639.0	609.8	586.9	580.0
105°	714.2	792.3	817.4	811.1	792.9	774.1	762.7	755.8
107.5°	649.8	754.1	818.6	848.3	857.6	857.5	853.7	849.1
110°	602.4	710.8	791.2	839.7	865.3	876.2	880.2	880.2



TEST NUMBER: P333591

CATALOG NUMBER: S125RDIP-S1090D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	565.0	667.9	749.2	806.4	843.9	862.5	872.4	876.5
115°	517.9	606.4	684.5	746.7	791.2	818.6	834.5	842.0
117.5°	487.6	563.8	631.1	688.2	732.7	761.0	776.8	781.4
120°	471.2	539.6	602.4	652.6	694.8	722.2	737.6	742.1
122.5°	458.9	522.3	578.2	625.2	662.8	687.9	703.3	707.4
125°	440.9	499.1	548.8	589.8	621.8	645.2	657.7	663.4
127.5°	422.7	477.0	523.3	561.8	590.7	611.4	623.2	625.8
130°	411.3	461.5	506.0	543.0	571.6	590.4	601.8	605.2
132.5°	399.9	446.9	487.3	523.0	551.5	570.3	580.8	584.7
135°	385.0	424.4	460.9	493.4	518.5	537.3	547.6	551.0
137.5°	372.5	404.3	434.7	462.3	484.7	501.9	511.3	515.1
140°	365.6	392.5	418.7	442.7	463.8	478.6	487.1	490.0
142.5°	359.7	382.4	405.0	425.8	443.7	456.2	464.3	466.7
145°	352.0	369.6	387.3	402.7	416.4	426.1	432.4	434.7
147.5°	344.7	359.0	372.6	384.2	395.1	402.8	406.5	407.5
150°	340.5	353.1	363.9	374.2	382.8	389.6	391.9	392.5
152.5°	336.0	347.2	357.1	365.1	372.3	377.7	380.0	380.6
155°	329.1	338.3	346.2	352.5	358.2	362.2	363.9	364.5
157.5°	322.3	329.8	336.0	340.9	345.3	348.6	350.2	350.1
160°	317.7	323.4	329.1	333.1	337.1	340.0	341.1	340.5
162.5°	312.7	318.0	322.7	326.3	329.4	331.8	332.0	331.9
165°	305.7	309.7	313.2	316.0	318.3	319.4	319.4	319.4
167.5°	299.1	301.8	304.4	306.4	307.6	308.6	308.1	308.0
170°	295.5	297.2	298.9	300.0	301.2	301.8	301.8	301.2
172.5°	291.4	293.1	294.3	295.0	295.3	296.3	295.4	294.8
175°	286.9	286.9	288.1	288.1	288.1	288.6	287.5	286.9
177.5°	283.8	284.3	284.3	284.3	283.8	284.3	282.9	282.9
180°	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9

(END OF REPORT)