

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333628

Luminaire Tested: **S125RDIP-S1270D1035U835-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333628
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S1270D1035U835-4F0-1E-UDD-A
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1035 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9058.7 lumens
Efficiency: N/A
Efficacy: 135.6 lumens/watt
Spacing Criteria (0/90/45): 1.4 / 1.22 / 1.47
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 66.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

Luminous Intensity Polar Plot

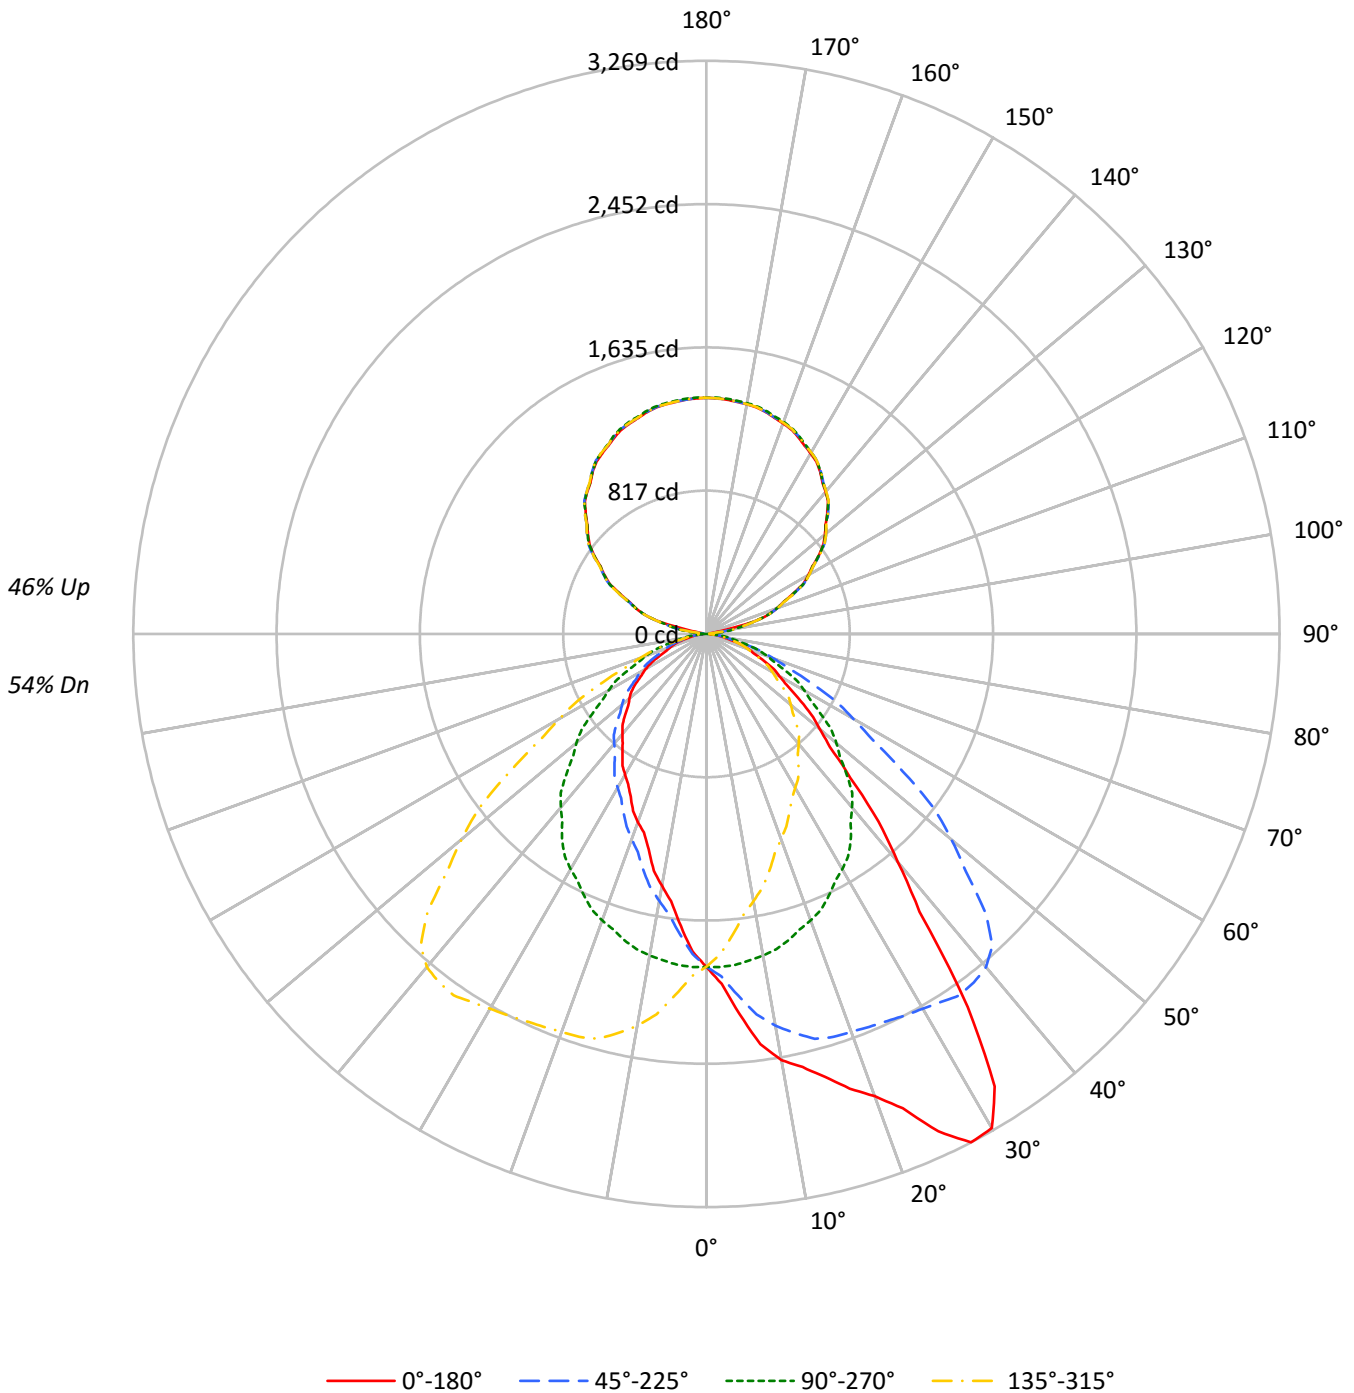



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	72	72	72	60	60	60	54
1	99	95	91	88	92	88	85	82	76	74	71	64	63	61	54	53	52	47
2	91	84	78	73	84	78	73	68	67	63	60	57	54	52	48	46	44	40
3	83	74	67	61	77	69	63	57	59	55	51	51	47	44	43	40	38	34
4	76	66	58	52	70	61	54	49	53	48	44	46	41	38	38	36	33	30
5	70	59	51	45	65	55	48	42	48	42	38	41	37	33	35	32	29	26
6	65	53	45	39	60	49	42	37	43	37	33	37	33	29	32	28	26	23
7	60	48	40	34	55	45	38	33	39	33	29	34	29	26	29	25	23	20
8	55	43	36	30	51	41	34	29	36	30	26	31	27	23	27	23	21	18
9	52	40	32	27	48	37	30	26	33	27	23	29	24	21	25	21	19	16
10	48	36	29	24	45	34	28	23	30	25	21	26	22	19	23	19	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	12264	12264	12264	12264
5°	14110	12280	10845	12280
10°	16184	12218	9569	12218
15°	17481	12092	8506	12092
20°	19276	11947	7854	11947
25°	22308	11754	7288	11754
30°	24276	11551	6918	11551
35°	20478	11315	6576	11315
40°	14300	10890	6283	10890
45°	10609	10316	5994	10316
50°	8459	9720	5749	9720
55°	7179	8979	5530	8979
60°	6203	8317	5176	8317
65°	5527	7600	4455	7600
70°	4857	6962	4062	6962
75°	4202	6029	3813	6029
80°	3187	5073	3187	5073
85°	2660	3987	3001	3987



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	182.1	2.0
10°-20°	533.6	5.9
20°-30°	846.1	9.3
30°-40°	1020.3	11.3
40°-50°	911.2	10.1
50°-60°	698.8	7.7
60°-70°	454.1	5.0
70°-80°	220.8	2.4
80°-90°	55.5	0.6
90°-100°	49.0	0.5
100°-110°	301.7	3.3
110°-120°	547.1	6.0
120°-130°	702.2	7.8
130°-140°	755.2	8.3
140°-150°	708.9	7.8
150°-160°	573.4	6.3
160°-170°	370.9	4.1
170°-180°	127.9	1.4
0°-30°	1561.8	17.2
0°-40°	2582.2	28.5
0°-60°	4192.1	46.3
0°-90°	4922.5	54.3
90°-120°	897.7	9.9
90°-150°	3064.0	33.8
90°-180°	4136.0	45.7
0°-180°	9058.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1899	1899	1899	1899	1899	
5°	2176	1894	1673	1894	2176	217
15°	2614	1808	1272	1808	2614	749
25°	3130	1649	1023	1649	3130	1437
35°	2597	1435	834	1435	2597	1569
45°	1162	1130	656	1130	1162	927
55°	638	797	491	797	638	579
65°	362	497	292	497	362	360
75°	168	242	153	242	168	179
85°	36	54	40	54	36	42
90°	24	1	24	1	24	12
95°	21	57	21	57	21	17
105°	296	294	296	294	296	268
115°	547	551	547	551	547	543
125°	784	784	784	784	784	697
135°	974	978	974	978	974	751
145°	1130	1133	1130	1133	1130	706
155°	1239	1248	1239	1248	1239	571
165°	1310	1317	1310	1317	1310	370
175°	1341	1347	1341	1347	1341	128
180°	1347	1347	1347	1347	1347	



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9
2.5°	1997.4	1996.2	1998.7	1991.8	1992.4	1981.8	1981.8	1973.7	1963.1	1955.0	1951.3
5°	2176.4	2178.0	2174.8	2163.1	2155.4	2143.7	2130.4	2107.0	2087.5	2068.8	2054.0
7.5°	2360.7	2361.8	2351.5	2347.9	2328.2	2313.9	2284.4	2252.6	2224.4	2188.6	2161.1
10°	2467.9	2467.2	2456.2	2447.7	2430.5	2408.7	2379.9	2342.4	2307.4	2268.4	2231.0
12.5°	2530.3	2528.3	2524.8	2514.4	2498.5	2479.2	2454.7	2417.9	2374.7	2332.0	2288.3
15°	2614.5	2609.0	2598.9	2585.6	2563.0	2540.4	2513.1	2480.4	2439.1	2390.8	2350.2
17.5°	2718.6	2718.8	2703.2	2684.8	2654.1	2614.2	2572.1	2519.2	2463.1	2409.9	2366.8
20°	2804.7	2802.3	2786.8	2750.9	2715.8	2665.9	2617.6	2552.9	2484.3	2414.9	2361.1
22.5°	2928.2	2922.1	2905.9	2858.8	2804.4	2740.1	2666.2	2587.2	2504.3	2425.5	2354.9
25°	3130.5	3125.8	3093.9	3039.3	2962.9	2863.9	2767.3	2658.9	2539.7	2436.0	2350.2
27.5°	3269.0	3263.8	3240.1	3194.8	3124.3	3020.1	2889.3	2744.5	2595.6	2453.0	2329.3
30°	3255.2	3266.9	3263.8	3242.8	3189.8	3096.2	2975.4	2812.5	2635.5	2467.9	2320.6
32.5°	3059.4	3069.9	3097.3	3138.6	3141.7	3104.3	3014.1	2863.6	2680.4	2489.8	2313.7
35°	2597.3	2611.4	2664.4	2747.8	2856.9	2948.1	2966.8	2885.8	2721.3	2516.3	2303.5
37.5°	1996.8	2073.5	2118.1	2205.9	2370.8	2538.6	2699.9	2759.3	2689.3	2505.4	2286.8
40°	1696.2	1714.9	1794.4	1893.4	2032.2	2206.8	2436.8	2602.8	2608.2	2480.4	2260.6
42.5°	1451.8	1475.5	1530.0	1609.1	1727.9	1902.5	2139.9	2359.0	2460.5	2411.8	2226.3
45°	1161.5	1179.4	1219.2	1280.0	1371.2	1515.4	1719.6	1972.9	2174.1	2252.8	2134.3
47.5°	954.1	963.8	998.4	1044.7	1112.2	1217.3	1375.4	1595.3	1836.5	2005.7	1989.0
50°	841.9	852.8	879.3	914.4	971.3	1060.1	1186.4	1369.6	1618.3	1824.8	1866.2
52.5°	754.6	763.6	780.1	813.3	860.3	928.6	1030.5	1196.2	1420.0	1639.6	1735.2
55°	637.6	643.9	657.1	675.8	713.3	762.4	850.4	965.0	1145.9	1367.3	1507.6
57.5°	541.3	544.4	552.8	570.1	596.0	631.9	695.5	792.6	922.3	1121.7	1276.5
60°	480.2	483.3	494.2	505.9	526.2	558.9	608.8	676.6	801.3	965.8	1122.5
62.5°	431.5	433.4	438.1	449.8	467.6	492.8	532.1	587.4	686.6	831.1	979.1
65°	361.7	362.5	364.0	373.4	384.3	403.0	428.7	467.7	542.5	651.7	782.6
67.5°	294.7	295.7	301.2	304.5	315.9	325.7	340.8	370.6	423.3	496.9	598.7
70°	257.2	256.5	261.9	265.8	269.7	281.4	291.5	315.7	348.4	404.6	489.5
72.5°	222.3	220.3	222.6	224.0	229.2	237.1	247.3	262.1	287.3	326.0	391.0
75°	168.4	169.2	169.2	170.7	174.6	177.7	180.8	188.6	202.7	228.4	263.5
77.5°	118.2	116.9	120.2	120.7	123.0	126.4	129.1	132.2	138.0	148.6	166.7
80°	85.7	85.7	86.5	88.9	88.1	89.6	93.5	96.7	103.7	109.9	116.1
82.5°	65.8	65.2	65.9	66.4	66.3	67.8	69.2	69.8	72.5	75.6	80.0
85°	35.9	35.9	36.6	36.6	37.4	37.4	38.2	38.2	38.2	39.0	39.8
87.5°	18.5	17.8	17.0	16.9	17.4	18.4	17.6	16.7	16.5	16.3	16.6
90°	24.0	23.3	22.6	22.0	21.3	20.4	19.3	18.2	17.1	16.0	14.4
92.5°	22.4	22.1	21.7	21.4	21.1	20.4	19.3	18.2	17.1	16.0	14.6
95°	21.0	21.0	21.0	21.0	21.0	20.4	19.3	18.2	17.1	16.0	24.4
97.5°	21.0	21.0	21.0	21.0	21.0	24.1	30.4	36.6	42.9	49.1	65.8
100°	21.0	21.9	22.7	23.6	24.5	41.5	74.6	107.6	140.7	173.7	172.8
102.5°	125.6	140.7	155.8	170.9	186.0	196.6	202.9	209.1	215.4	221.7	221.1
105°	296.5	296.8	297.0	297.2	297.4	297.5	297.5	297.5	297.5	297.5	297.5
107.5°	373.8	374.5	375.2	375.8	376.5	376.8	376.8	376.7	376.7	376.6	376.2
110°	427.3	427.1	426.9	426.7	426.5	426.7	427.3	428.0	428.7	429.3	428.9



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	475.3	475.6	475.9	476.2	476.5	477.1	477.9	478.8	479.6	480.5	480.2
115°	547.2	548.5	549.8	551.2	552.5	553.6	554.5	555.4	556.3	557.1	556.9
117.5°	623.8	624.4	625.0	625.6	626.1	627.0	628.2	629.3	630.5	631.6	630.8
120°	671.0	672.1	673.2	674.3	675.4	676.2	676.6	677.1	677.5	678.0	677.3
122.5°	715.7	717.0	718.3	719.6	720.8	721.7	722.2	722.6	723.0	723.5	723.2
125°	783.8	784.5	785.1	785.8	786.5	787.2	788.1	789.0	789.9	790.8	790.8
127.5°	841.1	842.8	844.4	846.0	847.7	848.7	849.2	849.7	850.2	850.7	850.8
130°	882.6	883.8	884.9	886.0	887.1	888.0	888.6	889.3	890.0	890.6	890.4
132.5°	921.0	922.1	923.2	924.3	925.4	926.0	926.2	926.3	926.4	926.6	927.1
135°	973.5	974.8	976.2	977.5	978.8	979.7	980.2	980.6	981.0	981.5	981.9
137.5°	1026.2	1027.4	1028.5	1029.7	1030.8	1031.4	1031.3	1031.2	1031.1	1031.0	1031.4
140°	1057.4	1058.7	1060.0	1061.4	1062.7	1063.1	1062.7	1062.3	1061.8	1061.4	1061.6
142.5°	1086.9	1088.3	1089.6	1090.9	1092.3	1092.9	1092.8	1092.7	1092.6	1092.5	1092.2
145°	1130.3	1131.6	1132.9	1134.3	1135.6	1136.1	1135.9	1135.7	1135.5	1135.3	1135.3
147.5°	1166.0	1167.6	1169.2	1170.8	1172.4	1173.1	1172.8	1172.5	1172.3	1172.0	1171.7
150°	1189.2	1190.9	1192.7	1194.5	1196.3	1196.9	1196.5	1196.1	1195.6	1195.2	1194.7
152.5°	1210.7	1212.3	1213.9	1215.5	1217.1	1217.7	1217.3	1216.8	1216.4	1215.9	1215.5
155°	1239.1	1240.9	1242.6	1244.4	1246.2	1246.8	1246.1	1245.4	1244.8	1244.1	1243.6
157.5°	1262.9	1264.6	1266.4	1268.2	1270.0	1270.5	1269.8	1269.1	1268.4	1267.7	1267.6
160°	1278.0	1279.8	1281.6	1283.4	1285.1	1285.6	1284.7	1283.8	1282.9	1282.0	1281.8
162.5°	1291.6	1293.6	1295.5	1297.5	1299.4	1299.8	1298.5	1297.3	1296.1	1294.8	1294.6
165°	1310.0	1311.8	1313.5	1315.3	1317.1	1317.3	1316.0	1314.6	1313.3	1312.0	1311.8
167.5°	1322.8	1324.8	1326.8	1328.8	1330.8	1331.0	1329.4	1327.8	1326.2	1324.6	1324.3
170°	1330.0	1332.0	1334.0	1335.9	1337.9	1338.1	1336.3	1334.5	1332.7	1331.0	1330.7
172.5°	1334.8	1336.7	1338.7	1340.7	1342.7	1342.9	1341.3	1339.7	1338.1	1336.5	1336.1
175°	1340.9	1342.9	1344.9	1346.9	1348.9	1349.0	1347.3	1345.5	1343.7	1341.9	1341.7
177.5°	1344.5	1346.0	1347.4	1348.8	1350.2	1350.3	1349.1	1347.8	1346.6	1345.3	1345.2
180°	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9
2.5°	1951.3	1946.9	1938.8	1931.3	1922.0	1913.9	1908.2	1901.4	1892.7	1882.1	1873.3
5°	2037.6	2020.5	1997.9	1978.4	1953.5	1934.0	1913.7	1894.2	1874.7	1849.8	1828.0
7.5°	2133.4	2098.0	2063.5	2020.2	1980.9	1945.8	1912.1	1878.0	1844.6	1809.2	1775.1
10°	2192.0	2149.1	2101.6	2047.0	1997.1	1949.6	1905.9	1863.0	1817.8	1778.1	1735.2
12.5°	2246.9	2191.5	2137.1	2068.2	2008.3	1950.2	1894.7	1841.2	1792.9	1741.3	1695.3
15°	2296.4	2241.9	2181.1	2096.9	2013.5	1943.3	1877.8	1808.5	1748.4	1690.8	1639.3
17.5°	2315.6	2258.4	2187.8	2106.9	2015.7	1927.4	1843.1	1767.0	1696.4	1629.2	1571.3
20°	2308.1	2252.8	2180.3	2103.1	2005.7	1913.7	1822.5	1738.3	1659.6	1588.6	1527.1
22.5°	2290.1	2232.8	2162.8	2081.3	1988.8	1891.3	1793.8	1704.0	1621.5	1548.1	1480.9
25°	2262.9	2185.0	2113.3	2033.7	1945.7	1849.0	1748.4	1649.4	1561.4	1486.5	1413.3
27.5°	2234.7	2137.4	2046.2	1967.2	1874.1	1787.9	1690.9	1589.4	1496.8	1420.6	1345.4
30°	2209.1	2100.0	1999.4	1909.8	1821.7	1739.9	1647.9	1548.9	1453.8	1375.1	1298.7
32.5°	2177.3	2061.3	1950.8	1847.4	1762.5	1681.3	1598.0	1503.4	1410.8	1329.5	1251.9
35°	2137.4	1989.3	1869.3	1759.4	1665.0	1586.3	1511.5	1435.1	1342.3	1258.1	1182.5
37.5°	2085.0	1917.0	1778.1	1658.3	1558.9	1479.8	1420.7	1350.9	1266.2	1185.6	1115.5
40°	2053.2	1864.6	1712.6	1594.1	1489.6	1406.2	1350.9	1291.7	1214.5	1138.9	1068.7
42.5°	2010.8	1816.6	1646.5	1523.0	1417.9	1337.6	1281.7	1229.9	1165.2	1094.0	1018.8
45°	1927.7	1723.5	1545.0	1412.5	1306.5	1227.7	1175.5	1129.5	1080.4	1014.9	949.4
47.5°	1819.5	1626.4	1439.6	1294.9	1191.1	1118.0	1067.3	1031.0	995.9	940.2	876.6
50°	1732.9	1546.6	1364.1	1223.8	1113.1	1043.8	996.2	967.4	935.4	884.7	831.7
52.5°	1630.6	1464.2	1285.6	1142.1	1037.7	972.7	927.0	898.2	871.8	830.5	780.0
55°	1469.4	1323.6	1159.9	1029.7	933.9	868.4	824.7	797.4	781.9	746.8	707.0
57.5°	1283.4	1178.9	1034.6	909.1	824.3	759.6	727.6	704.4	686.8	662.0	633.9
60°	1153.7	1080.4	951.0	831.7	753.8	692.2	663.4	643.9	627.5	606.5	584.6
62.5°	1022.1	968.8	856.2	753.8	682.1	630.5	603.5	585.9	567.0	552.8	531.6
65°	845.8	798.2	720.3	640.0	573.7	532.4	512.9	497.3	485.6	470.0	455.2
67.5°	657.9	638.6	584.8	529.4	481.9	445.1	428.3	417.4	403.3	394.0	383.8
70°	542.5	533.2	495.0	458.4	413.9	389.0	373.4	368.7	351.6	342.2	335.2
72.5°	440.3	435.9	413.9	388.5	357.2	335.3	321.0	315.7	304.8	297.3	292.8
75°	301.7	303.2	299.3	283.0	271.3	257.2	244.8	241.6	233.9	227.6	223.7
77.5°	190.8	198.8	199.1	198.3	193.6	185.1	179.9	177.6	169.9	167.6	166.7
80°	131.0	139.5	147.3	146.5	145.0	142.7	138.8	136.4	132.5	130.2	128.6
82.5°	87.3	95.3	101.8	106.0	105.7	103.4	100.7	99.6	98.8	97.1	96.8
85°	41.3	42.9	45.2	50.7	54.6	55.3	54.6	53.8	51.4	52.2	53.0
87.5°	16.9	16.6	16.9	16.6	15.6	18.4	19.9	20.2	19.3	18.4	17.5
90°	12.9	11.3	9.8	8.1	6.3	4.5	2.8	1.0	2.8	4.5	6.3
92.5°	13.2	11.8	10.5	10.4	11.6	12.9	14.1	15.4	14.1	12.9	11.6
95°	32.8	41.3	49.7	54.3	54.9	55.6	56.2	56.9	56.2	55.6	54.9
97.5°	82.5	99.2	115.9	123.6	122.4	121.2	120.0	118.8	120.0	121.2	122.4
100°	172.0	171.1	170.2	169.4	168.7	168.1	167.4	166.7	167.4	168.1	168.7
102.5°	220.6	220.1	219.5	218.8	218.0	217.2	216.3	215.5	216.3	217.2	218.0
105°	297.5	297.5	297.5	297.1	296.2	295.3	294.4	293.5	294.4	295.3	296.2
107.5°	375.7	375.3	374.8	374.6	374.6	374.6	374.6	374.6	374.6	374.6	374.6
110°	428.5	428.0	427.6	427.3	427.3	427.3	427.3	427.3	427.3	427.3	427.3



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	479.9	479.7	479.4	479.0	478.5	477.9	477.4	476.9	477.4	477.9	478.5
115°	556.7	556.5	556.3	555.6	554.5	553.4	552.3	551.2	552.3	553.4	554.5
117.5°	629.9	629.1	628.3	627.9	627.9	627.9	628.0	628.0	628.0	627.9	627.9
120°	676.6	676.0	675.3	675.1	675.3	675.5	675.7	676.0	675.7	675.5	675.3
122.5°	722.9	722.6	722.2	721.7	720.8	720.0	719.1	718.3	719.1	720.0	720.8
125°	790.8	790.8	790.8	790.0	788.5	786.9	785.3	783.8	785.3	786.9	788.5
127.5°	851.0	851.1	851.2	850.7	849.6	848.5	847.4	846.3	847.4	848.5	849.6
130°	890.2	890.0	889.7	889.1	888.0	886.9	885.8	884.6	885.8	886.9	888.0
132.5°	927.6	928.0	928.5	928.1	926.8	925.6	924.3	923.0	924.3	925.6	926.8
135°	982.4	982.8	983.3	982.8	981.5	980.2	978.8	977.5	978.8	980.2	981.5
137.5°	1031.8	1032.2	1032.6	1032.2	1031.1	1029.9	1028.8	1027.6	1028.8	1029.9	1031.1
140°	1061.8	1062.0	1062.3	1062.1	1061.7	1061.3	1060.8	1060.4	1060.8	1061.3	1061.7
142.5°	1091.9	1091.6	1091.3	1091.0	1090.7	1090.5	1090.2	1089.9	1090.2	1090.5	1090.7
145°	1135.3	1135.3	1135.3	1135.0	1134.6	1134.1	1133.7	1133.3	1133.7	1134.1	1134.6
147.5°	1171.5	1171.2	1170.9	1170.8	1170.9	1171.0	1171.1	1171.2	1171.1	1171.0	1170.9
150°	1194.3	1193.8	1193.4	1193.4	1193.8	1194.3	1194.7	1195.2	1194.7	1194.3	1193.8
152.5°	1215.0	1214.6	1214.2	1214.4	1215.4	1216.4	1217.4	1218.3	1217.4	1216.4	1215.4
155°	1243.2	1242.8	1242.3	1242.8	1244.1	1245.4	1246.8	1248.1	1246.8	1245.4	1244.1
157.5°	1267.6	1267.5	1267.5	1267.9	1268.7	1269.5	1270.2	1271.0	1270.2	1269.5	1268.7
160°	1281.6	1281.4	1281.1	1281.7	1283.0	1284.4	1285.7	1287.0	1285.7	1284.4	1283.0
162.5°	1294.4	1294.1	1293.9	1294.5	1295.8	1297.1	1298.5	1299.8	1298.5	1297.1	1295.8
165°	1311.5	1311.3	1311.1	1311.7	1313.0	1314.3	1315.6	1317.0	1315.6	1314.3	1313.0
167.5°	1324.1	1323.9	1323.7	1324.3	1325.6	1327.0	1328.4	1329.8	1328.4	1327.0	1325.6
170°	1330.5	1330.3	1330.1	1330.7	1332.3	1333.8	1335.4	1336.9	1335.4	1333.8	1332.3
172.5°	1335.7	1335.3	1335.0	1335.5	1337.1	1338.6	1340.2	1341.7	1340.2	1338.6	1337.1
175°	1341.5	1341.3	1341.1	1341.6	1342.9	1344.3	1345.6	1346.9	1345.6	1344.3	1342.9
177.5°	1345.0	1344.8	1344.6	1345.1	1346.1	1347.2	1348.3	1349.3	1348.3	1347.2	1346.1
180°	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9
2.5°	1867.1	1858.4	1852.1	1839.6	1830.9	1827.2	1820.3	1818.4	1825.3	1820.3	1819.7
5°	1811.6	1789.0	1771.1	1753.1	1733.6	1721.2	1702.5	1699.3	1694.7	1687.6	1686.1
7.5°	1745.0	1715.6	1692.5	1662.9	1637.1	1616.4	1593.0	1581.9	1575.9	1566.8	1554.7
10°	1700.1	1665.0	1633.9	1604.2	1572.3	1546.6	1523.2	1505.2	1493.5	1482.6	1478.0
12.5°	1655.8	1620.1	1580.2	1544.4	1508.7	1479.8	1453.9	1442.3	1429.3	1416.5	1405.6
15°	1587.1	1539.5	1495.9	1454.6	1424.2	1393.0	1368.0	1350.9	1331.4	1326.0	1304.9
17.5°	1514.1	1467.5	1416.4	1372.9	1337.6	1303.3	1275.9	1256.4	1241.8	1221.7	1212.0
20°	1468.6	1413.3	1363.4	1323.6	1284.6	1244.1	1216.0	1199.7	1185.6	1169.3	1161.5
22.5°	1420.0	1365.9	1314.7	1268.1	1228.5	1188.6	1168.6	1151.7	1135.7	1120.6	1110.3
25°	1348.6	1294.0	1240.2	1191.9	1150.6	1121.7	1098.3	1078.8	1070.3	1055.5	1044.5
27.5°	1277.9	1219.9	1164.1	1115.9	1083.5	1055.0	1035.8	1020.4	1004.9	992.0	982.5
30°	1232.4	1173.2	1112.4	1074.2	1039.9	1012.6	991.5	976.7	965.0	953.3	946.3
32.5°	1186.9	1125.8	1071.8	1030.5	998.1	974.5	952.9	938.7	926.4	913.4	905.2
35°	1113.9	1051.6	1007.9	967.4	935.4	913.6	898.8	878.5	868.4	859.0	850.4
37.5°	1046.1	988.1	940.9	905.3	877.6	855.9	836.7	825.8	813.3	804.9	797.8
40°	996.2	943.2	900.3	862.9	842.7	818.5	800.6	786.5	777.2	766.3	758.5
42.5°	951.3	902.1	860.4	826.8	801.5	781.1	763.8	749.7	737.9	730.1	723.5
45°	887.9	838.8	798.2	767.0	743.7	724.2	706.2	699.2	683.6	674.3	671.2
47.5°	822.2	778.3	739.1	710.4	686.4	668.0	651.2	636.9	628.3	619.1	614.1
50°	778.0	735.9	699.2	671.2	647.8	627.5	611.9	602.6	590.9	582.3	576.1
52.5°	733.7	694.7	658.1	631.2	611.0	590.7	573.3	563.9	552.8	547.4	543.0
55°	670.4	629.1	597.9	571.4	550.3	531.6	515.3	505.9	498.9	493.4	491.9
57.5°	598.7	565.9	536.9	513.1	491.2	473.6	459.3	450.4	444.2	443.4	438.7
60°	551.9	522.3	495.8	470.0	451.3	435.0	422.5	412.4	406.1	405.3	403.8
62.5°	505.1	476.7	452.1	429.5	412.7	396.9	385.1	373.7	370.0	366.1	362.6
65°	435.7	410.0	389.8	371.8	353.9	340.6	329.0	321.9	313.4	308.7	300.1
67.5°	367.6	347.7	328.2	313.1	299.0	286.4	276.7	266.3	260.5	256.8	250.5
70°	322.7	307.1	287.6	271.3	260.4	250.2	242.4	230.7	226.8	223.7	220.6
72.5°	280.3	266.6	250.2	237.0	226.1	216.5	207.5	202.0	198.2	195.0	193.2
75°	220.6	207.4	193.3	184.0	176.2	168.4	163.7	159.8	158.2	157.5	154.3
77.5°	162.0	155.0	143.7	136.3	131.1	128.0	123.8	121.8	121.6	118.2	117.1
80°	123.9	120.0	110.7	107.6	103.7	100.6	98.2	94.3	90.4	88.9	86.5
82.5°	92.1	88.2	84.5	79.5	76.2	74.4	72.0	70.6	71.1	68.9	67.8
85°	49.1	45.2	43.7	42.9	41.3	42.9	42.1	41.3	40.5	39.8	40.5
87.5°	17.2	17.5	17.2	18.8	17.2	18.2	18.4	18.0	18.2	18.4	18.0
90°	8.1	9.8	11.3	12.9	14.4	16.0	17.1	18.2	19.3	20.4	21.3
92.5°	10.4	10.5	11.8	13.2	14.6	16.0	17.1	18.2	19.3	20.4	21.1
95°	54.3	49.7	41.3	32.8	24.4	16.0	17.1	18.2	19.3	20.4	21.0
97.5°	123.6	115.9	99.2	82.5	65.8	49.1	42.9	36.6	30.4	24.1	21.0
100°	169.4	170.2	171.1	172.0	172.8	173.7	140.7	107.6	74.6	41.5	24.5
102.5°	218.8	219.5	220.1	220.6	221.1	221.7	215.4	209.1	202.9	196.6	186.0
105°	297.1	297.5	297.5	297.5	297.5	297.5	297.5	297.5	297.5	297.5	297.4
107.5°	374.6	374.8	375.3	375.7	376.2	376.6	376.7	376.7	376.8	376.8	376.5
110°	427.3	427.6	428.0	428.5	428.9	429.3	428.7	428.0	427.3	426.7	426.5



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	479.0	479.4	479.7	479.9	480.2	480.5	479.6	478.8	477.9	477.1	476.5
115°	555.6	556.3	556.5	556.7	556.9	557.1	556.3	555.4	554.5	553.6	552.5
117.5°	627.9	628.3	629.1	629.9	630.8	631.6	630.5	629.3	628.2	627.0	626.1
120°	675.1	675.3	676.0	676.6	677.3	678.0	677.5	677.1	676.6	676.2	675.4
122.5°	721.7	722.2	722.6	722.9	723.2	723.5	723.0	722.6	722.2	721.7	720.8
125°	790.0	790.8	790.8	790.8	790.8	790.8	789.9	789.0	788.1	787.2	786.5
127.5°	850.7	851.2	851.1	851.0	850.8	850.7	850.2	849.7	849.2	848.7	847.7
130°	889.1	889.7	890.0	890.2	890.4	890.6	890.0	889.3	888.6	888.0	887.1
132.5°	928.1	928.5	928.0	927.6	927.1	926.6	926.4	926.3	926.2	926.0	925.4
135°	982.8	983.3	982.8	982.4	981.9	981.5	981.0	980.6	980.2	979.7	978.8
137.5°	1032.2	1032.6	1032.2	1031.8	1031.4	1031.0	1031.1	1031.2	1031.3	1031.4	1030.8
140°	1062.1	1062.3	1062.0	1061.8	1061.6	1061.4	1061.8	1062.3	1062.7	1063.1	1062.7
142.5°	1091.0	1091.3	1091.6	1091.9	1092.2	1092.5	1092.6	1092.7	1092.8	1092.9	1092.3
145°	1135.0	1135.3	1135.3	1135.3	1135.3	1135.3	1135.5	1135.7	1135.9	1136.1	1135.6
147.5°	1170.8	1170.9	1171.2	1171.5	1171.7	1172.0	1172.3	1172.5	1172.8	1173.1	1172.4
150°	1193.4	1193.4	1193.8	1194.3	1194.7	1195.2	1195.6	1196.1	1196.5	1196.9	1196.3
152.5°	1214.4	1214.2	1214.6	1215.0	1215.5	1215.9	1216.4	1216.8	1217.3	1217.7	1217.1
155°	1242.8	1242.3	1242.8	1243.2	1243.6	1244.1	1244.8	1245.4	1246.1	1246.8	1246.2
157.5°	1267.9	1267.5	1267.5	1267.6	1267.6	1267.7	1268.4	1269.1	1269.8	1270.5	1270.0
160°	1281.7	1281.1	1281.4	1281.6	1281.8	1282.0	1282.9	1283.8	1284.7	1285.6	1285.1
162.5°	1294.5	1293.9	1294.1	1294.4	1294.6	1294.8	1296.1	1297.3	1298.5	1299.8	1299.4
165°	1311.7	1311.1	1311.3	1311.5	1311.8	1312.0	1313.3	1314.6	1316.0	1317.3	1317.1
167.5°	1324.3	1323.7	1323.9	1324.1	1324.3	1324.6	1326.2	1327.8	1329.4	1331.0	1330.8
170°	1330.7	1330.1	1330.3	1330.5	1330.7	1331.0	1332.7	1334.5	1336.3	1338.1	1337.9
172.5°	1335.5	1335.0	1335.3	1335.7	1336.1	1336.5	1338.1	1339.7	1341.3	1342.9	1342.7
175°	1341.6	1341.1	1341.3	1341.5	1341.7	1341.9	1343.7	1345.5	1347.3	1349.0	1348.9
177.5°	1345.1	1344.6	1344.8	1345.0	1345.2	1345.3	1346.6	1347.8	1349.1	1350.3	1350.2
180°	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9
2.5°	1819.1	1812.2	1810.3	1812.8	1810.3	1812.2	1819.1	1819.7	1820.3	1825.3	1818.4
5°	1678.3	1670.5	1674.4	1672.8	1674.4	1670.5	1678.3	1686.1	1687.6	1694.7	1699.3
7.5°	1554.5	1544.8	1534.5	1537.8	1534.5	1544.8	1554.5	1554.7	1566.8	1575.9	1581.9
10°	1467.8	1460.0	1455.3	1459.2	1455.3	1460.0	1467.8	1478.0	1482.6	1493.5	1505.2
12.5°	1394.9	1390.2	1386.1	1384.4	1386.1	1390.2	1394.9	1405.6	1416.5	1429.3	1442.3
15°	1295.5	1286.2	1282.3	1272.2	1282.3	1286.2	1295.5	1304.9	1326.0	1331.4	1350.9
17.5°	1204.0	1200.9	1190.8	1186.4	1190.8	1200.9	1204.0	1212.0	1221.7	1241.8	1256.4
20°	1149.8	1146.7	1136.5	1142.8	1136.5	1146.7	1149.8	1161.5	1169.3	1185.6	1199.7
22.5°	1104.9	1098.0	1094.7	1092.9	1094.7	1098.0	1104.9	1110.3	1120.6	1135.7	1151.7
25°	1041.4	1031.3	1027.4	1022.7	1027.4	1031.3	1041.4	1044.5	1055.5	1070.3	1078.8
27.5°	978.1	972.7	967.5	966.3	967.5	972.7	978.1	982.5	992.0	1004.9	1020.4
30°	937.0	931.5	927.6	927.6	927.6	931.5	937.0	946.3	953.3	965.0	976.7
32.5°	900.2	896.0	892.1	891.5	892.1	896.0	900.2	905.2	913.4	926.4	938.7
35°	846.6	840.3	838.8	834.1	838.8	840.3	846.6	850.4	859.0	868.4	878.5
37.5°	790.9	785.7	785.6	785.1	785.6	785.7	790.9	797.8	804.9	813.3	825.8
40°	755.3	751.4	750.7	745.2	750.7	751.4	755.3	758.5	766.3	777.2	786.5
42.5°	717.3	715.3	712.6	710.3	712.6	715.3	717.3	723.5	730.1	737.9	749.7
45°	665.7	660.2	660.2	656.3	660.2	660.2	665.7	671.2	674.3	683.6	699.2
47.5°	612.4	608.2	608.6	604.6	608.6	608.2	612.4	614.1	619.1	628.3	636.9
50°	576.8	574.5	573.7	572.2	573.7	574.5	576.8	576.1	582.3	590.9	602.6
52.5°	541.3	540.2	543.2	539.7	543.2	540.2	541.3	543.0	547.4	552.8	563.9
55°	493.4	491.1	495.8	491.1	495.8	491.1	493.4	491.9	493.4	498.9	505.9
57.5°	438.4	436.2	440.4	438.1	440.4	436.2	438.4	438.7	443.4	444.2	450.4
60°	402.2	397.6	399.9	400.7	399.9	397.6	402.2	403.8	405.3	406.1	412.4
62.5°	359.2	356.4	358.1	354.5	358.1	356.4	359.2	362.6	366.1	370.0	373.7
65°	298.6	296.2	293.1	291.5	293.1	296.2	298.6	300.1	308.7	313.4	321.9
67.5°	250.8	245.2	245.1	246.3	245.1	245.2	250.8	250.5	256.8	260.5	266.3
70°	215.9	215.9	215.1	215.1	215.1	215.9	215.9	220.6	223.7	226.8	230.7
72.5°	191.6	191.0	189.6	189.0	189.6	191.0	191.6	193.2	195.0	198.2	202.0
75°	154.3	155.1	153.6	152.8	153.6	155.1	154.3	154.3	157.5	158.2	159.8
77.5°	114.0	110.7	112.4	110.7	112.4	110.7	114.0	117.1	118.2	121.6	121.8
80°	86.5	85.7	88.1	85.7	88.1	85.7	86.5	86.5	88.9	90.4	94.3
82.5°	68.4	67.7	68.8	67.0	68.8	67.7	68.4	67.8	68.9	71.1	70.6
85°	41.3	40.5	39.8	40.5	39.8	40.5	41.3	40.5	39.8	40.5	41.3
87.5°	18.7	18.2	18.4	18.5	18.4	18.2	18.7	18.0	18.4	18.2	18.0
90°	22.0	22.6	23.3	24.0	23.3	22.6	22.0	21.3	20.4	19.3	18.2
92.5°	21.4	21.7	22.1	22.4	22.1	21.7	21.4	21.1	20.4	19.3	18.2
95°	21.0	21.0	21.0	21.0	21.0	21.0	21.0	21.0	20.4	19.3	18.2
97.5°	21.0	21.0	21.0	21.0	21.0	21.0	21.0	21.0	24.1	30.4	36.6
100°	23.6	22.7	21.9	21.0	21.9	22.7	23.6	24.5	41.5	74.6	107.6
102.5°	170.9	155.8	140.7	125.6	140.7	155.8	170.9	186.0	196.6	202.9	209.1
105°	297.2	297.0	296.8	296.5	296.8	297.0	297.2	297.4	297.5	297.5	297.5
107.5°	375.8	375.2	374.5	373.8	374.5	375.2	375.8	376.5	376.8	376.8	376.7
110°	426.7	426.9	427.1	427.3	427.1	426.9	426.7	426.5	426.7	427.3	428.0



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	476.2	475.9	475.6	475.3	475.6	475.9	476.2	476.5	477.1	477.9	478.8
115°	551.2	549.8	548.5	547.2	548.5	549.8	551.2	552.5	553.6	554.5	555.4
117.5°	625.6	625.0	624.4	623.8	624.4	625.0	625.6	626.1	627.0	628.2	629.3
120°	674.3	673.2	672.1	671.0	672.1	673.2	674.3	675.4	676.2	676.6	677.1
122.5°	719.6	718.3	717.0	715.7	717.0	718.3	719.6	720.8	721.7	722.2	722.6
125°	785.8	785.1	784.5	783.8	784.5	785.1	785.8	786.5	787.2	788.1	789.0
127.5°	846.0	844.4	842.8	841.1	842.8	844.4	846.0	847.7	848.7	849.2	849.7
130°	886.0	884.9	883.8	882.6	883.8	884.9	886.0	887.1	888.0	888.6	889.3
132.5°	924.3	923.2	922.1	921.0	922.1	923.2	924.3	925.4	926.0	926.2	926.3
135°	977.5	976.2	974.8	973.5	974.8	976.2	977.5	978.8	979.7	980.2	980.6
137.5°	1029.7	1028.5	1027.4	1026.2	1027.4	1028.5	1029.7	1030.8	1031.4	1031.3	1031.2
140°	1061.4	1060.0	1058.7	1057.4	1058.7	1060.0	1061.4	1062.7	1063.1	1062.7	1062.3
142.5°	1090.9	1089.6	1088.3	1086.9	1088.3	1089.6	1090.9	1092.3	1092.9	1092.8	1092.7
145°	1134.3	1132.9	1131.6	1130.3	1131.6	1132.9	1134.3	1135.6	1136.1	1135.9	1135.7
147.5°	1170.8	1169.2	1167.6	1166.0	1167.6	1169.2	1170.8	1172.4	1173.1	1172.8	1172.5
150°	1194.5	1192.7	1190.9	1189.2	1190.9	1192.7	1194.5	1196.3	1196.9	1196.5	1196.1
152.5°	1215.5	1213.9	1212.3	1210.7	1212.3	1213.9	1215.5	1217.1	1217.7	1217.3	1216.8
155°	1244.4	1242.6	1240.9	1239.1	1240.9	1242.6	1244.4	1246.2	1246.8	1246.1	1245.4
157.5°	1268.2	1266.4	1264.6	1262.9	1264.6	1266.4	1268.2	1270.0	1270.5	1269.8	1269.1
160°	1283.4	1281.6	1279.8	1278.0	1279.8	1281.6	1283.4	1285.1	1285.6	1284.7	1283.8
162.5°	1297.5	1295.5	1293.6	1291.6	1293.6	1295.5	1297.5	1299.4	1299.8	1298.5	1297.3
165°	1315.3	1313.5	1311.8	1310.0	1311.8	1313.5	1315.3	1317.1	1317.3	1316.0	1314.6
167.5°	1328.8	1326.8	1324.8	1322.8	1324.8	1326.8	1328.8	1330.8	1331.0	1329.4	1327.8
170°	1335.9	1334.0	1332.0	1330.0	1332.0	1334.0	1335.9	1337.9	1338.1	1336.3	1334.5
172.5°	1340.7	1338.7	1336.7	1334.8	1336.7	1338.7	1340.7	1342.7	1342.9	1341.3	1339.7
175°	1346.9	1344.9	1342.9	1340.9	1342.9	1344.9	1346.9	1348.9	1349.0	1347.3	1345.5
177.5°	1348.8	1347.4	1346.0	1344.5	1346.0	1347.4	1348.8	1350.2	1350.3	1349.1	1347.8
180°	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9
2.5°	1820.3	1827.2	1830.9	1839.6	1852.1	1858.4	1867.1	1873.3	1882.1	1892.7	1901.4
5°	1702.5	1721.2	1733.6	1753.1	1771.1	1789.0	1811.6	1828.0	1849.8	1874.7	1894.2
7.5°	1593.0	1616.4	1637.1	1662.9	1692.5	1715.6	1745.0	1775.1	1809.2	1844.6	1878.0
10°	1523.2	1546.6	1572.3	1604.2	1633.9	1665.0	1700.1	1735.2	1778.1	1817.8	1863.0
12.5°	1453.9	1479.8	1508.7	1544.4	1580.2	1620.1	1655.8	1695.3	1741.3	1792.9	1841.2
15°	1368.0	1393.0	1424.2	1454.6	1495.9	1539.5	1587.1	1639.3	1690.8	1748.4	1808.5
17.5°	1275.9	1303.3	1337.6	1372.9	1416.4	1467.5	1514.1	1571.3	1629.2	1696.4	1767.0
20°	1216.0	1244.1	1284.6	1323.6	1363.4	1413.3	1468.6	1527.1	1588.6	1659.6	1738.3
22.5°	1168.6	1188.6	1228.5	1268.1	1314.7	1365.9	1420.0	1480.9	1548.1	1621.5	1704.0
25°	1098.3	1121.7	1150.6	1191.9	1240.2	1294.0	1348.6	1413.3	1486.5	1561.4	1649.4
27.5°	1035.8	1055.0	1083.5	1115.9	1164.1	1219.9	1277.9	1345.4	1420.6	1496.8	1589.4
30°	991.5	1012.6	1039.9	1074.2	1112.4	1173.2	1232.4	1298.7	1375.1	1453.8	1548.9
32.5°	952.9	974.5	998.1	1030.5	1071.8	1125.8	1186.9	1251.9	1329.5	1410.8	1503.4
35°	898.8	913.6	935.4	967.4	1007.9	1051.6	1113.9	1182.5	1258.1	1342.3	1435.1
37.5°	836.7	855.9	877.6	905.3	940.9	988.1	1046.1	1115.5	1185.6	1266.2	1350.9
40°	800.6	818.5	842.7	862.9	900.3	943.2	996.2	1068.7	1138.9	1214.5	1291.7
42.5°	763.8	781.1	801.5	826.8	860.4	902.1	951.3	1018.8	1094.0	1165.2	1229.9
45°	706.2	724.2	743.7	767.0	798.2	838.8	887.9	949.4	1014.9	1080.4	1129.5
47.5°	651.2	668.0	686.4	710.4	739.1	778.3	822.2	876.6	940.2	995.9	1031.0
50°	611.9	627.5	647.8	671.2	699.2	735.9	778.0	831.7	884.7	935.4	967.4
52.5°	573.3	590.7	611.0	631.2	658.1	694.7	733.7	780.0	830.5	871.8	898.2
55°	515.3	531.6	550.3	571.4	597.9	629.1	670.4	707.0	746.8	781.9	797.4
57.5°	459.3	473.6	491.2	513.1	536.9	565.9	598.7	633.9	662.0	686.8	704.4
60°	422.5	435.0	451.3	470.0	495.8	522.3	551.9	584.6	606.5	627.5	643.9
62.5°	385.1	396.9	412.7	429.5	452.1	476.7	505.1	531.6	552.8	567.0	585.9
65°	329.0	340.6	353.9	371.8	389.8	410.0	435.7	455.2	470.0	485.6	497.3
67.5°	276.7	286.4	299.0	313.1	328.2	347.7	367.6	383.8	394.0	403.3	417.4
70°	242.4	250.2	260.4	271.3	287.6	307.1	322.7	335.2	342.2	351.6	368.7
72.5°	207.5	216.5	226.1	237.0	250.2	266.6	280.3	292.8	297.3	304.8	315.7
75°	163.7	168.4	176.2	184.0	193.3	207.4	220.6	223.7	227.6	233.9	241.6
77.5°	123.8	128.0	131.1	136.3	143.7	155.0	162.0	166.7	167.6	169.9	177.6
80°	98.2	100.6	103.7	107.6	110.7	120.0	123.9	128.6	130.2	132.5	136.4
82.5°	72.0	74.4	76.2	79.5	84.5	88.2	92.1	96.8	97.1	98.8	99.6
85°	42.1	42.9	41.3	42.9	43.7	45.2	49.1	53.0	52.2	51.4	53.8
87.5°	18.4	18.2	17.2	18.8	17.2	17.5	17.2	17.5	18.4	19.3	20.2
90°	17.1	16.0	14.4	12.9	11.3	9.8	8.1	6.3	4.5	2.8	1.0
92.5°	17.1	16.0	14.6	13.2	11.8	10.5	10.4	11.6	12.9	14.1	15.4
95°	17.1	16.0	24.4	32.8	41.3	49.7	54.3	54.9	55.6	56.2	56.9
97.5°	42.9	49.1	65.8	82.5	99.2	115.9	123.6	122.4	121.2	120.0	118.8
100°	140.7	173.7	172.8	172.0	171.1	170.2	169.4	168.7	168.1	167.4	166.7
102.5°	215.4	221.7	221.1	220.6	220.1	219.5	218.8	218.0	217.2	216.3	215.5
105°	297.5	297.5	297.5	297.5	297.5	297.5	297.1	296.2	295.3	294.4	293.5
107.5°	376.7	376.6	376.2	375.7	375.3	374.8	374.6	374.6	374.6	374.6	374.6
110°	428.7	429.3	428.9	428.5	428.0	427.6	427.3	427.3	427.3	427.3	427.3



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	479.6	480.5	480.2	479.9	479.7	479.4	479.0	478.5	477.9	477.4	476.9
115°	556.3	557.1	556.9	556.7	556.5	556.3	555.6	554.5	553.4	552.3	551.2
117.5°	630.5	631.6	630.8	629.9	629.1	628.3	627.9	627.9	627.9	628.0	628.0
120°	677.5	678.0	677.3	676.6	676.0	675.3	675.1	675.3	675.5	675.7	676.0
122.5°	723.0	723.5	723.2	722.9	722.6	722.2	721.7	720.8	720.0	719.1	718.3
125°	789.9	790.8	790.8	790.8	790.8	790.8	790.0	788.5	786.9	785.3	783.8
127.5°	850.2	850.7	850.8	851.0	851.1	851.2	850.7	849.6	848.5	847.4	846.3
130°	890.0	890.6	890.4	890.2	890.0	889.7	889.1	888.0	886.9	885.8	884.6
132.5°	926.4	926.6	927.1	927.6	928.0	928.5	928.1	926.8	925.6	924.3	923.0
135°	981.0	981.5	981.9	982.4	982.8	983.3	982.8	981.5	980.2	978.8	977.5
137.5°	1031.1	1031.0	1031.4	1031.8	1032.2	1032.6	1032.2	1031.1	1029.9	1028.8	1027.6
140°	1061.8	1061.4	1061.6	1061.8	1062.0	1062.3	1062.1	1061.7	1061.3	1060.8	1060.4
142.5°	1092.6	1092.5	1092.2	1091.9	1091.6	1091.3	1091.0	1090.7	1090.5	1090.2	1089.9
145°	1135.5	1135.3	1135.3	1135.3	1135.3	1135.3	1135.0	1134.6	1134.1	1133.7	1133.3
147.5°	1172.3	1172.0	1171.7	1171.5	1171.2	1170.9	1170.8	1170.9	1171.0	1171.1	1171.2
150°	1195.6	1195.2	1194.7	1194.3	1193.8	1193.4	1193.4	1193.8	1194.3	1194.7	1195.2
152.5°	1216.4	1215.9	1215.5	1215.0	1214.6	1214.2	1214.4	1215.4	1216.4	1217.4	1218.3
155°	1244.8	1244.1	1243.6	1243.2	1242.8	1242.3	1242.8	1244.1	1245.4	1246.8	1248.1
157.5°	1268.4	1267.7	1267.6	1267.6	1267.5	1267.5	1267.9	1268.7	1269.5	1270.2	1271.0
160°	1282.9	1282.0	1281.8	1281.6	1281.4	1281.1	1281.7	1283.0	1284.4	1285.7	1287.0
162.5°	1296.1	1294.8	1294.6	1294.4	1294.1	1293.9	1294.5	1295.8	1297.1	1298.5	1299.8
165°	1313.3	1312.0	1311.8	1311.5	1311.3	1311.1	1311.7	1313.0	1314.3	1315.6	1317.0
167.5°	1326.2	1324.6	1324.3	1324.1	1323.9	1323.7	1324.3	1325.6	1327.0	1328.4	1329.8
170°	1332.7	1331.0	1330.7	1330.5	1330.3	1330.1	1330.7	1332.3	1333.8	1335.4	1336.9
172.5°	1338.1	1336.5	1336.1	1335.7	1335.3	1335.0	1335.5	1337.1	1338.6	1340.2	1341.7
175°	1343.7	1341.9	1341.7	1341.5	1341.3	1341.1	1341.6	1342.9	1344.3	1345.6	1346.9
177.5°	1346.6	1345.3	1345.2	1345.0	1344.8	1344.6	1345.1	1346.1	1347.2	1348.3	1349.3
180°	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9
2.5°	1908.2	1913.9	1922.0	1931.3	1938.8	1946.9	1951.3	1951.3	1955.0	1963.1	1973.7
5°	1913.7	1934.0	1953.5	1978.4	1997.9	2020.5	2037.6	2054.0	2068.8	2087.5	2107.0
7.5°	1912.1	1945.8	1980.9	2020.2	2063.5	2098.0	2133.4	2161.1	2188.6	2224.4	2252.6
10°	1905.9	1949.6	1997.1	2047.0	2101.6	2149.1	2192.0	2231.0	2268.4	2307.4	2342.4
12.5°	1894.7	1950.2	2008.3	2068.2	2137.1	2191.5	2246.9	2288.3	2332.0	2374.7	2417.9
15°	1877.8	1943.3	2013.5	2096.9	2181.1	2241.9	2296.4	2350.2	2390.8	2439.1	2480.4
17.5°	1843.1	1927.4	2015.7	2106.9	2187.8	2258.4	2315.6	2366.8	2409.9	2463.1	2519.2
20°	1822.5	1913.7	2005.7	2103.1	2180.3	2252.8	2308.1	2361.1	2414.9	2484.3	2552.9
22.5°	1793.8	1891.3	1988.8	2081.3	2162.8	2232.8	2290.1	2354.9	2425.5	2504.3	2587.2
25°	1748.4	1849.0	1945.7	2033.7	2113.3	2185.0	2262.9	2350.2	2436.0	2539.7	2658.9
27.5°	1690.9	1787.9	1874.1	1967.2	2046.2	2137.4	2234.7	2329.3	2453.0	2595.6	2744.5
30°	1647.9	1739.9	1821.7	1909.8	1999.4	2100.0	2209.1	2320.6	2467.9	2635.5	2812.5
32.5°	1598.0	1681.3	1762.5	1847.4	1950.8	2061.3	2177.3	2313.7	2489.8	2680.4	2863.6
35°	1511.5	1586.3	1665.0	1759.4	1869.3	1989.3	2137.4	2303.5	2516.3	2721.3	2885.8
37.5°	1420.7	1479.8	1558.9	1658.3	1778.1	1917.0	2085.0	2286.8	2505.4	2689.3	2759.3
40°	1350.9	1406.2	1489.6	1594.1	1712.6	1864.6	2053.2	2260.6	2480.4	2608.2	2602.8
42.5°	1281.7	1337.6	1417.9	1523.0	1646.5	1816.6	2010.8	2226.3	2411.8	2460.5	2359.0
45°	1175.5	1227.7	1306.5	1412.5	1545.0	1723.5	1927.7	2134.3	2252.8	2174.1	1972.9
47.5°	1067.3	1118.0	1191.1	1294.9	1439.6	1626.4	1819.5	1989.0	2005.7	1836.5	1595.3
50°	996.2	1043.8	1113.1	1223.8	1364.1	1546.6	1732.9	1866.2	1824.8	1618.3	1369.6
52.5°	927.0	972.7	1037.7	1142.1	1285.6	1464.2	1630.6	1735.2	1639.6	1420.0	1196.2
55°	824.7	868.4	933.9	1029.7	1159.9	1323.6	1469.4	1507.6	1367.3	1145.9	965.0
57.5°	727.6	759.6	824.3	909.1	1034.6	1178.9	1283.4	1276.5	1121.7	922.3	792.6
60°	663.4	692.2	753.8	831.7	951.0	1080.4	1153.7	1122.5	965.8	801.3	676.6
62.5°	603.5	630.5	682.1	753.8	856.2	968.8	1022.1	979.1	831.1	686.6	587.4
65°	512.9	532.4	573.7	640.0	720.3	798.2	845.8	782.6	651.7	542.5	467.7
67.5°	428.3	445.1	481.9	529.4	584.8	638.6	657.9	598.7	496.9	423.3	370.6
70°	373.4	389.0	413.9	458.4	495.0	533.2	542.5	489.5	404.6	348.4	315.7
72.5°	321.0	335.3	357.2	388.5	413.9	435.9	440.3	391.0	326.0	287.3	262.1
75°	244.8	257.2	271.3	283.0	299.3	303.2	301.7	263.5	228.4	202.7	188.6
77.5°	179.9	185.1	193.6	198.3	199.1	198.8	190.8	166.7	148.6	138.0	132.2
80°	138.8	142.7	145.0	146.5	147.3	139.5	131.0	116.1	109.9	103.7	96.7
82.5°	100.7	103.4	105.7	106.0	101.8	95.3	87.3	80.0	75.6	72.5	69.8
85°	54.6	55.3	54.6	50.7	45.2	42.9	41.3	39.8	39.0	38.2	38.2
87.5°	19.9	18.4	15.6	16.6	16.9	16.6	16.9	16.6	16.3	16.5	16.7
90°	2.8	4.5	6.3	8.1	9.8	11.3	12.9	14.4	16.0	17.1	18.2
92.5°	14.1	12.9	11.6	10.4	10.5	11.8	13.2	14.6	16.0	17.1	18.2
95°	56.2	55.6	54.9	54.3	49.7	41.3	32.8	24.4	16.0	17.1	18.2
97.5°	120.0	121.2	122.4	123.6	115.9	99.2	82.5	65.8	49.1	42.9	36.6
100°	167.4	168.1	168.7	169.4	170.2	171.1	172.0	172.8	173.7	140.7	107.6
102.5°	216.3	217.2	218.0	218.8	219.5	220.1	220.6	221.1	221.7	215.4	209.1
105°	294.4	295.3	296.2	297.1	297.5	297.5	297.5	297.5	297.5	297.5	297.5
107.5°	374.6	374.6	374.6	374.6	374.8	375.3	375.7	376.2	376.6	376.7	376.7
110°	427.3	427.3	427.3	427.3	427.6	428.0	428.5	428.9	429.3	428.7	428.0



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	477.4	477.9	478.5	479.0	479.4	479.7	479.9	480.2	480.5	479.6	478.8
115°	552.3	553.4	554.5	555.6	556.3	556.5	556.7	556.9	557.1	556.3	555.4
117.5°	628.0	627.9	627.9	627.9	628.3	629.1	629.9	630.8	631.6	630.5	629.3
120°	675.7	675.5	675.3	675.1	675.3	676.0	676.6	677.3	678.0	677.5	677.1
122.5°	719.1	720.0	720.8	721.7	722.2	722.6	722.9	723.2	723.5	723.0	722.6
125°	785.3	786.9	788.5	790.0	790.8	790.8	790.8	790.8	790.8	789.9	789.0
127.5°	847.4	848.5	849.6	850.7	851.2	851.1	851.0	850.8	850.7	850.2	849.7
130°	885.8	886.9	888.0	889.1	889.7	890.0	890.2	890.4	890.6	890.0	889.3
132.5°	924.3	925.6	926.8	928.1	928.5	928.0	927.6	927.1	926.6	926.4	926.3
135°	978.8	980.2	981.5	982.8	983.3	982.8	982.4	981.9	981.5	981.0	980.6
137.5°	1028.8	1029.9	1031.1	1032.2	1032.6	1032.2	1031.8	1031.4	1031.0	1031.1	1031.2
140°	1060.8	1061.3	1061.7	1062.1	1062.3	1062.0	1061.8	1061.6	1061.4	1061.8	1062.3
142.5°	1090.2	1090.5	1090.7	1091.0	1091.3	1091.6	1091.9	1092.2	1092.5	1092.6	1092.7
145°	1133.7	1134.1	1134.6	1135.0	1135.3	1135.3	1135.3	1135.3	1135.3	1135.5	1135.7
147.5°	1171.1	1171.0	1170.9	1170.8	1170.9	1171.2	1171.5	1171.7	1172.0	1172.3	1172.5
150°	1194.7	1194.3	1193.8	1193.4	1193.4	1193.8	1194.3	1194.7	1195.2	1195.6	1196.1
152.5°	1217.4	1216.4	1215.4	1214.4	1214.2	1214.6	1215.0	1215.5	1215.9	1216.4	1216.8
155°	1246.8	1245.4	1244.1	1242.8	1242.3	1242.8	1243.2	1243.6	1244.1	1244.8	1245.4
157.5°	1270.2	1269.5	1268.7	1267.9	1267.5	1267.5	1267.6	1267.6	1267.7	1268.4	1269.1
160°	1285.7	1284.4	1283.0	1281.7	1281.1	1281.4	1281.6	1281.8	1282.0	1282.9	1283.8
162.5°	1298.5	1297.1	1295.8	1294.5	1293.9	1294.1	1294.4	1294.6	1294.8	1296.1	1297.3
165°	1315.6	1314.3	1313.0	1311.7	1311.1	1311.3	1311.5	1311.8	1312.0	1313.3	1314.6
167.5°	1328.4	1327.0	1325.6	1324.3	1323.7	1323.9	1324.1	1324.3	1324.6	1326.2	1327.8
170°	1335.4	1333.8	1332.3	1330.7	1330.1	1330.3	1330.5	1330.7	1331.0	1332.7	1334.5
172.5°	1340.2	1338.6	1337.1	1335.5	1335.0	1335.3	1335.7	1336.1	1336.5	1338.1	1339.7
175°	1345.6	1344.3	1342.9	1341.6	1341.1	1341.3	1341.5	1341.7	1341.9	1343.7	1345.5
177.5°	1348.3	1347.2	1346.1	1345.1	1344.6	1344.8	1345.0	1345.2	1345.3	1346.6	1347.8
180°	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9
2.5°	1981.8	1981.8	1992.4	1991.8	1998.7	1996.2	1997.4
5°	2130.4	2143.7	2155.4	2163.1	2174.8	2178.0	2176.4
7.5°	2284.4	2313.9	2328.2	2347.9	2351.5	2361.8	2360.7
10°	2379.9	2408.7	2430.5	2447.7	2456.2	2467.2	2467.9
12.5°	2454.7	2479.2	2498.5	2514.4	2524.8	2528.3	2530.3
15°	2513.1	2540.4	2563.0	2585.6	2598.9	2609.0	2614.5
17.5°	2572.1	2614.2	2654.1	2684.8	2703.2	2718.8	2718.6
20°	2617.6	2665.9	2715.8	2750.9	2786.8	2802.3	2804.7
22.5°	2666.2	2740.1	2804.4	2858.8	2905.9	2922.1	2928.2
25°	2767.3	2863.9	2962.9	3039.3	3093.9	3125.8	3130.5
27.5°	2889.3	3020.1	3124.3	3194.8	3240.1	3263.8	3269.0
30°	2975.4	3096.2	3189.8	3242.8	3263.8	3266.9	3255.2
32.5°	3014.1	3104.3	3141.7	3138.6	3097.3	3069.9	3059.4
35°	2966.8	2948.1	2856.9	2747.8	2664.4	2611.4	2597.3
37.5°	2699.9	2538.6	2370.8	2205.9	2118.1	2073.5	1996.8
40°	2436.8	2206.8	2032.2	1893.4	1794.4	1714.9	1696.2
42.5°	2139.9	1902.5	1727.9	1609.1	1530.0	1475.5	1451.8
45°	1719.6	1515.4	1371.2	1280.0	1219.2	1179.4	1161.5
47.5°	1375.4	1217.3	1112.2	1044.7	998.4	963.8	954.1
50°	1186.4	1060.1	971.3	914.4	879.3	852.8	841.9
52.5°	1030.5	928.6	860.3	813.3	780.1	763.6	754.6
55°	850.4	762.4	713.3	675.8	657.1	643.9	637.6
57.5°	695.5	631.9	596.0	570.1	552.8	544.4	541.3
60°	608.8	558.9	526.2	505.9	494.2	483.3	480.2
62.5°	532.1	492.8	467.6	449.8	438.1	433.4	431.5
65°	428.7	403.0	384.3	373.4	364.0	362.5	361.7
67.5°	340.8	325.7	315.9	304.5	301.2	295.7	294.7
70°	291.5	281.4	269.7	265.8	261.9	256.5	257.2
72.5°	247.3	237.1	229.2	224.0	222.6	220.3	222.3
75°	180.8	177.7	174.6	170.7	169.2	169.2	168.4
77.5°	129.1	126.4	123.0	120.7	120.2	116.9	118.2
80°	93.5	89.6	88.1	88.9	86.5	85.7	85.7
82.5°	69.2	67.8	66.3	66.4	65.9	65.2	65.8
85°	38.2	37.4	37.4	36.6	36.6	35.9	35.9
87.5°	17.6	18.4	17.4	16.9	17.0	17.8	18.5
90°	19.3	20.4	21.3	22.0	22.6	23.3	24.0
92.5°	19.3	20.4	21.1	21.4	21.7	22.1	22.4
95°	19.3	20.4	21.0	21.0	21.0	21.0	21.0
97.5°	30.4	24.1	21.0	21.0	21.0	21.0	21.0
100°	74.6	41.5	24.5	23.6	22.7	21.9	21.0
102.5°	202.9	196.6	186.0	170.9	155.8	140.7	125.6
105°	297.5	297.5	297.4	297.2	297.0	296.8	296.5
107.5°	376.8	376.8	376.5	375.8	375.2	374.5	373.8
110°	427.3	426.7	426.5	426.7	426.9	427.1	427.3



TEST NUMBER: P333628

CATALOG NUMBER: S125RDIP-S1270D1035U835-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	477.9	477.1	476.5	476.2	475.9	475.6	475.3
115°	554.5	553.6	552.5	551.2	549.8	548.5	547.2
117.5°	628.2	627.0	626.1	625.6	625.0	624.4	623.8
120°	676.6	676.2	675.4	674.3	673.2	672.1	671.0
122.5°	722.2	721.7	720.8	719.6	718.3	717.0	715.7
125°	788.1	787.2	786.5	785.8	785.1	784.5	783.8
127.5°	849.2	848.7	847.7	846.0	844.4	842.8	841.1
130°	888.6	888.0	887.1	886.0	884.9	883.8	882.6
132.5°	926.2	926.0	925.4	924.3	923.2	922.1	921.0
135°	980.2	979.7	978.8	977.5	976.2	974.8	973.5
137.5°	1031.3	1031.4	1030.8	1029.7	1028.5	1027.4	1026.2
140°	1062.7	1063.1	1062.7	1061.4	1060.0	1058.7	1057.4
142.5°	1092.8	1092.9	1092.3	1090.9	1089.6	1088.3	1086.9
145°	1135.9	1136.1	1135.6	1134.3	1132.9	1131.6	1130.3
147.5°	1172.8	1173.1	1172.4	1170.8	1169.2	1167.6	1166.0
150°	1196.5	1196.9	1196.3	1194.5	1192.7	1190.9	1189.2
152.5°	1217.3	1217.7	1217.1	1215.5	1213.9	1212.3	1210.7
155°	1246.1	1246.8	1246.2	1244.4	1242.6	1240.9	1239.1
157.5°	1269.8	1270.5	1270.0	1268.2	1266.4	1264.6	1262.9
160°	1284.7	1285.6	1285.1	1283.4	1281.6	1279.8	1278.0
162.5°	1298.5	1299.8	1299.4	1297.5	1295.5	1293.6	1291.6
165°	1316.0	1317.3	1317.1	1315.3	1313.5	1311.8	1310.0
167.5°	1329.4	1331.0	1330.8	1328.8	1326.8	1324.8	1322.8
170°	1336.3	1338.1	1337.9	1335.9	1334.0	1332.0	1330.0
172.5°	1341.3	1342.9	1342.7	1340.7	1338.7	1336.7	1334.8
175°	1347.3	1349.0	1348.9	1346.9	1344.9	1342.9	1340.9
177.5°	1349.1	1350.3	1350.2	1348.8	1347.4	1346.0	1344.5
180°	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9

(END OF REPORT)