

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333635

Luminaire Tested: **S125RDIP-S1270D1205U835-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333635
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9089.7 lumens
Efficiency: N/A
Efficacy: 126.8 lumens/watt
Spacing Criteria (0/90/45): 1.4 / 1.22 / 1.47
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

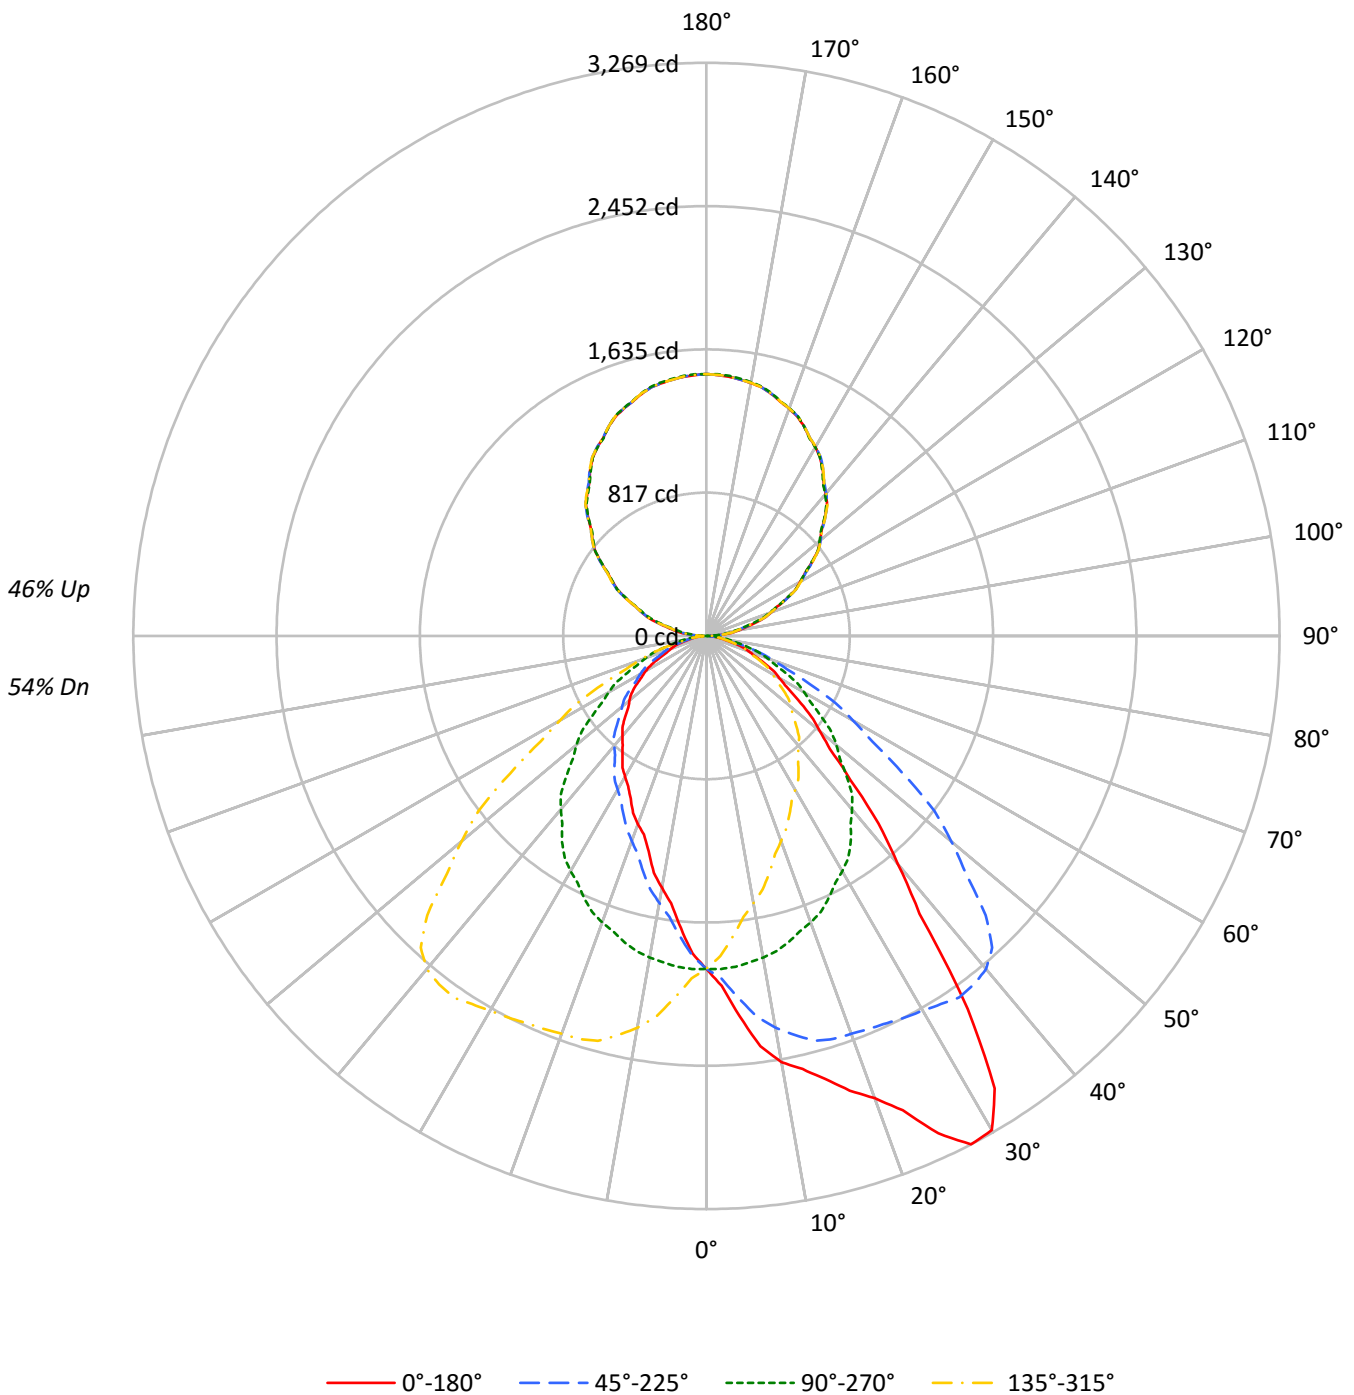



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	72	72	72	60	60	60	54
1	99	95	91	88	92	88	85	82	76	73	71	64	63	61	54	53	52	47
2	91	83	78	73	84	78	73	68	67	63	60	57	54	52	48	46	44	40
3	83	74	67	61	77	69	62	57	59	55	51	51	47	44	43	40	38	34
4	76	65	58	52	70	61	54	49	53	48	44	45	41	38	38	35	33	30
5	70	58	51	45	65	55	48	42	48	42	38	41	37	33	35	31	29	26
6	65	53	45	39	60	49	42	37	43	37	33	37	33	29	32	28	26	23
7	60	48	40	34	55	45	38	32	39	33	29	34	29	26	29	25	23	20
8	55	43	36	30	51	41	34	29	36	30	26	31	26	23	27	23	20	18
9	52	40	32	27	48	37	30	26	33	27	23	28	24	21	24	21	19	16
10	48	36	29	24	45	34	28	23	30	25	21	26	22	19	23	19	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	12264	12264	12264	12264
5°	14110	12280	10845	12280
10°	16184	12218	9569	12218
15°	17481	12092	8506	12092
20°	19276	11947	7854	11947
25°	22308	11754	7288	11754
30°	24276	11551	6918	11551
35°	20478	11315	6576	11315
40°	14300	10890	6283	10890
45°	10609	10316	5994	10316
50°	8459	9720	5749	9720
55°	7179	8979	5530	8979
60°	6203	8317	5176	8317
65°	5527	7600	4455	7600
70°	4857	6962	4062	6962
75°	4202	6029	3813	6029
80°	3187	5073	3187	5073
85°	2660	3987	3001	3987



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	182.1	2.0
10°-20°	533.6	5.9
20°-30°	846.1	9.3
30°-40°	1020.3	11.2
40°-50°	911.2	10.0
50°-60°	698.8	7.7
60°-70°	454.1	5.0
70°-80°	220.8	2.4
80°-90°	56.0	0.6
90°-100°	100.0	1.1
100°-110°	295.3	3.2
110°-120°	500.2	5.5
120°-130°	658.3	7.2
130°-140°	737.7	8.1
140°-150°	723.0	8.0
150°-160°	607.3	6.7
160°-170°	403.7	4.4
170°-180°	141.3	1.6
0°-30°	1561.8	17.2
0°-40°	2582.2	28.4
0°-60°	4192.1	46.1
0°-90°	4923.0	54.2
90°-120°	895.6	9.9
90°-150°	3014.6	33.2
90°-180°	4167.0	45.8
0°-180°	9089.7	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1899	1899	1899	1899	1899	
5°	2176	1894	1673	1894	2176	217
15°	2614	1808	1272	1808	2614	749
25°	3130	1649	1023	1649	3130	1437
35°	2597	1435	834	1435	2597	1569
45°	1162	1130	656	1130	1162	927
55°	638	797	491	797	638	579
65°	362	497	292	497	362	360
75°	168	242	153	242	168	179
85°	36	54	40	54	36	42
90°	28	1	28	1	28	18
95°	100	76	100	76	100	102
105°	288	265	288	265	288	305
115°	506	501	506	501	506	500
125°	736	731	736	731	736	657
135°	954	951	954	951	954	736
145°	1156	1152	1156	1152	1156	722
155°	1318	1318	1318	1318	1318	606
165°	1429	1433	1429	1433	1429	403
175°	1484	1490	1484	1490	1484	141
180°	1493	1493	1493	1493	1493	



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9
2.5°	1997.4	1996.2	1998.7	1991.8	1992.4	1981.8	1981.8	1973.7	1963.1	1955.0	1951.3
5°	2176.4	2178.0	2174.8	2163.1	2155.4	2143.7	2130.4	2107.0	2087.5	2068.8	2054.0
7.5°	2360.7	2361.8	2351.5	2347.9	2328.2	2313.9	2284.4	2252.6	2224.4	2188.6	2161.1
10°	2467.9	2467.2	2456.2	2447.7	2430.5	2408.7	2379.9	2342.4	2307.4	2268.4	2231.0
12.5°	2530.3	2528.3	2524.8	2514.4	2498.5	2479.2	2454.7	2417.9	2374.7	2332.0	2288.3
15°	2614.5	2609.0	2598.9	2585.6	2563.0	2540.4	2513.1	2480.4	2439.1	2390.8	2350.2
17.5°	2718.6	2718.8	2703.2	2684.8	2654.1	2614.2	2572.1	2519.2	2463.1	2409.9	2366.8
20°	2804.7	2802.3	2786.8	2750.9	2715.8	2665.9	2617.6	2552.9	2484.3	2414.9	2361.1
22.5°	2928.2	2922.1	2905.9	2858.8	2804.4	2740.1	2666.2	2587.2	2504.3	2425.5	2354.9
25°	3130.5	3125.8	3093.9	3039.3	2962.9	2863.9	2767.3	2658.9	2539.7	2436.0	2350.2
27.5°	3269.0	3263.8	3240.1	3194.8	3124.3	3020.1	2889.3	2744.5	2595.6	2453.0	2329.3
30°	3255.2	3266.9	3263.8	3242.8	3189.8	3096.2	2975.4	2812.5	2635.5	2467.9	2320.6
32.5°	3059.4	3069.9	3097.3	3138.6	3141.7	3104.3	3014.1	2863.6	2680.4	2489.8	2313.7
35°	2597.3	2611.4	2664.4	2747.8	2856.9	2948.1	2966.8	2885.8	2721.3	2516.3	2303.5
37.5°	1996.8	2073.5	2118.1	2205.9	2370.8	2538.6	2699.9	2759.3	2689.3	2505.4	2286.8
40°	1696.2	1714.9	1794.4	1893.4	2032.2	2206.8	2436.8	2602.8	2608.2	2480.4	2260.6
42.5°	1451.8	1475.5	1530.0	1609.1	1727.9	1902.5	2139.9	2359.0	2460.5	2411.8	2226.3
45°	1161.5	1179.4	1219.2	1280.0	1371.2	1515.4	1719.6	1972.9	2174.1	2252.8	2134.3
47.5°	954.1	963.8	998.4	1044.7	1112.2	1217.3	1375.4	1595.3	1836.5	2005.7	1989.0
50°	841.9	852.8	879.3	914.4	971.3	1060.1	1186.4	1369.6	1618.3	1824.8	1866.2
52.5°	754.6	763.6	780.1	813.3	860.3	928.6	1030.5	1196.2	1420.0	1639.6	1735.2
55°	637.6	643.9	657.1	675.8	713.3	762.4	850.4	965.0	1145.9	1367.3	1507.6
57.5°	541.3	544.4	552.8	570.1	596.0	631.9	695.5	792.6	922.3	1121.7	1276.5
60°	480.2	483.3	494.2	505.9	526.2	558.9	608.8	676.6	801.3	965.8	1122.5
62.5°	431.5	433.4	438.1	449.8	467.6	492.8	532.1	587.4	686.6	831.1	979.1
65°	361.7	362.5	364.0	373.4	384.3	403.0	428.7	467.7	542.5	651.7	782.6
67.5°	294.7	295.7	301.2	304.5	315.9	325.7	340.8	370.6	423.3	496.9	598.7
70°	257.2	256.5	261.9	265.8	269.7	281.4	291.5	315.7	348.4	404.6	489.5
72.5°	222.3	220.3	222.6	224.0	229.2	237.1	247.3	262.1	287.3	326.0	391.0
75°	168.4	169.2	169.2	170.7	174.6	177.7	180.8	188.6	202.7	228.4	263.5
77.5°	118.2	116.9	120.2	120.7	123.0	126.4	129.1	132.2	138.0	148.6	166.7
80°	85.7	85.7	86.5	88.9	88.1	89.6	93.5	96.7	103.7	109.9	116.1
82.5°	65.8	65.2	65.9	66.4	66.3	67.8	69.2	69.8	72.5	75.6	80.0
85°	35.9	35.9	36.6	36.6	37.4	37.4	38.2	38.2	38.2	39.0	39.8
87.5°	19.3	18.5	17.7	17.6	18.1	19.1	18.2	17.3	17.1	16.8	17.1
90°	27.9	27.1	26.3	25.6	24.8	23.8	22.5	21.2	19.9	18.6	16.8
92.5°	54.8	54.3	53.7	53.1	52.6	51.4	49.7	48.0	46.3	44.6	42.4
95°	99.9	99.4	98.9	98.4	97.9	96.7	94.9	93.1	91.3	89.5	86.9
97.5°	151.5	151.2	150.9	150.6	150.3	149.3	147.6	145.9	144.2	142.5	138.9
100°	190.6	190.1	189.5	189.0	188.5	187.1	184.8	182.4	180.1	177.8	174.4
102.5°	229.6	228.9	228.2	227.5	226.7	225.1	222.6	220.0	217.5	215.0	213.3
105°	288.2	287.4	286.6	285.9	285.1	283.9	282.4	280.8	279.3	277.7	276.2
107.5°	348.1	348.2	348.3	348.3	348.4	348.0	347.2	346.4	345.7	344.9	343.7
110°	392.8	393.0	393.3	393.5	393.8	393.5	392.8	392.0	391.2	390.4	389.7



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	436.5	436.9	437.4	437.9	438.3	438.4	438.0	437.7	437.3	436.9	435.9
115°	505.5	505.7	506.0	506.3	506.5	506.8	507.0	507.3	507.6	507.8	507.3
117.5°	572.9	573.9	575.0	576.0	577.0	577.4	577.2	577.0	576.8	576.6	576.1
120°	619.4	620.4	621.4	622.5	623.5	624.0	624.0	624.0	624.0	624.0	623.8
122.5°	665.9	666.7	667.5	668.3	669.2	669.7	669.9	670.1	670.3	670.5	669.8
125°	735.6	735.8	736.1	736.4	736.6	737.0	737.5	738.0	738.5	739.1	738.8
127.5°	802.5	803.0	803.5	804.1	804.6	805.0	805.2	805.5	805.7	806.0	805.7
130°	847.1	847.6	848.2	848.7	849.2	849.6	849.8	850.1	850.4	850.6	850.1
132.5°	889.0	889.7	890.4	891.1	891.9	892.3	892.6	892.9	893.1	893.4	893.5
135°	954.0	955.1	956.1	957.1	958.2	958.7	958.7	958.7	958.7	958.7	958.4
137.5°	1017.7	1019.0	1020.3	1021.6	1022.9	1023.4	1023.1	1022.8	1022.4	1022.1	1021.6
140°	1058.6	1059.9	1061.2	1062.5	1063.8	1064.2	1063.7	1063.1	1062.6	1062.1	1061.3
142.5°	1097.7	1099.0	1100.3	1101.5	1102.8	1103.3	1103.0	1102.7	1102.4	1102.1	1101.1
145°	1156.2	1157.0	1157.8	1158.6	1159.3	1159.7	1159.7	1159.7	1159.7	1159.7	1158.9
147.5°	1206.2	1208.0	1209.7	1211.5	1213.2	1213.8	1213.2	1212.6	1211.9	1211.3	1210.7
150°	1243.4	1243.9	1244.4	1244.9	1245.5	1245.7	1245.7	1245.7	1245.7	1245.7	1244.7
152.5°	1274.1	1275.0	1275.9	1276.9	1277.8	1277.9	1277.3	1276.7	1276.1	1275.5	1275.1
155°	1317.8	1319.1	1320.3	1321.6	1322.9	1323.1	1322.0	1321.0	1320.0	1318.9	1318.7
157.5°	1354.3	1356.0	1357.7	1359.4	1361.1	1361.4	1360.4	1359.3	1358.3	1357.3	1357.0
160°	1379.4	1380.6	1381.9	1383.2	1384.5	1384.6	1383.6	1382.6	1381.5	1380.5	1380.3
162.5°	1400.7	1402.2	1403.7	1405.2	1406.7	1406.9	1405.6	1404.4	1403.1	1401.9	1401.8
165°	1429.3	1430.9	1432.4	1434.0	1435.5	1435.8	1434.7	1433.7	1432.7	1431.6	1431.4
167.5°	1452.1	1453.7	1455.3	1456.9	1458.5	1458.5	1457.0	1455.4	1453.9	1452.3	1452.3
170°	1464.2	1466.0	1467.8	1469.6	1471.4	1471.5	1470.0	1468.4	1466.9	1465.3	1465.3
172.5°	1474.4	1476.0	1477.6	1479.2	1480.8	1480.8	1479.3	1477.7	1476.2	1474.6	1474.6
175°	1483.9	1485.7	1487.6	1489.4	1491.2	1491.3	1489.7	1488.2	1486.6	1485.1	1485.1
177.5°	1489.5	1491.0	1492.4	1493.9	1495.3	1495.4	1494.2	1492.9	1491.7	1490.4	1490.6
180°	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9
2.5°	1951.3	1946.9	1938.8	1931.3	1922.0	1913.9	1908.2	1901.4	1892.7	1882.1	1873.3
5°	2037.6	2020.5	1997.9	1978.4	1953.5	1934.0	1913.7	1894.2	1874.7	1849.8	1828.0
7.5°	2133.4	2098.0	2063.5	2020.2	1980.9	1945.8	1912.1	1878.0	1844.6	1809.2	1775.1
10°	2192.0	2149.1	2101.6	2047.0	1997.1	1949.6	1905.9	1863.0	1817.8	1778.1	1735.2
12.5°	2246.9	2191.5	2137.1	2068.2	2008.3	1950.2	1894.7	1841.2	1792.9	1741.3	1695.3
15°	2296.4	2241.9	2181.1	2096.9	2013.5	1943.3	1877.8	1808.5	1748.4	1690.8	1639.3
17.5°	2315.6	2258.4	2187.8	2106.9	2015.7	1927.4	1843.1	1767.0	1696.4	1629.2	1571.3
20°	2308.1	2252.8	2180.3	2103.1	2005.7	1913.7	1822.5	1738.3	1659.6	1588.6	1527.1
22.5°	2290.1	2232.8	2162.8	2081.3	1988.8	1891.3	1793.8	1704.0	1621.5	1548.1	1480.9
25°	2262.9	2185.0	2113.3	2033.7	1945.7	1849.0	1748.4	1649.4	1561.4	1486.5	1413.3
27.5°	2234.7	2137.4	2046.2	1967.2	1874.1	1787.9	1690.9	1589.4	1496.8	1420.6	1345.4
30°	2209.1	2100.0	1999.4	1909.8	1821.7	1739.9	1647.9	1548.9	1453.8	1375.1	1298.7
32.5°	2177.3	2061.3	1950.8	1847.4	1762.5	1681.3	1598.0	1503.4	1410.8	1329.5	1251.9
35°	2137.4	1989.3	1869.3	1759.4	1665.0	1586.3	1511.5	1435.1	1342.3	1258.1	1182.5
37.5°	2085.0	1917.0	1778.1	1658.3	1558.9	1479.8	1420.7	1350.9	1266.2	1185.6	1115.5
40°	2053.2	1864.6	1712.6	1594.1	1489.6	1406.2	1350.9	1291.7	1214.5	1138.9	1068.7
42.5°	2010.8	1816.6	1646.5	1523.0	1417.9	1337.6	1281.7	1229.9	1165.2	1094.0	1018.8
45°	1927.7	1723.5	1545.0	1412.5	1306.5	1227.7	1175.5	1129.5	1080.4	1014.9	949.4
47.5°	1819.5	1626.4	1439.6	1294.9	1191.1	1118.0	1067.3	1031.0	995.9	940.2	876.6
50°	1732.9	1546.6	1364.1	1223.8	1113.1	1043.8	996.2	967.4	935.4	884.7	831.7
52.5°	1630.6	1464.2	1285.6	1142.1	1037.7	972.7	927.0	898.2	871.8	830.5	780.0
55°	1469.4	1323.6	1159.9	1029.7	933.9	868.4	824.7	797.4	781.9	746.8	707.0
57.5°	1283.4	1178.9	1034.6	909.1	824.3	759.6	727.6	704.4	686.8	662.0	633.9
60°	1153.7	1080.4	951.0	831.7	753.8	692.2	663.4	643.9	627.5	606.5	584.6
62.5°	1022.1	968.8	856.2	753.8	682.1	630.5	603.5	585.9	567.0	552.8	531.6
65°	845.8	798.2	720.3	640.0	573.7	532.4	512.9	497.3	485.6	470.0	455.2
67.5°	657.9	638.6	584.8	529.4	481.9	445.1	428.3	417.4	403.3	394.0	383.8
70°	542.5	533.2	495.0	458.4	413.9	389.0	373.4	368.7	351.6	342.2	335.2
72.5°	440.3	435.9	413.9	388.5	357.2	335.3	321.0	315.7	304.8	297.3	292.8
75°	301.7	303.2	299.3	283.0	271.3	257.2	244.8	241.6	233.9	227.6	223.7
77.5°	190.8	198.8	199.1	198.3	193.6	185.1	179.9	177.6	169.9	167.6	166.7
80°	131.0	139.5	147.3	146.5	145.0	142.7	138.8	136.4	132.5	130.2	128.6
82.5°	87.3	95.3	101.8	106.0	105.7	103.4	100.7	99.6	98.8	97.1	96.8
85°	41.3	42.9	45.2	50.7	54.6	55.3	54.6	53.8	51.4	52.2	53.0
87.5°	17.3	17.0	17.2	16.9	15.8	18.5	20.0	20.2	19.4	18.5	17.7
90°	15.0	13.2	11.4	9.4	7.4	5.3	3.2	1.2	3.2	5.3	7.4
92.5°	40.2	38.0	35.7	33.9	32.5	31.0	29.6	28.1	29.6	31.0	32.5
95°	84.3	81.7	79.1	77.6	77.1	76.6	76.0	75.5	76.0	76.6	77.1
97.5°	135.3	131.8	128.2	126.3	126.1	125.9	125.7	125.5	125.7	125.9	126.1
100°	171.1	167.7	164.4	162.7	162.7	162.7	162.7	162.7	162.7	162.7	162.7
102.5°	211.6	209.9	208.2	206.8	205.8	204.7	203.7	202.7	203.7	204.7	205.8
105°	274.6	273.1	271.5	270.1	268.8	267.5	266.2	264.9	266.2	267.5	268.8
107.5°	342.5	341.3	340.1	338.9	337.6	336.3	335.0	333.7	335.0	336.3	337.6
110°	388.9	388.1	387.3	386.3	385.0	383.7	382.4	381.2	382.4	383.7	385.0



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	435.0	434.0	433.0	432.2	431.5	430.8	430.2	429.5	430.2	430.8	431.5
115°	506.8	506.3	505.7	505.0	503.9	502.9	501.9	500.8	501.9	502.9	503.9
117.5°	575.7	575.2	574.7	574.3	573.8	573.4	572.9	572.4	572.9	573.4	573.8
120°	623.5	623.2	623.0	622.2	620.9	619.6	618.3	617.0	618.3	619.6	620.9
122.5°	669.2	668.5	667.8	667.2	666.8	666.3	665.9	665.4	665.9	666.3	666.8
125°	738.5	738.3	738.0	737.1	735.6	734.0	732.5	730.9	732.5	734.0	735.6
127.5°	805.4	805.1	804.8	804.2	803.3	802.4	801.5	800.7	801.5	802.4	803.3
130°	849.6	849.1	848.6	847.6	846.4	845.1	843.8	842.5	843.8	845.1	846.4
132.5°	893.6	893.7	893.8	892.8	890.7	888.6	886.4	884.3	886.4	888.6	890.7
135°	958.2	957.9	957.7	956.8	955.2	953.7	952.1	950.6	952.1	953.7	955.2
137.5°	1021.0	1020.4	1019.9	1018.8	1017.3	1015.8	1014.3	1012.8	1014.3	1015.8	1017.3
140°	1060.6	1059.8	1059.0	1058.0	1056.7	1055.4	1054.1	1052.8	1054.1	1055.4	1056.7
142.5°	1100.1	1099.1	1098.2	1097.1	1096.0	1095.0	1093.9	1092.8	1093.9	1095.0	1096.0
145°	1158.2	1157.4	1156.6	1155.7	1154.7	1153.7	1152.6	1151.6	1152.6	1153.7	1154.7
147.5°	1210.1	1209.5	1208.8	1208.2	1207.7	1207.1	1206.5	1206.0	1206.5	1207.1	1207.7
150°	1243.6	1242.6	1241.6	1241.2	1241.5	1241.7	1242.0	1242.2	1242.0	1241.7	1241.5
152.5°	1274.6	1274.2	1273.8	1273.4	1273.1	1272.7	1272.3	1272.0	1272.3	1272.7	1273.1
155°	1318.4	1318.2	1317.9	1317.8	1317.8	1317.8	1317.8	1317.8	1317.8	1317.8	1317.8
157.5°	1356.8	1356.5	1356.2	1356.4	1357.0	1357.5	1358.1	1358.7	1358.1	1357.5	1357.0
160°	1380.0	1379.7	1379.5	1379.7	1380.5	1381.3	1382.1	1382.8	1382.1	1381.3	1380.5
162.5°	1401.8	1401.7	1401.7	1401.9	1402.5	1403.1	1403.7	1404.2	1403.7	1403.1	1402.5
165°	1431.1	1430.9	1430.6	1430.7	1431.3	1431.8	1432.3	1432.8	1432.3	1431.8	1431.3
167.5°	1452.3	1452.3	1452.3	1452.8	1453.9	1454.9	1455.9	1457.0	1455.9	1454.9	1453.9
170°	1465.3	1465.3	1465.3	1465.9	1466.9	1467.9	1469.0	1470.0	1469.0	1467.9	1466.9
172.5°	1474.6	1474.6	1474.6	1475.2	1476.2	1477.2	1478.3	1479.3	1478.3	1477.2	1476.2
175°	1485.1	1485.1	1485.1	1485.6	1486.6	1487.7	1488.7	1489.7	1488.7	1487.7	1486.6
177.5°	1490.9	1491.1	1491.3	1491.8	1492.6	1493.4	1494.3	1495.1	1494.3	1493.4	1492.6
180°	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9
2.5°	1867.1	1858.4	1852.1	1839.6	1830.9	1827.2	1820.3	1818.4	1825.3	1820.3	1819.7
5°	1811.6	1789.0	1771.1	1753.1	1733.6	1721.2	1702.5	1699.3	1694.7	1687.6	1686.1
7.5°	1745.0	1715.6	1692.5	1662.9	1637.1	1616.4	1593.0	1581.9	1575.9	1566.8	1554.7
10°	1700.1	1665.0	1633.9	1604.2	1572.3	1546.6	1523.2	1505.2	1493.5	1482.6	1478.0
12.5°	1655.8	1620.1	1580.2	1544.4	1508.7	1479.8	1453.9	1442.3	1429.3	1416.5	1405.6
15°	1587.1	1539.5	1495.9	1454.6	1424.2	1393.0	1368.0	1350.9	1331.4	1326.0	1304.9
17.5°	1514.1	1467.5	1416.4	1372.9	1337.6	1303.3	1275.9	1256.4	1241.8	1221.7	1212.0
20°	1468.6	1413.3	1363.4	1323.6	1284.6	1244.1	1216.0	1199.7	1185.6	1169.3	1161.5
22.5°	1420.0	1365.9	1314.7	1268.1	1228.5	1188.6	1168.6	1151.7	1135.7	1120.6	1110.3
25°	1348.6	1294.0	1240.2	1191.9	1150.6	1121.7	1098.3	1078.8	1070.3	1055.5	1044.5
27.5°	1277.9	1219.9	1164.1	1115.9	1083.5	1055.0	1035.8	1020.4	1004.9	992.0	982.5
30°	1232.4	1173.2	1112.4	1074.2	1039.9	1012.6	991.5	976.7	965.0	953.3	946.3
32.5°	1186.9	1125.8	1071.8	1030.5	998.1	974.5	952.9	938.7	926.4	913.4	905.2
35°	1113.9	1051.6	1007.9	967.4	935.4	913.6	898.8	878.5	868.4	859.0	850.4
37.5°	1046.1	988.1	940.9	905.3	877.6	855.9	836.7	825.8	813.3	804.9	797.8
40°	996.2	943.2	900.3	862.9	842.7	818.5	800.6	786.5	777.2	766.3	758.5
42.5°	951.3	902.1	860.4	826.8	801.5	781.1	763.8	749.7	737.9	730.1	723.5
45°	887.9	838.8	798.2	767.0	743.7	724.2	706.2	699.2	683.6	674.3	671.2
47.5°	822.2	778.3	739.1	710.4	686.4	668.0	651.2	636.9	628.3	619.1	614.1
50°	778.0	735.9	699.2	671.2	647.8	627.5	611.9	602.6	590.9	582.3	576.1
52.5°	733.7	694.7	658.1	631.2	611.0	590.7	573.3	563.9	552.8	547.4	543.0
55°	670.4	629.1	597.9	571.4	550.3	531.6	515.3	505.9	498.9	493.4	491.9
57.5°	598.7	565.9	536.9	513.1	491.2	473.6	459.3	450.4	444.2	443.4	438.7
60°	551.9	522.3	495.8	470.0	451.3	435.0	422.5	412.4	406.1	405.3	403.8
62.5°	505.1	476.7	452.1	429.5	412.7	396.9	385.1	373.7	370.0	366.1	362.6
65°	435.7	410.0	389.8	371.8	353.9	340.6	329.0	321.9	313.4	308.7	300.1
67.5°	367.6	347.7	328.2	313.1	299.0	286.4	276.7	266.3	260.5	256.8	250.5
70°	322.7	307.1	287.6	271.3	260.4	250.2	242.4	230.7	226.8	223.7	220.6
72.5°	280.3	266.6	250.2	237.0	226.1	216.5	207.5	202.0	198.2	195.0	193.2
75°	220.6	207.4	193.3	184.0	176.2	168.4	163.7	159.8	158.2	157.5	154.3
77.5°	162.0	155.0	143.7	136.3	131.1	128.0	123.8	121.8	121.6	118.2	117.1
80°	123.9	120.0	110.7	107.6	103.7	100.6	98.2	94.3	90.4	88.9	86.5
82.5°	92.1	88.2	84.5	79.5	76.2	74.4	72.0	70.6	71.1	68.9	67.8
85°	49.1	45.2	43.7	42.9	41.3	42.9	42.1	41.3	40.5	39.8	40.5
87.5°	17.5	17.9	17.6	19.2	17.7	18.7	18.9	18.6	18.8	19.1	18.7
90°	9.4	11.4	13.2	15.0	16.8	18.6	19.9	21.2	22.5	23.8	24.8
92.5°	33.9	35.7	38.0	40.2	42.4	44.6	46.3	48.0	49.7	51.4	52.6
95°	77.6	79.1	81.7	84.3	86.9	89.5	91.3	93.1	94.9	96.7	97.9
97.5°	126.3	128.2	131.8	135.3	138.9	142.5	144.2	145.9	147.6	149.3	150.3
100°	162.7	164.4	167.7	171.1	174.4	177.8	180.1	182.4	184.8	187.1	188.5
102.5°	206.8	208.2	209.9	211.6	213.3	215.0	217.5	220.0	222.6	225.1	226.7
105°	270.1	271.5	273.1	274.6	276.2	277.7	279.3	280.8	282.4	283.9	285.1
107.5°	338.9	340.1	341.3	342.5	343.7	344.9	345.7	346.4	347.2	348.0	348.4
110°	386.3	387.3	388.1	388.9	389.7	390.4	391.2	392.0	392.8	393.5	393.8



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	432.2	433.0	434.0	435.0	435.9	436.9	437.3	437.7	438.0	438.4	438.3
115°	505.0	505.7	506.3	506.8	507.3	507.8	507.6	507.3	507.0	506.8	506.5
117.5°	574.3	574.7	575.2	575.7	576.1	576.6	576.8	577.0	577.2	577.4	577.0
120°	622.2	623.0	623.2	623.5	623.8	624.0	624.0	624.0	624.0	624.0	623.5
122.5°	667.2	667.8	668.5	669.2	669.8	670.5	670.3	670.1	669.9	669.7	669.2
125°	737.1	738.0	738.3	738.5	738.8	739.1	738.5	738.0	737.5	737.0	736.6
127.5°	804.2	804.8	805.1	805.4	805.7	806.0	805.7	805.5	805.2	805.0	804.6
130°	847.6	848.6	849.1	849.6	850.1	850.6	850.4	850.1	849.8	849.6	849.2
132.5°	892.8	893.8	893.7	893.6	893.5	893.4	893.1	892.9	892.6	892.3	891.9
135°	956.8	957.7	957.9	958.2	958.4	958.7	958.7	958.7	958.7	958.7	958.2
137.5°	1018.8	1019.9	1020.4	1021.0	1021.6	1022.1	1022.4	1022.8	1023.1	1023.4	1022.9
140°	1058.0	1059.0	1059.8	1060.6	1061.3	1062.1	1062.6	1063.1	1063.7	1064.2	1063.8
142.5°	1097.1	1098.2	1099.1	1100.1	1101.1	1102.1	1102.4	1102.7	1103.0	1103.3	1102.8
145°	1155.7	1156.6	1157.4	1158.2	1158.9	1159.7	1159.7	1159.7	1159.7	1159.7	1159.3
147.5°	1208.2	1208.8	1209.5	1210.1	1210.7	1211.3	1211.9	1212.6	1213.2	1213.8	1213.2
150°	1241.2	1241.6	1242.6	1243.6	1244.7	1245.7	1245.7	1245.7	1245.7	1245.7	1245.5
152.5°	1273.4	1273.8	1274.2	1274.6	1275.1	1275.5	1276.1	1276.7	1277.3	1277.9	1277.8
155°	1317.8	1317.9	1318.2	1318.4	1318.7	1318.9	1320.0	1321.0	1322.0	1323.1	1322.9
157.5°	1356.4	1356.2	1356.5	1356.8	1357.0	1357.3	1358.3	1359.3	1360.4	1361.4	1361.1
160°	1379.7	1379.5	1379.7	1380.0	1380.3	1380.5	1381.5	1382.6	1383.6	1384.6	1384.5
162.5°	1401.9	1401.7	1401.7	1401.8	1401.8	1401.9	1403.1	1404.4	1405.6	1406.9	1406.7
165°	1430.7	1430.6	1430.9	1431.1	1431.4	1431.6	1432.7	1433.7	1434.7	1435.8	1435.5
167.5°	1452.8	1452.3	1452.3	1452.3	1452.3	1452.3	1453.9	1455.4	1457.0	1458.5	1458.5
170°	1465.9	1465.3	1465.3	1465.3	1465.3	1465.3	1466.9	1468.4	1470.0	1471.5	1471.4
172.5°	1475.2	1474.6	1474.6	1474.6	1474.6	1474.6	1476.2	1477.7	1479.3	1480.8	1480.8
175°	1485.6	1485.1	1485.1	1485.1	1485.1	1485.1	1486.6	1488.2	1489.7	1491.3	1491.2
177.5°	1491.8	1491.3	1491.1	1490.9	1490.6	1490.4	1491.7	1492.9	1494.2	1495.4	1495.3
180°	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9
2.5°	1819.1	1812.2	1810.3	1812.8	1810.3	1812.2	1819.1	1819.7	1820.3	1825.3	1818.4
5°	1678.3	1670.5	1674.4	1672.8	1674.4	1670.5	1678.3	1686.1	1687.6	1694.7	1699.3
7.5°	1554.5	1544.8	1534.5	1537.8	1534.5	1544.8	1554.5	1554.7	1566.8	1575.9	1581.9
10°	1467.8	1460.0	1455.3	1459.2	1455.3	1460.0	1467.8	1478.0	1482.6	1493.5	1505.2
12.5°	1394.9	1390.2	1386.1	1384.4	1386.1	1390.2	1394.9	1405.6	1416.5	1429.3	1442.3
15°	1295.5	1286.2	1282.3	1272.2	1282.3	1286.2	1295.5	1304.9	1326.0	1331.4	1350.9
17.5°	1204.0	1200.9	1190.8	1186.4	1190.8	1200.9	1204.0	1212.0	1221.7	1241.8	1256.4
20°	1149.8	1146.7	1136.5	1142.8	1136.5	1146.7	1149.8	1161.5	1169.3	1185.6	1199.7
22.5°	1104.9	1098.0	1094.7	1092.9	1094.7	1098.0	1104.9	1110.3	1120.6	1135.7	1151.7
25°	1041.4	1031.3	1027.4	1022.7	1027.4	1031.3	1041.4	1044.5	1055.5	1070.3	1078.8
27.5°	978.1	972.7	967.5	966.3	967.5	972.7	978.1	982.5	992.0	1004.9	1020.4
30°	937.0	931.5	927.6	927.6	927.6	931.5	937.0	946.3	953.3	965.0	976.7
32.5°	900.2	896.0	892.1	891.5	892.1	896.0	900.2	905.2	913.4	926.4	938.7
35°	846.6	840.3	838.8	834.1	838.8	840.3	846.6	850.4	859.0	868.4	878.5
37.5°	790.9	785.7	785.6	785.1	785.6	785.7	790.9	797.8	804.9	813.3	825.8
40°	755.3	751.4	750.7	745.2	750.7	751.4	755.3	758.5	766.3	777.2	786.5
42.5°	717.3	715.3	712.6	710.3	712.6	715.3	717.3	723.5	730.1	737.9	749.7
45°	665.7	660.2	660.2	656.3	660.2	660.2	665.7	671.2	674.3	683.6	699.2
47.5°	612.4	608.2	608.6	604.6	608.6	608.2	612.4	614.1	619.1	628.3	636.9
50°	576.8	574.5	573.7	572.2	573.7	574.5	576.8	576.1	582.3	590.9	602.6
52.5°	541.3	540.2	543.2	539.7	543.2	540.2	541.3	543.0	547.4	552.8	563.9
55°	493.4	491.1	495.8	491.1	495.8	491.1	493.4	491.9	493.4	498.9	505.9
57.5°	438.4	436.2	440.4	438.1	440.4	436.2	438.4	438.7	443.4	444.2	450.4
60°	402.2	397.6	399.9	400.7	399.9	397.6	402.2	403.8	405.3	406.1	412.4
62.5°	359.2	356.4	358.1	354.5	358.1	356.4	359.2	362.6	366.1	370.0	373.7
65°	298.6	296.2	293.1	291.5	293.1	296.2	298.6	300.1	308.7	313.4	321.9
67.5°	250.8	245.2	245.1	246.3	245.1	245.2	250.8	250.5	256.8	260.5	266.3
70°	215.9	215.9	215.1	215.1	215.1	215.9	215.9	220.6	223.7	226.8	230.7
72.5°	191.6	191.0	189.6	189.0	189.6	191.0	191.6	193.2	195.0	198.2	202.0
75°	154.3	155.1	153.6	152.8	153.6	155.1	154.3	154.3	157.5	158.2	159.8
77.5°	114.0	110.7	112.4	110.7	112.4	110.7	114.0	117.1	118.2	121.6	121.8
80°	86.5	85.7	88.1	85.7	88.1	85.7	86.5	86.5	88.9	90.4	94.3
82.5°	68.4	67.7	68.8	67.0	68.8	67.7	68.4	67.8	68.9	71.1	70.6
85°	41.3	40.5	39.8	40.5	39.8	40.5	41.3	40.5	39.8	40.5	41.3
87.5°	19.5	19.0	19.1	19.3	19.1	19.0	19.5	18.7	19.1	18.8	18.6
90°	25.6	26.3	27.1	27.9	27.1	26.3	25.6	24.8	23.8	22.5	21.2
92.5°	53.1	53.7	54.3	54.8	54.3	53.7	53.1	52.6	51.4	49.7	48.0
95°	98.4	98.9	99.4	99.9	99.4	98.9	98.4	97.9	96.7	94.9	93.1
97.5°	150.6	150.9	151.2	151.5	151.2	150.9	150.6	150.3	149.3	147.6	145.9
100°	189.0	189.5	190.1	190.6	190.1	189.5	189.0	188.5	187.1	184.8	182.4
102.5°	227.5	228.2	228.9	229.6	228.9	228.2	227.5	226.7	225.1	222.6	220.0
105°	285.9	286.6	287.4	288.2	287.4	286.6	285.9	285.1	283.9	282.4	280.8
107.5°	348.3	348.3	348.2	348.1	348.2	348.3	348.3	348.4	348.0	347.2	346.4
110°	393.5	393.3	393.0	392.8	393.0	393.3	393.5	393.8	393.5	392.8	392.0



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	437.9	437.4	436.9	436.5	436.9	437.4	437.9	438.3	438.4	438.0	437.7
115°	506.3	506.0	505.7	505.5	505.7	506.0	506.3	506.5	506.8	507.0	507.3
117.5°	576.0	575.0	573.9	572.9	573.9	575.0	576.0	577.0	577.4	577.2	577.0
120°	622.5	621.4	620.4	619.4	620.4	621.4	622.5	623.5	624.0	624.0	624.0
122.5°	668.3	667.5	666.7	665.9	666.7	667.5	668.3	669.2	669.7	669.9	670.1
125°	736.4	736.1	735.8	735.6	735.8	736.1	736.4	736.6	737.0	737.5	738.0
127.5°	804.1	803.5	803.0	802.5	803.0	803.5	804.1	804.6	805.0	805.2	805.5
130°	848.7	848.2	847.6	847.1	847.6	848.2	848.7	849.2	849.6	849.8	850.1
132.5°	891.1	890.4	889.7	889.0	889.7	890.4	891.1	891.9	892.3	892.6	892.9
135°	957.1	956.1	955.1	954.0	955.1	956.1	957.1	958.2	958.7	958.7	958.7
137.5°	1021.6	1020.3	1019.0	1017.7	1019.0	1020.3	1021.6	1022.9	1023.4	1023.1	1022.8
140°	1062.5	1061.2	1059.9	1058.6	1059.9	1061.2	1062.5	1063.8	1064.2	1063.7	1063.1
142.5°	1101.5	1100.3	1099.0	1097.7	1099.0	1100.3	1101.5	1102.8	1103.3	1103.0	1102.7
145°	1158.6	1157.8	1157.0	1156.2	1157.0	1157.8	1158.6	1159.3	1159.7	1159.7	1159.7
147.5°	1211.5	1209.7	1208.0	1206.2	1208.0	1209.7	1211.5	1213.2	1213.8	1213.2	1212.6
150°	1244.9	1244.4	1243.9	1243.4	1243.9	1244.4	1244.9	1245.5	1245.7	1245.7	1245.7
152.5°	1276.9	1275.9	1275.0	1274.1	1275.0	1275.9	1276.9	1277.8	1277.9	1277.3	1276.7
155°	1321.6	1320.3	1319.1	1317.8	1319.1	1320.3	1321.6	1322.9	1323.1	1322.0	1321.0
157.5°	1359.4	1357.7	1356.0	1354.3	1356.0	1357.7	1359.4	1361.1	1361.4	1360.4	1359.3
160°	1383.2	1381.9	1380.6	1379.4	1380.6	1381.9	1383.2	1384.5	1384.6	1383.6	1382.6
162.5°	1405.2	1403.7	1402.2	1400.7	1402.2	1403.7	1405.2	1406.7	1406.9	1405.6	1404.4
165°	1434.0	1432.4	1430.9	1429.3	1430.9	1432.4	1434.0	1435.5	1435.8	1434.7	1433.7
167.5°	1456.9	1455.3	1453.7	1452.1	1453.7	1455.3	1456.9	1458.5	1458.5	1457.0	1455.4
170°	1469.6	1467.8	1466.0	1464.2	1466.0	1467.8	1469.6	1471.4	1471.5	1470.0	1468.4
172.5°	1479.2	1477.6	1476.0	1474.4	1476.0	1477.6	1479.2	1480.8	1480.8	1479.3	1477.7
175°	1489.4	1487.6	1485.7	1483.9	1485.7	1487.6	1489.4	1491.2	1491.3	1489.7	1488.2
177.5°	1493.9	1492.4	1491.0	1489.5	1491.0	1492.4	1493.9	1495.3	1495.4	1494.2	1492.9
180°	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9
2.5°	1820.3	1827.2	1830.9	1839.6	1852.1	1858.4	1867.1	1873.3	1882.1	1892.7	1901.4
5°	1702.5	1721.2	1733.6	1753.1	1771.1	1789.0	1811.6	1828.0	1849.8	1874.7	1894.2
7.5°	1593.0	1616.4	1637.1	1662.9	1692.5	1715.6	1745.0	1775.1	1809.2	1844.6	1878.0
10°	1523.2	1546.6	1572.3	1604.2	1633.9	1665.0	1700.1	1735.2	1778.1	1817.8	1863.0
12.5°	1453.9	1479.8	1508.7	1544.4	1580.2	1620.1	1655.8	1695.3	1741.3	1792.9	1841.2
15°	1368.0	1393.0	1424.2	1454.6	1495.9	1539.5	1587.1	1639.3	1690.8	1748.4	1808.5
17.5°	1275.9	1303.3	1337.6	1372.9	1416.4	1467.5	1514.1	1571.3	1629.2	1696.4	1767.0
20°	1216.0	1244.1	1284.6	1323.6	1363.4	1413.3	1468.6	1527.1	1588.6	1659.6	1738.3
22.5°	1168.6	1188.6	1228.5	1268.1	1314.7	1365.9	1420.0	1480.9	1548.1	1621.5	1704.0
25°	1098.3	1121.7	1150.6	1191.9	1240.2	1294.0	1348.6	1413.3	1486.5	1561.4	1649.4
27.5°	1035.8	1055.0	1083.5	1115.9	1164.1	1219.9	1277.9	1345.4	1420.6	1496.8	1589.4
30°	991.5	1012.6	1039.9	1074.2	1112.4	1173.2	1232.4	1298.7	1375.1	1453.8	1548.9
32.5°	952.9	974.5	998.1	1030.5	1071.8	1125.8	1186.9	1251.9	1329.5	1410.8	1503.4
35°	898.8	913.6	935.4	967.4	1007.9	1051.6	1113.9	1182.5	1258.1	1342.3	1435.1
37.5°	836.7	855.9	877.6	905.3	940.9	988.1	1046.1	1115.5	1185.6	1266.2	1350.9
40°	800.6	818.5	842.7	862.9	900.3	943.2	996.2	1068.7	1138.9	1214.5	1291.7
42.5°	763.8	781.1	801.5	826.8	860.4	902.1	951.3	1018.8	1094.0	1165.2	1229.9
45°	706.2	724.2	743.7	767.0	798.2	838.8	887.9	949.4	1014.9	1080.4	1129.5
47.5°	651.2	668.0	686.4	710.4	739.1	778.3	822.2	876.6	940.2	995.9	1031.0
50°	611.9	627.5	647.8	671.2	699.2	735.9	778.0	831.7	884.7	935.4	967.4
52.5°	573.3	590.7	611.0	631.2	658.1	694.7	733.7	780.0	830.5	871.8	898.2
55°	515.3	531.6	550.3	571.4	597.9	629.1	670.4	707.0	746.8	781.9	797.4
57.5°	459.3	473.6	491.2	513.1	536.9	565.9	598.7	633.9	662.0	686.8	704.4
60°	422.5	435.0	451.3	470.0	495.8	522.3	551.9	584.6	606.5	627.5	643.9
62.5°	385.1	396.9	412.7	429.5	452.1	476.7	505.1	531.6	552.8	567.0	585.9
65°	329.0	340.6	353.9	371.8	389.8	410.0	435.7	455.2	470.0	485.6	497.3
67.5°	276.7	286.4	299.0	313.1	328.2	347.7	367.6	383.8	394.0	403.3	417.4
70°	242.4	250.2	260.4	271.3	287.6	307.1	322.7	335.2	342.2	351.6	368.7
72.5°	207.5	216.5	226.1	237.0	250.2	266.6	280.3	292.8	297.3	304.8	315.7
75°	163.7	168.4	176.2	184.0	193.3	207.4	220.6	223.7	227.6	233.9	241.6
77.5°	123.8	128.0	131.1	136.3	143.7	155.0	162.0	166.7	167.6	169.9	177.6
80°	98.2	100.6	103.7	107.6	110.7	120.0	123.9	128.6	130.2	132.5	136.4
82.5°	72.0	74.4	76.2	79.5	84.5	88.2	92.1	96.8	97.1	98.8	99.6
85°	42.1	42.9	41.3	42.9	43.7	45.2	49.1	53.0	52.2	51.4	53.8
87.5°	18.9	18.7	17.7	19.2	17.6	17.9	17.5	17.7	18.5	19.4	20.2
90°	19.9	18.6	16.8	15.0	13.2	11.4	9.4	7.4	5.3	3.2	1.2
92.5°	46.3	44.6	42.4	40.2	38.0	35.7	33.9	32.5	31.0	29.6	28.1
95°	91.3	89.5	86.9	84.3	81.7	79.1	77.6	77.1	76.6	76.0	75.5
97.5°	144.2	142.5	138.9	135.3	131.8	128.2	126.3	126.1	125.9	125.7	125.5
100°	180.1	177.8	174.4	171.1	167.7	164.4	162.7	162.7	162.7	162.7	162.7
102.5°	217.5	215.0	213.3	211.6	209.9	208.2	206.8	205.8	204.7	203.7	202.7
105°	279.3	277.7	276.2	274.6	273.1	271.5	270.1	268.8	267.5	266.2	264.9
107.5°	345.7	344.9	343.7	342.5	341.3	340.1	338.9	337.6	336.3	335.0	333.7
110°	391.2	390.4	389.7	388.9	388.1	387.3	386.3	385.0	383.7	382.4	381.2



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	437.3	436.9	435.9	435.0	434.0	433.0	432.2	431.5	430.8	430.2	429.5
115°	507.6	507.8	507.3	506.8	506.3	505.7	505.0	503.9	502.9	501.9	500.8
117.5°	576.8	576.6	576.1	575.7	575.2	574.7	574.3	573.8	573.4	572.9	572.4
120°	624.0	624.0	623.8	623.5	623.2	623.0	622.2	620.9	619.6	618.3	617.0
122.5°	670.3	670.5	669.8	669.2	668.5	667.8	667.2	666.8	666.3	665.9	665.4
125°	738.5	739.1	738.8	738.5	738.3	738.0	737.1	735.6	734.0	732.5	730.9
127.5°	805.7	806.0	805.7	805.4	805.1	804.8	804.2	803.3	802.4	801.5	800.7
130°	850.4	850.6	850.1	849.6	849.1	848.6	847.6	846.4	845.1	843.8	842.5
132.5°	893.1	893.4	893.5	893.6	893.7	893.8	892.8	890.7	888.6	886.4	884.3
135°	958.7	958.7	958.4	958.2	957.9	957.7	956.8	955.2	953.7	952.1	950.6
137.5°	1022.4	1022.1	1021.6	1021.0	1020.4	1019.9	1018.8	1017.3	1015.8	1014.3	1012.8
140°	1062.6	1062.1	1061.3	1060.6	1059.8	1059.0	1058.0	1056.7	1055.4	1054.1	1052.8
142.5°	1102.4	1102.1	1101.1	1100.1	1099.1	1098.2	1097.1	1096.0	1095.0	1093.9	1092.8
145°	1159.7	1159.7	1158.9	1158.2	1157.4	1156.6	1155.7	1154.7	1153.7	1152.6	1151.6
147.5°	1211.9	1211.3	1210.7	1210.1	1209.5	1208.8	1208.2	1207.7	1207.1	1206.5	1206.0
150°	1245.7	1245.7	1244.7	1243.6	1242.6	1241.6	1241.2	1241.5	1241.7	1242.0	1242.2
152.5°	1276.1	1275.5	1275.1	1274.6	1274.2	1273.8	1273.4	1273.1	1272.7	1272.3	1272.0
155°	1320.0	1318.9	1318.7	1318.4	1318.2	1317.9	1317.8	1317.8	1317.8	1317.8	1317.8
157.5°	1358.3	1357.3	1357.0	1356.8	1356.5	1356.2	1356.4	1357.0	1357.5	1358.1	1358.7
160°	1381.5	1380.5	1380.3	1380.0	1379.7	1379.5	1379.7	1380.5	1381.3	1382.1	1382.8
162.5°	1403.1	1401.9	1401.8	1401.8	1401.7	1401.7	1401.9	1402.5	1403.1	1403.7	1404.2
165°	1432.7	1431.6	1431.4	1431.1	1430.9	1430.6	1430.7	1431.3	1431.8	1432.3	1432.8
167.5°	1453.9	1452.3	1452.3	1452.3	1452.3	1452.3	1452.8	1453.9	1454.9	1455.9	1457.0
170°	1466.9	1465.3	1465.3	1465.3	1465.3	1465.3	1465.9	1466.9	1467.9	1469.0	1470.0
172.5°	1476.2	1474.6	1474.6	1474.6	1474.6	1474.6	1475.2	1476.2	1477.2	1478.3	1479.3
175°	1486.6	1485.1	1485.1	1485.1	1485.1	1485.1	1485.6	1486.6	1487.7	1488.7	1489.7
177.5°	1491.7	1490.4	1490.6	1490.9	1491.1	1491.3	1491.8	1492.6	1493.4	1494.3	1495.1
180°	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9
2.5°	1908.2	1913.9	1922.0	1931.3	1938.8	1946.9	1951.3	1951.3	1955.0	1963.1	1973.7
5°	1913.7	1934.0	1953.5	1978.4	1997.9	2020.5	2037.6	2054.0	2068.8	2087.5	2107.0
7.5°	1912.1	1945.8	1980.9	2020.2	2063.5	2098.0	2133.4	2161.1	2188.6	2224.4	2252.6
10°	1905.9	1949.6	1997.1	2047.0	2101.6	2149.1	2192.0	2231.0	2268.4	2307.4	2342.4
12.5°	1894.7	1950.2	2008.3	2068.2	2137.1	2191.5	2246.9	2288.3	2332.0	2374.7	2417.9
15°	1877.8	1943.3	2013.5	2096.9	2181.1	2241.9	2296.4	2350.2	2390.8	2439.1	2480.4
17.5°	1843.1	1927.4	2015.7	2106.9	2187.8	2258.4	2315.6	2366.8	2409.9	2463.1	2519.2
20°	1822.5	1913.7	2005.7	2103.1	2180.3	2252.8	2308.1	2361.1	2414.9	2484.3	2552.9
22.5°	1793.8	1891.3	1988.8	2081.3	2162.8	2232.8	2290.1	2354.9	2425.5	2504.3	2587.2
25°	1748.4	1849.0	1945.7	2033.7	2113.3	2185.0	2262.9	2350.2	2436.0	2539.7	2658.9
27.5°	1690.9	1787.9	1874.1	1967.2	2046.2	2137.4	2234.7	2329.3	2453.0	2595.6	2744.5
30°	1647.9	1739.9	1821.7	1909.8	1999.4	2100.0	2209.1	2320.6	2467.9	2635.5	2812.5
32.5°	1598.0	1681.3	1762.5	1847.4	1950.8	2061.3	2177.3	2313.7	2489.8	2680.4	2863.6
35°	1511.5	1586.3	1665.0	1759.4	1869.3	1989.3	2137.4	2303.5	2516.3	2721.3	2885.8
37.5°	1420.7	1479.8	1558.9	1658.3	1778.1	1917.0	2085.0	2286.8	2505.4	2689.3	2759.3
40°	1350.9	1406.2	1489.6	1594.1	1712.6	1864.6	2053.2	2260.6	2480.4	2608.2	2602.8
42.5°	1281.7	1337.6	1417.9	1523.0	1646.5	1816.6	2010.8	2226.3	2411.8	2460.5	2359.0
45°	1175.5	1227.7	1306.5	1412.5	1545.0	1723.5	1927.7	2134.3	2252.8	2174.1	1972.9
47.5°	1067.3	1118.0	1191.1	1294.9	1439.6	1626.4	1819.5	1989.0	2005.7	1836.5	1595.3
50°	996.2	1043.8	1113.1	1223.8	1364.1	1546.6	1732.9	1866.2	1824.8	1618.3	1369.6
52.5°	927.0	972.7	1037.7	1142.1	1285.6	1464.2	1630.6	1735.2	1639.6	1420.0	1196.2
55°	824.7	868.4	933.9	1029.7	1159.9	1323.6	1469.4	1507.6	1367.3	1145.9	965.0
57.5°	727.6	759.6	824.3	909.1	1034.6	1178.9	1283.4	1276.5	1121.7	922.3	792.6
60°	663.4	692.2	753.8	831.7	951.0	1080.4	1153.7	1122.5	965.8	801.3	676.6
62.5°	603.5	630.5	682.1	753.8	856.2	968.8	1022.1	979.1	831.1	686.6	587.4
65°	512.9	532.4	573.7	640.0	720.3	798.2	845.8	782.6	651.7	542.5	467.7
67.5°	428.3	445.1	481.9	529.4	584.8	638.6	657.9	598.7	496.9	423.3	370.6
70°	373.4	389.0	413.9	458.4	495.0	533.2	542.5	489.5	404.6	348.4	315.7
72.5°	321.0	335.3	357.2	388.5	413.9	435.9	440.3	391.0	326.0	287.3	262.1
75°	244.8	257.2	271.3	283.0	299.3	303.2	301.7	263.5	228.4	202.7	188.6
77.5°	179.9	185.1	193.6	198.3	199.1	198.8	190.8	166.7	148.6	138.0	132.2
80°	138.8	142.7	145.0	146.5	147.3	139.5	131.0	116.1	109.9	103.7	96.7
82.5°	100.7	103.4	105.7	106.0	101.8	95.3	87.3	80.0	75.6	72.5	69.8
85°	54.6	55.3	54.6	50.7	45.2	42.9	41.3	39.8	39.0	38.2	38.2
87.5°	20.0	18.5	15.8	16.9	17.2	17.0	17.3	17.1	16.8	17.1	17.3
90°	3.2	5.3	7.4	9.4	11.4	13.2	15.0	16.8	18.6	19.9	21.2
92.5°	29.6	31.0	32.5	33.9	35.7	38.0	40.2	42.4	44.6	46.3	48.0
95°	76.0	76.6	77.1	77.6	79.1	81.7	84.3	86.9	89.5	91.3	93.1
97.5°	125.7	125.9	126.1	126.3	128.2	131.8	135.3	138.9	142.5	144.2	145.9
100°	162.7	162.7	162.7	162.7	164.4	167.7	171.1	174.4	177.8	180.1	182.4
102.5°	203.7	204.7	205.8	206.8	208.2	209.9	211.6	213.3	215.0	217.5	220.0
105°	266.2	267.5	268.8	270.1	271.5	273.1	274.6	276.2	277.7	279.3	280.8
107.5°	335.0	336.3	337.6	338.9	340.1	341.3	342.5	343.7	344.9	345.7	346.4
110°	382.4	383.7	385.0	386.3	387.3	388.1	388.9	389.7	390.4	391.2	392.0



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	430.2	430.8	431.5	432.2	433.0	434.0	435.0	435.9	436.9	437.3	437.7
115°	501.9	502.9	503.9	505.0	505.7	506.3	506.8	507.3	507.8	507.6	507.3
117.5°	572.9	573.4	573.8	574.3	574.7	575.2	575.7	576.1	576.6	576.8	577.0
120°	618.3	619.6	620.9	622.2	623.0	623.2	623.5	623.8	624.0	624.0	624.0
122.5°	665.9	666.3	666.8	667.2	667.8	668.5	669.2	669.8	670.5	670.3	670.1
125°	732.5	734.0	735.6	737.1	738.0	738.3	738.5	738.8	739.1	738.5	738.0
127.5°	801.5	802.4	803.3	804.2	804.8	805.1	805.4	805.7	806.0	805.7	805.5
130°	843.8	845.1	846.4	847.6	848.6	849.1	849.6	850.1	850.6	850.4	850.1
132.5°	886.4	888.6	890.7	892.8	893.8	893.7	893.6	893.5	893.4	893.1	892.9
135°	952.1	953.7	955.2	956.8	957.7	957.9	958.2	958.4	958.7	958.7	958.7
137.5°	1014.3	1015.8	1017.3	1018.8	1019.9	1020.4	1021.0	1021.6	1022.1	1022.4	1022.8
140°	1054.1	1055.4	1056.7	1058.0	1059.0	1059.8	1060.6	1061.3	1062.1	1062.6	1063.1
142.5°	1093.9	1095.0	1096.0	1097.1	1098.2	1099.1	1100.1	1101.1	1102.1	1102.4	1102.7
145°	1152.6	1153.7	1154.7	1155.7	1156.6	1157.4	1158.2	1158.9	1159.7	1159.7	1159.7
147.5°	1206.5	1207.1	1207.7	1208.2	1208.8	1209.5	1210.1	1210.7	1211.3	1211.9	1212.6
150°	1242.0	1241.7	1241.5	1241.2	1241.6	1242.6	1243.6	1244.7	1245.7	1245.7	1245.7
152.5°	1272.3	1272.7	1273.1	1273.4	1273.8	1274.2	1274.6	1275.1	1275.5	1276.1	1276.7
155°	1317.8	1317.8	1317.8	1317.8	1317.9	1318.2	1318.4	1318.7	1318.9	1320.0	1321.0
157.5°	1358.1	1357.5	1357.0	1356.4	1356.2	1356.5	1356.8	1357.0	1357.3	1358.3	1359.3
160°	1382.1	1381.3	1380.5	1379.7	1379.5	1379.7	1380.0	1380.3	1380.5	1381.5	1382.6
162.5°	1403.7	1403.1	1402.5	1401.9	1401.7	1401.7	1401.8	1401.8	1401.9	1403.1	1404.4
165°	1432.3	1431.8	1431.3	1430.7	1430.6	1430.9	1431.1	1431.4	1431.6	1432.7	1433.7
167.5°	1455.9	1454.9	1453.9	1452.8	1452.3	1452.3	1452.3	1452.3	1452.3	1453.9	1455.4
170°	1469.0	1467.9	1466.9	1465.9	1465.3	1465.3	1465.3	1465.3	1465.3	1466.9	1468.4
172.5°	1478.3	1477.2	1476.2	1475.2	1474.6	1474.6	1474.6	1474.6	1474.6	1476.2	1477.7
175°	1488.7	1487.7	1486.6	1485.6	1485.1	1485.1	1485.1	1485.1	1485.1	1486.6	1488.2
177.5°	1494.3	1493.4	1492.6	1491.8	1491.3	1491.1	1490.9	1490.6	1490.4	1491.7	1492.9
180°	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9	1898.9
2.5°	1981.8	1981.8	1992.4	1991.8	1998.7	1996.2	1997.4
5°	2130.4	2143.7	2155.4	2163.1	2174.8	2178.0	2176.4
7.5°	2284.4	2313.9	2328.2	2347.9	2351.5	2361.8	2360.7
10°	2379.9	2408.7	2430.5	2447.7	2456.2	2467.2	2467.9
12.5°	2454.7	2479.2	2498.5	2514.4	2524.8	2528.3	2530.3
15°	2513.1	2540.4	2563.0	2585.6	2598.9	2609.0	2614.5
17.5°	2572.1	2614.2	2654.1	2684.8	2703.2	2718.8	2718.6
20°	2617.6	2665.9	2715.8	2750.9	2786.8	2802.3	2804.7
22.5°	2666.2	2740.1	2804.4	2858.8	2905.9	2922.1	2928.2
25°	2767.3	2863.9	2962.9	3039.3	3093.9	3125.8	3130.5
27.5°	2889.3	3020.1	3124.3	3194.8	3240.1	3263.8	3269.0
30°	2975.4	3096.2	3189.8	3242.8	3263.8	3266.9	3255.2
32.5°	3014.1	3104.3	3141.7	3138.6	3097.3	3069.9	3059.4
35°	2966.8	2948.1	2856.9	2747.8	2664.4	2611.4	2597.3
37.5°	2699.9	2538.6	2370.8	2205.9	2118.1	2073.5	1996.8
40°	2436.8	2206.8	2032.2	1893.4	1794.4	1714.9	1696.2
42.5°	2139.9	1902.5	1727.9	1609.1	1530.0	1475.5	1451.8
45°	1719.6	1515.4	1371.2	1280.0	1219.2	1179.4	1161.5
47.5°	1375.4	1217.3	1112.2	1044.7	998.4	963.8	954.1
50°	1186.4	1060.1	971.3	914.4	879.3	852.8	841.9
52.5°	1030.5	928.6	860.3	813.3	780.1	763.6	754.6
55°	850.4	762.4	713.3	675.8	657.1	643.9	637.6
57.5°	695.5	631.9	596.0	570.1	552.8	544.4	541.3
60°	608.8	558.9	526.2	505.9	494.2	483.3	480.2
62.5°	532.1	492.8	467.6	449.8	438.1	433.4	431.5
65°	428.7	403.0	384.3	373.4	364.0	362.5	361.7
67.5°	340.8	325.7	315.9	304.5	301.2	295.7	294.7
70°	291.5	281.4	269.7	265.8	261.9	256.5	257.2
72.5°	247.3	237.1	229.2	224.0	222.6	220.3	222.3
75°	180.8	177.7	174.6	170.7	169.2	169.2	168.4
77.5°	129.1	126.4	123.0	120.7	120.2	116.9	118.2
80°	93.5	89.6	88.1	88.9	86.5	85.7	85.7
82.5°	69.2	67.8	66.3	66.4	65.9	65.2	65.8
85°	38.2	37.4	37.4	36.6	36.6	35.9	35.9
87.5°	18.2	19.1	18.1	17.6	17.7	18.5	19.3
90°	22.5	23.8	24.8	25.6	26.3	27.1	27.9
92.5°	49.7	51.4	52.6	53.1	53.7	54.3	54.8
95°	94.9	96.7	97.9	98.4	98.9	99.4	99.9
97.5°	147.6	149.3	150.3	150.6	150.9	151.2	151.5
100°	184.8	187.1	188.5	189.0	189.5	190.1	190.6
102.5°	222.6	225.1	226.7	227.5	228.2	228.9	229.6
105°	282.4	283.9	285.1	285.9	286.6	287.4	288.2
107.5°	347.2	348.0	348.4	348.3	348.3	348.2	348.1
110°	392.8	393.5	393.8	393.5	393.3	393.0	392.8



TEST NUMBER: P333635

CATALOG NUMBER: S125RDIP-S1270D1205U835-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	438.0	438.4	438.3	437.9	437.4	436.9	436.5
115°	507.0	506.8	506.5	506.3	506.0	505.7	505.5
117.5°	577.2	577.4	577.0	576.0	575.0	573.9	572.9
120°	624.0	624.0	623.5	622.5	621.4	620.4	619.4
122.5°	669.9	669.7	669.2	668.3	667.5	666.7	665.9
125°	737.5	737.0	736.6	736.4	736.1	735.8	735.6
127.5°	805.2	805.0	804.6	804.1	803.5	803.0	802.5
130°	849.8	849.6	849.2	848.7	848.2	847.6	847.1
132.5°	892.6	892.3	891.9	891.1	890.4	889.7	889.0
135°	958.7	958.7	958.2	957.1	956.1	955.1	954.0
137.5°	1023.1	1023.4	1022.9	1021.6	1020.3	1019.0	1017.7
140°	1063.7	1064.2	1063.8	1062.5	1061.2	1059.9	1058.6
142.5°	1103.0	1103.3	1102.8	1101.5	1100.3	1099.0	1097.7
145°	1159.7	1159.7	1159.3	1158.6	1157.8	1157.0	1156.2
147.5°	1213.2	1213.8	1213.2	1211.5	1209.7	1208.0	1206.2
150°	1245.7	1245.7	1245.5	1244.9	1244.4	1243.9	1243.4
152.5°	1277.3	1277.9	1277.8	1276.9	1275.9	1275.0	1274.1
155°	1322.0	1323.1	1322.9	1321.6	1320.3	1319.1	1317.8
157.5°	1360.4	1361.4	1361.1	1359.4	1357.7	1356.0	1354.3
160°	1383.6	1384.6	1384.5	1383.2	1381.9	1380.6	1379.4
162.5°	1405.6	1406.9	1406.7	1405.2	1403.7	1402.2	1400.7
165°	1434.7	1435.8	1435.5	1434.0	1432.4	1430.9	1429.3
167.5°	1457.0	1458.5	1458.5	1456.9	1455.3	1453.7	1452.1
170°	1470.0	1471.5	1471.4	1469.6	1467.8	1466.0	1464.2
172.5°	1479.3	1480.8	1480.8	1479.2	1477.6	1476.0	1474.4
175°	1489.7	1491.3	1491.2	1489.4	1487.6	1485.7	1483.9
177.5°	1494.2	1495.4	1495.3	1493.9	1492.4	1491.0	1489.5
180°	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2	1493.2

(END OF REPORT)