

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333625

Luminaire Tested: **S125RDIP-S1270D810U835-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333625
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S1270D810U835-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 810 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8118.6 lumens
Efficiency: N/A
Efficacy: 133.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333625

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F

Luminous Intensity Polar Plot

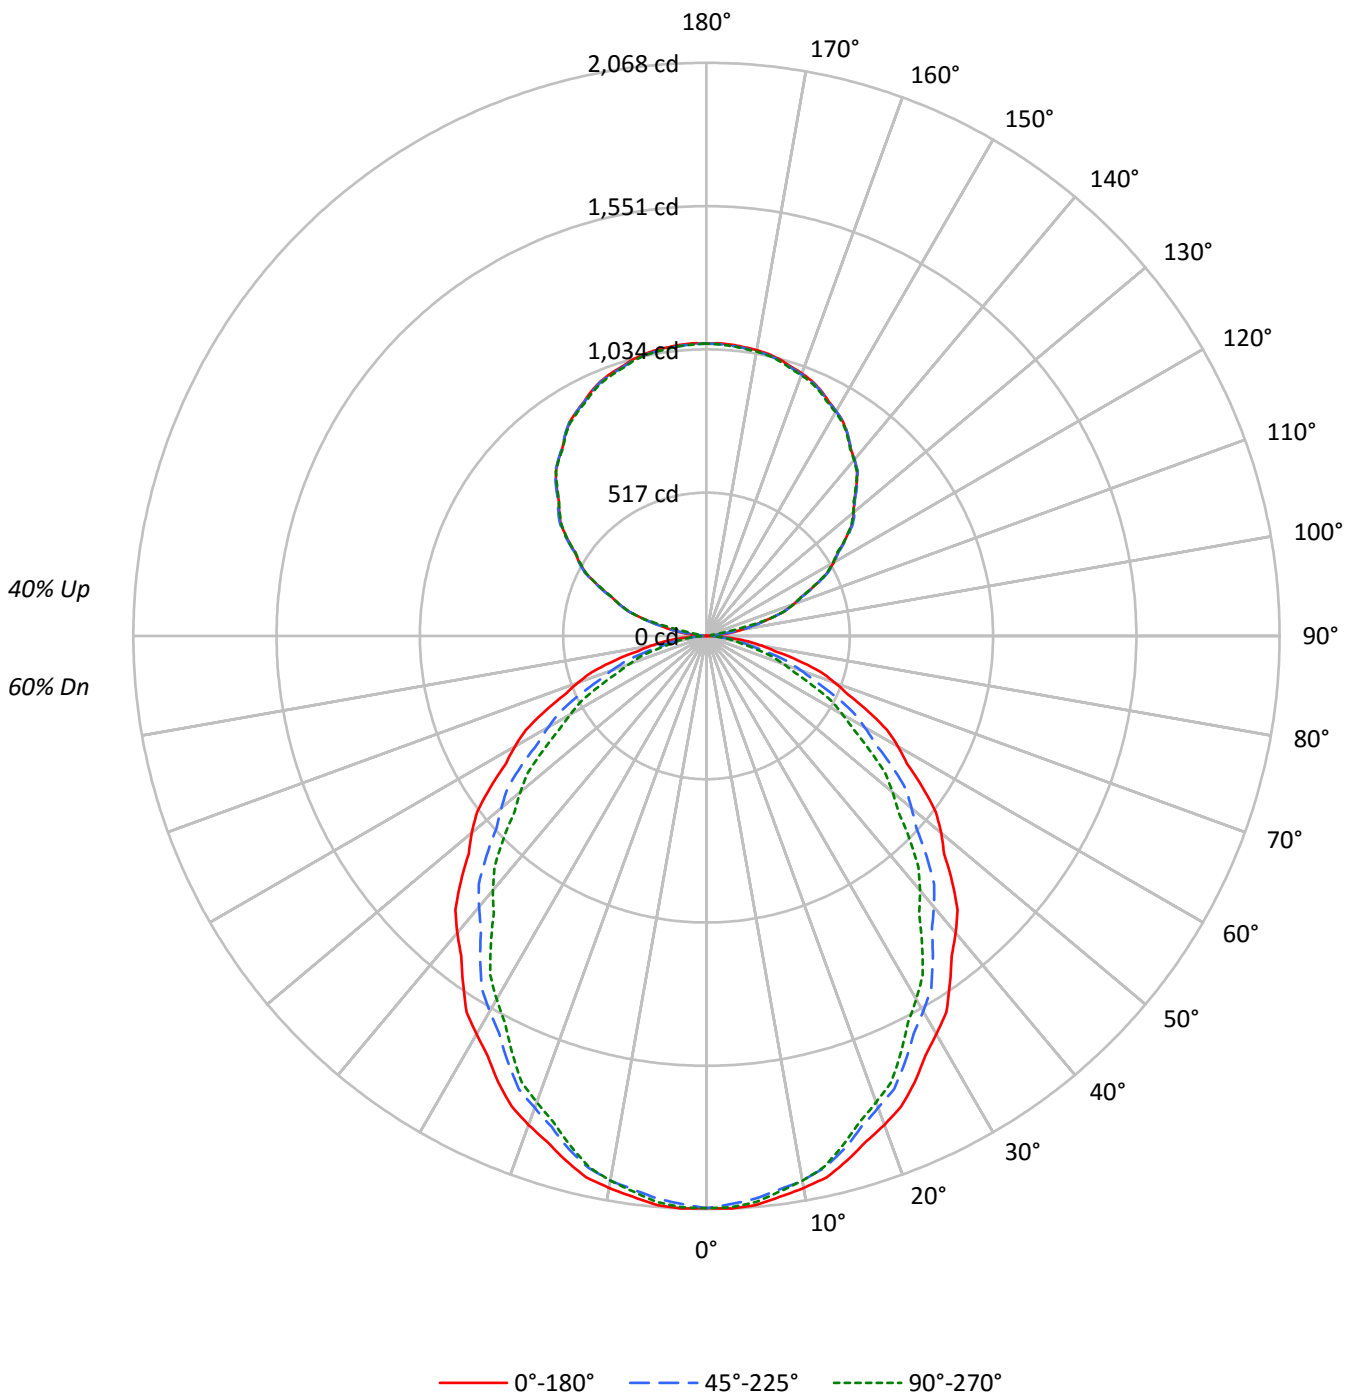



TEST NUMBER: P333625

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65	60
1	100	96	92	89	94	90	87	84	78	76	74	68	66	64	58	57	56	51
2	92	84	78	73	85	79	74	69	69	65	61	60	57	54	52	49	47	43
3	84	74	67	61	78	70	63	58	61	56	52	53	49	46	46	43	41	37
4	77	66	58	52	71	62	55	49	54	49	45	48	43	40	41	38	35	32
5	71	59	51	45	66	55	48	43	49	43	39	43	38	35	37	34	31	28
6	65	53	45	39	61	50	43	37	44	38	34	39	34	30	34	30	27	25
7	60	48	40	34	56	45	38	33	40	34	30	35	31	27	31	27	24	22
8	56	44	36	30	52	41	34	29	37	31	27	32	28	24	28	25	22	20
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	26	23	20	18
10	49	37	29	25	46	35	28	24	31	26	22	28	23	20	24	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	13332	13332	13332
5°	13363	13211	13291
10°	13262	13088	13088
15°	13104	12822	12718
20°	12902	12451	12302
25°	12666	12088	11821
30°	12371	11662	11290
35°	12071	11223	10694
40°	11790	10765	10108
45°	11449	10253	9470
50°	11106	9697	8804
55°	10709	9164	8094
60°	10311	8519	7330
65°	9840	7768	6457
70°	9304	6830	5565
75°	8559	5757	4629
80°	7539	4523	3887
85°	6358	3698	3468



TEST NUMBER: P333625

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	194.1	2.4
10°-20°	542.5	6.7
20°-30°	786.6	9.7
30°-40°	896.5	11.0
40°-50°	873.9	10.8
50°-60°	735.6	9.1
60°-70°	515.6	6.4
70°-80°	265.0	3.3
80°-90°	69.1	0.9
90°-100°	38.3	0.5
100°-110°	236.3	2.9
110°-120°	428.5	5.3
120°-130°	550.0	6.8
130°-140°	591.5	7.3
140°-150°	555.2	6.8
150°-160°	449.1	5.5
160°-170°	290.5	3.6
170°-180°	100.2	1.2
0°-30°	1523.2	18.8
0°-40°	2419.7	29.8
0°-60°	4029.1	49.6
0°-90°	4878.9	60.1
90°-120°	703.1	8.7
90°-150°	2399.9	29.6
90°-180°	3240.0	39.9
0°-180°	8118.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2064	2064	2064	2064	2064	
5°	2061	2054	2038	2052	2050	195
15°	1960	1949	1918	1915	1902	552
25°	1777	1752	1696	1676	1659	817
35°	1531	1492	1424	1380	1356	958
45°	1254	1206	1123	1062	1037	967
55°	951	899	814	746	719	850
65°	644	589	508	448	422	638
75°	343	295	231	198	186	363
85°	86	59	50	48	47	96
90°	1	7	12	16	19	6
95°	45	41	12	16	16	57
105°	230	233	233	233	232	244
115°	432	435	436	433	429	428
125°	614	619	619	616	614	548
135°	766	770	769	767	762	590
145°	888	889	889	890	885	555
155°	978	973	974	976	970	450
165°	1032	1027	1028	1032	1026	291
175°	1055	1051	1051	1057	1050	100
180°	1055	1055	1055	1055	1055	



TEST NUMBER: P333625

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3
2.5°	2068.0	2067.2	2066.3	2065.5	2064.7	2062.9	2060.1	2057.3	2054.6	2051.8	2054.6
5°	2061.2	2059.8	2058.4	2057.0	2055.6	2053.0	2049.2	2045.4	2041.6	2037.8	2041.2
7.5°	2040.9	2039.6	2038.3	2036.9	2035.6	2032.7	2028.1	2023.5	2019.0	2014.4	2016.8
10°	2022.2	2021.1	2020.1	2019.1	2018.0	2015.1	2010.2	2005.4	2000.5	1995.7	1996.7
12.5°	2001.0	1999.7	1998.3	1997.0	1995.7	1991.8	1985.3	1978.8	1972.2	1965.7	1966.5
15°	1959.8	1957.7	1955.7	1953.6	1951.5	1946.8	1939.5	1932.3	1925.0	1917.7	1917.4
17.5°	1913.3	1910.2	1907.0	1903.8	1900.6	1894.4	1885.3	1876.1	1867.0	1857.8	1856.1
20°	1877.2	1873.7	1870.2	1866.8	1863.3	1856.0	1845.0	1833.9	1822.8	1811.7	1810.0
22.5°	1837.3	1833.8	1830.3	1826.9	1823.4	1815.9	1804.2	1792.6	1780.9	1769.3	1765.9
25°	1777.4	1772.2	1767.0	1761.8	1756.6	1747.6	1734.8	1722.0	1709.1	1696.3	1691.8
27.5°	1708.8	1702.5	1696.2	1689.9	1683.6	1673.6	1659.8	1646.1	1632.4	1618.7	1612.4
30°	1658.9	1652.3	1645.7	1639.2	1632.6	1622.0	1607.4	1592.9	1578.3	1563.8	1555.8
32.5°	1610.3	1602.6	1594.9	1587.2	1579.5	1568.2	1553.4	1538.6	1523.7	1508.9	1500.1
35°	1531.1	1522.7	1514.4	1506.1	1497.8	1485.8	1470.2	1454.7	1439.1	1423.5	1413.4
37.5°	1453.4	1443.3	1433.2	1423.1	1412.9	1399.8	1383.8	1367.7	1351.6	1335.5	1323.5
40°	1398.5	1388.1	1377.7	1367.3	1357.0	1343.4	1326.8	1310.2	1293.5	1276.9	1263.8
42.5°	1341.2	1330.5	1319.8	1309.1	1298.5	1284.5	1267.4	1250.2	1233.0	1215.8	1203.2
45°	1253.5	1243.5	1233.4	1223.4	1213.3	1198.8	1179.7	1160.7	1141.6	1122.6	1108.7
47.5°	1162.8	1152.2	1141.6	1131.0	1120.4	1105.5	1086.3	1067.1	1047.9	1028.7	1014.4
50°	1105.4	1094.0	1082.5	1071.1	1059.7	1044.1	1024.3	1004.6	984.8	965.1	950.5
52.5°	1043.0	1031.3	1019.6	1007.9	996.2	981.0	962.4	943.8	925.1	906.5	890.8
55°	951.1	940.0	928.9	917.8	906.7	891.5	872.1	852.7	833.3	813.9	798.3
57.5°	858.1	846.3	834.4	822.6	810.7	795.5	776.8	758.0	739.3	720.6	705.4
60°	798.3	786.1	774.0	761.9	749.8	734.3	715.6	696.9	678.2	659.5	644.3
62.5°	734.7	723.1	711.5	699.9	688.4	673.1	654.1	635.1	616.1	597.1	583.0
65°	643.9	632.1	620.4	608.6	596.8	581.7	563.4	545.0	526.6	508.3	494.4
67.5°	553.8	542.0	530.2	518.5	506.7	492.0	474.4	456.8	439.2	421.6	408.9
70°	492.7	480.9	469.1	457.3	445.6	431.0	413.7	396.4	379.0	361.7	351.0
72.5°	432.8	421.3	409.8	398.3	386.8	372.9	356.7	340.5	324.3	308.1	298.2
75°	343.0	332.6	322.2	311.8	301.4	289.0	274.4	259.9	245.3	230.7	223.1
77.5°	253.8	245.5	237.2	228.9	220.6	210.6	198.9	187.3	175.7	164.0	158.7
80°	202.7	194.4	186.1	177.7	169.4	160.4	150.7	141.0	131.3	121.6	118.5
82.5°	152.8	145.3	137.8	130.3	122.9	115.8	109.1	102.5	95.8	89.2	87.7
85°	85.8	79.5	73.3	67.0	60.8	56.8	55.1	53.4	51.6	49.9	49.5
87.5°	28.8	27.2	25.5	23.9	22.2	21.3	21.3	21.3	21.2	21.2	21.4
90°	0.8	2.2	3.6	5.0	6.3	7.6	8.9	10.1	11.3	12.5	13.4
92.5°	12.0	11.1	10.1	9.1	8.2	8.2	9.3	10.4	11.4	12.5	13.4
95°	44.6	44.1	43.5	43.0	42.5	38.9	32.3	25.7	19.1	12.5	13.4
97.5°	93.1	94.0	94.9	95.9	96.8	90.8	77.7	64.6	51.5	38.5	33.6
100°	130.6	131.1	131.6	132.2	132.7	133.3	134.0	134.7	135.4	136.1	110.2
102.5°	168.8	169.4	170.1	170.7	171.4	171.9	172.4	172.8	173.2	173.6	168.7
105°	229.9	230.6	231.3	232.0	232.7	233.0	233.0	233.0	233.0	233.0	233.0
107.5°	293.4	293.4	293.4	293.4	293.4	293.6	293.9	294.3	294.6	295.0	295.0
110°	334.7	334.7	334.7	334.7	334.7	334.9	335.2	335.6	335.9	336.3	335.8



TEST NUMBER: P333625

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	373.5	373.9	374.3	374.8	375.2	375.5	375.7	375.9	376.1	376.3	375.7
115°	431.7	432.6	433.4	434.3	435.2	435.7	435.9	436.0	436.2	436.4	435.7
117.5°	491.9	491.9	491.8	491.8	491.8	492.1	492.7	493.4	494.1	494.7	493.8
120°	529.4	529.3	529.1	528.9	528.7	528.9	529.4	530.0	530.5	531.0	530.7
122.5°	562.6	563.3	563.9	564.6	565.2	565.7	565.9	566.2	566.4	566.7	566.3
125°	613.9	615.1	616.3	617.6	618.8	619.4	619.4	619.4	619.4	619.4	618.7
127.5°	662.9	663.7	664.6	665.5	666.3	666.7	666.6	666.5	666.4	666.3	665.9
130°	692.9	693.8	694.6	695.5	696.4	696.9	697.1	697.2	697.4	697.6	697.1
132.5°	722.9	723.9	724.9	725.9	727.0	727.3	726.9	726.5	726.1	725.7	725.6
135°	765.6	766.7	767.7	768.8	769.8	770.1	769.8	769.4	769.1	768.8	768.4
137.5°	804.9	805.8	806.7	807.6	808.5	808.8	808.5	808.2	807.9	807.5	807.6
140°	830.5	830.9	831.2	831.6	831.9	832.0	831.8	831.7	831.5	831.3	831.7
142.5°	853.7	853.9	854.1	854.3	854.5	854.7	855.0	855.2	855.5	855.7	855.8
145°	887.6	888.0	888.3	888.7	889.0	889.2	889.2	889.2	889.2	889.2	889.4
147.5°	917.3	917.3	917.2	917.1	917.1	917.1	917.3	917.5	917.8	918.0	918.2
150°	936.1	935.8	935.4	935.1	934.7	934.7	935.1	935.4	935.8	936.1	936.5
152.5°	954.3	953.5	952.7	952.0	951.2	951.0	951.3	951.7	952.0	952.4	952.7
155°	977.6	976.5	975.5	974.4	973.4	973.0	973.4	973.7	974.1	974.4	974.9
157.5°	995.5	994.9	994.3	993.7	993.0	992.7	992.8	992.8	992.8	992.9	993.4
160°	1008.1	1007.0	1006.0	1004.9	1003.9	1003.5	1003.6	1003.8	1004.0	1004.1	1004.8
162.5°	1018.1	1017.0	1016.0	1014.9	1013.9	1013.5	1013.6	1013.8	1014.0	1014.2	1015.1
165°	1031.5	1030.5	1029.4	1028.4	1027.3	1026.9	1027.1	1027.3	1027.4	1027.6	1028.7
167.5°	1041.5	1040.5	1039.4	1038.3	1037.2	1036.8	1036.9	1037.1	1037.3	1037.5	1038.7
170°	1047.2	1045.9	1044.7	1043.5	1042.3	1041.8	1041.9	1042.1	1042.3	1042.5	1043.9
172.5°	1050.9	1049.7	1048.5	1047.3	1046.0	1045.6	1045.9	1046.2	1046.5	1046.8	1048.1
175°	1055.0	1053.9	1052.9	1051.9	1050.8	1050.4	1050.5	1050.7	1050.9	1051.1	1052.5
177.5°	1056.9	1056.0	1055.2	1054.4	1053.5	1053.2	1053.3	1053.4	1053.6	1053.7	1054.7
180°	1055.0	1055.0	1055.0	1055.0	1055.0	1055.0	1055.0	1055.0	1055.0	1055.0	1055.0



TEST NUMBER: P333625

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3
2.5°	2057.3	2060.1	2062.9	2064.1	2063.9	2063.6	2063.3	2063.0
5°	2044.7	2048.2	2051.6	2053.0	2052.3	2051.6	2050.9	2050.2
7.5°	2019.2	2021.7	2024.1	2024.9	2024.1	2023.4	2022.6	2021.9
10°	1997.7	1998.8	1999.8	1999.8	1998.8	1997.7	1996.7	1995.7
12.5°	1967.3	1968.0	1968.8	1968.4	1966.8	1965.2	1963.6	1962.0
15°	1917.0	1916.7	1916.3	1914.6	1911.5	1908.4	1905.2	1902.1
17.5°	1854.4	1852.6	1850.9	1848.8	1846.2	1843.6	1841.1	1838.5
20°	1808.2	1806.5	1804.8	1802.3	1799.2	1796.1	1793.0	1789.9
22.5°	1762.5	1759.1	1755.7	1752.7	1750.2	1747.6	1745.0	1742.5
25°	1687.3	1682.8	1678.3	1674.1	1670.3	1666.5	1662.7	1658.9
27.5°	1606.1	1599.8	1593.5	1588.5	1584.8	1581.1	1577.4	1573.8
30°	1547.9	1539.9	1531.9	1526.4	1523.3	1520.1	1517.0	1513.9
32.5°	1491.3	1482.5	1473.7	1467.3	1463.4	1459.4	1455.5	1451.5
35°	1403.4	1393.3	1383.3	1375.8	1371.0	1366.1	1361.3	1356.4
37.5°	1311.4	1299.4	1287.3	1278.9	1274.2	1269.5	1264.8	1260.1
40°	1250.6	1237.4	1224.3	1215.6	1211.4	1207.3	1203.1	1199.0
42.5°	1190.6	1178.0	1165.4	1156.0	1149.9	1143.8	1137.7	1131.6
45°	1094.8	1081.0	1067.1	1057.6	1052.4	1047.2	1042.0	1036.8
47.5°	1000.2	985.9	971.6	961.6	955.8	950.1	944.3	938.6
50°	936.0	921.4	906.9	897.0	891.8	886.6	881.4	876.2
52.5°	875.1	859.5	843.8	833.4	828.2	823.0	817.8	812.6
55°	782.7	767.1	751.5	740.9	735.4	729.8	724.3	718.8
57.5°	690.1	674.9	659.6	649.6	644.6	639.7	634.8	629.9
60°	629.0	613.8	598.5	588.3	583.1	577.9	572.7	567.5
62.5°	568.9	554.7	540.6	530.9	525.7	520.5	515.3	510.1
65°	480.6	466.7	452.8	443.3	438.1	432.9	427.7	422.5
67.5°	396.2	383.5	370.9	362.4	358.3	354.1	350.0	345.8
70°	340.2	329.5	318.8	311.3	307.1	303.0	298.8	294.7
72.5°	288.3	278.4	268.4	262.1	259.3	256.6	253.8	251.0
75°	215.5	207.9	200.3	195.2	192.8	190.4	188.0	185.5
77.5°	153.3	148.0	142.7	139.1	137.3	135.5	133.7	131.9
80°	115.4	112.3	109.1	107.2	106.5	105.8	105.2	104.5
82.5°	86.3	84.8	83.4	82.4	82.0	81.6	81.2	80.8
85°	49.2	48.9	48.5	48.2	47.8	47.5	47.1	46.8
87.5°	21.6	21.7	21.9	21.9	21.7	21.6	21.4	21.2
90°	14.3	15.1	16.0	16.7	17.2	17.7	18.2	18.8
92.5°	14.3	15.1	16.0	16.5	16.8	17.0	17.3	17.5
95°	14.3	15.1	16.0	16.4	16.4	16.4	16.4	16.4
97.5°	28.7	23.8	18.9	16.4	16.4	16.4	16.4	16.4
100°	84.3	58.4	32.5	19.2	18.5	17.8	17.1	16.4
102.5°	163.8	158.9	154.0	145.7	133.8	122.0	110.2	98.4
105°	233.0	233.0	233.0	233.0	232.8	232.6	232.4	232.3
107.5°	295.1	295.1	295.1	294.9	294.4	293.8	293.3	292.8
110°	335.2	334.7	334.2	334.0	334.2	334.4	334.5	334.7



TEST NUMBER: P333625

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	375.0	374.3	373.7	373.2	373.0	372.7	372.5	372.3
115°	435.0	434.3	433.6	432.7	431.7	430.6	429.6	428.6
117.5°	492.9	492.0	491.1	490.4	490.0	489.5	489.1	488.6
120°	530.3	530.0	529.6	529.0	528.1	527.3	526.4	525.5
122.5°	566.0	565.6	565.3	564.6	563.6	562.6	561.6	560.6
125°	618.0	617.3	616.6	616.0	615.5	614.9	614.4	613.9
127.5°	665.5	665.2	664.8	663.9	662.7	661.4	660.1	658.8
130°	696.5	696.0	695.5	694.8	693.9	693.1	692.2	691.3
132.5°	725.5	725.4	725.3	724.8	724.0	723.1	722.2	721.4
135°	768.1	767.7	767.4	766.7	765.6	764.6	763.5	762.5
137.5°	807.7	807.7	807.8	807.4	806.5	805.6	804.7	803.8
140°	832.0	832.4	832.7	832.4	831.3	830.3	829.2	828.2
142.5°	855.9	855.9	856.0	855.5	854.5	853.4	852.4	851.3
145°	889.5	889.7	889.9	889.4	888.4	887.4	886.3	885.3
147.5°	918.4	918.6	918.8	918.3	917.0	915.8	914.5	913.3
150°	936.8	937.2	937.5	937.0	935.6	934.2	932.8	931.4
152.5°	953.1	953.4	953.8	953.3	952.1	950.8	949.6	948.3
155°	975.5	976.0	976.5	976.1	974.7	973.3	971.9	970.5
157.5°	994.0	994.6	995.1	994.7	993.3	991.9	990.5	989.1
160°	1005.5	1006.2	1006.9	1006.6	1005.2	1003.8	1002.4	1001.0
162.5°	1016.1	1017.1	1018.0	1017.8	1016.2	1014.7	1013.2	1011.7
165°	1029.7	1030.7	1031.8	1031.6	1030.2	1028.8	1027.4	1026.0
167.5°	1040.0	1041.2	1042.5	1042.3	1040.7	1039.2	1037.6	1036.1
170°	1045.2	1046.6	1048.0	1047.9	1046.4	1044.8	1043.2	1041.7
172.5°	1049.3	1050.6	1051.9	1051.7	1050.1	1048.6	1047.0	1045.4
175°	1053.8	1055.2	1056.6	1056.5	1055.0	1053.4	1051.9	1050.3
177.5°	1055.7	1056.6	1057.6	1057.6	1056.4	1055.3	1054.2	1053.1
180°	1055.0	1055.0	1055.0	1055.0	1055.0	1055.0	1055.0	1055.0

(END OF REPORT)