

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333626

Luminaire Tested: **S125RDIP-S1270D810U835-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333626  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIP-S1270D810U835-4F0-1E-UDD-F1  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7682.8 lumens  
Efficiency: N/A  
Efficacy: 126.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 60.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333626

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

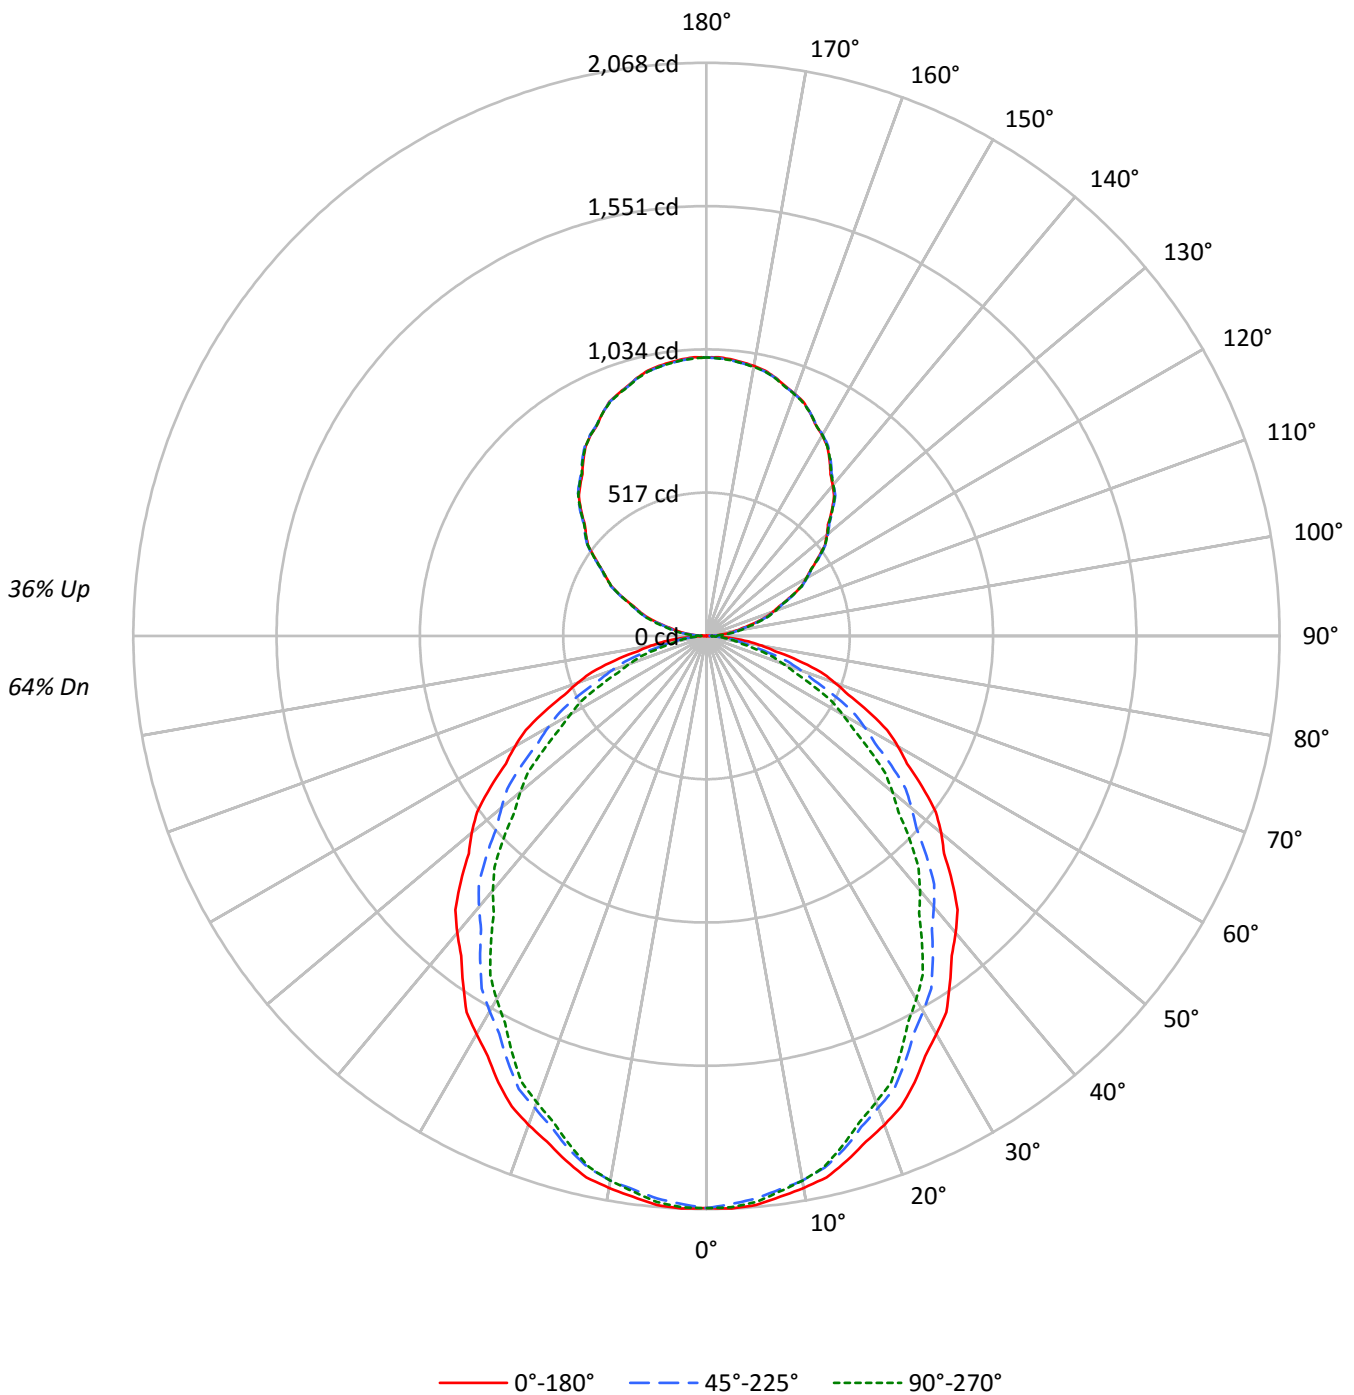



TEST NUMBER: P333626

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	104	104	104	104	91	91	91	79	79	79	69	69	69	64
1	101	97	93	89	95	91	88	85	80	78	75	70	68	67	61	60	58	54
2	92	85	79	74	86	80	74	70	71	66	63	62	59	56	54	52	50	46
3	84	75	67	62	79	71	64	59	62	57	53	55	51	48	48	45	43	39
4	77	66	58	52	72	63	56	50	56	50	46	49	45	41	43	40	37	34
5	71	59	51	45	67	56	49	43	50	44	40	44	40	36	39	35	32	29
6	66	53	45	39	61	51	43	38	45	39	35	40	35	32	35	32	29	26
7	61	48	40	35	57	46	39	33	41	35	31	37	32	28	32	29	25	23
8	57	44	36	31	53	42	35	30	38	32	27	34	29	25	30	26	23	21
9	53	40	33	28	50	38	31	27	35	29	25	31	26	23	28	24	21	19
10	49	37	30	25	46	35	29	24	32	26	22	29	24	21	26	22	19	17

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	13332	13332	13332
5°	13363	13211	13291
10°	13262	13088	13088
15°	13104	12822	12718
20°	12902	12451	12302
25°	12666	12088	11821
30°	12371	11662	11290
35°	12071	11223	10694
40°	11790	10765	10108
45°	11449	10253	9470
50°	11106	9697	8804
55°	10709	9164	8094
60°	10311	8519	7330
65°	9840	7768	6457
70°	9304	6830	5565
75°	8559	5757	4629
80°	7539	4523	3887
85°	6358	3698	3468



TEST NUMBER: P333626

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	194.1	2.5
10°-20°	542.5	7.1
20°-30°	786.6	10.2
30°-40°	896.5	11.7
40°-50°	873.9	11.4
50°-60°	735.6	9.6
60°-70°	515.6	6.7
70°-80°	265.0	3.4
80°-90°	69.1	0.9
90°-100°	67.3	0.9
100°-110°	198.7	2.6
110°-120°	336.6	4.4
120°-130°	443.0	5.8
130°-140°	496.4	6.5
140°-150°	486.5	6.3
150°-160°	408.6	5.3
160°-170°	271.6	3.5
170°-180°	95.1	1.2
0°-30°	1523.2	19.8
0°-40°	2419.7	31.5
0°-60°	4029.1	52.4
0°-90°	4878.9	63.5
90°-120°	602.7	7.8
90°-150°	2028.6	26.4
90°-180°	2804.0	36.5
0°-180°	7682.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2064	2064	2064	2064	2064	
5°	2061	2054	2038	2052	2050	195
15°	1960	1949	1918	1915	1902	552
25°	1777	1752	1696	1676	1659	817
35°	1531	1492	1424	1380	1356	958
45°	1254	1206	1123	1062	1037	967
55°	951	899	814	746	719	850
65°	644	589	508	448	422	638
75°	343	295	231	198	186	363
85°	86	59	50	48	47	96
90°	1	7	12	16	19	7
95°	51	53	60	66	67	54
105°	178	182	187	191	194	190
115°	337	340	342	341	340	333
125°	492	496	497	496	495	440
135°	640	644	645	645	642	493
145°	775	778	780	780	778	484
155°	887	887	888	890	887	408
165°	964	963	963	966	962	272
175°	1002	1000	999	1003	999	95
180°	1005	1005	1005	1005	1005	



TEST NUMBER: P333626

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3
2.5°	2068.0	2067.2	2066.3	2065.5	2064.7	2062.9	2060.1	2057.3	2054.6	2051.8	2054.6
5°	2061.2	2059.8	2058.4	2057.0	2055.6	2053.0	2049.2	2045.4	2041.6	2037.8	2041.2
7.5°	2040.9	2039.6	2038.3	2036.9	2035.6	2032.7	2028.1	2023.5	2019.0	2014.4	2016.8
10°	2022.2	2021.1	2020.1	2019.1	2018.0	2015.1	2010.2	2005.4	2000.5	1995.7	1996.7
12.5°	2001.0	1999.7	1998.3	1997.0	1995.7	1991.8	1985.3	1978.8	1972.2	1965.7	1966.5
15°	1959.8	1957.7	1955.7	1953.6	1951.5	1946.8	1939.5	1932.3	1925.0	1917.7	1917.4
17.5°	1913.3	1910.2	1907.0	1903.8	1900.6	1894.4	1885.3	1876.1	1867.0	1857.8	1856.1
20°	1877.2	1873.7	1870.2	1866.8	1863.3	1856.0	1845.0	1833.9	1822.8	1811.7	1810.0
22.5°	1837.3	1833.8	1830.3	1826.9	1823.4	1815.9	1804.2	1792.6	1780.9	1769.3	1765.9
25°	1777.4	1772.2	1767.0	1761.8	1756.6	1747.6	1734.8	1722.0	1709.1	1696.3	1691.8
27.5°	1708.8	1702.5	1696.2	1689.9	1683.6	1673.6	1659.8	1646.1	1632.4	1618.7	1612.4
30°	1658.9	1652.3	1645.7	1639.2	1632.6	1622.0	1607.4	1592.9	1578.3	1563.8	1555.8
32.5°	1610.3	1602.6	1594.9	1587.2	1579.5	1568.2	1553.4	1538.6	1523.7	1508.9	1500.1
35°	1531.1	1522.7	1514.4	1506.1	1497.8	1485.8	1470.2	1454.7	1439.1	1423.5	1413.4
37.5°	1453.4	1443.3	1433.2	1423.1	1412.9	1399.8	1383.8	1367.7	1351.6	1335.5	1323.5
40°	1398.5	1388.1	1377.7	1367.3	1357.0	1343.4	1326.8	1310.2	1293.5	1276.9	1263.8
42.5°	1341.2	1330.5	1319.8	1309.1	1298.5	1284.5	1267.4	1250.2	1233.0	1215.8	1203.2
45°	1253.5	1243.5	1233.4	1223.4	1213.3	1198.8	1179.7	1160.7	1141.6	1122.6	1108.7
47.5°	1162.8	1152.2	1141.6	1131.0	1120.4	1105.5	1086.3	1067.1	1047.9	1028.7	1014.4
50°	1105.4	1094.0	1082.5	1071.1	1059.7	1044.1	1024.3	1004.6	984.8	965.1	950.5
52.5°	1043.0	1031.3	1019.6	1007.9	996.2	981.0	962.4	943.8	925.1	906.5	890.8
55°	951.1	940.0	928.9	917.8	906.7	891.5	872.1	852.7	833.3	813.9	798.3
57.5°	858.1	846.3	834.4	822.6	810.7	795.5	776.8	758.0	739.3	720.6	705.4
60°	798.3	786.1	774.0	761.9	749.8	734.3	715.6	696.9	678.2	659.5	644.3
62.5°	734.7	723.1	711.5	699.9	688.4	673.1	654.1	635.1	616.1	597.1	583.0
65°	643.9	632.1	620.4	608.6	596.8	581.7	563.4	545.0	526.6	508.3	494.4
67.5°	553.8	542.0	530.2	518.5	506.7	492.0	474.4	456.8	439.2	421.6	408.9
70°	492.7	480.9	469.1	457.3	445.6	431.0	413.7	396.4	379.0	361.7	351.0
72.5°	432.8	421.3	409.8	398.3	386.8	372.9	356.7	340.5	324.3	308.1	298.2
75°	343.0	332.6	322.2	311.8	301.4	289.0	274.4	259.9	245.3	230.7	223.1
77.5°	253.8	245.5	237.2	228.9	220.6	210.6	198.9	187.3	175.7	164.0	158.7
80°	202.7	194.4	186.1	177.7	169.4	160.4	150.7	141.0	131.3	121.6	118.5
82.5°	152.8	145.3	137.8	130.3	122.9	115.8	109.1	102.5	95.8	89.2	87.7
85°	85.8	79.5	73.3	67.0	60.8	56.8	55.1	53.4	51.6	49.9	49.5
87.5°	28.8	27.2	25.5	23.9	22.2	21.3	21.3	21.3	21.2	21.2	21.4
90°	0.8	2.2	3.6	5.0	6.3	7.6	8.9	10.1	11.3	12.5	13.4
92.5°	18.9	19.9	20.9	21.8	22.8	24.0	25.5	27.0	28.5	30.0	31.2
95°	50.8	51.2	51.5	51.9	52.2	53.3	55.0	56.7	58.5	60.2	61.4
97.5°	84.5	84.6	84.7	84.9	85.0	86.3	88.7	91.1	93.5	95.9	97.0
100°	109.5	109.5	109.5	109.5	109.5	110.6	112.9	115.1	117.4	119.6	121.2
102.5°	136.4	137.1	137.8	138.5	139.2	140.1	141.2	142.4	143.5	144.7	146.4
105°	178.3	179.2	180.0	180.9	181.8	182.7	183.8	184.8	185.8	186.9	187.9
107.5°	224.6	225.4	226.3	227.2	228.1	228.9	229.7	230.5	231.3	232.1	232.6
110°	256.5	257.4	258.2	259.1	260.0	260.7	261.2	261.7	262.2	262.7	263.3



TEST NUMBER: P333626

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	289.0	289.5	289.9	290.4	290.8	291.4	292.0	292.7	293.4	294.0	294.3
115°	337.0	337.7	338.4	339.1	339.8	340.3	340.7	341.0	341.4	341.7	341.5
117.5°	385.2	385.5	385.8	386.1	386.4	386.8	387.1	387.4	387.7	388.0	388.1
120°	415.2	416.1	417.0	417.8	418.7	419.2	419.4	419.6	419.7	419.9	419.9
122.5°	447.7	448.1	448.4	448.7	449.0	449.4	449.8	450.3	450.7	451.2	451.0
125°	491.8	492.9	493.9	495.0	496.0	496.6	496.8	497.0	497.1	497.3	497.0
127.5°	538.8	539.4	539.9	540.5	541.1	541.5	541.7	541.9	542.2	542.4	542.2
130°	566.9	567.8	568.7	569.5	570.4	571.0	571.3	571.7	572.0	572.4	572.2
132.5°	595.1	596.5	597.9	599.3	600.8	601.4	601.4	601.3	601.2	601.2	601.0
135°	639.6	640.7	641.7	642.8	643.8	644.4	644.6	644.8	644.9	645.1	645.1
137.5°	681.6	682.6	683.6	684.6	685.6	686.3	686.7	687.0	687.4	687.8	688.0
140°	708.5	709.3	710.2	711.1	711.9	712.6	713.1	713.7	714.2	714.7	715.1
142.5°	735.4	736.1	736.8	737.5	738.3	739.0	739.6	740.3	740.9	741.6	741.8
145°	774.9	775.6	776.3	777.0	777.7	778.3	778.8	779.3	779.9	780.4	780.4
147.5°	811.5	811.9	812.3	812.7	813.0	813.4	813.9	814.3	814.7	815.1	815.5
150°	835.9	835.7	835.6	835.4	835.2	835.5	836.2	836.9	837.6	838.3	838.3
152.5°	855.9	856.2	856.4	856.7	856.9	857.2	857.4	857.7	858.0	858.3	858.7
155°	886.7	886.7	886.7	886.7	886.7	886.8	887.0	887.2	887.3	887.5	888.2
157.5°	914.3	913.9	913.5	913.1	912.7	912.6	912.8	913.0	913.1	913.3	914.0
160°	930.5	930.0	929.5	929.0	928.4	928.3	928.4	928.6	928.8	929.0	929.7
162.5°	944.9	944.5	944.1	943.8	943.4	943.2	943.2	943.3	943.3	943.4	944.2
165°	964.2	963.8	963.5	963.1	962.8	962.7	962.8	963.0	963.2	963.4	964.1
167.5°	980.4	979.7	979.0	978.3	977.6	977.3	977.3	977.3	977.3	977.3	978.3
170°	989.2	988.5	987.8	987.1	986.4	986.0	986.0	986.0	986.0	986.0	987.1
172.5°	995.4	994.7	994.0	993.3	992.6	992.3	992.3	992.3	992.3	992.3	993.3
175°	1002.5	1001.8	1001.1	1000.4	999.7	999.3	999.3	999.3	999.3	999.3	1000.4
177.5°	1006.1	1005.5	1005.0	1004.4	1003.8	1003.5	1003.4	1003.2	1003.1	1002.9	1003.8
180°	1004.8	1004.8	1004.8	1004.8	1004.8	1004.8	1004.8	1004.8	1004.8	1004.8	1004.8



TEST NUMBER: P333626

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3
2.5°	2057.3	2060.1	2062.9	2064.1	2063.9	2063.6	2063.3	2063.0
5°	2044.7	2048.2	2051.6	2053.0	2052.3	2051.6	2050.9	2050.2
7.5°	2019.2	2021.7	2024.1	2024.9	2024.1	2023.4	2022.6	2021.9
10°	1997.7	1998.8	1999.8	1999.8	1998.8	1997.7	1996.7	1995.7
12.5°	1967.3	1968.0	1968.8	1968.4	1966.8	1965.2	1963.6	1962.0
15°	1917.0	1916.7	1916.3	1914.6	1911.5	1908.4	1905.2	1902.1
17.5°	1854.4	1852.6	1850.9	1848.8	1846.2	1843.6	1841.1	1838.5
20°	1808.2	1806.5	1804.8	1802.3	1799.2	1796.1	1793.0	1789.9
22.5°	1762.5	1759.1	1755.7	1752.7	1750.2	1747.6	1745.0	1742.5
25°	1687.3	1682.8	1678.3	1674.1	1670.3	1666.5	1662.7	1658.9
27.5°	1606.1	1599.8	1593.5	1588.5	1584.8	1581.1	1577.4	1573.8
30°	1547.9	1539.9	1531.9	1526.4	1523.3	1520.1	1517.0	1513.9
32.5°	1491.3	1482.5	1473.7	1467.3	1463.4	1459.4	1455.5	1451.5
35°	1403.4	1393.3	1383.3	1375.8	1371.0	1366.1	1361.3	1356.4
37.5°	1311.4	1299.4	1287.3	1278.9	1274.2	1269.5	1264.8	1260.1
40°	1250.6	1237.4	1224.3	1215.6	1211.4	1207.3	1203.1	1199.0
42.5°	1190.6	1178.0	1165.4	1156.0	1149.9	1143.8	1137.7	1131.6
45°	1094.8	1081.0	1067.1	1057.6	1052.4	1047.2	1042.0	1036.8
47.5°	1000.2	985.9	971.6	961.6	955.8	950.1	944.3	938.6
50°	936.0	921.4	906.9	897.0	891.8	886.6	881.4	876.2
52.5°	875.1	859.5	843.8	833.4	828.2	823.0	817.8	812.6
55°	782.7	767.1	751.5	740.9	735.4	729.8	724.3	718.8
57.5°	690.1	674.9	659.6	649.6	644.6	639.7	634.8	629.9
60°	629.0	613.8	598.5	588.3	583.1	577.9	572.7	567.5
62.5°	568.9	554.7	540.6	530.9	525.7	520.5	515.3	510.1
65°	480.6	466.7	452.8	443.3	438.1	432.9	427.7	422.5
67.5°	396.2	383.5	370.9	362.4	358.3	354.1	350.0	345.8
70°	340.2	329.5	318.8	311.3	307.1	303.0	298.8	294.7
72.5°	288.3	278.4	268.4	262.1	259.3	256.6	253.8	251.0
75°	215.5	207.9	200.3	195.2	192.8	190.4	188.0	185.5
77.5°	153.3	148.0	142.7	139.1	137.3	135.5	133.7	131.9
80°	115.4	112.3	109.1	107.2	106.5	105.8	105.2	104.5
82.5°	86.3	84.8	83.4	82.4	82.0	81.6	81.2	80.8
85°	49.2	48.9	48.5	48.2	47.8	47.5	47.1	46.8
87.5°	21.6	21.7	21.9	21.9	21.7	21.6	21.4	21.2
90°	14.2	15.1	16.0	16.7	17.2	17.7	18.2	18.8
92.5°	32.3	33.5	34.6	35.4	35.8	36.1	36.5	36.9
95°	62.6	63.9	65.1	65.9	66.2	66.6	66.9	67.2
97.5°	98.2	99.3	100.5	101.1	101.3	101.5	101.8	102.0
100°	122.8	124.3	125.9	126.9	127.2	127.5	127.9	128.2
102.5°	148.1	149.8	151.5	152.6	153.1	153.5	154.0	154.5
105°	189.0	190.0	191.1	191.8	192.4	192.9	193.4	193.9
107.5°	233.1	233.6	234.2	234.4	234.4	234.3	234.3	234.3
110°	263.8	264.3	264.8	265.0	264.8	264.6	264.5	264.3





TEST NUMBER: P333626

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	294.5	294.7	295.0	295.0	294.6	294.3	294.0	293.7
115°	341.4	341.2	341.0	340.8	340.7	340.5	340.3	340.2
117.5°	388.3	388.4	388.6	388.3	387.6	386.9	386.2	385.5
120°	419.9	419.9	419.9	419.6	418.9	418.2	417.5	416.8
122.5°	450.9	450.8	450.6	450.3	449.7	449.2	448.6	448.1
125°	496.6	496.3	495.9	495.7	495.5	495.3	495.2	495.0
127.5°	542.0	541.8	541.7	541.4	541.1	540.7	540.4	540.0
130°	572.0	571.9	571.7	571.4	571.1	570.7	570.4	570.0
132.5°	600.8	600.6	600.5	600.1	599.7	599.2	598.7	598.2
135°	645.1	645.1	645.1	644.8	644.1	643.4	642.7	642.0
137.5°	688.2	688.4	688.6	688.3	687.4	686.6	685.7	684.8
140°	715.4	715.7	716.1	715.8	715.0	714.1	713.2	712.4
142.5°	742.0	742.2	742.4	742.1	741.2	740.4	739.5	738.6
145°	780.4	780.4	780.4	780.1	779.6	779.1	778.6	778.0
147.5°	815.9	816.4	816.8	816.4	815.2	814.0	812.9	811.7
150°	838.3	838.3	838.3	838.1	837.7	837.4	837.0	836.7
152.5°	859.1	859.5	859.9	859.8	859.2	858.6	858.0	857.3
155°	888.9	889.6	890.3	890.2	889.3	888.5	887.6	886.7
157.5°	914.7	915.4	916.1	915.9	914.7	913.6	912.4	911.3
160°	930.4	931.0	931.7	931.7	930.8	929.9	929.0	928.2
162.5°	945.0	945.9	946.7	946.6	945.6	944.6	943.6	942.6
165°	964.8	965.5	966.1	966.0	964.9	963.9	962.8	961.8
167.5°	979.4	980.4	981.5	981.4	980.4	979.3	978.2	977.1
170°	988.1	989.2	990.2	990.1	988.9	987.7	986.5	985.3
172.5°	994.4	995.4	996.5	996.5	995.4	994.3	993.2	992.1
175°	1001.4	1002.5	1003.5	1003.4	1002.2	1001.0	999.8	998.6
177.5°	1004.6	1005.4	1006.3	1006.2	1005.2	1004.3	1003.3	1002.3
180°	1004.8	1004.8	1004.8	1004.8	1004.8	1004.8	1004.8	1004.8

(END OF REPORT)