

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333627

Luminaire Tested: **S125RDIP-S1270D810U835-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333627  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIP-S1270D810U835-4F0-1E-UDD-F4  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 810 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7787.2 lumens  
Efficiency: N/A  
Efficacy: 128.3 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 60.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333627

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

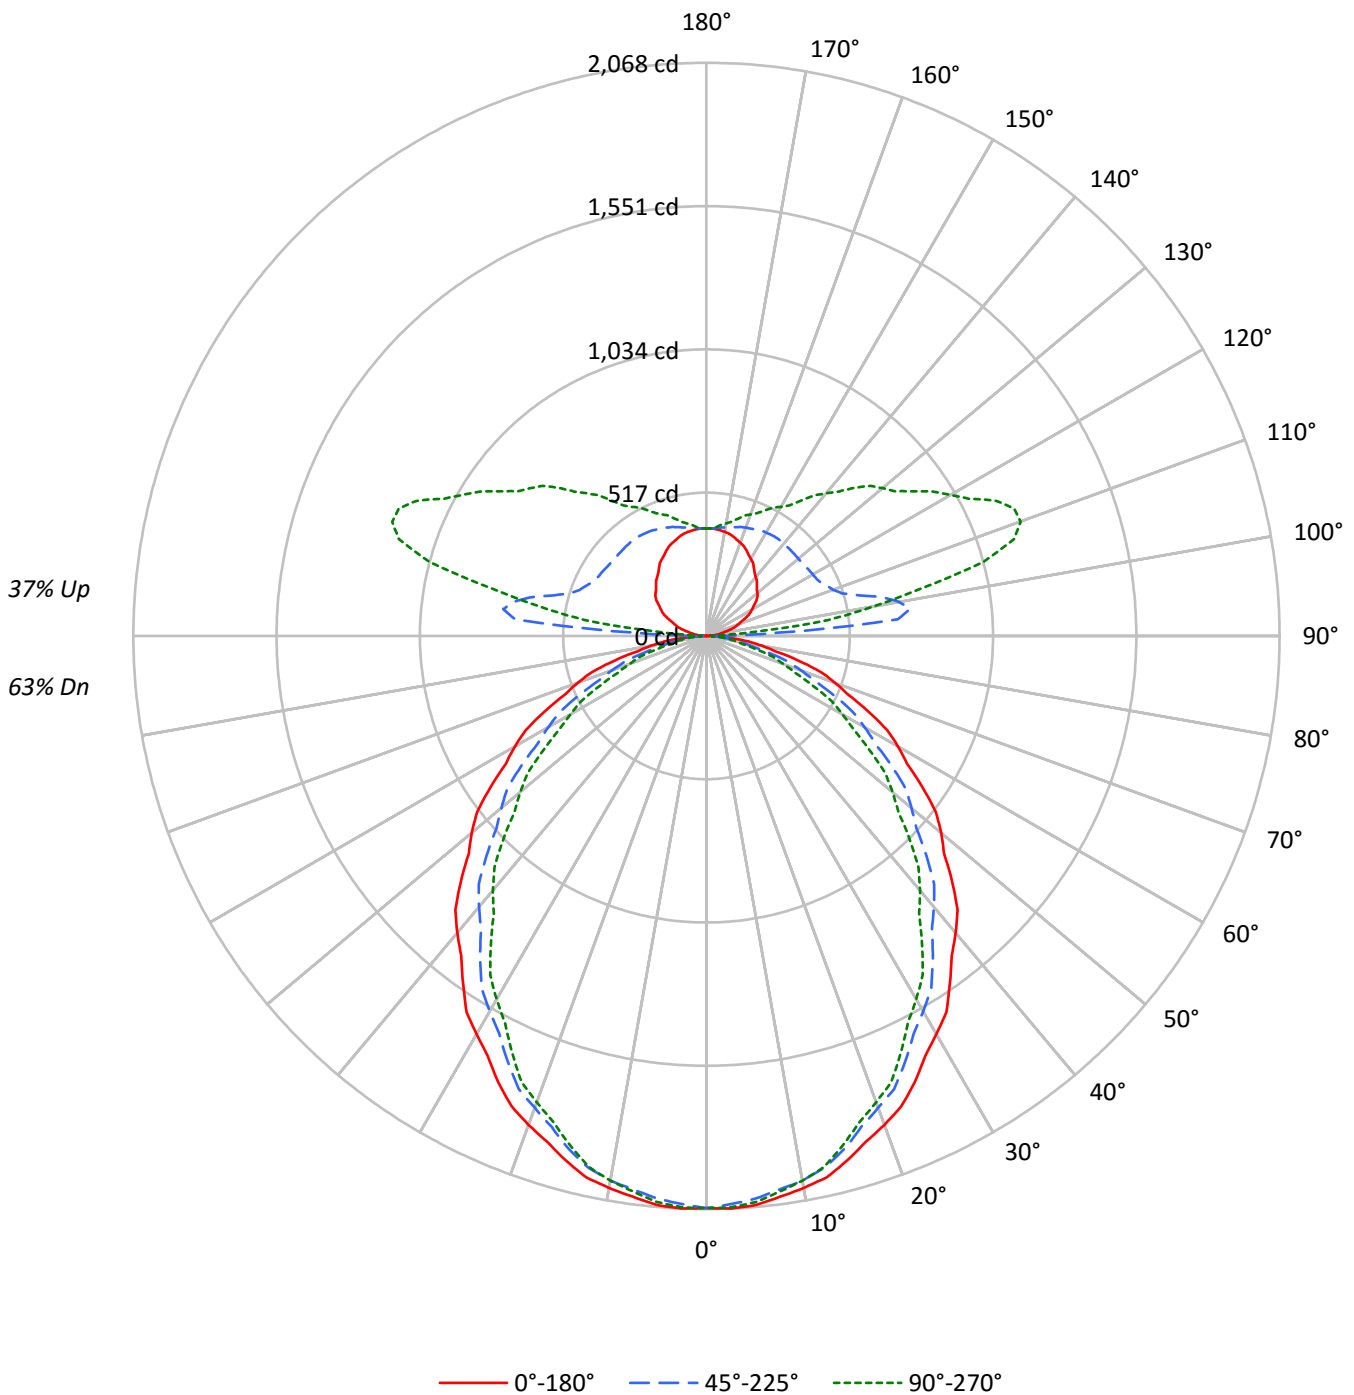



TEST NUMBER: P333627

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	79	79	79	68	68	68	63
1	101	97	93	89	94	91	87	84	80	77	75	70	68	66	60	59	58	53
2	92	85	79	73	86	80	74	70	70	66	62	61	58	56	53	51	49	45
3	84	75	67	61	79	70	64	59	62	57	53	55	51	47	48	45	42	38
4	77	66	58	52	72	63	55	50	55	50	45	49	44	41	43	39	36	33
5	71	59	51	45	66	56	49	43	50	44	39	44	39	36	39	35	32	29
6	66	53	45	39	61	50	43	38	45	39	34	40	35	31	35	31	28	26
7	61	48	40	35	57	46	38	33	41	35	31	36	31	28	32	28	25	23
8	56	44	36	31	53	42	35	30	37	31	27	33	28	25	30	26	23	20
9	53	40	33	28	49	38	31	27	34	29	25	31	26	22	27	23	21	18
10	49	37	30	25	46	35	28	24	32	26	22	28	24	20	25	21	19	17

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	13332	13332	13332
5°	13363	13211	13291
10°	13262	13088	13088
15°	13104	12822	12718
20°	12902	12451	12302
25°	12666	12088	11821
30°	12371	11662	11290
35°	12071	11223	10694
40°	11790	10765	10108
45°	11449	10253	9470
50°	11106	9697	8804
55°	10709	9164	8094
60°	10311	8519	7330
65°	9840	7768	6457
70°	9304	6830	5565
75°	8559	5757	4629
80°	7539	4523	3887
85°	6358	3698	3468



TEST NUMBER: P333627

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	194.1	2.5
10°-20°	542.5	7.0
20°-30°	786.6	10.1
30°-40°	896.5	11.5
40°-50°	873.9	11.2
50°-60°	735.6	9.4
60°-70°	515.6	6.6
70°-80°	265.0	3.4
80°-90°	69.1	0.9
90°-100°	281.1	3.6
100°-110°	604.3	7.8
110°-120°	567.1	7.3
120°-130°	459.6	5.9
130°-140°	368.8	4.7
140°-150°	278.3	3.6
150°-160°	195.9	2.5
160°-170°	115.5	1.5
170°-180°	37.6	0.5
0°-30°	1523.2	19.6
0°-40°	2419.7	31.1
0°-60°	4029.1	51.7
0°-90°	4878.9	62.7
90°-120°	1452.5	18.7
90°-150°	2559.3	32.9
90°-180°	2908.0	37.3
0°-180°	7787.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2064	2064	2064	2064	2064	
5°	2061	2054	2038	2052	2050	195
15°	1960	1949	1918	1915	1902	552
25°	1777	1752	1696	1676	1659	817
35°	1531	1492	1424	1380	1356	958
45°	1254	1206	1123	1062	1037	967
55°	951	899	814	746	719	850
65°	644	589	508	448	422	638
75°	343	295	231	198	186	363
85°	86	59	50	48	47	96
90°	1	7	12	16	18	5
95°	26	76	693	314	184	27
105°	88	124	567	1116	1036	93
115°	158	190	455	981	1154	155
125°	219	256	436	780	909	194
135°	256	308	433	654	755	199
145°	299	342	435	541	596	187
155°	341	367	424	479	500	157
165°	372	382	407	431	438	105
175°	387	387	390	395	393	37
180°	388	388	388	388	388	



TEST NUMBER: P333627

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3
2.5°	2068.0	2067.2	2066.3	2065.5	2064.7	2062.9	2060.1	2057.3	2054.6	2051.8	2054.6
5°	2061.2	2059.8	2058.4	2057.0	2055.6	2053.0	2049.2	2045.4	2041.6	2037.8	2041.2
7.5°	2040.9	2039.6	2038.3	2036.9	2035.6	2032.7	2028.1	2023.5	2019.0	2014.4	2016.8
10°	2022.2	2021.1	2020.1	2019.1	2018.0	2015.1	2010.2	2005.4	2000.5	1995.7	1996.7
12.5°	2001.0	1999.7	1998.3	1997.0	1995.7	1991.8	1985.3	1978.8	1972.2	1965.7	1966.5
15°	1959.8	1957.7	1955.7	1953.6	1951.5	1946.8	1939.5	1932.3	1925.0	1917.7	1917.4
17.5°	1913.3	1910.2	1907.0	1903.8	1900.6	1894.4	1885.3	1876.1	1867.0	1857.8	1856.1
20°	1877.2	1873.7	1870.2	1866.8	1863.3	1856.0	1845.0	1833.9	1822.8	1811.7	1810.0
22.5°	1837.3	1833.8	1830.3	1826.9	1823.4	1815.9	1804.2	1792.6	1780.9	1769.3	1765.9
25°	1777.4	1772.2	1767.0	1761.8	1756.6	1747.6	1734.8	1722.0	1709.1	1696.3	1691.8
27.5°	1708.8	1702.5	1696.2	1689.9	1683.6	1673.6	1659.8	1646.1	1632.4	1618.7	1612.4
30°	1658.9	1652.3	1645.7	1639.2	1632.6	1622.0	1607.4	1592.9	1578.3	1563.8	1555.8
32.5°	1610.3	1602.6	1594.9	1587.2	1579.5	1568.2	1553.4	1538.6	1523.7	1508.9	1500.1
35°	1531.1	1522.7	1514.4	1506.1	1497.8	1485.8	1470.2	1454.7	1439.1	1423.5	1413.4
37.5°	1453.4	1443.3	1433.2	1423.1	1412.9	1399.8	1383.8	1367.7	1351.6	1335.5	1323.5
40°	1398.5	1388.1	1377.7	1367.3	1357.0	1343.4	1326.8	1310.2	1293.5	1276.9	1263.8
42.5°	1341.2	1330.5	1319.8	1309.1	1298.5	1284.5	1267.4	1250.2	1233.0	1215.8	1203.2
45°	1253.5	1243.5	1233.4	1223.4	1213.3	1198.8	1179.7	1160.7	1141.6	1122.6	1108.7
47.5°	1162.8	1152.2	1141.6	1131.0	1120.4	1105.5	1086.3	1067.1	1047.9	1028.7	1014.4
50°	1105.4	1094.0	1082.5	1071.1	1059.7	1044.1	1024.3	1004.6	984.8	965.1	950.5
52.5°	1043.0	1031.3	1019.6	1007.9	996.2	981.0	962.4	943.8	925.1	906.5	890.8
55°	951.1	940.0	928.9	917.8	906.7	891.5	872.1	852.7	833.3	813.9	798.3
57.5°	858.1	846.3	834.4	822.6	810.7	795.5	776.8	758.0	739.3	720.6	705.4
60°	798.3	786.1	774.0	761.9	749.8	734.3	715.6	696.9	678.2	659.5	644.3
62.5°	734.7	723.1	711.5	699.9	688.4	673.1	654.1	635.1	616.1	597.1	583.0
65°	643.9	632.1	620.4	608.6	596.8	581.7	563.4	545.0	526.6	508.3	494.4
67.5°	553.8	542.0	530.2	518.5	506.7	492.0	474.4	456.8	439.2	421.6	408.9
70°	492.7	480.9	469.1	457.3	445.6	431.0	413.7	396.4	379.0	361.7	351.0
72.5°	432.8	421.3	409.8	398.3	386.8	372.9	356.7	340.5	324.3	308.1	298.2
75°	343.0	332.6	322.2	311.8	301.4	289.0	274.4	259.9	245.3	230.7	223.1
77.5°	253.8	245.5	237.2	228.9	220.6	210.6	198.9	187.3	175.7	164.0	158.7
80°	202.7	194.4	186.1	177.7	169.4	160.4	150.7	141.0	131.3	121.6	118.5
82.5°	152.8	145.3	137.8	130.3	122.9	115.8	109.1	102.5	95.8	89.2	87.7
85°	85.8	79.5	73.3	67.0	60.8	56.8	55.1	53.4	51.6	49.9	49.5
87.5°	28.8	27.1	25.4	23.8	22.2	21.4	21.3	21.3	21.2	21.2	21.4
90°	0.8	1.6	3.1	4.7	6.3	7.8	8.6	10.2	10.9	12.5	13.3
92.5°	9.5	11.6	18.1	27.8	41.3	64.1	106.8	178.4	256.1	252.1	204.1
95°	25.8	26.6	32.8	41.4	58.6	93.8	177.5	349.5	565.3	692.8	677.9
97.5°	42.8	43.8	48.2	56.8	72.2	97.6	152.9	279.0	504.8	739.8	857.7
100°	54.7	56.3	59.4	68.0	82.9	106.3	151.7	253.3	450.4	706.1	901.5
102.5°	67.9	68.8	71.3	80.5	94.1	117.0	157.3	242.7	409.1	646.6	875.3
105°	88.4	88.4	92.3	100.1	112.6	134.5	168.9	238.5	369.1	566.9	791.3
107.5°	108.4	109.9	113.7	120.1	133.1	152.8	186.1	245.7	352.2	512.0	705.6
110°	122.8	124.3	127.4	134.5	146.2	166.5	198.6	252.6	347.2	486.3	656.8



TEST NUMBER: P333627

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	137.1	138.7	141.2	148.2	160.0	179.7	210.5	261.3	347.2	471.3	620.5
115°	157.9	159.5	161.9	168.9	180.6	200.2	229.1	274.4	349.5	455.1	580.9
117.5°	176.7	179.1	181.6	188.6	201.9	220.8	248.2	289.5	354.7	447.1	557.3
120°	189.2	191.6	194.7	201.7	215.0	234.6	261.9	299.5	359.7	443.3	544.2
122.5°	202.4	204.1	206.6	213.6	228.2	247.7	275.1	310.7	364.0	440.2	532.9
125°	218.9	220.5	224.4	231.4	246.3	266.6	292.4	326.0	371.4	436.3	517.6
127.5°	231.9	234.3	239.3	248.2	264.0	284.3	309.2	340.1	379.7	434.4	503.5
130°	240.0	242.4	248.6	258.8	275.2	295.6	319.8	349.5	384.7	433.2	494.2
132.5°	246.3	249.3	256.8	268.2	285.2	305.6	329.8	357.6	390.3	433.2	486.7
135°	256.5	259.6	269.0	281.5	297.9	319.0	343.3	369.1	398.0	433.2	477.7
137.5°	269.3	271.6	280.4	292.9	309.0	330.7	352.8	377.5	405.0	434.1	469.8
140°	276.8	279.1	288.5	301.0	315.9	337.0	359.7	383.1	408.1	434.7	466.0
142.5°	285.5	287.3	296.0	308.5	322.8	342.6	364.0	386.3	410.0	435.4	462.9
145°	298.7	300.2	308.1	319.0	333.1	351.1	371.4	390.9	412.1	434.7	458.2
147.5°	312.4	313.4	320.1	330.3	342.5	358.3	376.1	393.8	412.8	432.7	453.3
150°	320.6	322.1	327.6	337.8	348.7	362.0	379.2	395.6	412.8	430.8	449.6
152.5°	329.3	330.3	335.1	344.0	354.4	366.4	382.3	396.9	412.2	428.3	445.2
155°	340.9	340.9	345.6	353.4	361.2	372.2	385.5	398.0	410.5	423.8	437.9
157.5°	351.2	351.1	354.8	361.5	368.4	376.7	388.1	398.8	408.5	419.1	431.0
160°	358.1	357.3	360.5	365.9	372.2	379.2	389.4	398.8	406.6	416.0	425.4
162.5°	363.7	363.0	366.1	370.9	375.9	381.7	390.6	398.1	404.7	412.2	420.3
165°	372.2	370.6	373.0	376.9	380.0	384.7	390.9	397.2	401.9	406.6	412.8
167.5°	377.8	377.0	378.4	380.6	382.8	385.8	390.9	395.3	397.5	401.1	405.5
170°	381.6	380.8	381.6	383.1	384.7	387.0	390.9	394.1	395.6	398.0	401.1
172.5°	384.1	382.7	383.4	385.0	385.9	387.0	390.3	392.8	393.1	394.2	396.7
175°	387.0	385.5	386.3	387.0	387.0	387.0	389.4	390.9	390.2	390.2	390.9
177.5°	388.4	387.2	387.2	387.8	387.2	387.2	388.4	389.1	387.8	387.8	388.4
180°	387.8	387.8	387.8	387.8	387.8	387.8	387.8	387.8	387.8	387.8	387.8



TEST NUMBER: P333627

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3	2064.3
2.5°	2057.3	2060.1	2062.9	2064.1	2063.9	2063.6	2063.3	2063.0
5°	2044.7	2048.2	2051.6	2053.0	2052.3	2051.6	2050.9	2050.2
7.5°	2019.2	2021.7	2024.1	2024.9	2024.1	2023.4	2022.6	2021.9
10°	1997.7	1998.8	1999.8	1999.8	1998.8	1997.7	1996.7	1995.7
12.5°	1967.3	1968.0	1968.8	1968.4	1966.8	1965.2	1963.6	1962.0
15°	1917.0	1916.7	1916.3	1914.6	1911.5	1908.4	1905.2	1902.1
17.5°	1854.4	1852.6	1850.9	1848.8	1846.2	1843.6	1841.1	1838.5
20°	1808.2	1806.5	1804.8	1802.3	1799.2	1796.1	1793.0	1789.9
22.5°	1762.5	1759.1	1755.7	1752.7	1750.2	1747.6	1745.0	1742.5
25°	1687.3	1682.8	1678.3	1674.1	1670.3	1666.5	1662.7	1658.9
27.5°	1606.1	1599.8	1593.5	1588.5	1584.8	1581.1	1577.4	1573.8
30°	1547.9	1539.9	1531.9	1526.4	1523.3	1520.1	1517.0	1513.9
32.5°	1491.3	1482.5	1473.7	1467.3	1463.4	1459.4	1455.5	1451.5
35°	1403.4	1393.3	1383.3	1375.8	1371.0	1366.1	1361.3	1356.4
37.5°	1311.4	1299.4	1287.3	1278.9	1274.2	1269.5	1264.8	1260.1
40°	1250.6	1237.4	1224.3	1215.6	1211.4	1207.3	1203.1	1199.0
42.5°	1190.6	1178.0	1165.4	1156.0	1149.9	1143.8	1137.7	1131.6
45°	1094.8	1081.0	1067.1	1057.6	1052.4	1047.2	1042.0	1036.8
47.5°	1000.2	985.9	971.6	961.6	955.8	950.1	944.3	938.6
50°	936.0	921.4	906.9	897.0	891.8	886.6	881.4	876.2
52.5°	875.1	859.5	843.8	833.4	828.2	823.0	817.8	812.6
55°	782.7	767.1	751.5	740.9	735.4	729.8	724.3	718.8
57.5°	690.1	674.9	659.6	649.6	644.6	639.7	634.8	629.9
60°	629.0	613.8	598.5	588.3	583.1	577.9	572.7	567.5
62.5°	568.9	554.7	540.6	530.9	525.7	520.5	515.3	510.1
65°	480.6	466.7	452.8	443.3	438.1	432.9	427.7	422.5
67.5°	396.2	383.5	370.9	362.4	358.3	354.1	350.0	345.8
70°	340.2	329.5	318.8	311.3	307.1	303.0	298.8	294.7
72.5°	288.3	278.4	268.4	262.1	259.3	256.6	253.8	251.0
75°	215.5	207.9	200.3	195.2	192.8	190.4	188.0	185.5
77.5°	153.3	148.0	142.7	139.1	137.3	135.5	133.7	131.9
80°	115.4	112.3	109.1	107.2	106.5	105.8	105.2	104.5
82.5°	86.3	84.8	83.4	82.4	82.0	81.6	81.2	80.8
85°	49.2	48.9	48.5	48.2	47.8	47.5	47.1	46.8
87.5°	21.5	21.7	21.8	22.0	21.7	21.5	21.3	21.1
90°	14.1	14.9	15.6	17.2	17.2	17.2	18.0	18.0
92.5°	138.6	100.6	75.7	64.1	54.1	52.2	51.1	49.9
95°	562.2	443.3	347.2	281.5	226.0	202.5	196.3	183.7
97.5°	837.3	753.9	660.2	568.9	520.6	476.8	454.1	444.1
100°	961.7	923.4	842.9	761.6	707.6	651.3	622.4	609.9
102.5°	1003.6	1027.3	988.6	933.6	875.9	835.8	804.4	795.0
105°	978.9	1086.1	1120.5	1111.9	1086.8	1061.0	1045.4	1036.0
107.5°	890.7	1033.7	1122.0	1162.8	1175.5	1175.3	1170.2	1163.9
110°	825.7	974.2	1084.5	1150.9	1186.1	1201.0	1206.5	1206.5





TEST NUMBER: P333627

CATALOG NUMBER: S125RDIP-S1270D810U835-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	774.4	915.4	1026.9	1105.3	1156.7	1182.2	1195.8	1201.5
115°	710.0	831.2	938.3	1023.5	1084.5	1122.0	1143.9	1154.1
117.5°	668.4	772.8	865.1	943.3	1004.3	1043.0	1064.8	1071.0
120°	645.8	739.7	825.7	894.5	952.3	989.9	1011.0	1017.2
122.5°	629.0	715.9	792.5	857.0	908.6	943.0	964.1	969.7
125°	604.4	684.2	752.2	808.5	852.3	884.3	901.5	909.3
127.5°	579.4	653.8	717.3	770.0	809.7	838.0	854.3	857.7
130°	563.7	632.6	693.5	744.4	783.5	809.3	824.9	829.6
132.5°	548.1	612.5	667.9	716.8	755.9	781.7	796.1	801.4
135°	527.8	581.7	631.8	676.3	710.7	736.5	750.6	755.3
137.5°	510.6	554.2	595.8	633.6	664.5	687.9	700.9	706.1
140°	501.2	537.9	573.9	606.7	635.7	656.0	667.7	671.6
142.5°	493.1	524.2	555.1	583.6	608.2	625.4	636.5	639.7
145°	482.4	506.7	530.9	552.0	570.8	584.1	592.7	595.8
147.5°	472.4	492.1	510.7	526.7	541.5	552.2	557.2	558.6
150°	466.8	484.0	498.8	512.9	524.7	534.0	537.2	537.9
152.5°	460.5	475.9	489.5	500.4	510.3	517.8	520.9	521.7
155°	451.2	463.7	474.6	483.2	491.0	496.5	498.8	499.6
157.5°	441.8	452.1	460.5	467.3	473.4	477.9	480.1	479.9
160°	435.5	443.3	451.2	456.6	462.1	466.0	467.6	466.8
162.5°	428.6	435.8	442.4	447.2	451.5	454.7	455.1	454.9
165°	419.1	424.6	429.3	433.2	436.3	437.9	437.9	437.9
167.5°	410.0	413.6	417.2	420.0	421.6	423.0	422.4	422.2
170°	405.0	407.4	409.7	411.3	412.8	413.6	413.6	412.8
172.5°	399.4	401.7	403.5	404.4	404.7	406.1	404.9	404.1
175°	393.3	393.3	394.9	394.9	394.9	395.6	394.1	393.3
177.5°	389.1	389.7	389.7	389.7	389.1	389.7	387.8	387.8
180°	387.8	387.8	387.8	387.8	387.8	387.8	387.8	387.8

(END OF REPORT)