

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P333501

Luminaire Tested: **S125RDIP-S375D590U835-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333501
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S375D590U835-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 375 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 590 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3568.9 lumens
Efficiency: N/A
Efficacy: 139.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 25.6
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333501

CATALOG NUMBER: S125RDIP-S375D590U835-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

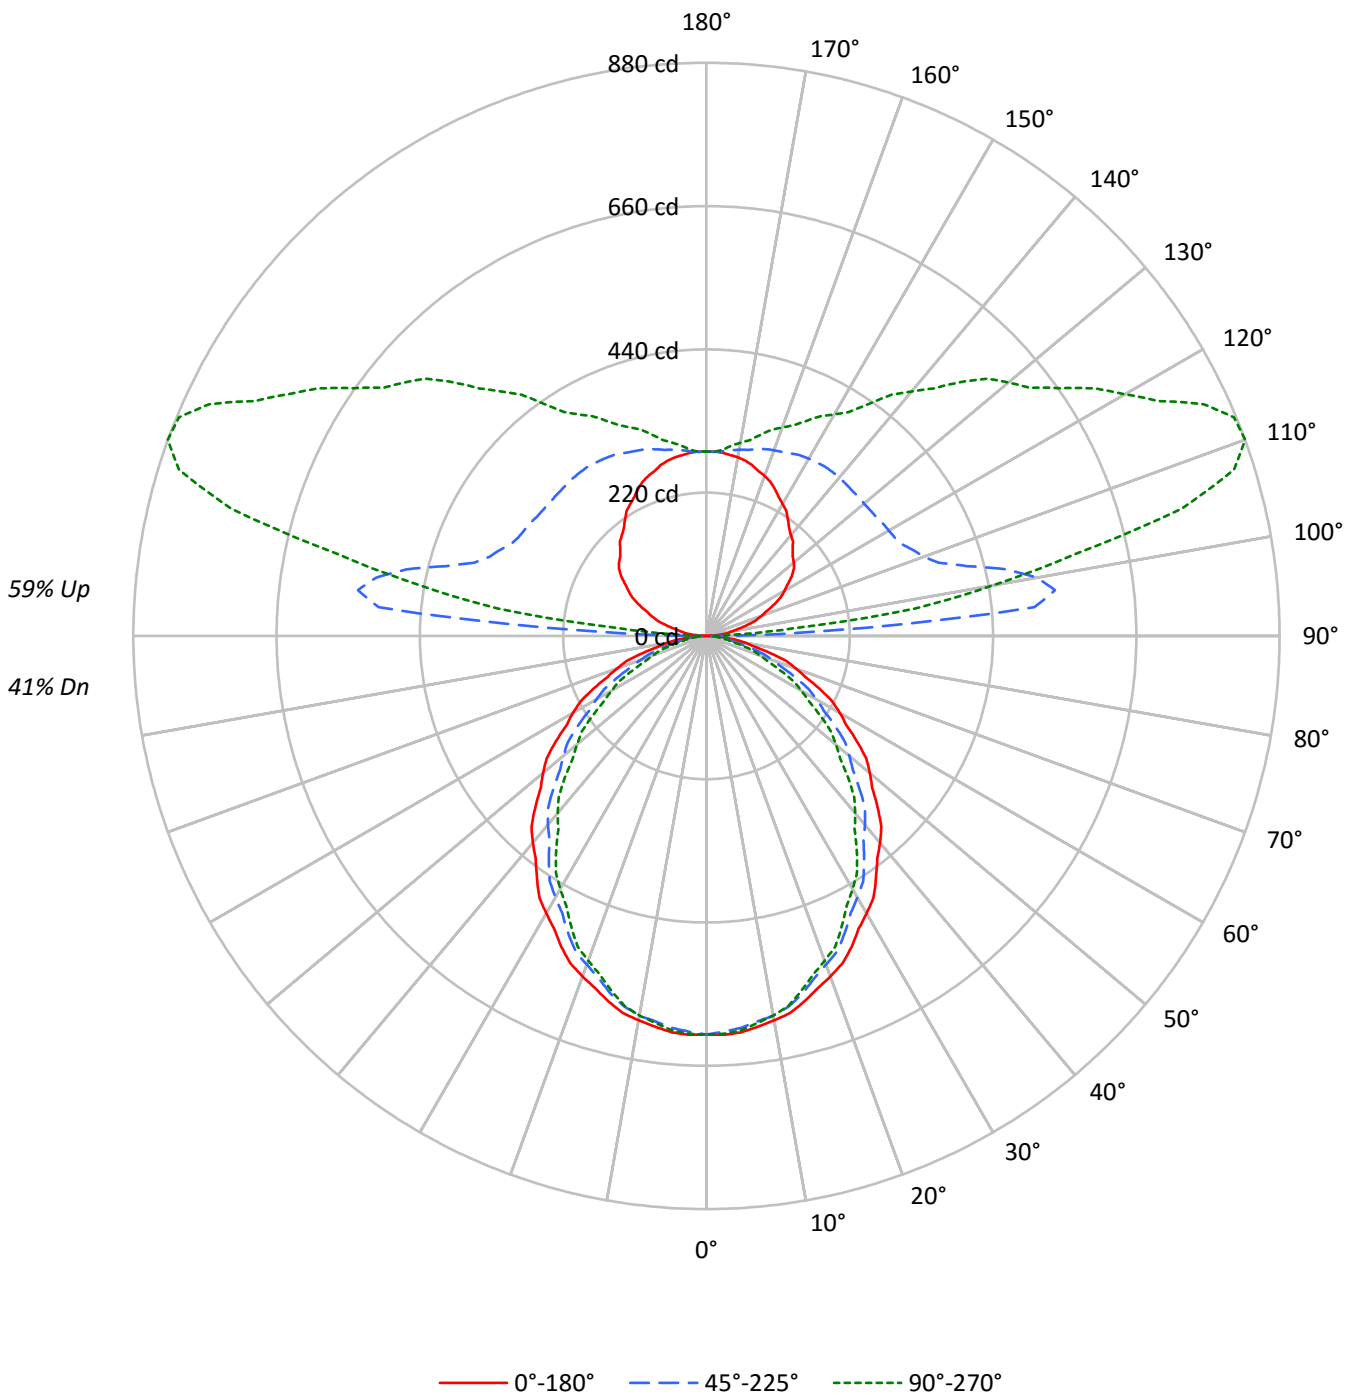



TEST NUMBER: P333501

CATALOG NUMBER: S125RDIP-S375D590U835-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	47	47	47	41																				
1	96	92	88	84	87	84	80	78	69	66	64	55	53	52	42	41	40	35																				
2	87	80	74	69	79	73	68	64	60	57	54	48	46	44	37	36	34	29																				
3	80	71	63	58	72	65	58	54	53	49	45	43	40	37	33	31	29	25																				
4	73	63	55	49	66	57	51	45	47	42	39	38	35	32	30	27	25	21																				
5	67	56	48	42	61	51	44	39	42	37	33	34	31	28	27	24	22	19																				
6	62	50	42	36	56	46	39	34	38	33	29	31	27	24	24	22	20	17																				
7	57	45	37	32	52	41	35	30	35	29	26	28	24	21	22	20	17	15																				
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	20	18	16	13																				
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14	12																				
10	46	34	27	22	42	32	25	21	27	22	18	22	18	16	18	15	13	11																				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3952	3952	3952
5°	3961	3916	3940
10°	3931	3880	3880
15°	3884	3801	3770
20°	3824	3691	3647
25°	3755	3583	3504
30°	3667	3457	3347
35°	3578	3327	3170
40°	3495	3191	2996
45°	3394	3040	2807
50°	3293	2875	2609
55°	3174	2716	2399
60°	3056	2525	2173
65°	2917	2303	1913
70°	2757	2024	1648
75°	2538	1707	1372
80°	2235	1339	1153
85°	1882	1097	1030



TEST NUMBER: P333501

CATALOG NUMBER: S125RDIP-S375D590U835-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	57.5	1.6
10°-20°	160.8	4.5
20°-30°	233.2	6.5
30°-40°	265.7	7.4
40°-50°	259.0	7.3
50°-60°	218.0	6.1
60°-70°	152.8	4.3
70°-80°	78.6	2.2
80°-90°	21.4	0.6
90°-100°	205.1	5.7
100°-110°	440.9	12.4
110°-120°	413.8	11.6
120°-130°	335.3	9.4
130°-140°	269.1	7.5
140°-150°	203.1	5.7
150°-160°	142.9	4.0
160°-170°	84.3	2.4
170°-180°	27.4	0.8
0°-30°	451.5	12.7
0°-40°	717.3	20.1
0°-60°	1194.3	33.5
0°-90°	1447.2	40.5
90°-120°	1059.7	29.7
90°-150°	1867.2	52.3
90°-180°	2122.0	59.5
0°-180°	3568.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	612	612	612	612	612	
5°	611	609	604	608	608	58
15°	581	578	568	568	564	164
25°	527	519	503	497	492	242
35°	454	442	422	409	402	284
45°	372	358	333	315	307	287
55°	282	267	241	221	213	252
65°	191	175	151	133	125	189
75°	102	88	68	59	55	108
85°	25	17	15	14	14	29
90°	1	5	9	12	13	2
95°	19	56	505	229	134	20
105°	64	90	414	814	756	68
115°	115	139	332	716	842	113
125°	160	187	318	569	663	142
135°	187	225	316	477	551	145
145°	218	250	317	395	435	137
155°	249	268	309	349	364	114
165°	272	279	297	315	319	76
175°	282	282	285	288	287	27
180°	283	283	283	283	283	



TEST NUMBER: P333501

CATALOG NUMBER: S125RDIP-S375D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9
2.5°	613.0	612.8	612.5	612.3	612.0	611.5	610.7	609.8	609.0	608.2	609.0
5°	611.0	610.6	610.2	609.7	609.3	608.6	607.4	606.3	605.2	604.0	605.1
7.5°	605.0	604.6	604.2	603.8	603.4	602.5	601.2	599.8	598.5	597.1	597.8
10°	599.4	599.1	598.8	598.5	598.2	597.3	595.9	594.4	593.0	591.6	591.9
12.5°	593.1	592.7	592.4	592.0	591.6	590.4	588.5	586.6	584.6	582.7	582.9
15°	580.9	580.3	579.7	579.1	578.5	577.1	574.9	572.8	570.6	568.5	568.4
17.5°	567.2	566.2	565.3	564.3	563.4	561.6	558.8	556.1	553.4	550.7	550.2
20°	556.4	555.4	554.4	553.4	552.3	550.2	546.9	543.6	540.3	537.0	536.5
22.5°	544.6	543.6	542.6	541.5	540.5	538.3	534.8	531.4	527.9	524.5	523.5
25°	526.9	525.3	523.8	522.2	520.7	518.0	514.2	510.4	506.6	502.8	501.5
27.5°	506.5	504.7	502.8	500.9	499.0	496.1	492.0	487.9	483.9	479.8	477.9
30°	491.7	489.8	487.8	485.9	483.9	480.8	476.5	472.2	467.9	463.5	461.2
32.5°	477.3	475.0	472.8	470.5	468.2	464.9	460.5	456.1	451.7	447.3	444.7
35°	453.8	451.4	448.9	446.4	444.0	440.4	435.8	431.2	426.6	422.0	419.0
37.5°	430.8	427.8	424.8	421.8	418.8	414.9	410.2	405.4	400.7	395.9	392.3
40°	414.6	411.5	408.4	405.3	402.2	398.2	393.3	388.4	383.4	378.5	374.6
42.5°	397.5	394.4	391.2	388.1	384.9	380.8	375.7	370.6	365.5	360.4	356.7
45°	371.6	368.6	365.6	362.6	359.7	355.3	349.7	344.1	338.4	332.8	328.6
47.5°	344.7	341.5	338.4	335.2	332.1	327.7	322.0	316.3	310.6	304.9	300.7
50°	327.7	324.3	320.9	317.5	314.1	309.5	303.6	297.8	291.9	286.1	281.8
52.5°	309.2	305.7	302.2	298.8	295.3	290.8	285.3	279.7	274.2	268.7	264.1
55°	281.9	278.6	275.3	272.1	268.8	264.3	258.5	252.7	247.0	241.2	236.6
57.5°	254.4	250.9	247.3	243.8	240.3	235.8	230.2	224.7	219.2	213.6	209.1
60°	236.6	233.0	229.4	225.8	222.2	217.7	212.1	206.6	201.0	195.5	191.0
62.5°	217.8	214.3	210.9	207.5	204.0	199.5	193.9	188.3	182.6	177.0	172.8
65°	190.9	187.4	183.9	180.4	176.9	172.4	167.0	161.6	156.1	150.7	146.6
67.5°	164.2	160.7	157.2	153.7	150.2	145.8	140.6	135.4	130.2	125.0	121.2
70°	146.0	142.6	139.1	135.6	132.1	127.8	122.6	117.5	112.4	107.2	104.0
72.5°	128.3	124.9	121.5	118.1	114.7	110.5	105.7	100.9	96.1	91.3	88.4
75°	101.7	98.6	95.5	92.4	89.4	85.7	81.3	77.0	72.7	68.4	66.1
77.5°	75.2	72.8	70.3	67.8	65.4	62.4	59.0	55.5	52.1	48.6	47.0
80°	60.1	57.6	55.2	52.7	50.2	47.6	44.7	41.8	38.9	36.0	35.1
82.5°	45.3	43.1	40.9	38.6	36.4	34.3	32.4	30.4	28.4	26.4	26.0
85°	25.4	23.6	21.7	19.9	18.0	16.8	16.3	15.8	15.3	14.8	14.7
87.5°	8.6	8.2	7.8	7.5	7.1	7.0	7.0	7.2	7.2	7.4	7.5
90°	0.6	1.1	2.3	3.4	4.6	5.7	6.3	7.4	8.0	9.1	9.7
92.5°	7.0	8.4	13.2	20.3	30.1	46.8	77.9	130.2	186.9	183.9	148.9
95°	18.8	19.4	24.0	30.2	42.8	68.5	129.5	255.0	412.4	505.4	494.6
97.5°	31.3	31.9	35.1	41.4	52.7	71.2	111.6	203.5	368.3	539.7	625.8
100°	39.9	41.1	43.4	49.6	60.5	77.6	110.7	184.8	328.6	515.1	657.7
102.5°	49.5	50.2	52.0	58.8	68.7	85.3	114.8	177.1	298.4	471.7	638.5
105°	64.5	64.5	67.3	73.0	82.1	98.1	123.2	174.0	269.2	413.6	577.3
107.5°	79.1	80.2	82.9	87.6	97.1	111.5	135.8	179.2	256.9	373.5	514.8
110°	89.6	90.7	93.0	98.1	106.7	121.5	144.9	184.2	253.3	354.8	479.2



TEST NUMBER: P333501

CATALOG NUMBER: S125RDIP-S375D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	100.1	101.2	103.0	108.2	116.7	131.1	153.6	190.6	253.3	343.9	452.7
115°	115.2	116.4	118.1	123.2	131.8	146.0	167.1	200.2	255.0	332.0	423.8
117.5°	128.9	130.6	132.5	137.6	147.3	161.1	181.1	211.2	258.7	326.2	406.6
120°	138.0	139.8	142.0	147.2	156.9	171.1	191.1	218.5	262.4	323.4	397.0
122.5°	147.6	148.9	150.7	155.8	166.5	180.7	200.7	226.7	265.6	321.2	388.8
125°	159.7	160.9	163.7	168.8	179.7	194.5	213.3	237.9	271.0	318.3	377.6
127.5°	169.2	170.9	174.6	181.1	192.6	207.4	225.5	248.1	277.0	316.9	367.4
130°	175.1	176.8	181.4	188.8	200.8	215.6	233.3	255.0	280.7	316.0	360.5
132.5°	179.7	181.9	187.3	195.7	208.1	222.9	240.6	260.9	284.8	316.0	355.0
135°	187.1	189.4	196.2	205.4	217.3	232.7	250.4	269.2	290.3	316.0	348.5
137.5°	196.5	198.2	204.6	213.7	225.4	241.3	257.4	275.4	295.5	316.7	342.7
140°	201.9	203.6	210.5	219.6	230.5	245.9	262.4	279.5	297.8	317.2	340.0
142.5°	208.3	209.6	216.0	225.1	235.5	250.0	265.6	281.8	299.1	317.6	337.7
145°	217.9	219.0	224.7	232.7	243.0	256.1	271.0	285.2	300.6	317.2	334.3
147.5°	227.9	228.6	233.5	240.9	249.8	261.4	274.4	287.3	301.2	315.7	330.7
150°	233.9	235.0	239.0	246.4	254.4	264.1	276.7	288.6	301.2	314.3	328.0
152.5°	240.3	240.9	244.5	251.0	258.5	267.3	278.9	289.5	300.7	312.5	324.8
155°	248.7	248.7	252.1	257.8	263.5	271.5	281.2	290.3	299.5	309.2	319.4
157.5°	256.2	256.1	258.9	263.8	268.8	274.8	283.2	290.9	298.0	305.7	314.4
160°	261.3	260.7	263.0	267.0	271.5	276.7	284.1	290.9	296.6	303.5	310.3
162.5°	265.4	264.8	267.1	270.6	274.3	278.5	285.0	290.5	295.3	300.7	306.7
165°	271.5	270.4	272.1	274.9	277.2	280.7	285.2	289.8	293.2	296.6	301.2
167.5°	275.6	275.1	276.1	277.7	279.3	281.4	285.2	288.4	290.0	292.6	295.8
170°	278.4	277.8	278.4	279.5	280.7	282.4	285.2	287.5	288.6	290.3	292.6
172.5°	280.2	279.2	279.7	280.9	281.6	282.4	284.8	286.6	286.8	287.6	289.4
175°	282.4	281.2	281.8	282.4	282.4	282.4	284.1	285.2	284.6	284.6	285.2
177.5°	283.4	282.5	282.5	282.9	282.5	282.5	283.4	283.8	282.9	282.9	283.4
180°	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9



TEST NUMBER: P333501

CATALOG NUMBER: S125RDIP-S375D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	611.9	611.9	611.9	611.9	611.9	611.9	611.9	611.9
2.5°	609.8	610.7	611.5	611.9	611.8	611.7	611.6	611.5
5°	606.1	607.1	608.1	608.6	608.4	608.1	607.9	607.7
7.5°	598.5	599.3	600.0	600.2	600.0	599.8	599.6	599.3
10°	592.2	592.5	592.8	592.8	592.5	592.2	591.9	591.6
12.5°	583.1	583.4	583.6	583.5	583.0	582.5	582.1	581.6
15°	568.2	568.1	568.0	567.5	566.6	565.7	564.8	563.8
17.5°	549.7	549.2	548.7	548.0	547.3	546.5	545.7	545.0
20°	536.0	535.5	535.0	534.3	533.3	532.4	531.5	530.6
22.5°	522.4	521.4	520.4	519.5	518.8	518.0	517.3	516.5
25°	500.2	498.8	497.5	496.3	495.1	494.0	492.9	491.7
27.5°	476.1	474.2	472.3	470.9	469.8	468.7	467.6	466.5
30°	458.8	456.5	454.1	452.5	451.5	450.6	449.7	448.8
32.5°	442.1	439.5	436.8	435.0	433.8	432.6	431.4	430.3
35°	416.0	413.0	410.0	407.8	406.4	405.0	403.5	402.1
37.5°	388.7	385.2	381.6	379.1	377.7	376.3	374.9	373.5
40°	370.7	366.8	362.9	360.3	359.1	357.9	356.6	355.4
42.5°	352.9	349.2	345.4	342.7	340.9	339.0	337.2	335.4
45°	324.5	320.4	316.3	313.5	312.0	310.4	308.9	307.3
47.5°	296.5	292.2	288.0	285.0	283.3	281.6	279.9	278.2
50°	277.4	273.1	268.8	265.9	264.4	262.8	261.3	259.7
52.5°	259.4	254.8	250.1	247.0	245.5	244.0	242.4	240.9
55°	232.0	227.4	222.8	219.6	218.0	216.3	214.7	213.1
57.5°	204.6	200.1	195.5	192.5	191.1	189.6	188.2	186.7
60°	186.5	181.9	177.4	174.4	172.8	171.3	169.8	168.2
62.5°	168.6	164.4	160.2	157.4	155.8	154.3	152.8	151.2
65°	142.4	138.3	134.2	131.4	129.9	128.3	126.8	125.2
67.5°	117.4	113.7	109.9	107.4	106.2	105.0	103.7	102.5
70°	100.9	97.7	94.5	92.3	91.0	89.8	88.6	87.3
72.5°	85.4	82.5	79.6	77.7	76.9	76.1	75.2	74.4
75°	63.9	61.6	59.4	57.9	57.2	56.4	55.7	55.0
77.5°	45.5	43.9	42.3	41.2	40.7	40.2	39.6	39.1
80°	34.2	33.3	32.4	31.8	31.6	31.4	31.2	31.0
82.5°	25.6	25.1	24.7	24.4	24.3	24.2	24.1	23.9
85°	14.6	14.5	14.4	14.3	14.2	14.1	14.0	13.9
87.5°	7.6	7.7	7.8	8.0	7.9	7.9	7.9	7.8
90°	10.3	10.8	11.4	12.5	12.5	12.5	13.1	13.1
92.5°	101.1	73.4	55.2	46.8	39.5	38.1	37.3	36.4
95°	410.1	323.4	253.3	205.4	164.9	147.7	143.2	134.1
97.5°	610.8	550.0	481.7	415.0	379.8	347.8	331.3	324.0
100°	701.6	673.7	614.9	555.6	516.2	475.2	454.1	444.9
102.5°	732.2	749.4	721.2	681.1	639.0	609.8	586.9	580.0
105°	714.2	792.3	817.4	811.1	792.9	774.1	762.7	755.8
107.5°	649.8	754.1	818.6	848.3	857.6	857.5	853.7	849.1
110°	602.4	710.8	791.2	839.7	865.3	876.2	880.2	880.2



TEST NUMBER: P333501

CATALOG NUMBER: S125RDIP-S375D590U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	565.0	667.9	749.2	806.4	843.9	862.5	872.4	876.5
115°	517.9	606.4	684.5	746.7	791.2	818.6	834.5	842.0
117.5°	487.6	563.8	631.1	688.2	732.7	761.0	776.8	781.4
120°	471.2	539.6	602.4	652.6	694.8	722.2	737.6	742.1
122.5°	458.9	522.3	578.2	625.2	662.8	687.9	703.3	707.4
125°	440.9	499.1	548.8	589.8	621.8	645.2	657.7	663.4
127.5°	422.7	477.0	523.3	561.8	590.7	611.4	623.2	625.8
130°	411.3	461.5	506.0	543.0	571.6	590.4	601.8	605.2
132.5°	399.9	446.9	487.3	523.0	551.5	570.3	580.8	584.7
135°	385.0	424.4	460.9	493.4	518.5	537.3	547.6	551.0
137.5°	372.5	404.3	434.7	462.3	484.7	501.9	511.3	515.1
140°	365.6	392.5	418.7	442.7	463.8	478.6	487.1	490.0
142.5°	359.7	382.4	405.0	425.8	443.7	456.2	464.3	466.7
145°	352.0	369.6	387.3	402.7	416.4	426.1	432.4	434.7
147.5°	344.7	359.0	372.6	384.2	395.1	402.8	406.5	407.5
150°	340.5	353.1	363.9	374.2	382.8	389.6	391.9	392.5
152.5°	336.0	347.2	357.1	365.1	372.3	377.7	380.0	380.6
155°	329.1	338.3	346.2	352.5	358.2	362.2	363.9	364.5
157.5°	322.3	329.8	336.0	340.9	345.3	348.6	350.2	350.1
160°	317.7	323.4	329.1	333.1	337.1	340.0	341.1	340.5
162.5°	312.7	318.0	322.7	326.3	329.4	331.8	332.0	331.9
165°	305.7	309.7	313.2	316.0	318.3	319.4	319.4	319.4
167.5°	299.1	301.8	304.4	306.4	307.6	308.6	308.1	308.0
170°	295.5	297.2	298.9	300.0	301.2	301.8	301.8	301.2
172.5°	291.4	293.1	294.3	295.0	295.3	296.3	295.4	294.8
175°	286.9	286.9	288.1	288.1	288.1	288.6	287.5	286.9
177.5°	283.8	284.3	284.3	284.3	283.8	284.3	282.9	282.9
180°	282.9	282.9	282.9	282.9	282.9	282.9	282.9	282.9

(END OF REPORT)