

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333537

Luminaire Tested: **S125RDIP-S610D810U835-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333537
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S610D810U835-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 810 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5287.0 lumens
Efficiency: N/A
Efficacy: 137.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 38.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333537

CATALOG NUMBER: S125RDIP-S610D810U835-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

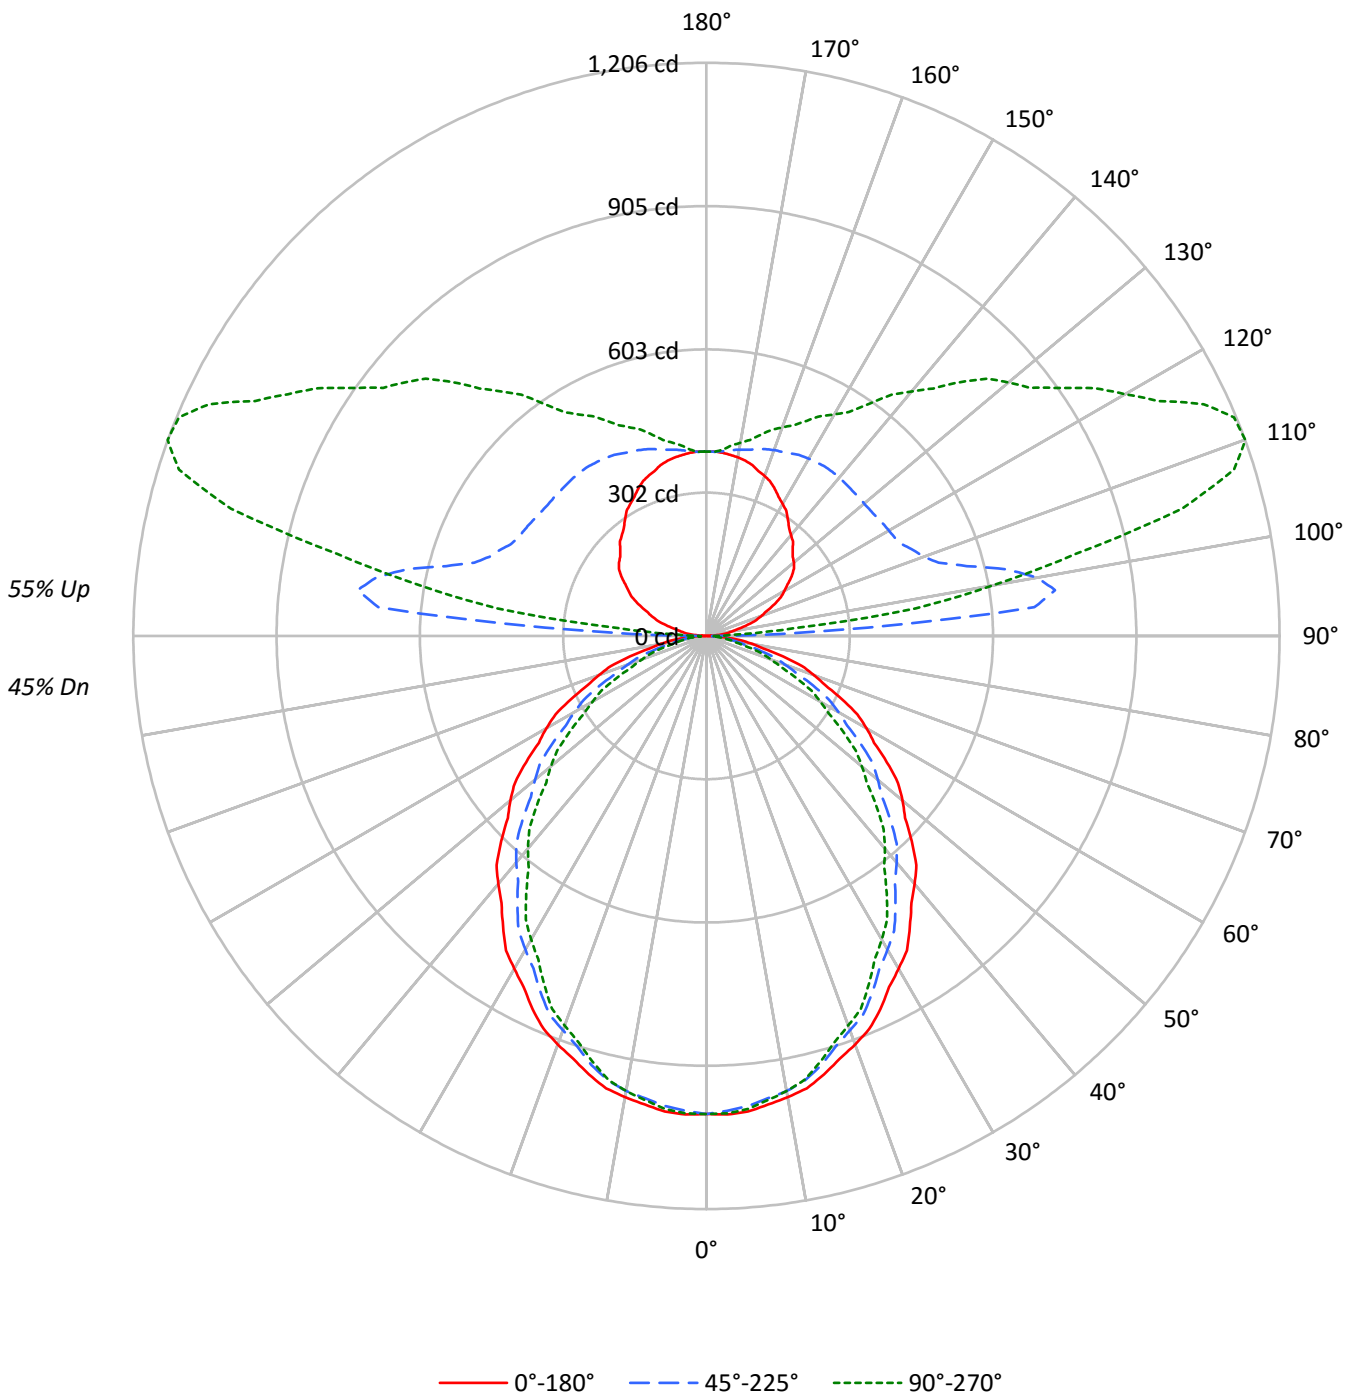



TEST NUMBER: P333537

CATALOG NUMBER: S125RDIP-S610D810U835-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0		
RCR																										
0	106	106	106	106	97	97	97	97	81	81	81	65	65	65	52	52	52	45					45			
1	97	93	89	85	89	85	82	79	71	69	67	58	56	55	46	45	44	38					38			
2	88	81	75	70	81	75	69	65	62	59	55	51	48	46	41	39	37	32					32			
3	81	71	64	59	74	66	60	55	55	51	47	45	42	39	36	34	32	28					28			
4	74	63	56	50	67	58	52	46	49	44	40	40	37	34	32	30	28	24					24			
5	68	56	48	43	62	52	45	40	44	39	34	36	32	29	29	26	24	21					21			
6	62	51	43	37	57	47	40	35	40	34	30	33	29	26	27	24	21	18					18			
7	58	46	38	32	53	42	35	30	36	31	27	30	26	23	24	21	19	16					16			
8	54	42	34	29	49	39	32	27	33	27	24	27	23	20	22	19	17	15					15			
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	21	18	15	13					13			
10	47	35	28	23	43	32	26	22	28	23	19	23	19	17	19	16	14	12					12			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6497	6497	6497
5°	6512	6438	6477
10°	6462	6378	6378
15°	6386	6248	6197
20°	6287	6068	5994
25°	6173	5890	5761
30°	6029	5683	5502
35°	5882	5469	5211
40°	5746	5246	4926
45°	5580	4996	4615
50°	5413	4725	4290
55°	5219	4466	3944
60°	5025	4151	3573
65°	4795	3785	3147
70°	4534	3329	2712
75°	4172	2805	2256
80°	3675	2205	1893
85°	3097	1801	1690



TEST NUMBER: P333537

CATALOG NUMBER: S125RDIP-S610D810U835-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	94.6	1.8
10°-20°	264.3	5.0
20°-30°	383.3	7.3
30°-40°	436.9	8.3
40°-50°	425.9	8.1
50°-60°	358.5	6.8
60°-70°	251.3	4.8
70°-80°	129.2	2.4
80°-90°	34.8	0.7
90°-100°	281.1	5.3
100°-110°	604.3	11.4
110°-120°	567.1	10.7
120°-130°	459.6	8.7
130°-140°	368.8	7.0
140°-150°	278.3	5.3
150°-160°	195.9	3.7
160°-170°	115.5	2.2
170°-180°	37.6	0.7
0°-30°	742.3	14.0
0°-40°	1179.2	22.3
0°-60°	1963.5	37.1
0°-90°	2378.7	45.0
90°-120°	1452.5	27.5
90°-150°	2559.3	48.4
90°-180°	2908.0	55.0
0°-180°	5287.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1006	1006	1006	1006	1006	
5°	1004	1001	993	1000	999	95
15°	955	950	934	933	927	269
25°	866	854	827	817	808	398
35°	746	727	694	672	661	467
45°	611	588	547	518	505	471
55°	464	438	397	364	350	414
65°	314	287	248	218	206	311
75°	167	144	112	96	90	177
85°	42	29	24	24	23	47
90°	1	7	12	16	18	3
95°	26	76	693	314	184	27
105°	88	124	567	1116	1036	93
115°	158	190	455	981	1154	155
125°	219	256	436	780	909	194
135°	256	308	433	654	755	199
145°	299	342	435	541	596	187
155°	341	367	424	479	500	157
165°	372	382	407	431	438	105
175°	387	387	390	395	393	37
180°	388	388	388	388	388	



TEST NUMBER: P333537

CATALOG NUMBER: S125RDIP-S610D810U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0
2.5°	1007.8	1007.4	1007.0	1006.6	1006.2	1005.3	1003.9	1002.6	1001.2	999.9	1001.2
5°	1004.4	1003.8	1003.1	1002.4	1001.7	1000.5	998.6	996.8	994.9	993.0	994.7
7.5°	994.6	993.9	993.3	992.6	992.0	990.6	988.3	986.1	983.9	981.6	982.8
10°	985.4	984.9	984.4	983.9	983.4	982.0	979.6	977.3	974.9	972.5	973.0
12.5°	975.1	974.5	973.8	973.2	972.5	970.6	967.5	964.3	961.1	957.9	958.3
15°	955.1	954.0	953.0	952.0	951.0	948.7	945.2	941.6	938.1	934.5	934.4
17.5°	932.4	930.9	929.3	927.8	926.2	923.2	918.7	914.3	909.8	905.4	904.5
20°	914.8	913.1	911.4	909.7	908.0	904.5	899.1	893.7	888.3	882.9	882.0
22.5°	895.3	893.6	892.0	890.3	888.6	884.9	879.2	873.6	867.9	862.2	860.6
25°	866.2	863.6	861.1	858.6	856.0	851.6	845.4	839.1	832.9	826.6	824.5
27.5°	832.7	829.7	826.6	823.5	820.4	815.6	808.9	802.2	795.5	788.8	785.7
30°	808.4	805.2	802.0	798.8	795.6	790.4	783.3	776.3	769.2	762.1	758.2
32.5°	784.7	781.0	777.2	773.5	769.7	764.2	757.0	749.8	742.5	735.3	731.0
35°	746.1	742.1	738.0	734.0	729.9	724.1	716.5	708.9	701.3	693.7	688.8
37.5°	708.3	703.3	698.4	693.5	688.6	682.2	674.3	666.5	658.7	650.8	645.0
40°	681.5	676.5	671.4	666.3	661.3	654.7	646.6	638.5	630.4	622.3	615.9
42.5°	653.6	648.4	643.2	638.0	632.8	626.0	617.6	609.2	600.9	592.5	586.3
45°	610.9	606.0	601.1	596.2	591.3	584.2	574.9	565.6	556.3	547.0	540.3
47.5°	566.7	561.5	556.3	551.2	546.0	538.7	529.4	520.0	510.7	501.3	494.4
50°	538.7	533.1	527.5	522.0	516.4	508.8	499.2	489.6	479.9	470.3	463.2
52.5°	508.3	502.6	496.9	491.2	485.5	478.1	469.0	459.9	450.8	441.7	434.1
55°	463.5	458.1	452.7	447.3	441.9	434.4	425.0	415.5	406.1	396.6	389.0
57.5°	418.2	412.4	406.6	400.9	395.1	387.6	378.5	369.4	360.3	351.2	343.7
60°	389.0	383.1	377.2	371.3	365.4	357.9	348.7	339.6	330.5	321.4	314.0
62.5°	358.0	352.4	346.7	341.1	335.5	328.0	318.8	309.5	300.3	291.0	284.1
65°	313.8	308.1	302.3	296.6	290.8	283.5	274.5	265.6	256.6	247.7	240.9
67.5°	269.9	264.1	258.4	252.7	246.9	239.8	231.2	222.6	214.0	205.4	199.3
70°	240.1	234.4	228.6	222.9	217.1	210.0	201.6	193.2	184.7	176.3	171.0
72.5°	210.9	205.3	199.7	194.1	188.5	181.7	173.8	165.9	158.0	150.1	145.3
75°	167.2	162.1	157.0	152.0	146.9	140.8	133.7	126.6	119.5	112.4	108.7
77.5°	123.7	119.6	115.6	111.5	107.5	102.6	96.9	91.3	85.6	79.9	77.3
80°	98.8	94.7	90.7	86.6	82.6	78.2	73.4	68.7	64.0	59.3	57.7
82.5°	74.5	70.8	67.2	63.5	59.9	56.4	53.2	49.9	46.7	43.5	42.8
85°	41.8	38.7	35.7	32.7	29.6	27.7	26.8	26.0	25.2	24.3	24.1
87.5°	14.1	13.3	12.7	12.1	11.4	11.2	11.2	11.4	11.4	11.6	11.8
90°	0.8	1.6	3.1	4.7	6.3	7.8	8.6	10.2	10.9	12.5	13.3
92.5°	9.5	11.6	18.1	27.8	41.3	64.1	106.8	178.4	256.1	252.1	204.1
95°	25.8	26.6	32.8	41.4	58.6	93.8	177.5	349.5	565.3	692.8	677.9
97.5°	42.8	43.8	48.2	56.8	72.2	97.6	152.9	279.0	504.8	739.8	857.7
100°	54.7	56.3	59.4	68.0	82.9	106.3	151.7	253.3	450.4	706.1	901.5
102.5°	67.9	68.8	71.3	80.5	94.1	117.0	157.3	242.7	409.1	646.6	875.3
105°	88.4	88.4	92.3	100.1	112.6	134.5	168.9	238.5	369.1	566.9	791.3
107.5°	108.4	109.9	113.7	120.1	133.1	152.8	186.1	245.7	352.2	512.0	705.6
110°	122.8	124.3	127.4	134.5	146.2	166.5	198.6	252.6	347.2	486.3	656.8



TEST NUMBER: P333537

CATALOG NUMBER: S125RDIP-S610D810U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	137.1	138.7	141.2	148.2	160.0	179.7	210.5	261.3	347.2	471.3	620.5
115°	157.9	159.5	161.9	168.9	180.6	200.2	229.1	274.4	349.5	455.1	580.9
117.5°	176.7	179.1	181.6	188.6	201.9	220.8	248.2	289.5	354.7	447.1	557.3
120°	189.2	191.6	194.7	201.7	215.0	234.6	261.9	299.5	359.7	443.3	544.2
122.5°	202.4	204.1	206.6	213.6	228.2	247.7	275.1	310.7	364.0	440.2	532.9
125°	218.9	220.5	224.4	231.4	246.3	266.6	292.4	326.0	371.4	436.3	517.6
127.5°	231.9	234.3	239.3	248.2	264.0	284.3	309.2	340.1	379.7	434.4	503.5
130°	240.0	242.4	248.6	258.8	275.2	295.6	319.8	349.5	384.7	433.2	494.2
132.5°	246.3	249.3	256.8	268.2	285.2	305.6	329.8	357.6	390.3	433.2	486.7
135°	256.5	259.6	269.0	281.5	297.9	319.0	343.3	369.1	398.0	433.2	477.7
137.5°	269.3	271.6	280.4	292.9	309.0	330.7	352.8	377.5	405.0	434.1	469.8
140°	276.8	279.1	288.5	301.0	315.9	337.0	359.7	383.1	408.1	434.7	466.0
142.5°	285.5	287.3	296.0	308.5	322.8	342.6	364.0	386.3	410.0	435.4	462.9
145°	298.7	300.2	308.1	319.0	333.1	351.1	371.4	390.9	412.1	434.7	458.2
147.5°	312.4	313.4	320.1	330.3	342.5	358.3	376.1	393.8	412.8	432.7	453.3
150°	320.6	322.1	327.6	337.8	348.7	362.0	379.2	395.6	412.8	430.8	449.6
152.5°	329.3	330.3	335.1	344.0	354.4	366.4	382.3	396.9	412.2	428.3	445.2
155°	340.9	340.9	345.6	353.4	361.2	372.2	385.5	398.0	410.5	423.8	437.9
157.5°	351.2	351.1	354.8	361.5	368.4	376.7	388.1	398.8	408.5	419.1	431.0
160°	358.1	357.3	360.5	365.9	372.2	379.2	389.4	398.8	406.6	416.0	425.4
162.5°	363.7	363.0	366.1	370.9	375.9	381.7	390.6	398.1	404.7	412.2	420.3
165°	372.2	370.6	373.0	376.9	380.0	384.7	390.9	397.2	401.9	406.6	412.8
167.5°	377.8	377.0	378.4	380.6	382.8	385.8	390.9	395.3	397.5	401.1	405.5
170°	381.6	380.8	381.6	383.1	384.7	387.0	390.9	394.1	395.6	398.0	401.1
172.5°	384.1	382.7	383.4	385.0	385.9	387.0	390.3	392.8	393.1	394.2	396.7
175°	387.0	385.5	386.3	387.0	387.0	387.0	389.4	390.9	390.2	390.2	390.9
177.5°	388.4	387.2	387.2	387.8	387.2	387.2	388.4	389.1	387.8	387.8	388.4
180°	387.8	387.8	387.8	387.8	387.8	387.8	387.8	387.8	387.8	387.8	387.8



TEST NUMBER: P333537

CATALOG NUMBER: S125RDIP-S610D810U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0	1006.0
2.5°	1002.6	1003.9	1005.3	1005.9	1005.8	1005.6	1005.5	1005.4
5°	996.4	998.1	999.8	1000.5	1000.1	999.8	999.5	999.1
7.5°	984.0	985.2	986.4	986.8	986.4	986.0	985.7	985.3
10°	973.5	974.0	974.6	974.6	974.0	973.5	973.0	972.5
12.5°	958.7	959.1	959.4	959.2	958.4	957.7	956.9	956.1
15°	934.2	934.0	933.9	933.0	931.5	930.0	928.5	926.9
17.5°	903.7	902.8	902.0	900.9	899.7	898.4	897.2	895.9
20°	881.2	880.3	879.5	878.3	876.8	875.3	873.8	872.2
22.5°	858.9	857.2	855.6	854.1	852.9	851.6	850.4	849.1
25°	822.3	820.1	817.9	815.8	814.0	812.1	810.3	808.4
27.5°	782.7	779.6	776.5	774.1	772.3	770.5	768.7	766.9
30°	754.3	750.4	746.5	743.8	742.3	740.8	739.3	737.8
32.5°	726.7	722.5	718.2	715.1	713.1	711.2	709.3	707.4
35°	683.9	679.0	674.1	670.5	668.1	665.7	663.4	661.0
37.5°	639.1	633.2	627.3	623.2	620.9	618.7	616.4	614.1
40°	609.4	603.0	596.6	592.4	590.4	588.3	586.3	584.3
42.5°	580.2	574.0	567.9	563.3	560.4	557.4	554.4	551.5
45°	533.5	526.8	520.0	515.4	512.9	510.3	507.8	505.3
47.5°	487.4	480.4	473.5	468.6	465.8	463.0	460.2	457.4
50°	456.1	449.0	441.9	437.1	434.6	432.1	429.5	427.0
52.5°	426.5	418.8	411.2	406.1	403.6	401.1	398.5	396.0
55°	381.4	373.8	366.2	361.1	358.4	355.7	353.0	350.3
57.5°	336.3	328.9	321.5	316.5	314.1	311.7	309.4	307.0
60°	306.5	299.1	291.7	286.7	284.2	281.6	279.1	276.6
62.5°	277.2	270.3	263.4	258.7	256.2	253.7	251.1	248.6
65°	234.2	227.4	220.7	216.0	213.5	211.0	208.4	205.9
67.5°	193.1	186.9	180.7	176.6	174.6	172.6	170.5	168.5
70°	165.8	160.6	155.3	151.7	149.7	147.7	145.6	143.6
72.5°	140.5	135.6	130.8	127.7	126.4	125.0	123.7	122.3
75°	105.0	101.3	97.6	95.1	94.0	92.8	91.6	90.4
77.5°	74.7	72.1	69.5	67.8	66.9	66.0	65.2	64.3
80°	56.2	54.7	53.2	52.3	51.9	51.6	51.2	50.9
82.5°	42.0	41.3	40.6	40.2	40.0	39.8	39.6	39.4
85°	24.0	23.8	23.6	23.5	23.3	23.1	23.0	22.8
87.5°	11.9	12.1	12.2	12.5	12.4	12.2	12.2	12.1
90°	14.1	14.9	15.6	17.2	17.2	17.2	18.0	18.0
92.5°	138.6	100.6	75.7	64.1	54.1	52.2	51.1	49.9
95°	562.2	443.3	347.2	281.5	226.0	202.5	196.3	183.7
97.5°	837.3	753.9	660.2	568.9	520.6	476.8	454.1	444.1
100°	961.7	923.4	842.9	761.6	707.6	651.3	622.4	609.9
102.5°	1003.6	1027.3	988.6	933.6	875.9	835.8	804.4	795.0
105°	978.9	1086.1	1120.5	1111.9	1086.8	1061.0	1045.4	1036.0
107.5°	890.7	1033.7	1122.0	1162.8	1175.5	1175.3	1170.2	1163.9
110°	825.7	974.2	1084.5	1150.9	1186.1	1201.0	1206.5	1206.5



TEST NUMBER: P333537

CATALOG NUMBER: S125RDIP-S610D810U835-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	774.4	915.4	1026.9	1105.3	1156.7	1182.2	1195.8	1201.5
115°	710.0	831.2	938.3	1023.5	1084.5	1122.0	1143.9	1154.1
117.5°	668.4	772.8	865.1	943.3	1004.3	1043.0	1064.8	1071.0
120°	645.8	739.7	825.7	894.5	952.3	989.9	1011.0	1017.2
122.5°	629.0	715.9	792.5	857.0	908.6	943.0	964.1	969.7
125°	604.4	684.2	752.2	808.5	852.3	884.3	901.5	909.3
127.5°	579.4	653.8	717.3	770.0	809.7	838.0	854.3	857.7
130°	563.7	632.6	693.5	744.4	783.5	809.3	824.9	829.6
132.5°	548.1	612.5	667.9	716.8	755.9	781.7	796.1	801.4
135°	527.8	581.7	631.8	676.3	710.7	736.5	750.6	755.3
137.5°	510.6	554.2	595.8	633.6	664.5	687.9	700.9	706.1
140°	501.2	537.9	573.9	606.7	635.7	656.0	667.7	671.6
142.5°	493.1	524.2	555.1	583.6	608.2	625.4	636.5	639.7
145°	482.4	506.7	530.9	552.0	570.8	584.1	592.7	595.8
147.5°	472.4	492.1	510.7	526.7	541.5	552.2	557.2	558.6
150°	466.8	484.0	498.8	512.9	524.7	534.0	537.2	537.9
152.5°	460.5	475.9	489.5	500.4	510.3	517.8	520.9	521.7
155°	451.2	463.7	474.6	483.2	491.0	496.5	498.8	499.6
157.5°	441.8	452.1	460.5	467.3	473.4	477.9	480.1	479.9
160°	435.5	443.3	451.2	456.6	462.1	466.0	467.6	466.8
162.5°	428.6	435.8	442.4	447.2	451.5	454.7	455.1	454.9
165°	419.1	424.6	429.3	433.2	436.3	437.9	437.9	437.9
167.5°	410.0	413.6	417.2	420.0	421.6	423.0	422.4	422.2
170°	405.0	407.4	409.7	411.3	412.8	413.6	413.6	412.8
172.5°	399.4	401.7	403.5	404.4	404.7	406.1	404.9	404.1
175°	393.3	393.3	394.9	394.9	394.9	395.6	394.1	393.3
177.5°	389.1	389.7	389.7	389.7	389.1	389.7	387.8	387.8
180°	387.8	387.8	387.8	387.8	387.8	387.8	387.8	387.8

(END OF REPORT)