

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333568

Luminaire Tested: **S125RDIP-S850D1035U835-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333568  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIP-S850D1035U835-4F0-1E-UDD-A  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 850 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 1035 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7416.1 lumens  
Efficiency: N/A  
Efficacy: 142.6 lumens/watt  
Spacing Criteria (0/90/45): 1.4 / 1.22 / 1.47  
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 52  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

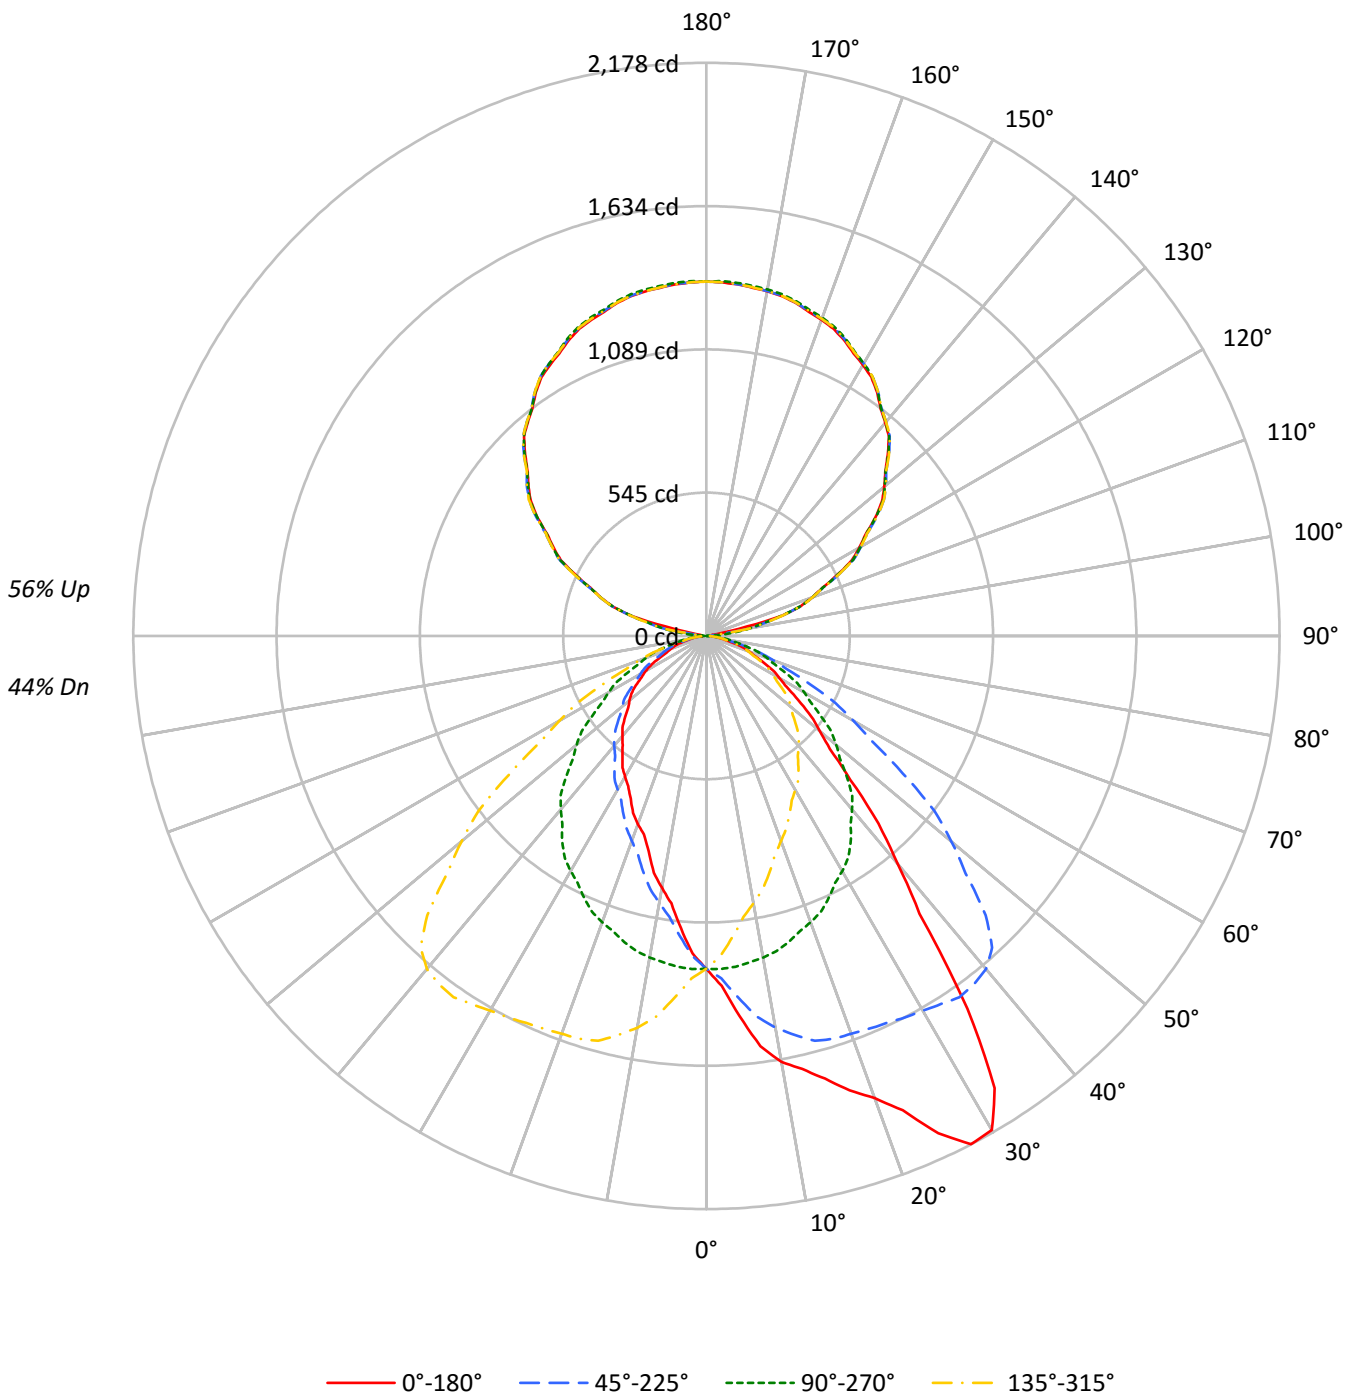



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	44				
1	97	93	89	86	89	85	82	79	71	69	67	58	56	55	46	45	44	38				
2	88	81	75	71	81	75	70	65	62	59	56	51	48	46	40	39	37	32				
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	36	34	32	28				
4	74	64	56	50	68	59	52	47	49	44	40	41	37	34	32	30	28	24				
5	68	57	49	43	62	52	46	40	44	39	35	36	33	30	29	27	24	21				
6	63	51	43	37	57	47	40	35	40	34	31	33	29	26	27	24	22	19				
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	24	21	19	17				
8	54	42	34	29	49	39	32	27	33	28	24	27	23	21	22	19	17	15				
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	21	18	16	13				
10	47	35	28	23	43	32	26	22	28	23	19	23	19	17	19	16	14	12				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	8169	8169	8169	8169
5°	9398	8180	7224	8180
10°	10781	8138	6374	8138
15°	11645	8055	5666	8055
20°	12841	7958	5232	7958
25°	14860	7829	4855	7829
30°	16171	7694	4608	7694
35°	13640	7536	4380	7536
40°	9526	7254	4185	7254
45°	7067	6872	3993	6872
50°	5635	6475	3829	6475
55°	4782	5981	3683	5981
60°	4132	5540	3447	5540
65°	3681	5063	2968	5063
70°	3237	4638	2706	4638
75°	2800	4017	2540	4017
80°	2124	3381	2124	3381
85°	1771	2653	2001	2653



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	121.3	1.6
10°-20°	355.5	4.8
20°-30°	563.6	7.6
30°-40°	679.7	9.2
40°-50°	607.0	8.2
50°-60°	465.5	6.3
60°-70°	302.5	4.1
70°-80°	147.1	2.0
80°-90°	37.9	0.5
90°-100°	49.0	0.7
100°-110°	301.7	4.1
110°-120°	547.1	7.4
120°-130°	702.2	9.5
130°-140°	755.2	10.2
140°-150°	708.9	9.6
150°-160°	573.4	7.7
160°-170°	370.9	5.0
170°-180°	127.9	1.7
0°-30°	1040.4	14.0
0°-40°	1720.1	23.2
0°-60°	2792.5	37.7
0°-90°	3279.9	44.2
90°-120°	897.7	12.1
90°-150°	3064.0	41.3
90°-180°	4136.0	55.8
0°-180°	7416.1	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1265	1265	1265	1265	1265	
5°	1450	1262	1114	1262	1450	145
15°	1742	1205	847	1205	1742	499
25°	2085	1099	681	1099	2085	957
35°	1730	956	556	956	1730	1045
45°	774	752	437	752	774	617
55°	425	531	327	531	425	385
65°	241	331	194	331	241	240
75°	112	161	102	161	112	119
85°	24	36	27	36	24	28
90°	24	1	24	1	24	12
95°	21	57	21	57	21	17
105°	296	294	296	294	296	268
115°	547	551	547	551	547	543
125°	784	784	784	784	784	697
135°	974	978	974	978	974	751
145°	1130	1133	1130	1133	1130	706
155°	1239	1248	1239	1248	1239	571
165°	1310	1317	1310	1317	1310	370
175°	1341	1347	1341	1347	1341	128
180°	1347	1347	1347	1347	1347	



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1330.5	1329.7	1331.4	1326.8	1327.2	1320.1	1320.1	1314.7	1307.7	1302.3	1299.8
5°	1449.7	1450.8	1448.7	1440.9	1435.7	1427.9	1419.1	1403.5	1390.5	1378.1	1368.2
7.5°	1572.5	1573.2	1566.4	1564.0	1550.9	1541.3	1521.7	1500.5	1481.7	1457.8	1439.6
10°	1643.9	1643.4	1636.2	1630.4	1619.0	1604.5	1585.3	1560.3	1537.0	1511.0	1486.1
12.5°	1685.5	1684.1	1681.8	1674.9	1664.3	1651.4	1635.1	1610.6	1581.8	1553.4	1524.3
15°	1741.6	1737.9	1731.2	1722.3	1707.3	1692.2	1674.1	1652.3	1624.7	1592.5	1565.5
17.5°	1810.9	1811.0	1800.7	1788.4	1767.9	1741.4	1713.3	1678.1	1640.7	1605.3	1576.5
20°	1868.3	1866.7	1856.3	1832.4	1809.1	1775.8	1743.6	1700.5	1654.8	1608.6	1572.8
22.5°	1950.5	1946.5	1935.7	1904.3	1868.1	1825.3	1776.0	1723.4	1668.1	1615.7	1568.7
25°	2085.3	2082.2	2060.9	2024.6	1973.7	1907.7	1843.3	1771.2	1691.7	1622.7	1565.5
27.5°	2177.5	2174.1	2158.3	2128.1	2081.2	2011.8	1924.6	1828.2	1729.0	1634.0	1551.6
30°	2168.4	2176.2	2174.1	2160.1	2124.8	2062.5	1982.0	1873.5	1755.6	1643.9	1545.8
32.5°	2037.9	2044.9	2063.2	2090.7	2092.8	2067.9	2007.7	1907.5	1785.5	1658.5	1541.2
35°	1730.1	1739.5	1774.8	1830.4	1903.0	1963.8	1976.3	1922.3	1812.7	1676.1	1534.4
37.5°	1330.1	1381.2	1410.9	1469.4	1579.2	1691.0	1798.5	1838.0	1791.4	1668.9	1523.3
40°	1129.9	1142.3	1195.3	1261.3	1353.7	1470.0	1623.2	1733.8	1737.4	1652.3	1505.8
42.5°	967.0	982.8	1019.2	1071.8	1151.0	1267.3	1425.4	1571.4	1639.0	1606.6	1483.0
45°	773.7	785.6	812.1	852.6	913.4	1009.4	1145.5	1314.2	1448.2	1500.6	1421.7
47.5°	635.6	642.0	665.1	695.9	740.9	810.9	916.2	1062.7	1223.4	1336.0	1324.9
50°	560.8	568.1	585.7	609.1	647.0	706.2	790.3	912.3	1078.0	1215.6	1243.1
52.5°	502.6	508.7	519.7	541.8	573.0	618.5	686.4	796.8	945.9	1092.2	1155.8
55°	424.7	428.9	437.7	450.2	475.1	507.8	566.5	642.8	763.3	910.8	1004.2
57.5°	360.6	362.6	368.3	379.8	397.0	420.9	463.3	528.0	614.4	747.2	850.3
60°	319.9	321.9	329.2	337.0	350.5	372.3	405.5	450.7	533.8	643.3	747.7
62.5°	287.5	288.7	291.8	299.6	311.4	328.3	354.4	391.3	457.4	553.6	652.2
65°	240.9	241.5	242.5	248.7	256.0	268.5	285.6	311.5	361.4	434.1	521.3
67.5°	196.3	197.0	200.6	202.8	210.4	216.9	227.0	246.9	282.0	331.0	398.8
70°	171.4	170.8	174.5	177.1	179.7	187.4	194.2	210.3	232.1	269.5	326.1
72.5°	148.1	146.7	148.3	149.2	152.7	158.0	164.7	174.6	191.4	217.1	260.5
75°	112.2	112.7	112.7	113.7	116.3	118.4	120.5	125.7	135.0	152.1	175.5
77.5°	78.7	77.9	80.1	80.4	81.9	84.2	86.0	88.1	91.9	99.0	111.0
80°	57.1	57.1	57.6	59.2	58.7	59.7	62.3	64.4	69.1	73.2	77.4
82.5°	43.8	43.4	43.9	44.2	44.1	45.2	46.1	46.5	48.3	50.4	53.3
85°	23.9	23.9	24.4	24.4	24.9	24.9	25.4	25.4	25.4	26.0	26.5
87.5°	13.9	13.4	12.8	12.7	13.0	13.6	13.0	12.4	12.1	11.9	12.0
90°	24.0	23.3	22.6	22.0	21.3	20.4	19.3	18.2	17.1	16.0	14.4
92.5°	22.4	22.1	21.7	21.4	21.1	20.4	19.3	18.2	17.1	16.0	14.6
95°	21.0	21.0	21.0	21.0	21.0	20.4	19.3	18.2	17.1	16.0	24.4
97.5°	21.0	21.0	21.0	21.0	21.0	24.1	30.4	36.6	42.9	49.1	65.8
100°	21.0	21.9	22.7	23.6	24.5	41.5	74.6	107.6	140.7	173.7	172.8
102.5°	125.6	140.7	155.8	170.9	186.0	196.6	202.9	209.1	215.4	221.7	221.1
105°	296.5	296.8	297.0	297.2	297.4	297.5	297.5	297.5	297.5	297.5	297.5
107.5°	373.8	374.5	375.2	375.8	376.5	376.8	376.8	376.7	376.7	376.6	376.2
110°	427.3	427.1	426.9	426.7	426.5	426.7	427.3	428.0	428.7	429.3	428.9



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	475.3	475.6	475.9	476.2	476.5	477.1	477.9	478.8	479.6	480.5	480.2
115°	547.2	548.5	549.8	551.2	552.5	553.6	554.5	555.4	556.3	557.1	556.9
117.5°	623.8	624.4	625.0	625.6	626.1	627.0	628.2	629.3	630.5	631.6	630.8
120°	671.0	672.1	673.2	674.3	675.4	676.2	676.6	677.1	677.5	678.0	677.3
122.5°	715.7	717.0	718.3	719.6	720.8	721.7	722.2	722.6	723.0	723.5	723.2
125°	783.8	784.5	785.1	785.8	786.5	787.2	788.1	789.0	789.9	790.8	790.8
127.5°	841.1	842.8	844.4	846.0	847.7	848.7	849.2	849.7	850.2	850.7	850.8
130°	882.6	883.8	884.9	886.0	887.1	888.0	888.6	889.3	890.0	890.6	890.4
132.5°	921.0	922.1	923.2	924.3	925.4	926.0	926.2	926.3	926.4	926.6	927.1
135°	973.5	974.8	976.2	977.5	978.8	979.7	980.2	980.6	981.0	981.5	981.9
137.5°	1026.2	1027.4	1028.5	1029.7	1030.8	1031.4	1031.3	1031.2	1031.1	1031.0	1031.4
140°	1057.4	1058.7	1060.0	1061.4	1062.7	1063.1	1062.7	1062.3	1061.8	1061.4	1061.6
142.5°	1086.9	1088.3	1089.6	1090.9	1092.3	1092.9	1092.8	1092.7	1092.6	1092.5	1092.2
145°	1130.3	1131.6	1132.9	1134.3	1135.6	1136.1	1135.9	1135.7	1135.5	1135.3	1135.3
147.5°	1166.0	1167.6	1169.2	1170.8	1172.4	1173.1	1172.8	1172.5	1172.3	1172.0	1171.7
150°	1189.2	1190.9	1192.7	1194.5	1196.3	1196.9	1196.5	1196.1	1195.6	1195.2	1194.7
152.5°	1210.7	1212.3	1213.9	1215.5	1217.1	1217.7	1217.3	1216.8	1216.4	1215.9	1215.5
155°	1239.1	1240.9	1242.6	1244.4	1246.2	1246.8	1246.1	1245.4	1244.8	1244.1	1243.6
157.5°	1262.9	1264.6	1266.4	1268.2	1270.0	1270.5	1269.8	1269.1	1268.4	1267.7	1267.6
160°	1278.0	1279.8	1281.6	1283.4	1285.1	1285.6	1284.7	1283.8	1282.9	1282.0	1281.8
162.5°	1291.6	1293.6	1295.5	1297.5	1299.4	1299.8	1298.5	1297.3	1296.1	1294.8	1294.6
165°	1310.0	1311.8	1313.5	1315.3	1317.1	1317.3	1316.0	1314.6	1313.3	1312.0	1311.8
167.5°	1322.8	1324.8	1326.8	1328.8	1330.8	1331.0	1329.4	1327.8	1326.2	1324.6	1324.3
170°	1330.0	1332.0	1334.0	1335.9	1337.9	1338.1	1336.3	1334.5	1332.7	1331.0	1330.7
172.5°	1334.8	1336.7	1338.7	1340.7	1342.7	1342.9	1341.3	1339.7	1338.1	1336.5	1336.1
175°	1340.9	1342.9	1344.9	1346.9	1348.9	1349.0	1347.3	1345.5	1343.7	1341.9	1341.7
177.5°	1344.5	1346.0	1347.4	1348.8	1350.2	1350.3	1349.1	1347.8	1346.6	1345.3	1345.2
180°	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1299.8	1296.9	1291.5	1286.5	1280.3	1274.9	1271.1	1266.6	1260.7	1253.7	1247.9
5°	1357.3	1345.9	1330.8	1317.9	1301.2	1288.3	1274.8	1261.8	1248.8	1232.2	1217.6
7.5°	1421.1	1397.5	1374.6	1345.7	1319.5	1296.1	1273.7	1251.0	1228.8	1205.2	1182.4
10°	1460.1	1431.6	1399.9	1363.5	1330.3	1298.6	1269.6	1241.0	1210.9	1184.4	1155.8
12.5°	1496.7	1459.8	1423.6	1377.7	1337.8	1299.1	1262.1	1226.5	1194.3	1159.9	1129.3
15°	1529.7	1493.4	1452.9	1396.8	1341.2	1294.5	1250.9	1204.7	1164.7	1126.3	1092.0
17.5°	1542.5	1504.4	1457.3	1403.4	1342.7	1283.9	1227.7	1177.0	1130.0	1085.2	1046.7
20°	1537.5	1500.6	1452.3	1400.9	1336.0	1274.8	1214.0	1157.9	1105.5	1058.2	1017.2
22.5°	1525.4	1487.3	1440.7	1386.4	1324.8	1259.8	1194.9	1135.1	1080.1	1031.2	986.5
25°	1507.4	1455.5	1407.7	1354.7	1296.0	1231.7	1164.7	1098.7	1040.1	990.2	941.4
27.5°	1488.6	1423.8	1363.0	1310.4	1248.4	1190.9	1126.4	1058.7	997.1	946.3	896.2
30°	1471.6	1398.9	1331.9	1272.2	1213.5	1159.0	1097.7	1031.7	968.4	916.0	865.1
32.5°	1450.4	1373.1	1299.5	1230.6	1174.0	1119.9	1064.5	1001.4	939.7	885.6	833.9
35°	1423.8	1325.1	1245.2	1171.9	1109.1	1056.7	1006.8	955.9	894.1	838.1	787.7
37.5°	1388.9	1276.9	1184.4	1104.7	1038.4	985.7	946.4	899.9	843.5	789.8	743.0
40°	1367.7	1242.0	1140.8	1061.9	992.3	936.7	899.9	860.4	809.0	758.6	711.9
42.5°	1339.5	1210.1	1096.8	1014.5	944.5	891.0	853.7	819.3	776.2	728.7	678.7
45°	1284.1	1148.1	1029.2	940.9	870.3	817.8	783.0	752.4	719.7	676.1	632.4
47.5°	1212.0	1083.4	958.9	862.6	793.4	744.7	711.0	686.8	663.4	626.3	583.9
50°	1154.3	1030.2	908.7	815.2	741.5	695.3	663.6	644.4	623.1	589.3	554.0
52.5°	1086.2	975.4	856.3	760.8	691.2	647.9	617.5	598.3	580.7	553.2	519.6
55°	978.8	881.7	772.6	685.9	622.1	578.4	549.4	531.2	520.8	497.4	471.0
57.5°	854.9	785.3	689.1	605.5	549.1	506.0	484.7	469.2	457.5	440.9	422.3
60°	768.5	719.7	633.5	554.0	502.1	461.1	441.9	428.9	418.0	404.0	389.4
62.5°	680.8	645.3	570.3	502.1	454.3	420.0	402.0	390.3	377.7	368.3	354.1
65°	563.4	531.7	479.8	426.3	382.2	354.6	341.7	331.3	323.5	313.1	303.2
67.5°	438.2	425.4	389.5	352.7	321.0	296.5	285.3	278.0	268.7	262.4	255.7
70°	361.4	355.2	329.7	305.3	275.7	259.1	248.7	245.6	234.2	228.0	223.3
72.5°	293.3	290.4	275.7	258.8	237.9	223.4	213.8	210.3	203.0	198.0	195.0
75°	200.9	202.0	199.4	188.5	180.7	171.4	163.0	161.0	155.8	151.6	149.0
77.5°	127.1	132.4	132.6	132.1	129.0	123.3	119.8	118.3	113.2	111.6	111.0
80°	87.2	92.9	98.1	97.6	96.6	95.0	92.4	90.9	88.3	86.7	85.7
82.5°	58.2	63.5	67.8	70.6	70.4	68.9	67.1	66.4	65.8	64.7	64.5
85°	27.5	28.6	30.1	33.8	36.3	36.9	36.3	35.8	34.3	34.8	35.3
87.5°	12.1	11.8	11.9	11.6	10.8	12.5	13.4	13.5	13.0	12.5	12.1
90°	12.9	11.3	9.8	8.1	6.3	4.5	2.8	1.0	2.8	4.5	6.3
92.5°	13.2	11.8	10.5	10.4	11.6	12.9	14.1	15.4	14.1	12.9	11.6
95°	32.8	41.3	49.7	54.3	54.9	55.6	56.2	56.9	56.2	55.6	54.9
97.5°	82.5	99.2	115.9	123.6	122.4	121.2	120.0	118.8	120.0	121.2	122.4
100°	172.0	171.1	170.2	169.4	168.7	168.1	167.4	166.7	167.4	168.1	168.7
102.5°	220.6	220.1	219.5	218.8	218.0	217.2	216.3	215.5	216.3	217.2	218.0
105°	297.5	297.5	297.5	297.1	296.2	295.3	294.4	293.5	294.4	295.3	296.2
107.5°	375.7	375.3	374.8	374.6	374.6	374.6	374.6	374.6	374.6	374.6	374.6
110°	428.5	428.0	427.6	427.3	427.3	427.3	427.3	427.3	427.3	427.3	427.3





TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	479.9	479.7	479.4	479.0	478.5	477.9	477.4	476.9	477.4	477.9	478.5
115°	556.7	556.5	556.3	555.6	554.5	553.4	552.3	551.2	552.3	553.4	554.5
117.5°	629.9	629.1	628.3	627.9	627.9	627.9	628.0	628.0	628.0	627.9	627.9
120°	676.6	676.0	675.3	675.1	675.3	675.5	675.7	676.0	675.7	675.5	675.3
122.5°	722.9	722.6	722.2	721.7	720.8	720.0	719.1	718.3	719.1	720.0	720.8
125°	790.8	790.8	790.8	790.0	788.5	786.9	785.3	783.8	785.3	786.9	788.5
127.5°	851.0	851.1	851.2	850.7	849.6	848.5	847.4	846.3	847.4	848.5	849.6
130°	890.2	890.0	889.7	889.1	888.0	886.9	885.8	884.6	885.8	886.9	888.0
132.5°	927.6	928.0	928.5	928.1	926.8	925.6	924.3	923.0	924.3	925.6	926.8
135°	982.4	982.8	983.3	982.8	981.5	980.2	978.8	977.5	978.8	980.2	981.5
137.5°	1031.8	1032.2	1032.6	1032.2	1031.1	1029.9	1028.8	1027.6	1028.8	1029.9	1031.1
140°	1061.8	1062.0	1062.3	1062.1	1061.7	1061.3	1060.8	1060.4	1060.8	1061.3	1061.7
142.5°	1091.9	1091.6	1091.3	1091.0	1090.7	1090.5	1090.2	1089.9	1090.2	1090.5	1090.7
145°	1135.3	1135.3	1135.3	1135.0	1134.6	1134.1	1133.7	1133.3	1133.7	1134.1	1134.6
147.5°	1171.5	1171.2	1170.9	1170.8	1170.9	1171.0	1171.1	1171.2	1171.1	1171.0	1170.9
150°	1194.3	1193.8	1193.4	1193.4	1193.8	1194.3	1194.7	1195.2	1194.7	1194.3	1193.8
152.5°	1215.0	1214.6	1214.2	1214.4	1215.4	1216.4	1217.4	1218.3	1217.4	1216.4	1215.4
155°	1243.2	1242.8	1242.3	1242.8	1244.1	1245.4	1246.8	1248.1	1246.8	1245.4	1244.1
157.5°	1267.6	1267.5	1267.5	1267.9	1268.7	1269.5	1270.2	1271.0	1270.2	1269.5	1268.7
160°	1281.6	1281.4	1281.1	1281.7	1283.0	1284.4	1285.7	1287.0	1285.7	1284.4	1283.0
162.5°	1294.4	1294.1	1293.9	1294.5	1295.8	1297.1	1298.5	1299.8	1298.5	1297.1	1295.8
165°	1311.5	1311.3	1311.1	1311.7	1313.0	1314.3	1315.6	1317.0	1315.6	1314.3	1313.0
167.5°	1324.1	1323.9	1323.7	1324.3	1325.6	1327.0	1328.4	1329.8	1328.4	1327.0	1325.6
170°	1330.5	1330.3	1330.1	1330.7	1332.3	1333.8	1335.4	1336.9	1335.4	1333.8	1332.3
172.5°	1335.7	1335.3	1335.0	1335.5	1337.1	1338.6	1340.2	1341.7	1340.2	1338.6	1337.1
175°	1341.5	1341.3	1341.1	1341.6	1342.9	1344.3	1345.6	1346.9	1345.6	1344.3	1342.9
177.5°	1345.0	1344.8	1344.6	1345.1	1346.1	1347.2	1348.3	1349.3	1348.3	1347.2	1346.1
180°	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1243.7	1237.9	1233.7	1225.4	1219.6	1217.1	1212.6	1211.3	1215.9	1212.6	1212.1
5°	1206.7	1191.7	1179.7	1167.8	1154.8	1146.5	1134.0	1132.0	1128.8	1124.2	1123.1
7.5°	1162.4	1142.8	1127.4	1107.7	1090.5	1076.7	1061.1	1053.8	1049.7	1043.7	1035.6
10°	1132.5	1109.1	1088.3	1068.6	1047.3	1030.2	1014.6	1002.7	994.9	987.6	984.5
12.5°	1103.0	1079.2	1052.6	1028.7	1005.0	985.7	968.5	960.7	952.1	943.6	936.3
15°	1057.2	1025.5	996.4	968.9	948.7	927.9	911.3	899.9	886.9	883.2	869.2
17.5°	1008.6	977.5	943.5	914.5	891.0	868.2	849.9	836.9	827.2	813.8	807.3
20°	978.3	941.4	908.2	881.7	855.7	828.7	810.0	799.1	789.8	778.9	773.7
22.5°	945.9	909.8	875.8	844.7	818.3	791.8	778.5	767.1	756.5	746.5	739.6
25°	898.3	862.0	826.1	793.9	766.4	747.2	731.6	718.6	712.9	703.1	695.8
27.5°	851.3	812.6	775.4	743.4	721.8	702.8	690.0	679.7	669.4	660.8	654.5
30°	820.9	781.5	741.0	715.5	692.7	674.5	660.5	650.6	642.8	635.0	630.4
32.5°	790.6	749.9	714.0	686.4	664.8	649.2	634.7	625.3	617.1	608.5	603.0
35°	742.0	700.5	671.4	644.4	623.1	608.6	598.7	585.2	578.4	572.2	566.5
37.5°	696.8	658.2	626.7	603.1	584.6	570.1	557.4	550.1	541.8	536.2	531.4
40°	663.6	628.3	599.7	574.8	561.3	545.2	533.3	523.9	517.7	510.4	505.2
42.5°	633.7	600.9	573.1	550.7	533.9	520.3	508.8	499.4	491.5	486.3	482.0
45°	591.4	558.7	531.7	510.9	495.4	482.4	470.4	465.8	455.4	449.2	447.1
47.5°	547.7	518.4	492.4	473.2	457.3	445.0	433.8	424.2	418.5	412.4	409.1
50°	518.2	490.2	465.8	447.1	431.5	418.0	407.6	401.4	393.6	387.9	383.7
52.5°	488.7	462.8	438.4	420.5	407.0	393.5	381.9	375.6	368.3	364.6	361.7
55°	446.6	419.0	398.3	380.6	366.6	354.1	343.2	337.0	332.3	328.7	327.6
57.5°	398.8	377.0	357.7	341.8	327.2	315.5	305.9	300.0	295.9	295.3	292.2
60°	367.6	347.9	330.2	313.1	300.6	289.7	281.4	274.7	270.5	270.0	269.0
62.5°	336.5	317.6	301.2	286.1	274.9	264.4	256.5	248.9	246.4	243.8	241.6
65°	290.3	273.1	259.6	247.7	235.7	226.9	219.1	214.4	208.7	205.6	199.9
67.5°	244.9	231.6	218.6	208.5	199.2	190.8	184.3	177.4	173.5	171.0	166.9
70°	215.0	204.6	191.6	180.7	173.4	166.7	161.5	153.7	151.1	149.0	146.9
72.5°	186.7	177.6	166.7	157.9	150.6	144.2	138.2	134.6	132.0	129.9	128.7
75°	146.9	138.1	128.8	122.5	117.4	112.2	109.0	106.4	105.4	104.9	102.8
77.5°	107.9	103.2	95.7	90.8	87.3	85.3	82.5	81.1	81.0	78.7	78.0
80°	82.6	80.0	73.7	71.7	69.1	67.0	65.4	62.8	60.2	59.2	57.6
82.5°	61.4	58.8	56.3	53.0	50.8	49.5	48.0	47.0	47.4	45.9	45.2
85°	32.7	30.1	29.1	28.6	27.5	28.6	28.0	27.5	27.0	26.5	27.0
87.5°	12.0	12.3	12.2	13.4	12.4	13.2	13.4	13.2	13.4	13.6	13.4
90°	8.1	9.8	11.3	12.9	14.4	16.0	17.1	18.2	19.3	20.4	21.3
92.5°	10.4	10.5	11.8	13.2	14.6	16.0	17.1	18.2	19.3	20.4	21.1
95°	54.3	49.7	41.3	32.8	24.4	16.0	17.1	18.2	19.3	20.4	21.0
97.5°	123.6	115.9	99.2	82.5	65.8	49.1	42.9	36.6	30.4	24.1	21.0
100°	169.4	170.2	171.1	172.0	172.8	173.7	140.7	107.6	74.6	41.5	24.5
102.5°	218.8	219.5	220.1	220.6	221.1	221.7	215.4	209.1	202.9	196.6	186.0
105°	297.1	297.5	297.5	297.5	297.5	297.5	297.5	297.5	297.5	297.5	297.4
107.5°	374.6	374.8	375.3	375.7	376.2	376.6	376.7	376.7	376.8	376.8	376.5
110°	427.3	427.6	428.0	428.5	428.9	429.3	428.7	428.0	427.3	426.7	426.5



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	479.0	479.4	479.7	479.9	480.2	480.5	479.6	478.8	477.9	477.1	476.5
115°	555.6	556.3	556.5	556.7	556.9	557.1	556.3	555.4	554.5	553.6	552.5
117.5°	627.9	628.3	629.1	629.9	630.8	631.6	630.5	629.3	628.2	627.0	626.1
120°	675.1	675.3	676.0	676.6	677.3	678.0	677.5	677.1	676.6	676.2	675.4
122.5°	721.7	722.2	722.6	722.9	723.2	723.5	723.0	722.6	722.2	721.7	720.8
125°	790.0	790.8	790.8	790.8	790.8	790.8	789.9	789.0	788.1	787.2	786.5
127.5°	850.7	851.2	851.1	851.0	850.8	850.7	850.2	849.7	849.2	848.7	847.7
130°	889.1	889.7	890.0	890.2	890.4	890.6	890.0	889.3	888.6	888.0	887.1
132.5°	928.1	928.5	928.0	927.6	927.1	926.6	926.4	926.3	926.2	926.0	925.4
135°	982.8	983.3	982.8	982.4	981.9	981.5	981.0	980.6	980.2	979.7	978.8
137.5°	1032.2	1032.6	1032.2	1031.8	1031.4	1031.0	1031.1	1031.2	1031.3	1031.4	1030.8
140°	1062.1	1062.3	1062.0	1061.8	1061.6	1061.4	1061.8	1062.3	1062.7	1063.1	1062.7
142.5°	1091.0	1091.3	1091.6	1091.9	1092.2	1092.5	1092.6	1092.7	1092.8	1092.9	1092.3
145°	1135.0	1135.3	1135.3	1135.3	1135.3	1135.3	1135.5	1135.7	1135.9	1136.1	1135.6
147.5°	1170.8	1170.9	1171.2	1171.5	1171.7	1172.0	1172.3	1172.5	1172.8	1173.1	1172.4
150°	1193.4	1193.4	1193.8	1194.3	1194.7	1195.2	1195.6	1196.1	1196.5	1196.9	1196.3
152.5°	1214.4	1214.2	1214.6	1215.0	1215.5	1215.9	1216.4	1216.8	1217.3	1217.7	1217.1
155°	1242.8	1242.3	1242.8	1243.2	1243.6	1244.1	1244.8	1245.4	1246.1	1246.8	1246.2
157.5°	1267.9	1267.5	1267.5	1267.6	1267.6	1267.7	1268.4	1269.1	1269.8	1270.5	1270.0
160°	1281.7	1281.1	1281.4	1281.6	1281.8	1282.0	1282.9	1283.8	1284.7	1285.6	1285.1
162.5°	1294.5	1293.9	1294.1	1294.4	1294.6	1294.8	1296.1	1297.3	1298.5	1299.8	1299.4
165°	1311.7	1311.1	1311.3	1311.5	1311.8	1312.0	1313.3	1314.6	1316.0	1317.3	1317.1
167.5°	1324.3	1323.7	1323.9	1324.1	1324.3	1324.6	1326.2	1327.8	1329.4	1331.0	1330.8
170°	1330.7	1330.1	1330.3	1330.5	1330.7	1331.0	1332.7	1334.5	1336.3	1338.1	1337.9
172.5°	1335.5	1335.0	1335.3	1335.7	1336.1	1336.5	1338.1	1339.7	1341.3	1342.9	1342.7
175°	1341.6	1341.1	1341.3	1341.5	1341.7	1341.9	1343.7	1345.5	1347.3	1349.0	1348.9
177.5°	1345.1	1344.6	1344.8	1345.0	1345.2	1345.3	1346.6	1347.8	1349.1	1350.3	1350.2
180°	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1211.7	1207.2	1205.9	1207.6	1205.9	1207.2	1211.7	1212.1	1212.6	1215.9	1211.3
5°	1117.9	1112.8	1115.3	1114.3	1115.3	1112.8	1117.9	1123.1	1124.2	1128.8	1132.0
7.5°	1035.5	1029.0	1022.2	1024.4	1022.2	1029.0	1035.5	1035.6	1043.7	1049.7	1053.8
10°	977.7	972.6	969.4	972.0	969.4	972.6	977.7	984.5	987.6	994.9	1002.7
12.5°	929.1	926.0	923.3	922.2	923.3	926.0	929.1	936.3	943.6	952.1	960.7
15°	863.0	856.8	854.2	847.4	854.2	856.8	863.0	869.2	883.2	886.9	899.9
17.5°	802.0	800.0	793.2	790.3	793.2	800.0	802.0	807.3	813.8	827.2	836.9
20°	765.9	763.8	757.1	761.2	757.1	763.8	765.9	773.7	778.9	789.8	799.1
22.5°	736.0	731.4	729.2	728.0	729.2	731.4	736.0	739.6	746.5	756.5	767.1
25°	693.7	687.0	684.4	681.3	684.4	687.0	693.7	695.8	703.1	712.9	718.6
27.5°	651.6	647.9	644.5	643.7	644.5	647.9	651.6	654.5	660.8	669.4	679.7
30°	624.1	620.5	617.9	617.9	617.9	620.5	624.1	630.4	635.0	642.8	650.6
32.5°	599.6	596.8	594.2	593.8	594.2	596.8	599.6	603.0	608.5	617.1	625.3
35°	563.9	559.8	558.7	555.6	558.7	559.8	563.9	566.5	572.2	578.4	585.2
37.5°	526.8	523.4	523.3	523.0	523.3	523.4	526.8	531.4	536.2	541.8	550.1
40°	503.2	500.6	500.0	496.4	500.0	500.6	503.2	505.2	510.4	517.7	523.9
42.5°	477.8	476.5	474.7	473.1	474.7	476.5	477.8	482.0	486.3	491.5	499.4
45°	443.4	439.8	439.8	437.2	439.8	439.8	443.4	447.1	449.2	455.4	465.8
47.5°	407.9	405.1	405.4	402.7	405.4	405.1	407.9	409.1	412.4	418.5	424.2
50°	384.2	382.7	382.2	381.1	382.2	382.7	384.2	383.7	387.9	393.6	401.4
52.5°	360.6	359.8	361.8	359.5	361.8	359.8	360.6	361.7	364.6	368.3	375.6
55°	328.7	327.1	330.2	327.1	330.2	327.1	328.7	327.6	328.7	332.3	337.0
57.5°	292.0	290.6	293.4	291.8	293.4	290.6	292.0	292.2	295.3	295.9	300.0
60°	267.9	264.8	266.4	266.9	266.4	264.8	267.9	269.0	270.0	270.5	274.7
62.5°	239.3	237.4	238.5	236.2	238.5	237.4	239.3	241.6	243.8	246.4	248.9
65°	198.9	197.3	195.2	194.2	195.2	197.3	198.9	199.9	205.6	208.7	214.4
67.5°	167.1	163.4	163.3	164.1	163.3	163.4	167.1	166.9	171.0	173.5	177.4
70°	143.8	143.8	143.3	143.3	143.3	143.8	143.8	146.9	149.0	151.1	153.7
72.5°	127.6	127.2	126.3	125.9	126.3	127.2	127.6	128.7	129.9	132.0	134.6
75°	102.8	103.3	102.3	101.8	102.3	103.3	102.8	102.8	104.9	105.4	106.4
77.5°	75.9	73.7	74.9	73.7	74.9	73.7	75.9	78.0	78.7	81.0	81.1
80°	57.6	57.1	58.7	57.1	58.7	57.1	57.6	57.6	59.2	60.2	62.8
82.5°	45.6	45.1	45.8	44.7	45.8	45.1	45.6	45.2	45.9	47.4	47.0
85°	27.5	27.0	26.5	27.0	26.5	27.0	27.5	27.0	26.5	27.0	27.5
87.5°	13.9	13.7	13.8	13.9	13.8	13.7	13.9	13.4	13.6	13.4	13.2
90°	22.0	22.6	23.3	24.0	23.3	22.6	22.0	21.3	20.4	19.3	18.2
92.5°	21.4	21.7	22.1	22.4	22.1	21.7	21.4	21.1	20.4	19.3	18.2
95°	21.0	21.0	21.0	21.0	21.0	21.0	21.0	21.0	20.4	19.3	18.2
97.5°	21.0	21.0	21.0	21.0	21.0	21.0	21.0	21.0	24.1	30.4	36.6
100°	23.6	22.7	21.9	21.0	21.9	22.7	23.6	24.5	41.5	74.6	107.6
102.5°	170.9	155.8	140.7	125.6	140.7	155.8	170.9	186.0	196.6	202.9	209.1
105°	297.2	297.0	296.8	296.5	296.8	297.0	297.2	297.4	297.5	297.5	297.5
107.5°	375.8	375.2	374.5	373.8	374.5	375.2	375.8	376.5	376.8	376.8	376.7
110°	426.7	426.9	427.1	427.3	427.1	426.9	426.7	426.5	426.7	427.3	428.0



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	476.2	475.9	475.6	475.3	475.6	475.9	476.2	476.5	477.1	477.9	478.8
115°	551.2	549.8	548.5	547.2	548.5	549.8	551.2	552.5	553.6	554.5	555.4
117.5°	625.6	625.0	624.4	623.8	624.4	625.0	625.6	626.1	627.0	628.2	629.3
120°	674.3	673.2	672.1	671.0	672.1	673.2	674.3	675.4	676.2	676.6	677.1
122.5°	719.6	718.3	717.0	715.7	717.0	718.3	719.6	720.8	721.7	722.2	722.6
125°	785.8	785.1	784.5	783.8	784.5	785.1	785.8	786.5	787.2	788.1	789.0
127.5°	846.0	844.4	842.8	841.1	842.8	844.4	846.0	847.7	848.7	849.2	849.7
130°	886.0	884.9	883.8	882.6	883.8	884.9	886.0	887.1	888.0	888.6	889.3
132.5°	924.3	923.2	922.1	921.0	922.1	923.2	924.3	925.4	926.0	926.2	926.3
135°	977.5	976.2	974.8	973.5	974.8	976.2	977.5	978.8	979.7	980.2	980.6
137.5°	1029.7	1028.5	1027.4	1026.2	1027.4	1028.5	1029.7	1030.8	1031.4	1031.3	1031.2
140°	1061.4	1060.0	1058.7	1057.4	1058.7	1060.0	1061.4	1062.7	1063.1	1062.7	1062.3
142.5°	1090.9	1089.6	1088.3	1086.9	1088.3	1089.6	1090.9	1092.3	1092.9	1092.8	1092.7
145°	1134.3	1132.9	1131.6	1130.3	1131.6	1132.9	1134.3	1135.6	1136.1	1135.9	1135.7
147.5°	1170.8	1169.2	1167.6	1166.0	1167.6	1169.2	1170.8	1172.4	1173.1	1172.8	1172.5
150°	1194.5	1192.7	1190.9	1189.2	1190.9	1192.7	1194.5	1196.3	1196.9	1196.5	1196.1
152.5°	1215.5	1213.9	1212.3	1210.7	1212.3	1213.9	1215.5	1217.1	1217.7	1217.3	1216.8
155°	1244.4	1242.6	1240.9	1239.1	1240.9	1242.6	1244.4	1246.2	1246.8	1246.1	1245.4
157.5°	1268.2	1266.4	1264.6	1262.9	1264.6	1266.4	1268.2	1270.0	1270.5	1269.8	1269.1
160°	1283.4	1281.6	1279.8	1278.0	1279.8	1281.6	1283.4	1285.1	1285.6	1284.7	1283.8
162.5°	1297.5	1295.5	1293.6	1291.6	1293.6	1295.5	1297.5	1299.4	1299.8	1298.5	1297.3
165°	1315.3	1313.5	1311.8	1310.0	1311.8	1313.5	1315.3	1317.1	1317.3	1316.0	1314.6
167.5°	1328.8	1326.8	1324.8	1322.8	1324.8	1326.8	1328.8	1330.8	1331.0	1329.4	1327.8
170°	1335.9	1334.0	1332.0	1330.0	1332.0	1334.0	1335.9	1337.9	1338.1	1336.3	1334.5
172.5°	1340.7	1338.7	1336.7	1334.8	1336.7	1338.7	1340.7	1342.7	1342.9	1341.3	1339.7
175°	1346.9	1344.9	1342.9	1340.9	1342.9	1344.9	1346.9	1348.9	1349.0	1347.3	1345.5
177.5°	1348.8	1347.4	1346.0	1344.5	1346.0	1347.4	1348.8	1350.2	1350.3	1349.1	1347.8
180°	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1212.6	1217.1	1219.6	1225.4	1233.7	1237.9	1243.7	1247.9	1253.7	1260.7	1266.6
5°	1134.0	1146.5	1154.8	1167.8	1179.7	1191.7	1206.7	1217.6	1232.2	1248.8	1261.8
7.5°	1061.1	1076.7	1090.5	1107.7	1127.4	1142.8	1162.4	1182.4	1205.2	1228.8	1251.0
10°	1014.6	1030.2	1047.3	1068.6	1088.3	1109.1	1132.5	1155.8	1184.4	1210.9	1241.0
12.5°	968.5	985.7	1005.0	1028.7	1052.6	1079.2	1103.0	1129.3	1159.9	1194.3	1226.5
15°	911.3	927.9	948.7	968.9	996.4	1025.5	1057.2	1092.0	1126.3	1164.7	1204.7
17.5°	849.9	868.2	891.0	914.5	943.5	977.5	1008.6	1046.7	1085.2	1130.0	1177.0
20°	810.0	828.7	855.7	881.7	908.2	941.4	978.3	1017.2	1058.2	1105.5	1157.9
22.5°	778.5	791.8	818.3	844.7	875.8	909.8	945.9	986.5	1031.2	1080.1	1135.1
25°	731.6	747.2	766.4	793.9	826.1	862.0	898.3	941.4	990.2	1040.1	1098.7
27.5°	690.0	702.8	721.8	743.4	775.4	812.6	851.3	896.2	946.3	997.1	1058.7
30°	660.5	674.5	692.7	715.5	741.0	781.5	820.9	865.1	916.0	968.4	1031.7
32.5°	634.7	649.2	664.8	686.4	714.0	749.9	790.6	833.9	885.6	939.7	1001.4
35°	598.7	608.6	623.1	644.4	671.4	700.5	742.0	787.7	838.1	894.1	955.9
37.5°	557.4	570.1	584.6	603.1	626.7	658.2	696.8	743.0	789.8	843.5	899.9
40°	533.3	545.2	561.3	574.8	599.7	628.3	663.6	711.9	758.6	809.0	860.4
42.5°	508.8	520.3	533.9	550.7	573.1	600.9	633.7	678.7	728.7	776.2	819.3
45°	470.4	482.4	495.4	510.9	531.7	558.7	591.4	632.4	676.1	719.7	752.4
47.5°	433.8	445.0	457.3	473.2	492.4	518.4	547.7	583.9	626.3	663.4	686.8
50°	407.6	418.0	431.5	447.1	465.8	490.2	518.2	554.0	589.3	623.1	644.4
52.5°	381.9	393.5	407.0	420.5	438.4	462.8	488.7	519.6	553.2	580.7	598.3
55°	343.2	354.1	366.6	380.6	398.3	419.0	446.6	471.0	497.4	520.8	531.2
57.5°	305.9	315.5	327.2	341.8	357.7	377.0	398.8	422.3	440.9	457.5	469.2
60°	281.4	289.7	300.6	313.1	330.2	347.9	367.6	389.4	404.0	418.0	428.9
62.5°	256.5	264.4	274.9	286.1	301.2	317.6	336.5	354.1	368.3	377.7	390.3
65°	219.1	226.9	235.7	247.7	259.6	273.1	290.3	303.2	313.1	323.5	331.3
67.5°	184.3	190.8	199.2	208.5	218.6	231.6	244.9	255.7	262.4	268.7	278.0
70°	161.5	166.7	173.4	180.7	191.6	204.6	215.0	223.3	228.0	234.2	245.6
72.5°	138.2	144.2	150.6	157.9	166.7	177.6	186.7	195.0	198.0	203.0	210.3
75°	109.0	112.2	117.4	122.5	128.8	138.1	146.9	149.0	151.6	155.8	161.0
77.5°	82.5	85.3	87.3	90.8	95.7	103.2	107.9	111.0	111.6	113.2	118.3
80°	65.4	67.0	69.1	71.7	73.7	80.0	82.6	85.7	86.7	88.3	90.9
82.5°	48.0	49.5	50.8	53.0	56.3	58.8	61.4	64.5	64.7	65.8	66.4
85°	28.0	28.6	27.5	28.6	29.1	30.1	32.7	35.3	34.8	34.3	35.8
87.5°	13.4	13.2	12.4	13.4	12.2	12.3	12.0	12.1	12.5	13.0	13.5
90°	17.1	16.0	14.4	12.9	11.3	9.8	8.1	6.3	4.5	2.8	1.0
92.5°	17.1	16.0	14.6	13.2	11.8	10.5	10.4	11.6	12.9	14.1	15.4
95°	17.1	16.0	24.4	32.8	41.3	49.7	54.3	54.9	55.6	56.2	56.9
97.5°	42.9	49.1	65.8	82.5	99.2	115.9	123.6	122.4	121.2	120.0	118.8
100°	140.7	173.7	172.8	172.0	171.1	170.2	169.4	168.7	168.1	167.4	166.7
102.5°	215.4	221.7	221.1	220.6	220.1	219.5	218.8	218.0	217.2	216.3	215.5
105°	297.5	297.5	297.5	297.5	297.5	297.5	297.1	296.2	295.3	294.4	293.5
107.5°	376.7	376.6	376.2	375.7	375.3	374.8	374.6	374.6	374.6	374.6	374.6
110°	428.7	429.3	428.9	428.5	428.0	427.6	427.3	427.3	427.3	427.3	427.3



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	479.6	480.5	480.2	479.9	479.7	479.4	479.0	478.5	477.9	477.4	476.9
115°	556.3	557.1	556.9	556.7	556.5	556.3	555.6	554.5	553.4	552.3	551.2
117.5°	630.5	631.6	630.8	629.9	629.1	628.3	627.9	627.9	627.9	628.0	628.0
120°	677.5	678.0	677.3	676.6	676.0	675.3	675.1	675.3	675.5	675.7	676.0
122.5°	723.0	723.5	723.2	722.9	722.6	722.2	721.7	720.8	720.0	719.1	718.3
125°	789.9	790.8	790.8	790.8	790.8	790.8	790.0	788.5	786.9	785.3	783.8
127.5°	850.2	850.7	850.8	851.0	851.1	851.2	850.7	849.6	848.5	847.4	846.3
130°	890.0	890.6	890.4	890.2	890.0	889.7	889.1	888.0	886.9	885.8	884.6
132.5°	926.4	926.6	927.1	927.6	928.0	928.5	928.1	926.8	925.6	924.3	923.0
135°	981.0	981.5	981.9	982.4	982.8	983.3	982.8	981.5	980.2	978.8	977.5
137.5°	1031.1	1031.0	1031.4	1031.8	1032.2	1032.6	1032.2	1031.1	1029.9	1028.8	1027.6
140°	1061.8	1061.4	1061.6	1061.8	1062.0	1062.3	1062.1	1061.7	1061.3	1060.8	1060.4
142.5°	1092.6	1092.5	1092.2	1091.9	1091.6	1091.3	1091.0	1090.7	1090.5	1090.2	1089.9
145°	1135.5	1135.3	1135.3	1135.3	1135.3	1135.3	1135.0	1134.6	1134.1	1133.7	1133.3
147.5°	1172.3	1172.0	1171.7	1171.5	1171.2	1170.9	1170.8	1170.9	1171.0	1171.1	1171.2
150°	1195.6	1195.2	1194.7	1194.3	1193.8	1193.4	1193.4	1193.8	1194.3	1194.7	1195.2
152.5°	1216.4	1215.9	1215.5	1215.0	1214.6	1214.2	1214.4	1215.4	1216.4	1217.4	1218.3
155°	1244.8	1244.1	1243.6	1243.2	1242.8	1242.3	1242.8	1244.1	1245.4	1246.8	1248.1
157.5°	1268.4	1267.7	1267.6	1267.6	1267.5	1267.5	1267.9	1268.7	1269.5	1270.2	1271.0
160°	1282.9	1282.0	1281.8	1281.6	1281.4	1281.1	1281.7	1283.0	1284.4	1285.7	1287.0
162.5°	1296.1	1294.8	1294.6	1294.4	1294.1	1293.9	1294.5	1295.8	1297.1	1298.5	1299.8
165°	1313.3	1312.0	1311.8	1311.5	1311.3	1311.1	1311.7	1313.0	1314.3	1315.6	1317.0
167.5°	1326.2	1324.6	1324.3	1324.1	1323.9	1323.7	1324.3	1325.6	1327.0	1328.4	1329.8
170°	1332.7	1331.0	1330.7	1330.5	1330.3	1330.1	1330.7	1332.3	1333.8	1335.4	1336.9
172.5°	1338.1	1336.5	1336.1	1335.7	1335.3	1335.0	1335.5	1337.1	1338.6	1340.2	1341.7
175°	1343.7	1341.9	1341.7	1341.5	1341.3	1341.1	1341.6	1342.9	1344.3	1345.6	1346.9
177.5°	1346.6	1345.3	1345.2	1345.0	1344.8	1344.6	1345.1	1346.1	1347.2	1348.3	1349.3
180°	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1271.1	1274.9	1280.3	1286.5	1291.5	1296.9	1299.8	1299.8	1302.3	1307.7	1314.7
5°	1274.8	1288.3	1301.2	1317.9	1330.8	1345.9	1357.3	1368.2	1378.1	1390.5	1403.5
7.5°	1273.7	1296.1	1319.5	1345.7	1374.6	1397.5	1421.1	1439.6	1457.8	1481.7	1500.5
10°	1269.6	1298.6	1330.3	1363.5	1399.9	1431.6	1460.1	1486.1	1511.0	1537.0	1560.3
12.5°	1262.1	1299.1	1337.8	1377.7	1423.6	1459.8	1496.7	1524.3	1553.4	1581.8	1610.6
15°	1250.9	1294.5	1341.2	1396.8	1452.9	1493.4	1529.7	1565.5	1592.5	1624.7	1652.3
17.5°	1227.7	1283.9	1342.7	1403.4	1457.3	1504.4	1542.5	1576.5	1605.3	1640.7	1678.1
20°	1214.0	1274.8	1336.0	1400.9	1452.3	1500.6	1537.5	1572.8	1608.6	1654.8	1700.5
22.5°	1194.9	1259.8	1324.8	1386.4	1440.7	1487.3	1525.4	1568.7	1615.7	1668.1	1723.4
25°	1164.7	1231.7	1296.0	1354.7	1407.7	1455.5	1507.4	1565.5	1622.7	1691.7	1771.2
27.5°	1126.4	1190.9	1248.4	1310.4	1363.0	1423.8	1488.6	1551.6	1634.0	1729.0	1828.2
30°	1097.7	1159.0	1213.5	1272.2	1331.9	1398.9	1471.6	1545.8	1643.9	1755.6	1873.5
32.5°	1064.5	1119.9	1174.0	1230.6	1299.5	1373.1	1450.4	1541.2	1658.5	1785.5	1907.5
35°	1006.8	1056.7	1109.1	1171.9	1245.2	1325.1	1423.8	1534.4	1676.1	1812.7	1922.3
37.5°	946.4	985.7	1038.4	1104.7	1184.4	1276.9	1388.9	1523.3	1668.9	1791.4	1838.0
40°	899.9	936.7	992.3	1061.9	1140.8	1242.0	1367.7	1505.8	1652.3	1737.4	1733.8
42.5°	853.7	891.0	944.5	1014.5	1096.8	1210.1	1339.5	1483.0	1606.6	1639.0	1571.4
45°	783.0	817.8	870.3	940.9	1029.2	1148.1	1284.1	1421.7	1500.6	1448.2	1314.2
47.5°	711.0	744.7	793.4	862.6	958.9	1083.4	1212.0	1324.9	1336.0	1223.4	1062.7
50°	663.6	695.3	741.5	815.2	908.7	1030.2	1154.3	1243.1	1215.6	1078.0	912.3
52.5°	617.5	647.9	691.2	760.8	856.3	975.4	1086.2	1155.8	1092.2	945.9	796.8
55°	549.4	578.4	622.1	685.9	772.6	881.7	978.8	1004.2	910.8	763.3	642.8
57.5°	484.7	506.0	549.1	605.5	689.1	785.3	854.9	850.3	747.2	614.4	528.0
60°	441.9	461.1	502.1	554.0	633.5	719.7	768.5	747.7	643.3	533.8	450.7
62.5°	402.0	420.0	454.3	502.1	570.3	645.3	680.8	652.2	553.6	457.4	391.3
65°	341.7	354.6	382.2	426.3	479.8	531.7	563.4	521.3	434.1	361.4	311.5
67.5°	285.3	296.5	321.0	352.7	389.5	425.4	438.2	398.8	331.0	282.0	246.9
70°	248.7	259.1	275.7	305.3	329.7	355.2	361.4	326.1	269.5	232.1	210.3
72.5°	213.8	223.4	237.9	258.8	275.7	290.4	293.3	260.5	217.1	191.4	174.6
75°	163.0	171.4	180.7	188.5	199.4	202.0	200.9	175.5	152.1	135.0	125.7
77.5°	119.8	123.3	129.0	132.1	132.6	132.4	127.1	111.0	99.0	91.9	88.1
80°	92.4	95.0	96.6	97.6	98.1	92.9	87.2	77.4	73.2	69.1	64.4
82.5°	67.1	68.9	70.4	70.6	67.8	63.5	58.2	53.3	50.4	48.3	46.5
85°	36.3	36.9	36.3	33.8	30.1	28.6	27.5	26.5	26.0	25.4	25.4
87.5°	13.4	12.5	10.8	11.6	11.9	11.8	12.1	12.0	11.9	12.1	12.4
90°	2.8	4.5	6.3	8.1	9.8	11.3	12.9	14.4	16.0	17.1	18.2
92.5°	14.1	12.9	11.6	10.4	10.5	11.8	13.2	14.6	16.0	17.1	18.2
95°	56.2	55.6	54.9	54.3	49.7	41.3	32.8	24.4	16.0	17.1	18.2
97.5°	120.0	121.2	122.4	123.6	115.9	99.2	82.5	65.8	49.1	42.9	36.6
100°	167.4	168.1	168.7	169.4	170.2	171.1	172.0	172.8	173.7	140.7	107.6
102.5°	216.3	217.2	218.0	218.8	219.5	220.1	220.6	221.1	221.7	215.4	209.1
105°	294.4	295.3	296.2	297.1	297.5	297.5	297.5	297.5	297.5	297.5	297.5
107.5°	374.6	374.6	374.6	374.6	374.8	375.3	375.7	376.2	376.6	376.7	376.7
110°	427.3	427.3	427.3	427.3	427.6	428.0	428.5	428.9	429.3	428.7	428.0





TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	477.4	477.9	478.5	479.0	479.4	479.7	479.9	480.2	480.5	479.6	478.8
115°	552.3	553.4	554.5	555.6	556.3	556.5	556.7	556.9	557.1	556.3	555.4
117.5°	628.0	627.9	627.9	627.9	628.3	629.1	629.9	630.8	631.6	630.5	629.3
120°	675.7	675.5	675.3	675.1	675.3	676.0	676.6	677.3	678.0	677.5	677.1
122.5°	719.1	720.0	720.8	721.7	722.2	722.6	722.9	723.2	723.5	723.0	722.6
125°	785.3	786.9	788.5	790.0	790.8	790.8	790.8	790.8	790.8	789.9	789.0
127.5°	847.4	848.5	849.6	850.7	851.2	851.1	851.0	850.8	850.7	850.2	849.7
130°	885.8	886.9	888.0	889.1	889.7	890.0	890.2	890.4	890.6	890.0	889.3
132.5°	924.3	925.6	926.8	928.1	928.5	928.0	927.6	927.1	926.6	926.4	926.3
135°	978.8	980.2	981.5	982.8	983.3	982.8	982.4	981.9	981.5	981.0	980.6
137.5°	1028.8	1029.9	1031.1	1032.2	1032.6	1032.2	1031.8	1031.4	1031.0	1031.1	1031.2
140°	1060.8	1061.3	1061.7	1062.1	1062.3	1062.0	1061.8	1061.6	1061.4	1061.8	1062.3
142.5°	1090.2	1090.5	1090.7	1091.0	1091.3	1091.6	1091.9	1092.2	1092.5	1092.6	1092.7
145°	1133.7	1134.1	1134.6	1135.0	1135.3	1135.3	1135.3	1135.3	1135.3	1135.5	1135.7
147.5°	1171.1	1171.0	1170.9	1170.8	1170.9	1171.2	1171.5	1171.7	1172.0	1172.3	1172.5
150°	1194.7	1194.3	1193.8	1193.4	1193.4	1193.8	1194.3	1194.7	1195.2	1195.6	1196.1
152.5°	1217.4	1216.4	1215.4	1214.4	1214.2	1214.6	1215.0	1215.5	1215.9	1216.4	1216.8
155°	1246.8	1245.4	1244.1	1242.8	1242.3	1242.8	1243.2	1243.6	1244.1	1244.8	1245.4
157.5°	1270.2	1269.5	1268.7	1267.9	1267.5	1267.5	1267.6	1267.6	1267.7	1268.4	1269.1
160°	1285.7	1284.4	1283.0	1281.7	1281.1	1281.4	1281.6	1281.8	1282.0	1282.9	1283.8
162.5°	1298.5	1297.1	1295.8	1294.5	1293.9	1294.1	1294.4	1294.6	1294.8	1296.1	1297.3
165°	1315.6	1314.3	1313.0	1311.7	1311.1	1311.3	1311.5	1311.8	1312.0	1313.3	1314.6
167.5°	1328.4	1327.0	1325.6	1324.3	1323.7	1323.9	1324.1	1324.3	1324.6	1326.2	1327.8
170°	1335.4	1333.8	1332.3	1330.7	1330.1	1330.3	1330.5	1330.7	1331.0	1332.7	1334.5
172.5°	1340.2	1338.6	1337.1	1335.5	1335.0	1335.3	1335.7	1336.1	1336.5	1338.1	1339.7
175°	1345.6	1344.3	1342.9	1341.6	1341.1	1341.3	1341.5	1341.7	1341.9	1343.7	1345.5
177.5°	1348.3	1347.2	1346.1	1345.1	1344.6	1344.8	1345.0	1345.2	1345.3	1346.6	1347.8
180°	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1320.1	1320.1	1327.2	1326.8	1331.4	1329.7	1330.5
5°	1419.1	1427.9	1435.7	1440.9	1448.7	1450.8	1449.7
7.5°	1521.7	1541.3	1550.9	1564.0	1566.4	1573.2	1572.5
10°	1585.3	1604.5	1619.0	1630.4	1636.2	1643.4	1643.9
12.5°	1635.1	1651.4	1664.3	1674.9	1681.8	1684.1	1685.5
15°	1674.1	1692.2	1707.3	1722.3	1731.2	1737.9	1741.6
17.5°	1713.3	1741.4	1767.9	1788.4	1800.7	1811.0	1810.9
20°	1743.6	1775.8	1809.1	1832.4	1856.3	1866.7	1868.3
22.5°	1776.0	1825.3	1868.1	1904.3	1935.7	1946.5	1950.5
25°	1843.3	1907.7	1973.7	2024.6	2060.9	2082.2	2085.3
27.5°	1924.6	2011.8	2081.2	2128.1	2158.3	2174.1	2177.5
30°	1982.0	2062.5	2124.8	2160.1	2174.1	2176.2	2168.4
32.5°	2007.7	2067.9	2092.8	2090.7	2063.2	2044.9	2037.9
35°	1976.3	1963.8	1903.0	1830.4	1774.8	1739.5	1730.1
37.5°	1798.5	1691.0	1579.2	1469.4	1410.9	1381.2	1330.1
40°	1623.2	1470.0	1353.7	1261.3	1195.3	1142.3	1129.9
42.5°	1425.4	1267.3	1151.0	1071.8	1019.2	982.8	967.0
45°	1145.5	1009.4	913.4	852.6	812.1	785.6	773.7
47.5°	916.2	810.9	740.9	695.9	665.1	642.0	635.6
50°	790.3	706.2	647.0	609.1	585.7	568.1	560.8
52.5°	686.4	618.5	573.0	541.8	519.7	508.7	502.6
55°	566.5	507.8	475.1	450.2	437.7	428.9	424.7
57.5°	463.3	420.9	397.0	379.8	368.3	362.6	360.6
60°	405.5	372.3	350.5	337.0	329.2	321.9	319.9
62.5°	354.4	328.3	311.4	299.6	291.8	288.7	287.5
65°	285.6	268.5	256.0	248.7	242.5	241.5	240.9
67.5°	227.0	216.9	210.4	202.8	200.6	197.0	196.3
70°	194.2	187.4	179.7	177.1	174.5	170.8	171.4
72.5°	164.7	158.0	152.7	149.2	148.3	146.7	148.1
75°	120.5	118.4	116.3	113.7	112.7	112.7	112.2
77.5°	86.0	84.2	81.9	80.4	80.1	77.9	78.7
80°	62.3	59.7	58.7	59.2	57.6	57.1	57.1
82.5°	46.1	45.2	44.1	44.2	43.9	43.4	43.8
85°	25.4	24.9	24.9	24.4	24.4	23.9	23.9
87.5°	13.0	13.6	13.0	12.7	12.8	13.4	13.9
90°	19.3	20.4	21.3	22.0	22.6	23.3	24.0
92.5°	19.3	20.4	21.1	21.4	21.7	22.1	22.4
95°	19.3	20.4	21.0	21.0	21.0	21.0	21.0
97.5°	30.4	24.1	21.0	21.0	21.0	21.0	21.0
100°	74.6	41.5	24.5	23.6	22.7	21.9	21.0
102.5°	202.9	196.6	186.0	170.9	155.8	140.7	125.6
105°	297.5	297.5	297.4	297.2	297.0	296.8	296.5
107.5°	376.8	376.8	376.5	375.8	375.2	374.5	373.8
110°	427.3	426.7	426.5	426.7	426.9	427.1	427.3



TEST NUMBER: P333568

CATALOG NUMBER: S125RDIP-S850D1035U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	477.9	477.1	476.5	476.2	475.9	475.6	475.3
115°	554.5	553.6	552.5	551.2	549.8	548.5	547.2
117.5°	628.2	627.0	626.1	625.6	625.0	624.4	623.8
120°	676.6	676.2	675.4	674.3	673.2	672.1	671.0
122.5°	722.2	721.7	720.8	719.6	718.3	717.0	715.7
125°	788.1	787.2	786.5	785.8	785.1	784.5	783.8
127.5°	849.2	848.7	847.7	846.0	844.4	842.8	841.1
130°	888.6	888.0	887.1	886.0	884.9	883.8	882.6
132.5°	926.2	926.0	925.4	924.3	923.2	922.1	921.0
135°	980.2	979.7	978.8	977.5	976.2	974.8	973.5
137.5°	1031.3	1031.4	1030.8	1029.7	1028.5	1027.4	1026.2
140°	1062.7	1063.1	1062.7	1061.4	1060.0	1058.7	1057.4
142.5°	1092.8	1092.9	1092.3	1090.9	1089.6	1088.3	1086.9
145°	1135.9	1136.1	1135.6	1134.3	1132.9	1131.6	1130.3
147.5°	1172.8	1173.1	1172.4	1170.8	1169.2	1167.6	1166.0
150°	1196.5	1196.9	1196.3	1194.5	1192.7	1190.9	1189.2
152.5°	1217.3	1217.7	1217.1	1215.5	1213.9	1212.3	1210.7
155°	1246.1	1246.8	1246.2	1244.4	1242.6	1240.9	1239.1
157.5°	1269.8	1270.5	1270.0	1268.2	1266.4	1264.6	1262.9
160°	1284.7	1285.6	1285.1	1283.4	1281.6	1279.8	1278.0
162.5°	1298.5	1299.8	1299.4	1297.5	1295.5	1293.6	1291.6
165°	1316.0	1317.3	1317.1	1315.3	1313.5	1311.8	1310.0
167.5°	1329.4	1331.0	1330.8	1328.8	1326.8	1324.8	1322.8
170°	1336.3	1338.1	1337.9	1335.9	1334.0	1332.0	1330.0
172.5°	1341.3	1342.9	1342.7	1340.7	1338.7	1336.7	1334.8
175°	1347.3	1349.0	1348.9	1346.9	1344.9	1342.9	1340.9
177.5°	1349.1	1350.3	1350.2	1348.8	1347.4	1346.0	1344.5
180°	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9	1346.9

(END OF REPORT)