

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333574

Luminaire Tested: **S125RDIP-S850D1205U835-4F0-1E-UDD-A**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333574  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIP-S850D1205U835-4F0-1E-UDD-A  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 850 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 1205 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8094.8 lumens  
Efficiency: N/A  
Efficacy: 142.3 lumens/watt  
Spacing Criteria (0/90/45): 1.4 / 1.22 / 1.47  
Luminous Opening: Rectangular (W 4' x L: 0.42' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 56.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

### Luminous Intensity Polar Plot

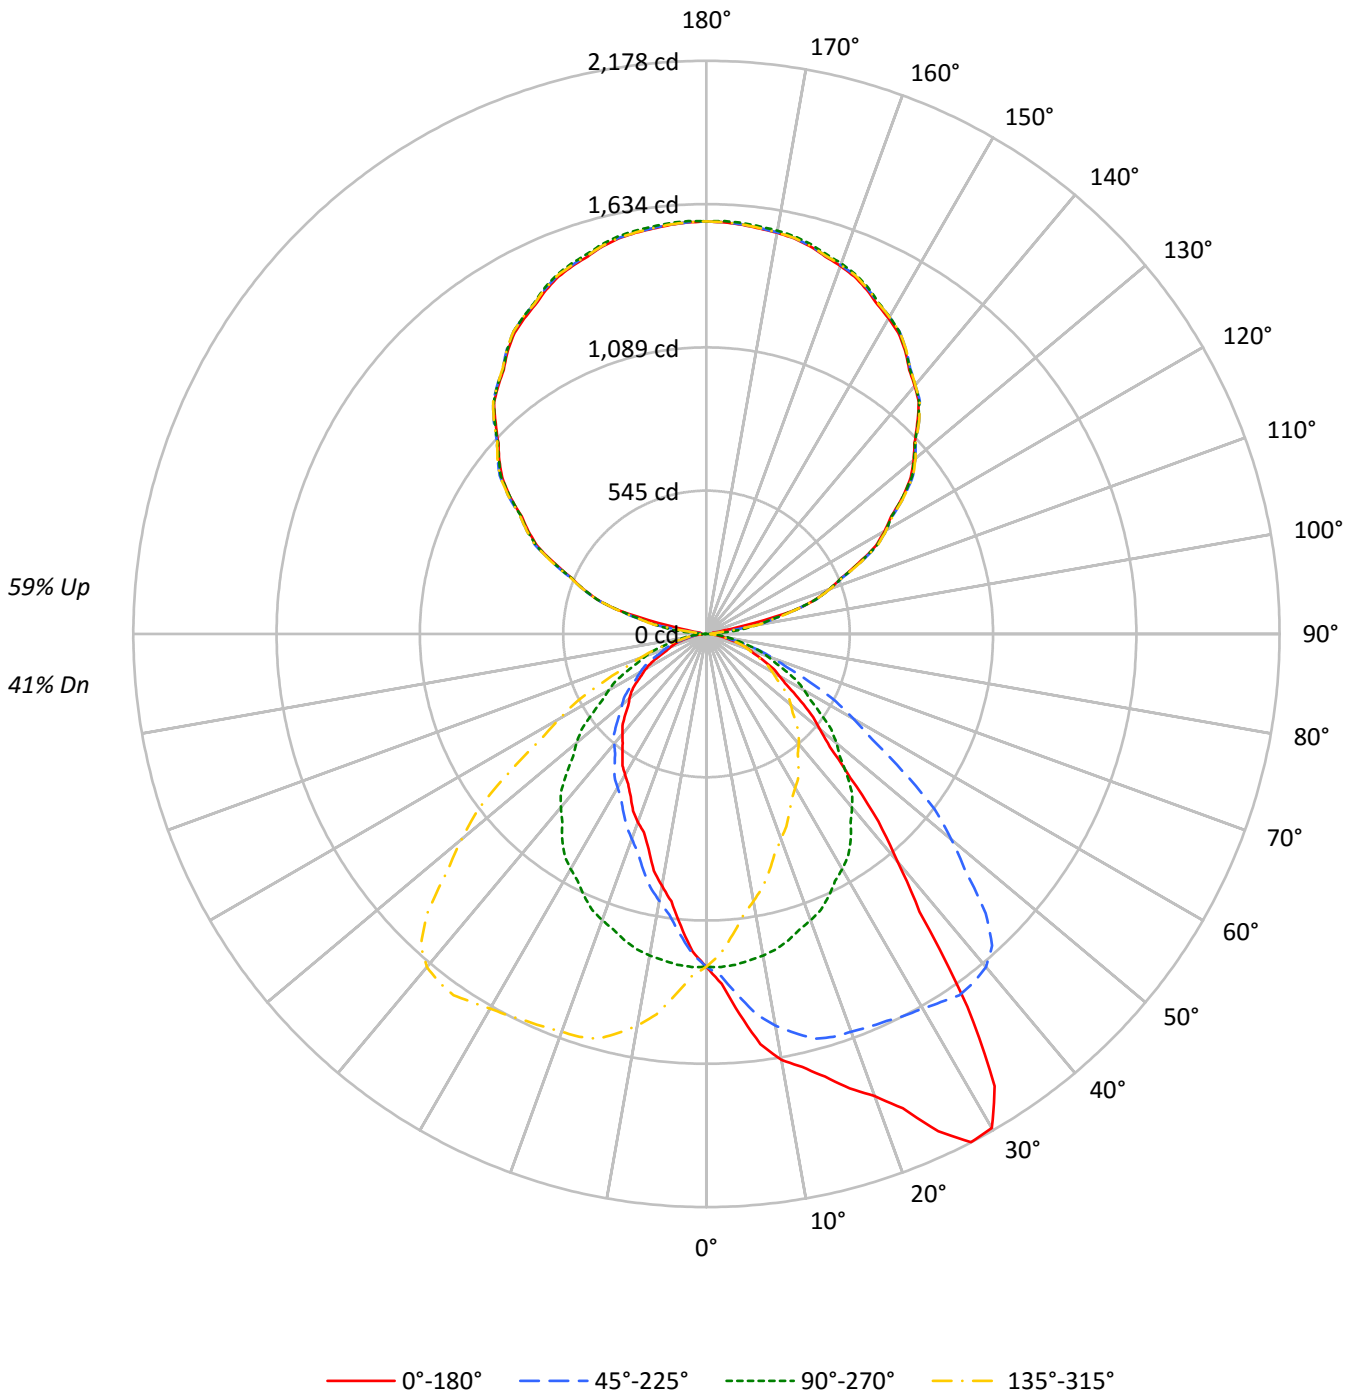



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20										
RC	80									70									50									30									10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0														
RCR																																						
0	105	105	105	105	96	96	96	96	78	78	78	62	62	62	47	47	47	41																				
1	96	92	88	85	87	84	81	78	69	67	65	55	54	52	42	42	41	35																				
2	88	81	75	70	80	74	69	64	61	57	54	49	46	44	38	36	35	30																				
3	80	71	64	58	73	65	59	54	54	49	46	43	40	38	34	32	30	25																				
4	73	63	55	50	67	58	51	46	48	43	39	39	35	32	30	28	26	22																				
5	67	56	48	43	61	52	45	40	43	38	34	35	31	28	27	25	23	19																				
6	62	50	43	37	56	46	39	34	39	33	30	32	28	25	25	22	20	17																				
7	57	45	38	32	52	42	35	30	35	30	26	29	25	22	23	20	18	15																				
8	53	41	34	29	48	38	31	27	32	27	23	26	22	20	21	18	16	14																				
9	49	38	30	25	45	35	28	24	29	24	21	24	20	18	19	16	14	12																				
10	46	34	27	23	42	32	26	21	27	22	19	22	18	16	18	15	13	11																				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	8169	8169	8169	8169
5°	9398	8180	7224	8180
10°	10781	8138	6374	8138
15°	11645	8055	5666	8055
20°	12841	7958	5232	7958
25°	14860	7829	4855	7829
30°	16171	7694	4608	7694
35°	13640	7536	4380	7536
40°	9526	7254	4185	7254
45°	7067	6872	3993	6872
50°	5635	6475	3829	6475
55°	4782	5981	3683	5981
60°	4132	5540	3447	5540
65°	3681	5063	2968	5063
70°	3237	4638	2706	4638
75°	2800	4017	2540	4017
80°	2124	3381	2124	3381
85°	1771	2653	2001	2653



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	121.3	1.5
10°-20°	355.5	4.4
20°-30°	563.6	7.0
30°-40°	679.7	8.4
40°-50°	607.0	7.5
50°-60°	465.5	5.8
60°-70°	302.5	3.7
70°-80°	147.1	1.8
80°-90°	38.4	0.5
90°-100°	57.0	0.7
100°-110°	351.1	4.3
110°-120°	636.8	7.9
120°-130°	817.3	10.1
130°-140°	879.1	10.9
140°-150°	825.1	10.2
150°-160°	667.5	8.2
160°-170°	431.7	5.3
170°-180°	148.9	1.8
0°-30°	1040.4	12.9
0°-40°	1720.1	21.2
0°-60°	2792.5	34.5
0°-90°	3280.4	40.5
90°-120°	1044.9	12.9
90°-150°	3566.4	44.1
90°-180°	4814.0	59.5
0°-180°	8094.8	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1265	1265	1265	1265	1265	
5°	1450	1262	1114	1262	1450	145
15°	1742	1205	847	1205	1742	499
25°	2085	1099	681	1099	2085	957
35°	1730	956	556	956	1730	1045
45°	774	752	437	752	774	617
55°	425	531	327	531	425	385
65°	241	331	194	331	241	240
75°	112	161	102	161	112	119
85°	24	36	27	36	24	28
90°	28	1	28	1	28	13
95°	24	66	24	66	24	20
105°	345	342	345	342	345	312
115°	637	642	637	642	637	632
125°	912	912	912	912	912	812
135°	1133	1138	1133	1138	1133	874
145°	1316	1319	1316	1319	1316	822
155°	1442	1453	1442	1453	1442	665
165°	1525	1533	1525	1533	1525	430
175°	1561	1568	1561	1568	1561	149
180°	1568	1568	1568	1568	1568	



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1330.5	1329.7	1331.4	1326.8	1327.2	1320.1	1320.1	1314.7	1307.7	1302.3	1299.8
5°	1449.7	1450.8	1448.7	1440.9	1435.7	1427.9	1419.1	1403.5	1390.5	1378.1	1368.2
7.5°	1572.5	1573.2	1566.4	1564.0	1550.9	1541.3	1521.7	1500.5	1481.7	1457.8	1439.6
10°	1643.9	1643.4	1636.2	1630.4	1619.0	1604.5	1585.3	1560.3	1537.0	1511.0	1486.1
12.5°	1685.5	1684.1	1681.8	1674.9	1664.3	1651.4	1635.1	1610.6	1581.8	1553.4	1524.3
15°	1741.6	1737.9	1731.2	1722.3	1707.3	1692.2	1674.1	1652.3	1624.7	1592.5	1565.5
17.5°	1810.9	1811.0	1800.7	1788.4	1767.9	1741.4	1713.3	1678.1	1640.7	1605.3	1576.5
20°	1868.3	1866.7	1856.3	1832.4	1809.1	1775.8	1743.6	1700.5	1654.8	1608.6	1572.8
22.5°	1950.5	1946.5	1935.7	1904.3	1868.1	1825.3	1776.0	1723.4	1668.1	1615.7	1568.7
25°	2085.3	2082.2	2060.9	2024.6	1973.7	1907.7	1843.3	1771.2	1691.7	1622.7	1565.5
27.5°	2177.5	2174.1	2158.3	2128.1	2081.2	2011.8	1924.6	1828.2	1729.0	1634.0	1551.6
30°	2168.4	2176.2	2174.1	2160.1	2124.8	2062.5	1982.0	1873.5	1755.6	1643.9	1545.8
32.5°	2037.9	2044.9	2063.2	2090.7	2092.8	2067.9	2007.7	1907.5	1785.5	1658.5	1541.2
35°	1730.1	1739.5	1774.8	1830.4	1903.0	1963.8	1976.3	1922.3	1812.7	1676.1	1534.4
37.5°	1330.1	1381.2	1410.9	1469.4	1579.2	1691.0	1798.5	1838.0	1791.4	1668.9	1523.3
40°	1129.9	1142.3	1195.3	1261.3	1353.7	1470.0	1623.2	1733.8	1737.4	1652.3	1505.8
42.5°	967.0	982.8	1019.2	1071.8	1151.0	1267.3	1425.4	1571.4	1639.0	1606.6	1483.0
45°	773.7	785.6	812.1	852.6	913.4	1009.4	1145.5	1314.2	1448.2	1500.6	1421.7
47.5°	635.6	642.0	665.1	695.9	740.9	810.9	916.2	1062.7	1223.4	1336.0	1324.9
50°	560.8	568.1	585.7	609.1	647.0	706.2	790.3	912.3	1078.0	1215.6	1243.1
52.5°	502.6	508.7	519.7	541.8	573.0	618.5	686.4	796.8	945.9	1092.2	1155.8
55°	424.7	428.9	437.7	450.2	475.1	507.8	566.5	642.8	763.3	910.8	1004.2
57.5°	360.6	362.6	368.3	379.8	397.0	420.9	463.3	528.0	614.4	747.2	850.3
60°	319.9	321.9	329.2	337.0	350.5	372.3	405.5	450.7	533.8	643.3	747.7
62.5°	287.5	288.7	291.8	299.6	311.4	328.3	354.4	391.3	457.4	553.6	652.2
65°	240.9	241.5	242.5	248.7	256.0	268.5	285.6	311.5	361.4	434.1	521.3
67.5°	196.3	197.0	200.6	202.8	210.4	216.9	227.0	246.9	282.0	331.0	398.8
70°	171.4	170.8	174.5	177.1	179.7	187.4	194.2	210.3	232.1	269.5	326.1
72.5°	148.1	146.7	148.3	149.2	152.7	158.0	164.7	174.6	191.4	217.1	260.5
75°	112.2	112.7	112.7	113.7	116.3	118.4	120.5	125.7	135.0	152.1	175.5
77.5°	78.7	77.9	80.1	80.4	81.9	84.2	86.0	88.1	91.9	99.0	111.0
80°	57.1	57.1	57.6	59.2	58.7	59.7	62.3	64.4	69.1	73.2	77.4
82.5°	43.8	43.4	43.9	44.2	44.1	45.2	46.1	46.5	48.3	50.4	53.3
85°	23.9	23.9	24.4	24.4	24.9	24.9	25.4	25.4	25.4	26.0	26.5
87.5°	14.7	14.1	13.6	13.4	13.7	14.3	13.6	13.0	12.7	12.4	12.5
90°	27.9	27.1	26.3	25.6	24.8	23.8	22.5	21.2	19.9	18.6	16.8
92.5°	26.0	25.7	25.3	24.9	24.6	23.8	22.5	21.2	19.9	18.6	17.0
95°	24.4	24.4	24.4	24.4	24.4	23.8	22.5	21.2	19.9	18.6	28.4
97.5°	24.4	24.4	24.4	24.4	24.4	28.0	35.3	42.6	49.9	57.2	76.6
100°	24.4	25.4	26.5	27.5	28.5	48.3	86.8	125.3	163.7	202.2	201.2
102.5°	146.2	163.8	181.3	198.9	216.5	228.9	236.2	243.4	250.7	258.0	257.4
105°	345.2	345.4	345.7	345.9	346.2	346.3	346.3	346.3	346.3	346.3	346.3
107.5°	435.1	435.9	436.7	437.4	438.2	438.6	438.5	438.5	438.4	438.4	437.9
110°	497.4	497.2	496.9	496.6	496.4	496.6	497.4	498.2	499.0	499.7	499.2



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	553.2	553.6	553.9	554.3	554.6	555.3	556.3	557.3	558.3	559.2	558.9
115°	636.9	638.4	640.0	641.5	643.1	644.4	645.4	646.4	647.5	648.5	648.2
117.5°	726.1	726.8	727.5	728.1	728.8	729.8	731.2	732.5	733.9	735.2	734.2
120°	781.0	782.3	783.6	784.9	786.2	787.1	787.6	788.1	788.6	789.1	788.3
122.5°	833.1	834.6	836.0	837.5	839.0	840.1	840.6	841.1	841.6	842.1	841.8
125°	912.3	913.1	913.9	914.6	915.4	916.3	917.3	918.4	919.4	920.4	920.4
127.5°	979.0	980.9	982.8	984.8	986.7	987.9	988.5	989.0	989.6	990.2	990.3
130°	1027.4	1028.7	1030.0	1031.2	1032.5	1033.6	1034.3	1035.1	1035.9	1036.7	1036.4
132.5°	1072.0	1073.3	1074.6	1075.9	1077.2	1077.9	1078.0	1078.2	1078.4	1078.5	1079.1
135°	1133.1	1134.7	1136.2	1137.8	1139.3	1140.4	1140.9	1141.4	1141.9	1142.4	1142.9
137.5°	1194.5	1195.8	1197.2	1198.5	1199.9	1200.5	1200.4	1200.3	1200.2	1200.1	1200.5
140°	1230.8	1232.3	1233.9	1235.4	1236.9	1237.5	1236.9	1236.4	1235.9	1235.4	1235.7
142.5°	1265.2	1266.7	1268.3	1269.8	1271.4	1272.1	1272.0	1271.9	1271.8	1271.7	1271.3
145°	1315.6	1317.1	1318.7	1320.2	1321.8	1322.4	1322.2	1321.9	1321.7	1321.4	1321.4
147.5°	1357.2	1359.1	1360.9	1362.8	1364.6	1365.4	1365.1	1364.8	1364.5	1364.2	1363.9
150°	1384.2	1386.2	1388.3	1390.4	1392.4	1393.2	1392.7	1392.2	1391.6	1391.1	1390.6
152.5°	1409.3	1411.1	1413.0	1414.8	1416.7	1417.4	1416.9	1416.3	1415.8	1415.3	1414.8
155°	1442.3	1444.3	1446.4	1448.5	1450.5	1451.2	1450.4	1449.6	1448.9	1448.1	1447.6
157.5°	1469.9	1472.0	1474.1	1476.1	1478.2	1478.8	1478.0	1477.2	1476.3	1475.5	1475.5
160°	1487.6	1489.7	1491.7	1493.8	1495.9	1496.4	1495.3	1494.3	1493.3	1492.2	1492.0
162.5°	1503.4	1505.7	1507.9	1510.2	1512.5	1512.9	1511.5	1510.0	1508.6	1507.1	1506.9
165°	1524.8	1526.8	1528.9	1531.0	1533.0	1533.3	1531.8	1530.2	1528.7	1527.1	1526.8
167.5°	1539.7	1542.0	1544.3	1546.6	1549.0	1549.2	1547.3	1545.5	1543.6	1541.8	1541.5
170°	1548.0	1550.4	1552.7	1555.0	1557.3	1557.5	1555.4	1553.3	1551.3	1549.2	1548.9
172.5°	1553.6	1555.9	1558.3	1560.6	1562.9	1563.1	1561.3	1559.4	1557.6	1555.7	1555.2
175°	1560.8	1563.1	1565.5	1567.8	1570.1	1570.2	1568.2	1566.1	1564.0	1562.0	1561.7
177.5°	1565.0	1566.6	1568.3	1570.0	1571.6	1571.7	1570.3	1568.8	1567.4	1565.9	1565.7
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1299.8	1296.9	1291.5	1286.5	1280.3	1274.9	1271.1	1266.6	1260.7	1253.7	1247.9
5°	1357.3	1345.9	1330.8	1317.9	1301.2	1288.3	1274.8	1261.8	1248.8	1232.2	1217.6
7.5°	1421.1	1397.5	1374.6	1345.7	1319.5	1296.1	1273.7	1251.0	1228.8	1205.2	1182.4
10°	1460.1	1431.6	1399.9	1363.5	1330.3	1298.6	1269.6	1241.0	1210.9	1184.4	1155.8
12.5°	1496.7	1459.8	1423.6	1377.7	1337.8	1299.1	1262.1	1226.5	1194.3	1159.9	1129.3
15°	1529.7	1493.4	1452.9	1396.8	1341.2	1294.5	1250.9	1204.7	1164.7	1126.3	1092.0
17.5°	1542.5	1504.4	1457.3	1403.4	1342.7	1283.9	1227.7	1177.0	1130.0	1085.2	1046.7
20°	1537.5	1500.6	1452.3	1400.9	1336.0	1274.8	1214.0	1157.9	1105.5	1058.2	1017.2
22.5°	1525.4	1487.3	1440.7	1386.4	1324.8	1259.8	1194.9	1135.1	1080.1	1031.2	986.5
25°	1507.4	1455.5	1407.7	1354.7	1296.0	1231.7	1164.7	1098.7	1040.1	990.2	941.4
27.5°	1488.6	1423.8	1363.0	1310.4	1248.4	1190.9	1126.4	1058.7	997.1	946.3	896.2
30°	1471.6	1398.9	1331.9	1272.2	1213.5	1159.0	1097.7	1031.7	968.4	916.0	865.1
32.5°	1450.4	1373.1	1299.5	1230.6	1174.0	1119.9	1064.5	1001.4	939.7	885.6	833.9
35°	1423.8	1325.1	1245.2	1171.9	1109.1	1056.7	1006.8	955.9	894.1	838.1	787.7
37.5°	1388.9	1276.9	1184.4	1104.7	1038.4	985.7	946.4	899.9	843.5	789.8	743.0
40°	1367.7	1242.0	1140.8	1061.9	992.3	936.7	899.9	860.4	809.0	758.6	711.9
42.5°	1339.5	1210.1	1096.8	1014.5	944.5	891.0	853.7	819.3	776.2	728.7	678.7
45°	1284.1	1148.1	1029.2	940.9	870.3	817.8	783.0	752.4	719.7	676.1	632.4
47.5°	1212.0	1083.4	958.9	862.6	793.4	744.7	711.0	686.8	663.4	626.3	583.9
50°	1154.3	1030.2	908.7	815.2	741.5	695.3	663.6	644.4	623.1	589.3	554.0
52.5°	1086.2	975.4	856.3	760.8	691.2	647.9	617.5	598.3	580.7	553.2	519.6
55°	978.8	881.7	772.6	685.9	622.1	578.4	549.4	531.2	520.8	497.4	471.0
57.5°	854.9	785.3	689.1	605.5	549.1	506.0	484.7	469.2	457.5	440.9	422.3
60°	768.5	719.7	633.5	554.0	502.1	461.1	441.9	428.9	418.0	404.0	389.4
62.5°	680.8	645.3	570.3	502.1	454.3	420.0	402.0	390.3	377.7	368.3	354.1
65°	563.4	531.7	479.8	426.3	382.2	354.6	341.7	331.3	323.5	313.1	303.2
67.5°	438.2	425.4	389.5	352.7	321.0	296.5	285.3	278.0	268.7	262.4	255.7
70°	361.4	355.2	329.7	305.3	275.7	259.1	248.7	245.6	234.2	228.0	223.3
72.5°	293.3	290.4	275.7	258.8	237.9	223.4	213.8	210.3	203.0	198.0	195.0
75°	200.9	202.0	199.4	188.5	180.7	171.4	163.0	161.0	155.8	151.6	149.0
77.5°	127.1	132.4	132.6	132.1	129.0	123.3	119.8	118.3	113.2	111.6	111.0
80°	87.2	92.9	98.1	97.6	96.6	95.0	92.4	90.9	88.3	86.7	85.7
82.5°	58.2	63.5	67.8	70.6	70.4	68.9	67.1	66.4	65.8	64.7	64.5
85°	27.5	28.6	30.1	33.8	36.3	36.9	36.3	35.8	34.3	34.8	35.3
87.5°	12.6	12.2	12.2	11.9	11.0	12.7	13.5	13.5	13.1	12.7	12.3
90°	15.0	13.2	11.4	9.4	7.4	5.3	3.2	1.2	3.2	5.3	7.4
92.5°	15.4	13.8	12.2	12.1	13.6	15.0	16.5	17.9	16.5	15.0	13.6
95°	38.2	48.0	57.9	63.1	63.9	64.7	65.5	66.2	65.5	64.7	63.9
97.5°	96.0	115.4	134.9	143.9	142.5	141.1	139.7	138.3	139.7	141.1	142.5
100°	200.2	199.1	198.1	197.2	196.4	195.6	194.9	194.1	194.9	195.6	196.4
102.5°	256.8	256.1	255.5	254.7	253.7	252.8	251.8	250.8	251.8	252.8	253.7
105°	346.3	346.3	346.3	345.8	344.8	343.7	342.7	341.7	342.7	343.7	344.8
107.5°	437.3	436.8	436.3	436.1	436.1	436.1	436.1	436.1	436.1	436.1	436.1
110°	498.7	498.2	497.7	497.4	497.4	497.4	497.4	497.4	497.4	497.4	497.4





TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	558.6	558.3	558.0	557.5	556.9	556.3	555.7	555.1	555.7	556.3	556.9
115°	648.0	647.7	647.5	646.7	645.4	644.1	642.8	641.5	642.8	644.1	645.4
117.5°	733.2	732.3	731.3	730.8	730.9	730.9	731.0	731.0	731.0	730.9	730.9
120°	787.6	786.8	786.0	785.8	786.0	786.3	786.5	786.8	786.5	786.3	786.0
122.5°	841.4	841.0	840.7	840.0	839.0	838.0	837.1	836.1	837.1	838.0	839.0
125°	920.4	920.4	920.4	919.5	917.7	915.9	914.1	912.3	914.1	915.9	917.7
127.5°	990.5	990.6	990.8	990.2	988.9	987.6	986.4	985.1	986.4	987.6	988.9
130°	1036.2	1035.9	1035.6	1034.9	1033.6	1032.3	1031.0	1029.7	1031.0	1032.3	1033.6
132.5°	1079.6	1080.2	1080.8	1080.3	1078.8	1077.3	1075.8	1074.3	1075.8	1077.3	1078.8
135°	1143.5	1144.0	1144.5	1144.0	1142.4	1140.9	1139.3	1137.8	1139.3	1140.9	1142.4
137.5°	1201.0	1201.5	1201.9	1201.5	1200.1	1198.8	1197.5	1196.1	1197.5	1198.8	1200.1
140°	1235.9	1236.2	1236.4	1236.3	1235.8	1235.3	1234.8	1234.2	1234.8	1235.3	1235.8
142.5°	1270.9	1270.6	1270.2	1269.9	1269.6	1269.3	1268.9	1268.6	1268.9	1269.3	1269.6
145°	1321.4	1321.4	1321.4	1321.1	1320.6	1320.1	1319.6	1319.1	1319.6	1320.1	1320.6
147.5°	1363.5	1363.2	1362.9	1362.8	1362.9	1363.0	1363.1	1363.2	1363.1	1363.0	1362.9
150°	1390.1	1389.6	1389.1	1389.1	1389.6	1390.1	1390.6	1391.1	1390.6	1390.1	1389.6
152.5°	1414.3	1413.8	1413.2	1413.5	1414.7	1415.8	1417.0	1418.1	1417.0	1415.8	1414.7
155°	1447.0	1446.5	1446.0	1446.5	1448.1	1449.6	1451.2	1452.7	1451.2	1449.6	1448.1
157.5°	1475.4	1475.4	1475.3	1475.7	1476.7	1477.6	1478.5	1479.5	1478.5	1477.6	1476.7
160°	1491.7	1491.5	1491.2	1491.9	1493.4	1495.0	1496.5	1498.1	1496.5	1495.0	1493.4
162.5°	1506.6	1506.3	1506.1	1506.7	1508.3	1509.8	1511.4	1512.9	1511.4	1509.8	1508.3
165°	1526.6	1526.3	1526.1	1526.7	1528.3	1529.8	1531.4	1532.9	1531.4	1529.8	1528.3
167.5°	1541.2	1541.0	1540.7	1541.4	1543.0	1544.6	1546.2	1547.8	1546.2	1544.6	1543.0
170°	1548.7	1548.4	1548.2	1548.9	1550.7	1552.5	1554.4	1556.2	1554.4	1552.5	1550.7
172.5°	1554.8	1554.3	1553.8	1554.5	1556.3	1558.1	1559.9	1561.7	1559.9	1558.1	1556.3
175°	1561.5	1561.2	1560.9	1561.6	1563.1	1564.7	1566.2	1567.8	1566.2	1564.7	1563.1
177.5°	1565.5	1565.3	1565.1	1565.6	1566.9	1568.1	1569.3	1570.6	1569.3	1568.1	1566.9
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1243.7	1237.9	1233.7	1225.4	1219.6	1217.1	1212.6	1211.3	1215.9	1212.6	1212.1
5°	1206.7	1191.7	1179.7	1167.8	1154.8	1146.5	1134.0	1132.0	1128.8	1124.2	1123.1
7.5°	1162.4	1142.8	1127.4	1107.7	1090.5	1076.7	1061.1	1053.8	1049.7	1043.7	1035.6
10°	1132.5	1109.1	1088.3	1068.6	1047.3	1030.2	1014.6	1002.7	994.9	987.6	984.5
12.5°	1103.0	1079.2	1052.6	1028.7	1005.0	985.7	968.5	960.7	952.1	943.6	936.3
15°	1057.2	1025.5	996.4	968.9	948.7	927.9	911.3	899.9	886.9	883.2	869.2
17.5°	1008.6	977.5	943.5	914.5	891.0	868.2	849.9	836.9	827.2	813.8	807.3
20°	978.3	941.4	908.2	881.7	855.7	828.7	810.0	799.1	789.8	778.9	773.7
22.5°	945.9	909.8	875.8	844.7	818.3	791.8	778.5	767.1	756.5	746.5	739.6
25°	898.3	862.0	826.1	793.9	766.4	747.2	731.6	718.6	712.9	703.1	695.8
27.5°	851.3	812.6	775.4	743.4	721.8	702.8	690.0	679.7	669.4	660.8	654.5
30°	820.9	781.5	741.0	715.5	692.7	674.5	660.5	650.6	642.8	635.0	630.4
32.5°	790.6	749.9	714.0	686.4	664.8	649.2	634.7	625.3	617.1	608.5	603.0
35°	742.0	700.5	671.4	644.4	623.1	608.6	598.7	585.2	578.4	572.2	566.5
37.5°	696.8	658.2	626.7	603.1	584.6	570.1	557.4	550.1	541.8	536.2	531.4
40°	663.6	628.3	599.7	574.8	561.3	545.2	533.3	523.9	517.7	510.4	505.2
42.5°	633.7	600.9	573.1	550.7	533.9	520.3	508.8	499.4	491.5	486.3	482.0
45°	591.4	558.7	531.7	510.9	495.4	482.4	470.4	465.8	455.4	449.2	447.1
47.5°	547.7	518.4	492.4	473.2	457.3	445.0	433.8	424.2	418.5	412.4	409.1
50°	518.2	490.2	465.8	447.1	431.5	418.0	407.6	401.4	393.6	387.9	383.7
52.5°	488.7	462.8	438.4	420.5	407.0	393.5	381.9	375.6	368.3	364.6	361.7
55°	446.6	419.0	398.3	380.6	366.6	354.1	343.2	337.0	332.3	328.7	327.6
57.5°	398.8	377.0	357.7	341.8	327.2	315.5	305.9	300.0	295.9	295.3	292.2
60°	367.6	347.9	330.2	313.1	300.6	289.7	281.4	274.7	270.5	270.0	269.0
62.5°	336.5	317.6	301.2	286.1	274.9	264.4	256.5	248.9	246.4	243.8	241.6
65°	290.3	273.1	259.6	247.7	235.7	226.9	219.1	214.4	208.7	205.6	199.9
67.5°	244.9	231.6	218.6	208.5	199.2	190.8	184.3	177.4	173.5	171.0	166.9
70°	215.0	204.6	191.6	180.7	173.4	166.7	161.5	153.7	151.1	149.0	146.9
72.5°	186.7	177.6	166.7	157.9	150.6	144.2	138.2	134.6	132.0	129.9	128.7
75°	146.9	138.1	128.8	122.5	117.4	112.2	109.0	106.4	105.4	104.9	102.8
77.5°	107.9	103.2	95.7	90.8	87.3	85.3	82.5	81.1	81.0	78.7	78.0
80°	82.6	80.0	73.7	71.7	69.1	67.0	65.4	62.8	60.2	59.2	57.6
82.5°	61.4	58.8	56.3	53.0	50.8	49.5	48.0	47.0	47.4	45.9	45.2
85°	32.7	30.1	29.1	28.6	27.5	28.6	28.0	27.5	27.0	26.5	27.0
87.5°	12.3	12.7	12.6	13.8	12.9	13.7	13.9	13.8	14.0	14.3	14.1
90°	9.4	11.4	13.2	15.0	16.8	18.6	19.9	21.2	22.5	23.8	24.8
92.5°	12.1	12.2	13.8	15.4	17.0	18.6	19.9	21.2	22.5	23.8	24.6
95°	63.1	57.9	48.0	38.2	28.4	18.6	19.9	21.2	22.5	23.8	24.4
97.5°	143.9	134.9	115.4	96.0	76.6	57.2	49.9	42.6	35.3	28.0	24.4
100°	197.2	198.1	199.1	200.2	201.2	202.2	163.7	125.3	86.8	48.3	28.5
102.5°	254.7	255.5	256.1	256.8	257.4	258.0	250.7	243.4	236.2	228.9	216.5
105°	345.8	346.3	346.3	346.3	346.3	346.3	346.3	346.3	346.3	346.3	346.2
107.5°	436.1	436.3	436.8	437.3	437.9	438.4	438.4	438.5	438.5	438.6	438.2
110°	497.4	497.7	498.2	498.7	499.2	499.7	499.0	498.2	497.4	496.6	496.4



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	557.5	558.0	558.3	558.6	558.9	559.2	558.3	557.3	556.3	555.3	554.6
115°	646.7	647.5	647.7	648.0	648.2	648.5	647.5	646.4	645.4	644.4	643.1
117.5°	730.8	731.3	732.3	733.2	734.2	735.2	733.9	732.5	731.2	729.8	728.8
120°	785.8	786.0	786.8	787.6	788.3	789.1	788.6	788.1	787.6	787.1	786.2
122.5°	840.0	840.7	841.0	841.4	841.8	842.1	841.6	841.1	840.6	840.1	839.0
125°	919.5	920.4	920.4	920.4	920.4	920.4	919.4	918.4	917.3	916.3	915.4
127.5°	990.2	990.8	990.6	990.5	990.3	990.2	989.6	989.0	988.5	987.9	986.7
130°	1034.9	1035.6	1035.9	1036.2	1036.4	1036.7	1035.9	1035.1	1034.3	1033.6	1032.5
132.5°	1080.3	1080.8	1080.2	1079.6	1079.1	1078.5	1078.4	1078.2	1078.0	1077.9	1077.2
135°	1144.0	1144.5	1144.0	1143.5	1142.9	1142.4	1141.9	1141.4	1140.9	1140.4	1139.3
137.5°	1201.5	1201.9	1201.5	1201.0	1200.5	1200.1	1200.2	1200.3	1200.4	1200.5	1199.9
140°	1236.3	1236.4	1236.2	1235.9	1235.7	1235.4	1235.9	1236.4	1236.9	1237.5	1236.9
142.5°	1269.9	1270.2	1270.6	1270.9	1271.3	1271.7	1271.8	1271.9	1272.0	1272.1	1271.4
145°	1321.1	1321.4	1321.4	1321.4	1321.4	1321.4	1321.7	1321.9	1322.2	1322.4	1321.8
147.5°	1362.8	1362.9	1363.2	1363.5	1363.9	1364.2	1364.5	1364.8	1365.1	1365.4	1364.6
150°	1389.1	1389.1	1389.6	1390.1	1390.6	1391.1	1391.6	1392.2	1392.7	1393.2	1392.4
152.5°	1413.5	1413.2	1413.8	1414.3	1414.8	1415.3	1415.8	1416.3	1416.9	1417.4	1416.7
155°	1446.5	1446.0	1446.5	1447.0	1447.6	1448.1	1448.9	1449.6	1450.4	1451.2	1450.5
157.5°	1475.7	1475.3	1475.4	1475.4	1475.5	1475.5	1476.3	1477.2	1478.0	1478.8	1478.2
160°	1491.9	1491.2	1491.5	1491.7	1492.0	1492.2	1493.3	1494.3	1495.3	1496.4	1495.9
162.5°	1506.7	1506.1	1506.3	1506.6	1506.9	1507.1	1508.6	1510.0	1511.5	1512.9	1512.5
165°	1526.7	1526.1	1526.3	1526.6	1526.8	1527.1	1528.7	1530.2	1531.8	1533.3	1533.0
167.5°	1541.4	1540.7	1541.0	1541.2	1541.5	1541.8	1543.6	1545.5	1547.3	1549.2	1549.0
170°	1548.9	1548.2	1548.4	1548.7	1548.9	1549.2	1551.3	1553.3	1555.4	1557.5	1557.3
172.5°	1554.5	1553.8	1554.3	1554.8	1555.2	1555.7	1557.6	1559.4	1561.3	1563.1	1562.9
175°	1561.6	1560.9	1561.2	1561.5	1561.7	1562.0	1564.0	1566.1	1568.2	1570.2	1570.1
177.5°	1565.6	1565.1	1565.3	1565.5	1565.7	1565.9	1567.4	1568.8	1570.3	1571.7	1571.6
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1211.7	1207.2	1205.9	1207.6	1205.9	1207.2	1211.7	1212.1	1212.6	1215.9	1211.3
5°	1117.9	1112.8	1115.3	1114.3	1115.3	1112.8	1117.9	1123.1	1124.2	1128.8	1132.0
7.5°	1035.5	1029.0	1022.2	1024.4	1022.2	1029.0	1035.5	1035.6	1043.7	1049.7	1053.8
10°	977.7	972.6	969.4	972.0	969.4	972.6	977.7	984.5	987.6	994.9	1002.7
12.5°	929.1	926.0	923.3	922.2	923.3	926.0	929.1	936.3	943.6	952.1	960.7
15°	863.0	856.8	854.2	847.4	854.2	856.8	863.0	869.2	883.2	886.9	899.9
17.5°	802.0	800.0	793.2	790.3	793.2	800.0	802.0	807.3	813.8	827.2	836.9
20°	765.9	763.8	757.1	761.2	757.1	763.8	765.9	773.7	778.9	789.8	799.1
22.5°	736.0	731.4	729.2	728.0	729.2	731.4	736.0	739.6	746.5	756.5	767.1
25°	693.7	687.0	684.4	681.3	684.4	687.0	693.7	695.8	703.1	712.9	718.6
27.5°	651.6	647.9	644.5	643.7	644.5	647.9	651.6	654.5	660.8	669.4	679.7
30°	624.1	620.5	617.9	617.9	617.9	620.5	624.1	630.4	635.0	642.8	650.6
32.5°	599.6	596.8	594.2	593.8	594.2	596.8	599.6	603.0	608.5	617.1	625.3
35°	563.9	559.8	558.7	555.6	558.7	559.8	563.9	566.5	572.2	578.4	585.2
37.5°	526.8	523.4	523.3	523.0	523.3	523.4	526.8	531.4	536.2	541.8	550.1
40°	503.2	500.6	500.0	496.4	500.0	500.6	503.2	505.2	510.4	517.7	523.9
42.5°	477.8	476.5	474.7	473.1	474.7	476.5	477.8	482.0	486.3	491.5	499.4
45°	443.4	439.8	439.8	437.2	439.8	439.8	443.4	447.1	449.2	455.4	465.8
47.5°	407.9	405.1	405.4	402.7	405.4	405.1	407.9	409.1	412.4	418.5	424.2
50°	384.2	382.7	382.2	381.1	382.2	382.7	384.2	383.7	387.9	393.6	401.4
52.5°	360.6	359.8	361.8	359.5	361.8	359.8	360.6	361.7	364.6	368.3	375.6
55°	328.7	327.1	330.2	327.1	330.2	327.1	328.7	327.6	328.7	332.3	337.0
57.5°	292.0	290.6	293.4	291.8	293.4	290.6	292.0	292.2	295.3	295.9	300.0
60°	267.9	264.8	266.4	266.9	266.4	264.8	267.9	269.0	270.0	270.5	274.7
62.5°	239.3	237.4	238.5	236.2	238.5	237.4	239.3	241.6	243.8	246.4	248.9
65°	198.9	197.3	195.2	194.2	195.2	197.3	198.9	199.9	205.6	208.7	214.4
67.5°	167.1	163.4	163.3	164.1	163.3	163.4	167.1	166.9	171.0	173.5	177.4
70°	143.8	143.8	143.3	143.3	143.3	143.8	143.8	146.9	149.0	151.1	153.7
72.5°	127.6	127.2	126.3	125.9	126.3	127.2	127.6	128.7	129.9	132.0	134.6
75°	102.8	103.3	102.3	101.8	102.3	103.3	102.8	102.8	104.9	105.4	106.4
77.5°	75.9	73.7	74.9	73.7	74.9	73.7	75.9	78.0	78.7	81.0	81.1
80°	57.6	57.1	58.7	57.1	58.7	57.1	57.6	57.6	59.2	60.2	62.8
82.5°	45.6	45.1	45.8	44.7	45.8	45.1	45.6	45.2	45.9	47.4	47.0
85°	27.5	27.0	26.5	27.0	26.5	27.0	27.5	27.0	26.5	27.0	27.5
87.5°	14.7	14.4	14.6	14.7	14.6	14.4	14.7	14.1	14.3	14.0	13.8
90°	25.6	26.3	27.1	27.9	27.1	26.3	25.6	24.8	23.8	22.5	21.2
92.5°	24.9	25.3	25.7	26.0	25.7	25.3	24.9	24.6	23.8	22.5	21.2
95°	24.4	24.4	24.4	24.4	24.4	24.4	24.4	24.4	23.8	22.5	21.2
97.5°	24.4	24.4	24.4	24.4	24.4	24.4	24.4	24.4	28.0	35.3	42.6
100°	27.5	26.5	25.4	24.4	25.4	26.5	27.5	28.5	48.3	86.8	125.3
102.5°	198.9	181.3	163.8	146.2	163.8	181.3	198.9	216.5	228.9	236.2	243.4
105°	345.9	345.7	345.4	345.2	345.4	345.7	345.9	346.2	346.3	346.3	346.3
107.5°	437.4	436.7	435.9	435.1	435.9	436.7	437.4	438.2	438.6	438.5	438.5
110°	496.6	496.9	497.2	497.4	497.2	496.9	496.6	496.4	496.6	497.4	498.2



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	554.3	553.9	553.6	553.2	553.6	553.9	554.3	554.6	555.3	556.3	557.3
115°	641.5	640.0	638.4	636.9	638.4	640.0	641.5	643.1	644.4	645.4	646.4
117.5°	728.1	727.5	726.8	726.1	726.8	727.5	728.1	728.8	729.8	731.2	732.5
120°	784.9	783.6	782.3	781.0	782.3	783.6	784.9	786.2	787.1	787.6	788.1
122.5°	837.5	836.0	834.6	833.1	834.6	836.0	837.5	839.0	840.1	840.6	841.1
125°	914.6	913.9	913.1	912.3	913.1	913.9	914.6	915.4	916.3	917.3	918.4
127.5°	984.8	982.8	980.9	979.0	980.9	982.8	984.8	986.7	987.9	988.5	989.0
130°	1031.2	1030.0	1028.7	1027.4	1028.7	1030.0	1031.2	1032.5	1033.6	1034.3	1035.1
132.5°	1075.9	1074.6	1073.3	1072.0	1073.3	1074.6	1075.9	1077.2	1077.9	1078.0	1078.2
135°	1137.8	1136.2	1134.7	1133.1	1134.7	1136.2	1137.8	1139.3	1140.4	1140.9	1141.4
137.5°	1198.5	1197.2	1195.8	1194.5	1195.8	1197.2	1198.5	1199.9	1200.5	1200.4	1200.3
140°	1235.4	1233.9	1232.3	1230.8	1232.3	1233.9	1235.4	1236.9	1237.5	1236.9	1236.4
142.5°	1269.8	1268.3	1266.7	1265.2	1266.7	1268.3	1269.8	1271.4	1272.1	1272.0	1271.9
145°	1320.2	1318.7	1317.1	1315.6	1317.1	1318.7	1320.2	1321.8	1322.4	1322.2	1321.9
147.5°	1362.8	1360.9	1359.1	1357.2	1359.1	1360.9	1362.8	1364.6	1365.4	1365.1	1364.8
150°	1390.4	1388.3	1386.2	1384.2	1386.2	1388.3	1390.4	1392.4	1393.2	1392.7	1392.2
152.5°	1414.8	1413.0	1411.1	1409.3	1411.1	1413.0	1414.8	1416.7	1417.4	1416.9	1416.3
155°	1448.5	1446.4	1444.3	1442.3	1444.3	1446.4	1448.5	1450.5	1451.2	1450.4	1449.6
157.5°	1476.1	1474.1	1472.0	1469.9	1472.0	1474.1	1476.1	1478.2	1478.8	1478.0	1477.2
160°	1493.8	1491.7	1489.7	1487.6	1489.7	1491.7	1493.8	1495.9	1496.4	1495.3	1494.3
162.5°	1510.2	1507.9	1505.7	1503.4	1505.7	1507.9	1510.2	1512.5	1512.9	1511.5	1510.0
165°	1531.0	1528.9	1526.8	1524.8	1526.8	1528.9	1531.0	1533.0	1533.3	1531.8	1530.2
167.5°	1546.6	1544.3	1542.0	1539.7	1542.0	1544.3	1546.6	1549.0	1549.2	1547.3	1545.5
170°	1555.0	1552.7	1550.4	1548.0	1550.4	1552.7	1555.0	1557.3	1557.5	1555.4	1553.3
172.5°	1560.6	1558.3	1555.9	1553.6	1555.9	1558.3	1560.6	1562.9	1563.1	1561.3	1559.4
175°	1567.8	1565.5	1563.1	1560.8	1563.1	1565.5	1567.8	1570.1	1570.2	1568.2	1566.1
177.5°	1570.0	1568.3	1566.6	1565.0	1566.6	1568.3	1570.0	1571.6	1571.7	1570.3	1568.8
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1212.6	1217.1	1219.6	1225.4	1233.7	1237.9	1243.7	1247.9	1253.7	1260.7	1266.6
5°	1134.0	1146.5	1154.8	1167.8	1179.7	1191.7	1206.7	1217.6	1232.2	1248.8	1261.8
7.5°	1061.1	1076.7	1090.5	1107.7	1127.4	1142.8	1162.4	1182.4	1205.2	1228.8	1251.0
10°	1014.6	1030.2	1047.3	1068.6	1088.3	1109.1	1132.5	1155.8	1184.4	1210.9	1241.0
12.5°	968.5	985.7	1005.0	1028.7	1052.6	1079.2	1103.0	1129.3	1159.9	1194.3	1226.5
15°	911.3	927.9	948.7	968.9	996.4	1025.5	1057.2	1092.0	1126.3	1164.7	1204.7
17.5°	849.9	868.2	891.0	914.5	943.5	977.5	1008.6	1046.7	1085.2	1130.0	1177.0
20°	810.0	828.7	855.7	881.7	908.2	941.4	978.3	1017.2	1058.2	1105.5	1157.9
22.5°	778.5	791.8	818.3	844.7	875.8	909.8	945.9	986.5	1031.2	1080.1	1135.1
25°	731.6	747.2	766.4	793.9	826.1	862.0	898.3	941.4	990.2	1040.1	1098.7
27.5°	690.0	702.8	721.8	743.4	775.4	812.6	851.3	896.2	946.3	997.1	1058.7
30°	660.5	674.5	692.7	715.5	741.0	781.5	820.9	865.1	916.0	968.4	1031.7
32.5°	634.7	649.2	664.8	686.4	714.0	749.9	790.6	833.9	885.6	939.7	1001.4
35°	598.7	608.6	623.1	644.4	671.4	700.5	742.0	787.7	838.1	894.1	955.9
37.5°	557.4	570.1	584.6	603.1	626.7	658.2	696.8	743.0	789.8	843.5	899.9
40°	533.3	545.2	561.3	574.8	599.7	628.3	663.6	711.9	758.6	809.0	860.4
42.5°	508.8	520.3	533.9	550.7	573.1	600.9	633.7	678.7	728.7	776.2	819.3
45°	470.4	482.4	495.4	510.9	531.7	558.7	591.4	632.4	676.1	719.7	752.4
47.5°	433.8	445.0	457.3	473.2	492.4	518.4	547.7	583.9	626.3	663.4	686.8
50°	407.6	418.0	431.5	447.1	465.8	490.2	518.2	554.0	589.3	623.1	644.4
52.5°	381.9	393.5	407.0	420.5	438.4	462.8	488.7	519.6	553.2	580.7	598.3
55°	343.2	354.1	366.6	380.6	398.3	419.0	446.6	471.0	497.4	520.8	531.2
57.5°	305.9	315.5	327.2	341.8	357.7	377.0	398.8	422.3	440.9	457.5	469.2
60°	281.4	289.7	300.6	313.1	330.2	347.9	367.6	389.4	404.0	418.0	428.9
62.5°	256.5	264.4	274.9	286.1	301.2	317.6	336.5	354.1	368.3	377.7	390.3
65°	219.1	226.9	235.7	247.7	259.6	273.1	290.3	303.2	313.1	323.5	331.3
67.5°	184.3	190.8	199.2	208.5	218.6	231.6	244.9	255.7	262.4	268.7	278.0
70°	161.5	166.7	173.4	180.7	191.6	204.6	215.0	223.3	228.0	234.2	245.6
72.5°	138.2	144.2	150.6	157.9	166.7	177.6	186.7	195.0	198.0	203.0	210.3
75°	109.0	112.2	117.4	122.5	128.8	138.1	146.9	149.0	151.6	155.8	161.0
77.5°	82.5	85.3	87.3	90.8	95.7	103.2	107.9	111.0	111.6	113.2	118.3
80°	65.4	67.0	69.1	71.7	73.7	80.0	82.6	85.7	86.7	88.3	90.9
82.5°	48.0	49.5	50.8	53.0	56.3	58.8	61.4	64.5	64.7	65.8	66.4
85°	28.0	28.6	27.5	28.6	29.1	30.1	32.7	35.3	34.8	34.3	35.8
87.5°	13.9	13.7	12.9	13.8	12.6	12.7	12.3	12.3	12.7	13.1	13.5
90°	19.9	18.6	16.8	15.0	13.2	11.4	9.4	7.4	5.3	3.2	1.2
92.5°	19.9	18.6	17.0	15.4	13.8	12.2	12.1	13.6	15.0	16.5	17.9
95°	19.9	18.6	28.4	38.2	48.0	57.9	63.1	63.9	64.7	65.5	66.2
97.5°	49.9	57.2	76.6	96.0	115.4	134.9	143.9	142.5	141.1	139.7	138.3
100°	163.7	202.2	201.2	200.2	199.1	198.1	197.2	196.4	195.6	194.9	194.1
102.5°	250.7	258.0	257.4	256.8	256.1	255.5	254.7	253.7	252.8	251.8	250.8
105°	346.3	346.3	346.3	346.3	346.3	346.3	345.8	344.8	343.7	342.7	341.7
107.5°	438.4	438.4	437.9	437.3	436.8	436.3	436.1	436.1	436.1	436.1	436.1
110°	499.0	499.7	499.2	498.7	498.2	497.7	497.4	497.4	497.4	497.4	497.4



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	558.3	559.2	558.9	558.6	558.3	558.0	557.5	556.9	556.3	555.7	555.1
115°	647.5	648.5	648.2	648.0	647.7	647.5	646.7	645.4	644.1	642.8	641.5
117.5°	733.9	735.2	734.2	733.2	732.3	731.3	730.8	730.9	730.9	731.0	731.0
120°	788.6	789.1	788.3	787.6	786.8	786.0	785.8	786.0	786.3	786.5	786.8
122.5°	841.6	842.1	841.8	841.4	841.0	840.7	840.0	839.0	838.0	837.1	836.1
125°	919.4	920.4	920.4	920.4	920.4	920.4	919.5	917.7	915.9	914.1	912.3
127.5°	989.6	990.2	990.3	990.5	990.6	990.8	990.2	988.9	987.6	986.4	985.1
130°	1035.9	1036.7	1036.4	1036.2	1035.9	1035.6	1034.9	1033.6	1032.3	1031.0	1029.7
132.5°	1078.4	1078.5	1079.1	1079.6	1080.2	1080.8	1080.3	1078.8	1077.3	1075.8	1074.3
135°	1141.9	1142.4	1142.9	1143.5	1144.0	1144.5	1144.0	1142.4	1140.9	1139.3	1137.8
137.5°	1200.2	1200.1	1200.5	1201.0	1201.5	1201.9	1201.5	1200.1	1198.8	1197.5	1196.1
140°	1235.9	1235.4	1235.7	1235.9	1236.2	1236.4	1236.3	1235.8	1235.3	1234.8	1234.2
142.5°	1271.8	1271.7	1271.3	1270.9	1270.6	1270.2	1269.9	1269.6	1269.3	1268.9	1268.6
145°	1321.7	1321.4	1321.4	1321.4	1321.4	1321.4	1321.1	1320.6	1320.1	1319.6	1319.1
147.5°	1364.5	1364.2	1363.9	1363.5	1363.2	1362.9	1362.8	1362.9	1363.0	1363.1	1363.2
150°	1391.6	1391.1	1390.6	1390.1	1389.6	1389.1	1389.1	1389.6	1390.1	1390.6	1391.1
152.5°	1415.8	1415.3	1414.8	1414.3	1413.8	1413.2	1413.5	1414.7	1415.8	1417.0	1418.1
155°	1448.9	1448.1	1447.6	1447.0	1446.5	1446.0	1446.5	1448.1	1449.6	1451.2	1452.7
157.5°	1476.3	1475.5	1475.5	1475.4	1475.4	1475.3	1475.7	1476.7	1477.6	1478.5	1479.5
160°	1493.3	1492.2	1492.0	1491.7	1491.5	1491.2	1491.9	1493.4	1495.0	1496.5	1498.1
162.5°	1508.6	1507.1	1506.9	1506.6	1506.3	1506.1	1506.7	1508.3	1509.8	1511.4	1512.9
165°	1528.7	1527.1	1526.8	1526.6	1526.3	1526.1	1526.7	1528.3	1529.8	1531.4	1532.9
167.5°	1543.6	1541.8	1541.5	1541.2	1541.0	1540.7	1541.4	1543.0	1544.6	1546.2	1547.8
170°	1551.3	1549.2	1548.9	1548.7	1548.4	1548.2	1548.9	1550.7	1552.5	1554.4	1556.2
172.5°	1557.6	1555.7	1555.2	1554.8	1554.3	1553.8	1554.5	1556.3	1558.1	1559.9	1561.7
175°	1564.0	1562.0	1561.7	1561.5	1561.2	1560.9	1561.6	1563.1	1564.7	1566.2	1567.8
177.5°	1567.4	1565.9	1565.7	1565.5	1565.3	1565.1	1565.6	1566.9	1568.1	1569.3	1570.6
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1271.1	1274.9	1280.3	1286.5	1291.5	1296.9	1299.8	1299.8	1302.3	1307.7	1314.7
5°	1274.8	1288.3	1301.2	1317.9	1330.8	1345.9	1357.3	1368.2	1378.1	1390.5	1403.5
7.5°	1273.7	1296.1	1319.5	1345.7	1374.6	1397.5	1421.1	1439.6	1457.8	1481.7	1500.5
10°	1269.6	1298.6	1330.3	1363.5	1399.9	1431.6	1460.1	1486.1	1511.0	1537.0	1560.3
12.5°	1262.1	1299.1	1337.8	1377.7	1423.6	1459.8	1496.7	1524.3	1553.4	1581.8	1610.6
15°	1250.9	1294.5	1341.2	1396.8	1452.9	1493.4	1529.7	1565.5	1592.5	1624.7	1652.3
17.5°	1227.7	1283.9	1342.7	1403.4	1457.3	1504.4	1542.5	1576.5	1605.3	1640.7	1678.1
20°	1214.0	1274.8	1336.0	1400.9	1452.3	1500.6	1537.5	1572.8	1608.6	1654.8	1700.5
22.5°	1194.9	1259.8	1324.8	1386.4	1440.7	1487.3	1525.4	1568.7	1615.7	1668.1	1723.4
25°	1164.7	1231.7	1296.0	1354.7	1407.7	1455.5	1507.4	1565.5	1622.7	1691.7	1771.2
27.5°	1126.4	1190.9	1248.4	1310.4	1363.0	1423.8	1488.6	1551.6	1634.0	1729.0	1828.2
30°	1097.7	1159.0	1213.5	1272.2	1331.9	1398.9	1471.6	1545.8	1643.9	1755.6	1873.5
32.5°	1064.5	1119.9	1174.0	1230.6	1299.5	1373.1	1450.4	1541.2	1658.5	1785.5	1907.5
35°	1006.8	1056.7	1109.1	1171.9	1245.2	1325.1	1423.8	1534.4	1676.1	1812.7	1922.3
37.5°	946.4	985.7	1038.4	1104.7	1184.4	1276.9	1388.9	1523.3	1668.9	1791.4	1838.0
40°	899.9	936.7	992.3	1061.9	1140.8	1242.0	1367.7	1505.8	1652.3	1737.4	1733.8
42.5°	853.7	891.0	944.5	1014.5	1096.8	1210.1	1339.5	1483.0	1606.6	1639.0	1571.4
45°	783.0	817.8	870.3	940.9	1029.2	1148.1	1284.1	1421.7	1500.6	1448.2	1314.2
47.5°	711.0	744.7	793.4	862.6	958.9	1083.4	1212.0	1324.9	1336.0	1223.4	1062.7
50°	663.6	695.3	741.5	815.2	908.7	1030.2	1154.3	1243.1	1215.6	1078.0	912.3
52.5°	617.5	647.9	691.2	760.8	856.3	975.4	1086.2	1155.8	1092.2	945.9	796.8
55°	549.4	578.4	622.1	685.9	772.6	881.7	978.8	1004.2	910.8	763.3	642.8
57.5°	484.7	506.0	549.1	605.5	689.1	785.3	854.9	850.3	747.2	614.4	528.0
60°	441.9	461.1	502.1	554.0	633.5	719.7	768.5	747.7	643.3	533.8	450.7
62.5°	402.0	420.0	454.3	502.1	570.3	645.3	680.8	652.2	553.6	457.4	391.3
65°	341.7	354.6	382.2	426.3	479.8	531.7	563.4	521.3	434.1	361.4	311.5
67.5°	285.3	296.5	321.0	352.7	389.5	425.4	438.2	398.8	331.0	282.0	246.9
70°	248.7	259.1	275.7	305.3	329.7	355.2	361.4	326.1	269.5	232.1	210.3
72.5°	213.8	223.4	237.9	258.8	275.7	290.4	293.3	260.5	217.1	191.4	174.6
75°	163.0	171.4	180.7	188.5	199.4	202.0	200.9	175.5	152.1	135.0	125.7
77.5°	119.8	123.3	129.0	132.1	132.6	132.4	127.1	111.0	99.0	91.9	88.1
80°	92.4	95.0	96.6	97.6	98.1	92.9	87.2	77.4	73.2	69.1	64.4
82.5°	67.1	68.9	70.4	70.6	67.8	63.5	58.2	53.3	50.4	48.3	46.5
85°	36.3	36.9	36.3	33.8	30.1	28.6	27.5	26.5	26.0	25.4	25.4
87.5°	13.5	12.7	11.0	11.9	12.2	12.2	12.6	12.5	12.4	12.7	13.0
90°	3.2	5.3	7.4	9.4	11.4	13.2	15.0	16.8	18.6	19.9	21.2
92.5°	16.5	15.0	13.6	12.1	12.2	13.8	15.4	17.0	18.6	19.9	21.2
95°	65.5	64.7	63.9	63.1	57.9	48.0	38.2	28.4	18.6	19.9	21.2
97.5°	139.7	141.1	142.5	143.9	134.9	115.4	96.0	76.6	57.2	49.9	42.6
100°	194.9	195.6	196.4	197.2	198.1	199.1	200.2	201.2	202.2	163.7	125.3
102.5°	251.8	252.8	253.7	254.7	255.5	256.1	256.8	257.4	258.0	250.7	243.4
105°	342.7	343.7	344.8	345.8	346.3	346.3	346.3	346.3	346.3	346.3	346.3
107.5°	436.1	436.1	436.1	436.1	436.3	436.8	437.3	437.9	438.4	438.4	438.5
110°	497.4	497.4	497.4	497.4	497.7	498.2	498.7	499.2	499.7	499.0	498.2





TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	555.7	556.3	556.9	557.5	558.0	558.3	558.6	558.9	559.2	558.3	557.3
115°	642.8	644.1	645.4	646.7	647.5	647.7	648.0	648.2	648.5	647.5	646.4
117.5°	731.0	730.9	730.9	730.8	731.3	732.3	733.2	734.2	735.2	733.9	732.5
120°	786.5	786.3	786.0	785.8	786.0	786.8	787.6	788.3	789.1	788.6	788.1
122.5°	837.1	838.0	839.0	840.0	840.7	841.0	841.4	841.8	842.1	841.6	841.1
125°	914.1	915.9	917.7	919.5	920.4	920.4	920.4	920.4	920.4	919.4	918.4
127.5°	986.4	987.6	988.9	990.2	990.8	990.6	990.5	990.3	990.2	989.6	989.0
130°	1031.0	1032.3	1033.6	1034.9	1035.6	1035.9	1036.2	1036.4	1036.7	1035.9	1035.1
132.5°	1075.8	1077.3	1078.8	1080.3	1080.8	1080.2	1079.6	1079.1	1078.5	1078.4	1078.2
135°	1139.3	1140.9	1142.4	1144.0	1144.5	1144.0	1143.5	1142.9	1142.4	1141.9	1141.4
137.5°	1197.5	1198.8	1200.1	1201.5	1201.9	1201.5	1201.0	1200.5	1200.1	1200.2	1200.3
140°	1234.8	1235.3	1235.8	1236.3	1236.4	1236.2	1235.9	1235.7	1235.4	1235.9	1236.4
142.5°	1268.9	1269.3	1269.6	1269.9	1270.2	1270.6	1270.9	1271.3	1271.7	1271.8	1271.9
145°	1319.6	1320.1	1320.6	1321.1	1321.4	1321.4	1321.4	1321.4	1321.4	1321.7	1321.9
147.5°	1363.1	1363.0	1362.9	1362.8	1362.9	1363.2	1363.5	1363.9	1364.2	1364.5	1364.8
150°	1390.6	1390.1	1389.6	1389.1	1389.1	1389.6	1390.1	1390.6	1391.1	1391.6	1392.2
152.5°	1417.0	1415.8	1414.7	1413.5	1413.2	1413.8	1414.3	1414.8	1415.3	1415.8	1416.3
155°	1451.2	1449.6	1448.1	1446.5	1446.0	1446.5	1447.0	1447.6	1448.1	1448.9	1449.6
157.5°	1478.5	1477.6	1476.7	1475.7	1475.3	1475.4	1475.4	1475.5	1475.5	1476.3	1477.2
160°	1496.5	1495.0	1493.4	1491.9	1491.2	1491.5	1491.7	1492.0	1492.2	1493.3	1494.3
162.5°	1511.4	1509.8	1508.3	1506.7	1506.1	1506.3	1506.6	1506.9	1507.1	1508.6	1510.0
165°	1531.4	1529.8	1528.3	1526.7	1526.1	1526.3	1526.6	1526.8	1527.1	1528.7	1530.2
167.5°	1546.2	1544.6	1543.0	1541.4	1540.7	1541.0	1541.2	1541.5	1541.8	1543.6	1545.5
170°	1554.4	1552.5	1550.7	1548.9	1548.2	1548.4	1548.7	1548.9	1549.2	1551.3	1553.3
172.5°	1559.9	1558.1	1556.3	1554.5	1553.8	1554.3	1554.8	1555.2	1555.7	1557.6	1559.4
175°	1566.2	1564.7	1563.1	1561.6	1560.9	1561.2	1561.5	1561.7	1562.0	1564.0	1566.1
177.5°	1569.3	1568.1	1566.9	1565.6	1565.1	1565.3	1565.5	1565.7	1565.9	1567.4	1568.8
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9	1264.9
2.5°	1320.1	1320.1	1327.2	1326.8	1331.4	1329.7	1330.5
5°	1419.1	1427.9	1435.7	1440.9	1448.7	1450.8	1449.7
7.5°	1521.7	1541.3	1550.9	1564.0	1566.4	1573.2	1572.5
10°	1585.3	1604.5	1619.0	1630.4	1636.2	1643.4	1643.9
12.5°	1635.1	1651.4	1664.3	1674.9	1681.8	1684.1	1685.5
15°	1674.1	1692.2	1707.3	1722.3	1731.2	1737.9	1741.6
17.5°	1713.3	1741.4	1767.9	1788.4	1800.7	1811.0	1810.9
20°	1743.6	1775.8	1809.1	1832.4	1856.3	1866.7	1868.3
22.5°	1776.0	1825.3	1868.1	1904.3	1935.7	1946.5	1950.5
25°	1843.3	1907.7	1973.7	2024.6	2060.9	2082.2	2085.3
27.5°	1924.6	2011.8	2081.2	2128.1	2158.3	2174.1	2177.5
30°	1982.0	2062.5	2124.8	2160.1	2174.1	2176.2	2168.4
32.5°	2007.7	2067.9	2092.8	2090.7	2063.2	2044.9	2037.9
35°	1976.3	1963.8	1903.0	1830.4	1774.8	1739.5	1730.1
37.5°	1798.5	1691.0	1579.2	1469.4	1410.9	1381.2	1330.1
40°	1623.2	1470.0	1353.7	1261.3	1195.3	1142.3	1129.9
42.5°	1425.4	1267.3	1151.0	1071.8	1019.2	982.8	967.0
45°	1145.5	1009.4	913.4	852.6	812.1	785.6	773.7
47.5°	916.2	810.9	740.9	695.9	665.1	642.0	635.6
50°	790.3	706.2	647.0	609.1	585.7	568.1	560.8
52.5°	686.4	618.5	573.0	541.8	519.7	508.7	502.6
55°	566.5	507.8	475.1	450.2	437.7	428.9	424.7
57.5°	463.3	420.9	397.0	379.8	368.3	362.6	360.6
60°	405.5	372.3	350.5	337.0	329.2	321.9	319.9
62.5°	354.4	328.3	311.4	299.6	291.8	288.7	287.5
65°	285.6	268.5	256.0	248.7	242.5	241.5	240.9
67.5°	227.0	216.9	210.4	202.8	200.6	197.0	196.3
70°	194.2	187.4	179.7	177.1	174.5	170.8	171.4
72.5°	164.7	158.0	152.7	149.2	148.3	146.7	148.1
75°	120.5	118.4	116.3	113.7	112.7	112.7	112.2
77.5°	86.0	84.2	81.9	80.4	80.1	77.9	78.7
80°	62.3	59.7	58.7	59.2	57.6	57.1	57.1
82.5°	46.1	45.2	44.1	44.2	43.9	43.4	43.8
85°	25.4	24.9	24.9	24.4	24.4	23.9	23.9
87.5°	13.6	14.3	13.7	13.4	13.6	14.1	14.7
90°	22.5	23.8	24.8	25.6	26.3	27.1	27.9
92.5°	22.5	23.8	24.6	24.9	25.3	25.7	26.0
95°	22.5	23.8	24.4	24.4	24.4	24.4	24.4
97.5°	35.3	28.0	24.4	24.4	24.4	24.4	24.4
100°	86.8	48.3	28.5	27.5	26.5	25.4	24.4
102.5°	236.2	228.9	216.5	198.9	181.3	163.8	146.2
105°	346.3	346.3	346.2	345.9	345.7	345.4	345.2
107.5°	438.5	438.6	438.2	437.4	436.7	435.9	435.1
110°	497.4	496.6	496.4	496.6	496.9	497.2	497.4



TEST NUMBER: P333574

CATALOG NUMBER: S125RDIP-S850D1205U835-4F0-1E-UDD-A

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	556.3	555.3	554.6	554.3	553.9	553.6	553.2
115°	645.4	644.4	643.1	641.5	640.0	638.4	636.9
117.5°	731.2	729.8	728.8	728.1	727.5	726.8	726.1
120°	787.6	787.1	786.2	784.9	783.6	782.3	781.0
122.5°	840.6	840.1	839.0	837.5	836.0	834.6	833.1
125°	917.3	916.3	915.4	914.6	913.9	913.1	912.3
127.5°	988.5	987.9	986.7	984.8	982.8	980.9	979.0
130°	1034.3	1033.6	1032.5	1031.2	1030.0	1028.7	1027.4
132.5°	1078.0	1077.9	1077.2	1075.9	1074.6	1073.3	1072.0
135°	1140.9	1140.4	1139.3	1137.8	1136.2	1134.7	1133.1
137.5°	1200.4	1200.5	1199.9	1198.5	1197.2	1195.8	1194.5
140°	1236.9	1237.5	1236.9	1235.4	1233.9	1232.3	1230.8
142.5°	1272.0	1272.1	1271.4	1269.8	1268.3	1266.7	1265.2
145°	1322.2	1322.4	1321.8	1320.2	1318.7	1317.1	1315.6
147.5°	1365.1	1365.4	1364.6	1362.8	1360.9	1359.1	1357.2
150°	1392.7	1393.2	1392.4	1390.4	1388.3	1386.2	1384.2
152.5°	1416.9	1417.4	1416.7	1414.8	1413.0	1411.1	1409.3
155°	1450.4	1451.2	1450.5	1448.5	1446.4	1444.3	1442.3
157.5°	1478.0	1478.8	1478.2	1476.1	1474.1	1472.0	1469.9
160°	1495.3	1496.4	1495.9	1493.8	1491.7	1489.7	1487.6
162.5°	1511.5	1512.9	1512.5	1510.2	1507.9	1505.7	1503.4
165°	1531.8	1533.3	1533.0	1531.0	1528.9	1526.8	1524.8
167.5°	1547.3	1549.2	1549.0	1546.6	1544.3	1542.0	1539.7
170°	1555.4	1557.5	1557.3	1555.0	1552.7	1550.4	1548.0
172.5°	1561.3	1563.1	1562.9	1560.6	1558.3	1555.9	1553.6
175°	1568.2	1570.2	1570.1	1567.8	1565.5	1563.1	1560.8
177.5°	1570.3	1571.7	1571.6	1570.0	1568.3	1566.6	1565.0
180°	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8	1567.8

(END OF REPORT)