

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333301-935

Luminaire Tested: **S125DIP-S1270D365U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333301-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S1270D365U935-4F0-1E-UDD-F
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1270 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5677.0 lumens
Efficiency: N/A
Efficacy: 114.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 49.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333301-935

CATALOG NUMBER: S125DIP-S1270D365U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

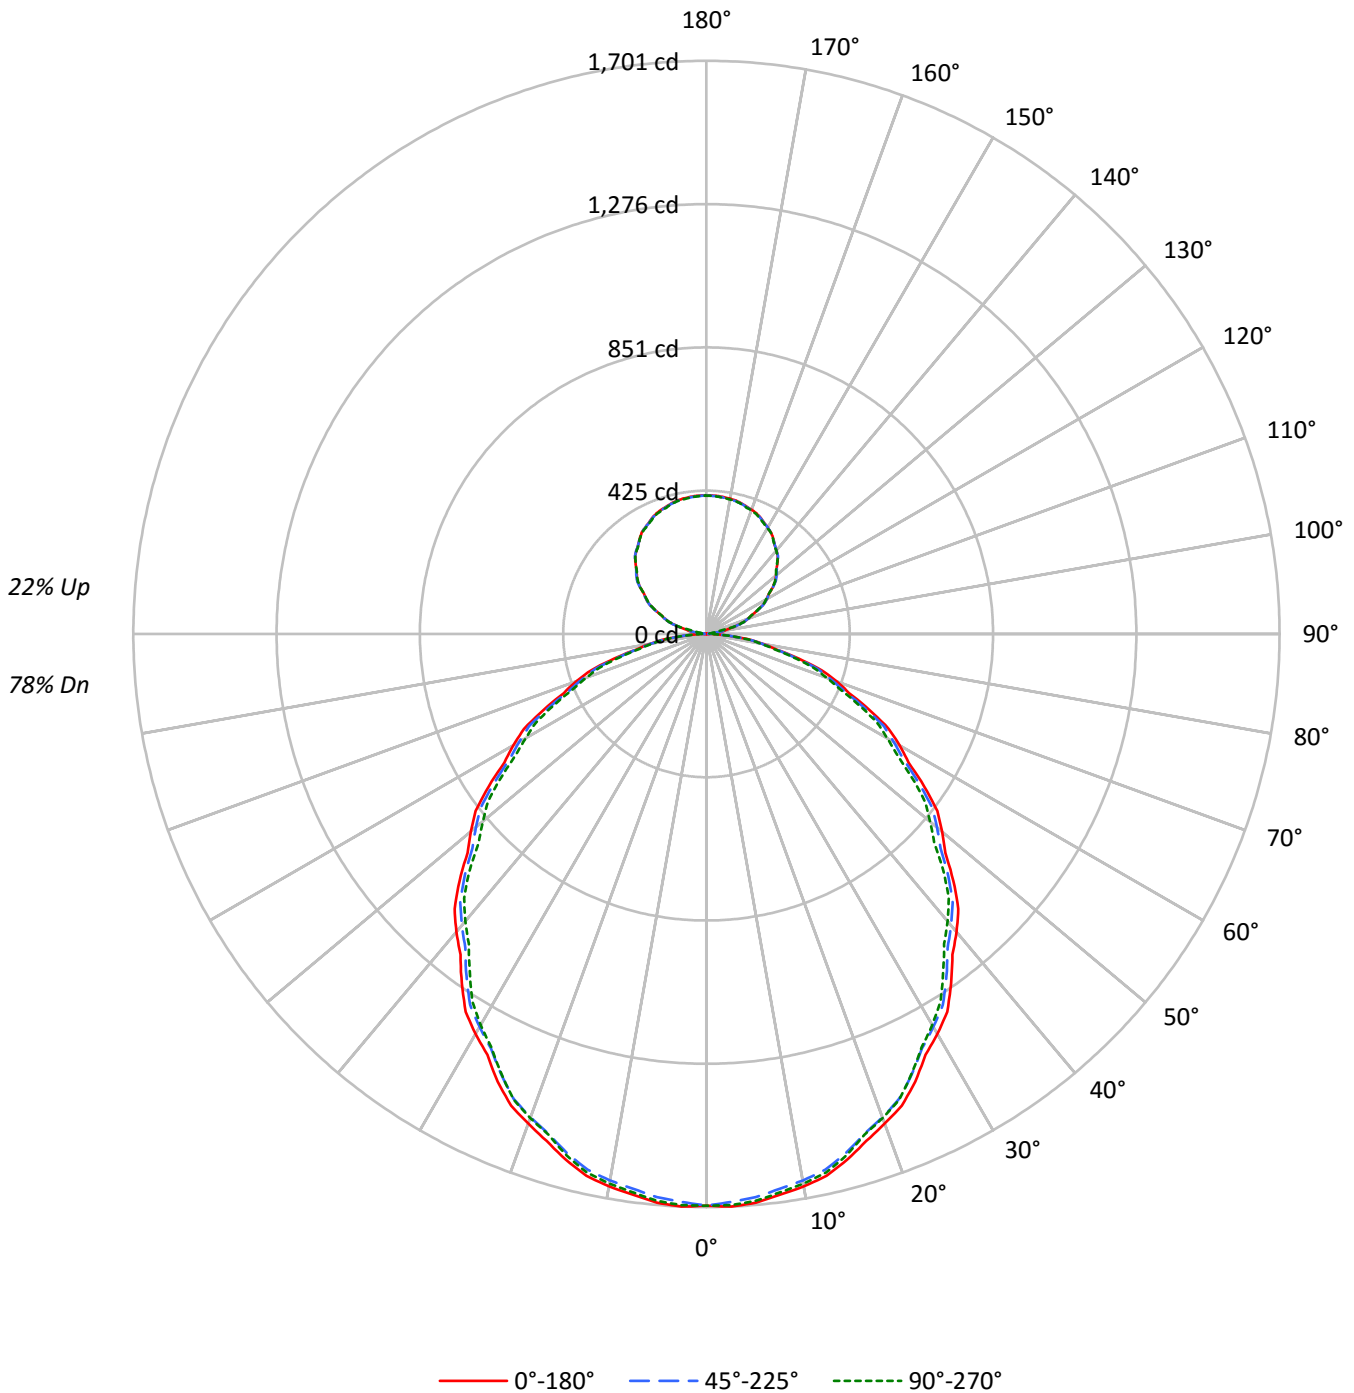



TEST NUMBER: P333301-935

CATALOG NUMBER: S125DIP-S1270D365U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	114	114	114	114	109	109	109	109	99	99	99	90	90	90	82	82	82	78
1	104	99	95	92	99	95	91	88	87	84	81	79	77	75	72	70	69	65
2	95	87	80	75	90	83	77	72	76	71	67	69	66	62	63	60	58	55
3	86	76	69	62	82	73	66	60	67	61	57	61	57	53	56	52	49	46
4	79	68	59	53	75	65	57	51	60	53	48	55	50	45	50	46	42	40
5	73	60	52	46	69	58	50	44	53	47	42	49	44	39	45	41	37	34
6	67	54	46	40	64	52	44	39	48	42	37	45	39	35	41	36	33	30
7	62	49	41	35	59	47	40	34	44	37	32	41	35	31	38	33	29	27
8	58	45	37	31	55	43	36	30	40	34	29	37	32	27	35	30	26	24
9	54	41	33	28	51	40	32	27	37	31	26	34	29	25	32	27	24	22
10	51	38	30	25	48	37	30	25	34	28	24	32	26	23	30	25	21	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	10959	10959	10959
5°	10983	10878	10949
10°	10916	10802	10864
15°	10797	10672	10717
20°	10628	10490	10509
25°	10446	10274	10264
30°	10221	10041	9991
35°	9980	9790	9653
40°	9732	9517	9382
45°	9465	9270	9085
50°	9171	8969	8699
55°	8888	8631	8389
60°	8548	8289	7994
65°	8145	7878	7610
70°	7757	7402	7149
75°	7069	6835	6598
80°	6289	6189	6044
85°	5476	5572	5269



TEST NUMBER: P333301-935

CATALOG NUMBER: S125DIP-S1270D365U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	160.0	2.8
10°-20°	451.9	8.0
20°-30°	667.3	11.8
30°-40°	778.6	13.7
40°-50°	782.0	13.8
50°-60°	686.5	12.1
60°-70°	511.5	9.0
70°-80°	292.5	5.2
80°-90°	85.9	1.5
90°-100°	14.9	0.3
100°-110°	92.0	1.6
110°-120°	166.8	2.9
120°-130°	214.0	3.8
130°-140°	230.2	4.1
140°-150°	216.1	3.8
150°-160°	174.8	3.1
160°-170°	113.0	2.0
170°-180°	39.0	0.7
0°-30°	1279.2	22.5
0°-40°	2057.8	36.2
0°-60°	3526.3	62.1
0°-90°	4416.2	77.8
90°-120°	273.7	4.8
90°-150°	934.0	16.5
90°-180°	1261.0	22.2
0°-180°	5677.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1697	1697	1697	1697	1697	
5°	1694	1691	1678	1689	1689	161
15°	1615	1610	1596	1602	1603	455
25°	1466	1459	1442	1444	1440	674
35°	1266	1260	1242	1235	1224	791
45°	1036	1030	1015	999	995	798
55°	789	784	766	755	745	704
65°	533	530	516	504	498	529
75°	283	280	274	270	264	302
85°	74	75	75	74	71	82
90°	0	3	5	6	7	5
95°	17	16	5	6	6	22
105°	90	91	91	91	90	95
115°	168	169	170	169	167	166
125°	239	241	241	240	239	213
135°	298	300	299	298	297	230
145°	345	346	346	346	344	216
155°	380	379	379	380	378	175
165°	401	400	400	402	399	113
175°	410	409	409	411	409	39
180°	410	410	410	410	410	



TEST NUMBER: P333301-935

CATALOG NUMBER: S125DIP-S1270D365U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1696.8	1696.8	1696.8	1696.8	1696.8	1696.8	1696.8	1696.8	1696.8	1696.8	1696.8
2.5°	1701.1	1700.4	1699.7	1698.9	1698.2	1696.7	1694.3	1691.9	1689.5	1687.1	1689.5
5°	1694.1	1693.5	1692.9	1692.3	1691.7	1690.0	1687.0	1683.9	1681.0	1678.0	1680.7
7.5°	1678.5	1677.9	1677.3	1676.7	1676.1	1674.2	1670.9	1667.7	1664.4	1661.1	1663.7
10°	1664.6	1664.0	1663.4	1662.8	1662.2	1660.3	1657.0	1653.7	1650.4	1647.1	1649.5
12.5°	1647.4	1646.3	1645.3	1644.2	1643.1	1641.1	1638.0	1635.0	1631.9	1628.8	1630.8
15°	1614.9	1614.0	1613.1	1612.2	1611.4	1609.2	1605.9	1602.7	1599.4	1596.1	1597.6
17.5°	1577.6	1576.3	1574.9	1573.6	1572.4	1569.9	1566.6	1563.1	1559.8	1556.3	1558.2
20°	1546.4	1545.8	1545.2	1544.6	1544.0	1541.8	1537.9	1534.0	1530.2	1526.3	1528.4
22.5°	1515.3	1514.2	1513.1	1512.1	1511.0	1508.6	1505.0	1501.4	1497.7	1494.1	1495.5
25°	1465.9	1464.4	1462.9	1461.5	1459.9	1457.2	1453.4	1449.5	1445.6	1441.7	1442.3
27.5°	1408.2	1407.3	1406.4	1405.5	1404.6	1402.1	1398.2	1394.1	1390.2	1386.1	1386.3
30°	1370.6	1369.7	1368.8	1367.9	1367.0	1364.3	1359.9	1355.4	1350.9	1346.4	1345.8
32.5°	1329.8	1328.4	1327.1	1325.7	1324.3	1321.6	1317.6	1313.6	1309.6	1305.6	1304.6
35°	1265.8	1264.7	1263.5	1262.3	1261.1	1258.4	1254.2	1250.1	1245.9	1241.7	1240.3
37.5°	1199.5	1198.1	1196.6	1195.1	1193.6	1190.8	1187.0	1183.0	1179.1	1175.2	1172.9
40°	1154.4	1153.0	1151.5	1150.0	1148.5	1145.6	1141.5	1137.3	1133.2	1128.9	1126.3
42.5°	1106.1	1104.9	1103.6	1102.3	1101.1	1098.4	1094.2	1090.0	1085.9	1081.7	1079.3
45°	1036.3	1035.2	1034.0	1032.8	1031.6	1029.2	1025.6	1022.0	1018.5	1014.9	1011.2
47.5°	961.1	961.2	961.3	961.3	961.4	959.2	955.0	950.7	946.4	942.1	938.5
50°	912.8	912.0	911.0	910.2	909.2	907.0	903.4	899.8	896.3	892.7	888.8
52.5°	863.4	862.8	862.1	861.4	860.8	858.6	854.7	850.9	847.1	843.3	839.9
55°	789.4	788.4	787.6	786.6	785.7	783.3	779.0	774.9	770.7	766.5	763.8
57.5°	711.2	710.8	710.2	709.8	709.3	707.3	703.8	700.3	696.7	693.2	689.7
60°	661.8	660.6	659.4	658.2	657.0	654.8	651.5	648.2	645.0	641.7	638.7
62.5°	610.3	609.3	608.4	607.3	606.4	604.6	601.8	598.9	596.2	593.3	590.1
65°	533.0	532.4	531.8	531.2	530.5	528.6	525.3	522.0	518.8	515.5	512.8
67.5°	458.1	456.8	455.6	454.3	453.1	451.2	448.8	446.3	443.8	441.3	439.1
70°	410.8	409.3	407.8	406.3	404.8	402.7	400.0	397.4	394.7	392.0	390.2
72.5°	359.2	358.2	357.2	356.2	355.2	353.8	352.1	350.3	348.6	346.9	344.8
75°	283.3	282.7	282.1	281.5	280.9	279.8	278.4	276.8	275.3	273.9	272.9
77.5°	213.2	212.9	212.7	212.5	212.2	211.7	210.9	210.0	209.1	208.4	207.8
80°	169.1	169.1	169.1	169.1	169.1	168.8	168.2	167.6	167.0	166.4	166.2
82.5°	130.4	130.0	129.5	129.1	128.5	128.3	128.1	128.0	127.9	127.8	127.3
85°	73.9	74.1	74.4	74.7	75.0	75.2	75.2	75.2	75.2	75.2	74.9
87.5°	29.0	29.2	29.3	29.4	29.5	29.4	29.4	29.2	29.0	28.9	28.9
90°	0.3	0.9	1.4	1.9	2.5	3.0	3.4	4.0	4.4	4.9	5.2
92.5°	4.6	4.3	4.0	3.5	3.2	3.2	3.6	4.0	4.5	4.9	5.2
95°	17.3	17.1	17.0	16.7	16.5	15.2	12.6	10.0	7.4	4.9	5.2
97.5°	36.2	36.6	36.9	37.3	37.7	35.3	30.2	25.1	20.1	15.0	13.1
100°	50.8	51.1	51.2	51.4	51.7	51.8	52.2	52.4	52.7	53.0	42.9
102.5°	65.7	66.0	66.2	66.5	66.7	66.9	67.1	67.2	67.4	67.6	65.7
105°	89.5	89.7	90.1	90.3	90.6	90.7	90.7	90.7	90.7	90.7	90.7
107.5°	114.2	114.2	114.2	114.2	114.2	114.3	114.4	114.5	114.7	114.8	114.8
110°	130.3	130.3	130.3	130.3	130.3	130.4	130.4	130.6	130.7	130.9	130.7



TEST NUMBER: P333301-935

CATALOG NUMBER: S125DIP-S1270D365U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	145.3	145.5	145.7	145.9	146.0	146.1	146.2	146.3	146.4	146.5	146.2
115°	168.0	168.3	168.7	169.0	169.4	169.5	169.6	169.7	169.8	169.8	169.5
117.5°	191.4	191.4	191.4	191.4	191.4	191.5	191.7	192.0	192.3	192.5	192.2
120°	206.0	206.0	206.0	205.9	205.8	205.9	206.0	206.2	206.5	206.6	206.6
122.5°	219.0	219.2	219.5	219.7	220.0	220.2	220.2	220.3	220.4	220.5	220.4
125°	238.9	239.4	239.9	240.3	240.8	241.1	241.1	241.1	241.1	241.1	240.7
127.5°	258.0	258.3	258.6	259.0	259.3	259.5	259.4	259.4	259.3	259.3	259.2
130°	269.7	270.0	270.4	270.7	271.0	271.2	271.3	271.3	271.4	271.5	271.3
132.5°	281.4	281.7	282.1	282.5	282.9	283.0	282.9	282.8	282.6	282.4	282.4
135°	298.0	298.3	298.8	299.2	299.5	299.7	299.5	299.5	299.3	299.2	299.0
137.5°	313.2	313.6	313.9	314.3	314.6	314.8	314.6	314.5	314.4	314.3	314.3
140°	323.2	323.4	323.5	323.6	323.7	323.8	323.7	323.6	323.6	323.6	323.6
142.5°	332.3	332.3	332.4	332.4	332.5	332.6	332.8	332.9	332.9	333.0	333.0
145°	345.4	345.6	345.7	345.9	345.9	346.0	346.0	346.0	346.0	346.0	346.1
147.5°	357.0	357.0	357.0	356.9	356.9	356.9	357.0	357.1	357.1	357.2	357.3
150°	364.3	364.2	364.0	363.9	363.8	363.8	363.9	364.0	364.2	364.3	364.5
152.5°	371.3	371.1	370.7	370.5	370.1	370.1	370.2	370.4	370.5	370.7	370.7
155°	380.5	380.0	379.6	379.2	378.8	378.7	378.8	378.9	379.1	379.2	379.4
157.5°	387.4	387.2	386.9	386.7	386.5	386.3	386.3	386.4	386.4	386.4	386.6
160°	392.3	391.9	391.5	391.1	390.7	390.5	390.5	390.6	390.7	390.8	391.1
162.5°	396.2	395.8	395.4	394.9	394.6	394.4	394.5	394.5	394.6	394.7	395.0
165°	401.4	401.1	400.6	400.2	399.8	399.7	399.7	399.8	399.8	399.9	400.3
167.5°	405.4	404.9	404.5	404.1	403.6	403.5	403.6	403.6	403.7	403.7	404.2
170°	407.5	407.1	406.6	406.1	405.6	405.4	405.5	405.5	405.6	405.7	406.2
172.5°	409.0	408.5	408.0	407.6	407.1	406.9	407.0	407.2	407.3	407.4	407.9
175°	410.5	410.2	409.7	409.3	409.0	408.8	408.8	408.9	409.0	409.1	409.6
177.5°	411.3	411.0	410.6	410.4	410.0	409.8	409.9	410.0	410.0	410.1	410.4
180°	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5



TEST NUMBER: P333301-935

CATALOG NUMBER: S125DIP-S1270D365U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1696.8	1696.8	1696.8	1696.8	1696.8	1696.8	1696.8	1696.8
2.5°	1691.9	1694.3	1696.7	1697.7	1697.5	1697.3	1697.0	1696.8
5°	1683.3	1686.1	1688.8	1690.0	1689.6	1689.4	1689.0	1688.8
7.5°	1666.3	1669.0	1671.5	1672.8	1672.5	1672.1	1671.9	1671.5
10°	1651.9	1654.3	1656.7	1657.7	1657.4	1657.1	1656.8	1656.6
12.5°	1632.7	1634.6	1636.5	1637.4	1637.4	1637.3	1637.3	1637.2
15°	1599.1	1600.6	1602.1	1602.8	1602.8	1602.8	1602.8	1602.8
17.5°	1560.0	1561.9	1563.7	1563.9	1562.5	1561.0	1559.4	1558.0
20°	1530.5	1532.6	1534.6	1535.0	1533.4	1532.0	1530.5	1529.0
22.5°	1496.8	1498.2	1499.6	1499.8	1498.7	1497.7	1496.7	1495.7
25°	1442.9	1443.6	1444.2	1444.0	1443.1	1442.2	1441.3	1440.4
27.5°	1386.4	1386.6	1386.6	1386.2	1385.3	1384.5	1383.5	1382.7
30°	1345.2	1344.6	1344.0	1343.3	1342.4	1341.5	1340.6	1339.7
32.5°	1303.5	1302.4	1301.3	1299.9	1298.4	1296.8	1295.1	1293.6
35°	1238.7	1237.3	1235.8	1233.8	1231.4	1229.1	1226.7	1224.3
37.5°	1170.7	1168.5	1166.3	1164.5	1163.1	1161.7	1160.4	1159.0
40°	1123.6	1120.9	1118.2	1116.5	1115.5	1114.7	1113.7	1112.8
42.5°	1076.9	1074.4	1071.9	1070.1	1068.7	1067.3	1065.9	1064.5
45°	1007.7	1004.1	1000.6	998.3	997.4	996.5	995.6	994.7
47.5°	934.8	931.2	927.6	924.7	922.6	920.5	918.4	916.4
50°	884.9	881.1	877.2	874.2	872.1	870.0	868.0	865.8
52.5°	836.5	833.1	829.7	826.8	824.5	822.2	819.8	817.5
55°	761.1	758.5	755.8	753.4	751.3	749.2	747.1	745.0
57.5°	686.3	682.9	679.4	677.1	676.0	674.9	673.6	672.5
60°	635.7	632.7	629.7	627.2	625.1	623.0	621.0	618.9
62.5°	586.9	583.7	580.5	578.1	576.4	574.8	573.2	571.6
65°	510.1	507.4	504.7	502.8	501.6	500.4	499.2	498.0
67.5°	436.9	434.5	432.3	430.8	430.1	429.4	428.7	427.9
70°	388.4	386.6	384.8	383.3	382.1	380.9	379.8	378.6
72.5°	342.9	340.8	338.8	337.2	336.0	334.8	333.6	332.3
75°	272.1	271.1	270.3	269.2	268.0	266.8	265.6	264.4
77.5°	207.2	206.7	206.2	205.5	204.7	203.8	203.0	202.2
80°	165.8	165.6	165.2	164.8	164.2	163.6	163.0	162.5
82.5°	126.7	126.2	125.6	125.4	125.2	125.1	124.9	124.8
85°	74.6	74.3	74.0	73.5	72.9	72.3	71.7	71.1
87.5°	29.0	29.1	29.2	29.0	28.6	28.1	27.6	27.2
90°	5.5	5.9	6.2	6.5	6.7	6.9	7.1	7.3
92.5°	5.5	5.9	6.2	6.5	6.5	6.6	6.7	6.8
95°	5.5	5.9	6.2	6.4	6.4	6.4	6.4	6.4
97.5°	11.2	9.2	7.3	6.4	6.4	6.4	6.4	6.4
100°	32.8	22.7	12.7	7.5	7.2	7.0	6.6	6.4
102.5°	63.7	61.8	59.9	56.7	52.1	47.5	42.9	38.3
105°	90.7	90.7	90.7	90.7	90.6	90.5	90.5	90.4
107.5°	114.9	114.9	114.9	114.8	114.6	114.3	114.2	113.9
110°	130.4	130.3	130.1	130.0	130.1	130.1	130.2	130.3



TEST NUMBER: P333301-935

CATALOG NUMBER: S125DIP-S1270D365U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	145.9	145.7	145.4	145.3	145.2	145.1	145.0	144.9
115°	169.3	169.0	168.8	168.4	168.0	167.6	167.2	166.8
117.5°	191.8	191.5	191.1	190.9	190.7	190.5	190.4	190.2
120°	206.4	206.2	206.1	205.9	205.5	205.2	204.8	204.5
122.5°	220.2	220.2	220.0	219.7	219.3	219.0	218.5	218.2
125°	240.5	240.2	240.0	239.7	239.5	239.4	239.1	238.9
127.5°	259.0	258.8	258.7	258.4	257.9	257.4	256.9	256.4
130°	271.0	270.9	270.7	270.4	270.1	269.8	269.4	269.1
132.5°	282.3	282.3	282.2	282.1	281.7	281.4	281.0	280.8
135°	298.9	298.8	298.6	298.3	298.0	297.6	297.1	296.7
137.5°	314.4	314.4	314.4	314.2	313.8	313.5	313.1	312.8
140°	323.8	323.9	324.1	323.9	323.6	323.1	322.7	322.3
142.5°	333.0	333.1	333.1	332.9	332.5	332.1	331.7	331.3
145°	346.2	346.2	346.3	346.1	345.8	345.3	344.9	344.5
147.5°	357.4	357.5	357.6	357.4	356.9	356.4	355.9	355.4
150°	364.5	364.7	364.8	364.6	364.1	363.6	363.0	362.5
152.5°	370.9	371.0	371.2	371.0	370.5	370.1	369.5	369.0
155°	379.6	379.8	380.0	379.9	379.4	378.8	378.2	377.7
157.5°	386.8	387.0	387.3	387.1	386.6	386.0	385.5	385.0
160°	391.3	391.6	391.8	391.8	391.2	390.6	390.1	389.6
162.5°	395.5	395.8	396.2	396.1	395.5	394.9	394.3	393.7
165°	400.7	401.1	401.6	401.5	401.0	400.4	399.8	399.3
167.5°	404.8	405.2	405.7	405.6	405.0	404.4	403.8	403.2
170°	406.7	407.3	407.9	407.9	407.3	406.7	406.0	405.4
172.5°	408.4	408.9	409.3	409.3	408.7	408.0	407.4	406.8
175°	410.1	410.7	411.2	411.2	410.5	409.9	409.3	408.7
177.5°	410.9	411.2	411.6	411.6	411.1	410.7	410.3	409.8
180°	410.5	410.5	410.5	410.5	410.5	410.5	410.5	410.5

(END OF REPORT)