

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333248-935

Luminaire Tested: **S125DIP-S850D1205U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333248-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIP-S850D1205U935-4F0-1E-UDD-F1  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 6531.5 lumens  
Efficiency: N/A  
Efficacy: 114.8 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 56.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333248-935

CATALOG NUMBER: S125DIP-S850D1205U935-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

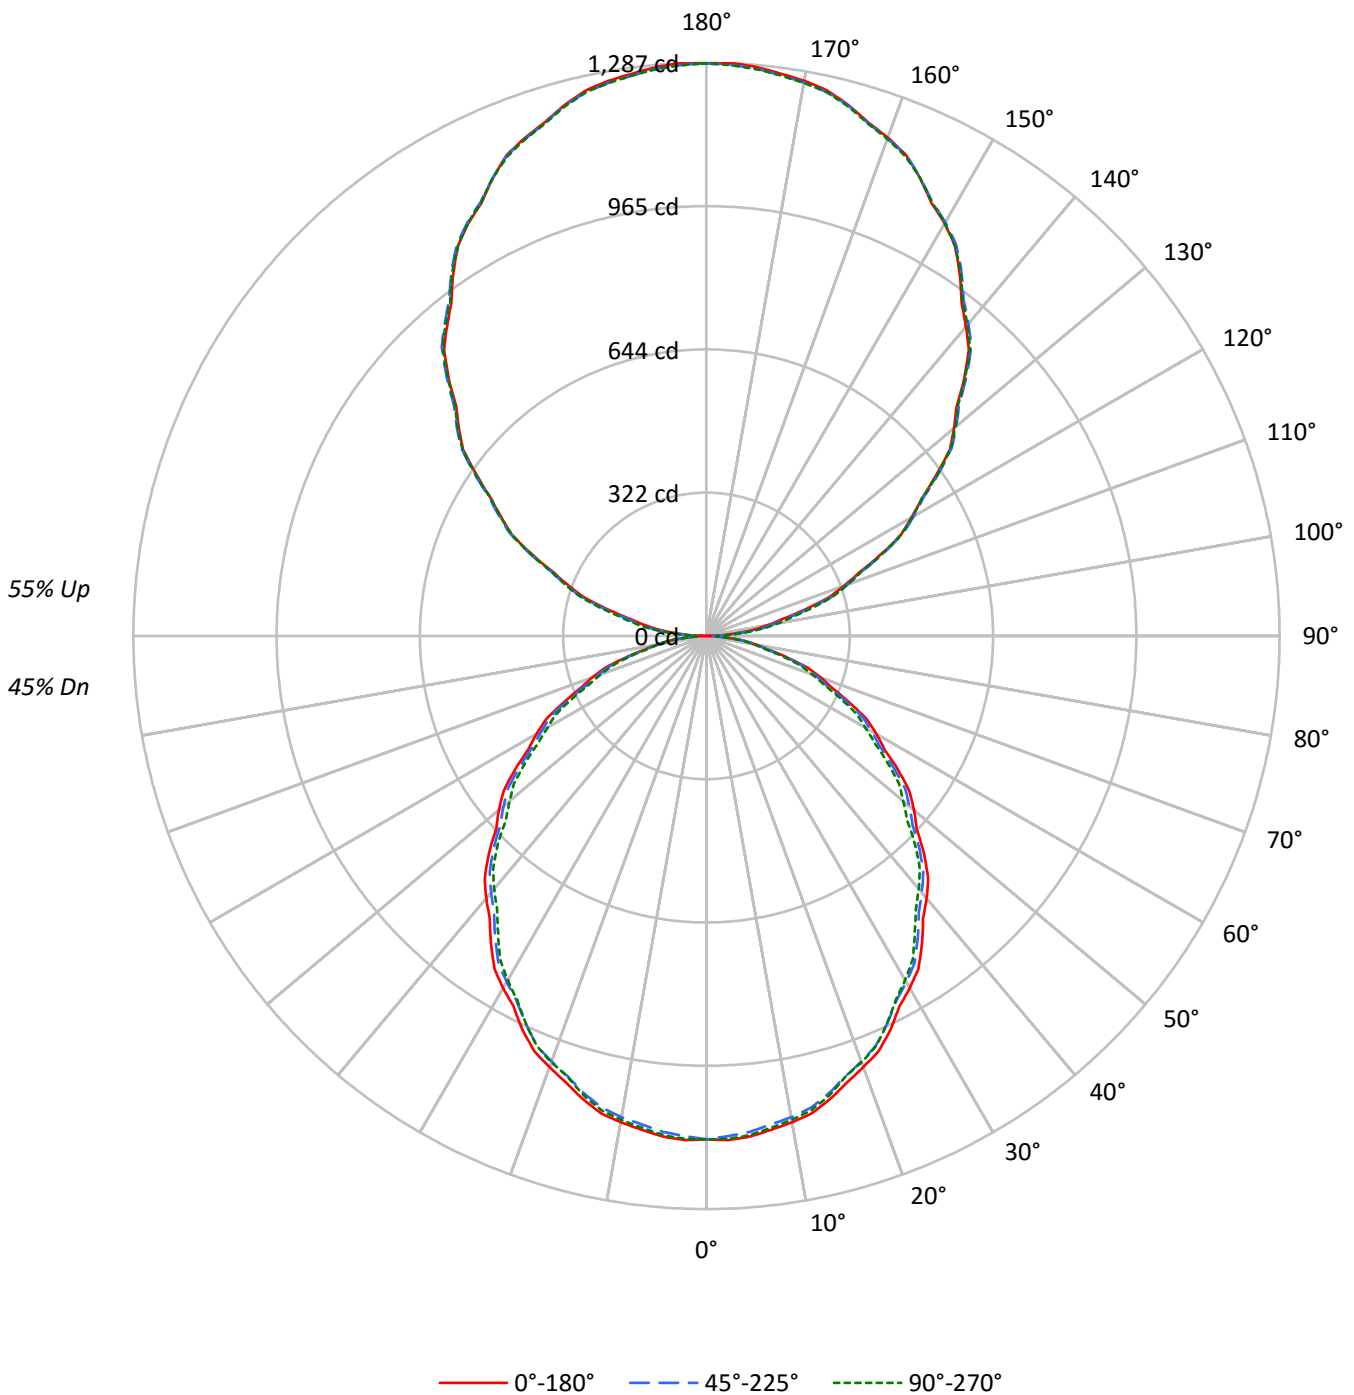



TEST NUMBER: P333248-935

CATALOG NUMBER: S125DIP-S850D1205U935-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	65	65	65	52	52	52	45
1	97	92	88	85	88	85	81	78	71	68	66	57	56	54	45	44	43	38
2	88	81	74	69	80	74	69	64	62	58	55	50	48	45	40	38	37	32
3	80	71	63	58	73	65	59	54	54	50	46	45	41	38	35	33	31	27
4	73	63	55	49	67	58	51	45	48	43	39	40	36	33	32	29	27	23
5	67	56	48	42	61	51	44	39	43	38	34	36	32	28	28	26	23	20
6	62	50	42	36	57	46	39	34	39	33	29	32	28	25	26	23	20	17
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	21	18	15
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16	14
9	49	37	30	25	45	35	28	23	29	24	20	25	20	18	20	17	15	12
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	19	16	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	7299	7299	7299
5°	7316	7247	7293
10°	7271	7195	7237
15°	7192	7109	7138
20°	7080	6988	7000
25°	6959	6844	6837
30°	6809	6689	6655
35°	6649	6522	6430
40°	6483	6340	6250
45°	6305	6175	6052
50°	6109	5974	5795
55°	5920	5749	5588
60°	5694	5521	5324
65°	5425	5248	5069
70°	5166	4930	4762
75°	4706	4551	4397
80°	4192	4125	4024
85°	3646	3712	3512



TEST NUMBER: P333248-935

CATALOG NUMBER: S125DIP-S850D1205U935-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	106.6	1.6
10°-20°	301.0	4.6
20°-30°	444.5	6.8
30°-40°	518.7	7.9
40°-50°	520.9	8.0
50°-60°	457.3	7.0
60°-70°	340.7	5.2
70°-80°	194.8	3.0
80°-90°	59.5	0.9
90°-100°	86.1	1.3
100°-110°	254.3	3.9
110°-120°	430.7	6.6
120°-130°	566.8	8.7
130°-140°	635.1	9.7
140°-150°	622.5	9.5
150°-160°	522.8	8.0
160°-170°	347.5	5.3
170°-180°	121.6	1.9
0°-30°	852.1	13.0
0°-40°	1370.8	21.0
0°-60°	2348.9	36.0
0°-90°	2944.0	45.1
90°-120°	771.1	11.8
90°-150°	2595.6	39.7
90°-180°	3588.0	54.9
0°-180°	6531.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1130	1130	1130	1130	1130	
5°	1128	1126	1118	1125	1125	107
15°	1076	1073	1063	1067	1068	303
25°	976	972	960	962	960	449
35°	843	839	827	823	816	527
45°	690	686	676	666	663	532
55°	526	523	511	503	496	469
65°	355	353	343	336	332	352
75°	189	187	182	180	176	201
85°	49	50	50	49	47	55
90°	1	9	16	21	24	6
95°	65	67	77	84	86	69
105°	228	233	239	245	248	244
115°	431	435	437	436	435	426
125°	629	635	636	634	633	563
135°	818	824	825	825	821	631
145°	992	995	998	998	996	620
155°	1135	1135	1136	1139	1135	522
165°	1234	1232	1233	1236	1231	348
175°	1283	1279	1279	1284	1278	122
180°	1286	1286	1286	1286	1286	



TEST NUMBER: P333248-935

CATALOG NUMBER: S125DIP-S850D1205U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2
2.5°	1133.2	1132.6	1132.2	1131.7	1131.2	1130.1	1128.6	1127.0	1125.4	1123.9	1125.4
5°	1128.5	1128.1	1127.7	1127.3	1126.9	1125.7	1123.7	1121.7	1119.7	1117.8	1119.6
7.5°	1118.1	1117.8	1117.3	1116.9	1116.5	1115.3	1113.0	1110.9	1108.7	1106.5	1108.2
10°	1108.8	1108.5	1108.0	1107.6	1107.2	1106.0	1103.7	1101.6	1099.4	1097.2	1098.8
12.5°	1097.3	1096.7	1096.0	1095.2	1094.5	1093.1	1091.1	1089.1	1087.0	1085.0	1086.3
15°	1075.7	1075.1	1074.5	1073.9	1073.3	1071.9	1069.8	1067.6	1065.4	1063.2	1064.2
17.5°	1050.9	1050.0	1049.1	1048.3	1047.4	1045.8	1043.5	1041.3	1039.0	1036.7	1037.9
20°	1030.1	1029.8	1029.3	1028.9	1028.6	1027.0	1024.4	1021.8	1019.3	1016.7	1018.1
22.5°	1009.4	1008.7	1008.0	1007.2	1006.5	1005.0	1002.5	1000.1	997.6	995.2	996.2
25°	976.5	975.5	974.5	973.4	972.5	970.7	968.1	965.5	962.9	960.4	960.8
27.5°	938.0	937.5	936.9	936.3	935.6	934.0	931.3	928.7	926.0	923.3	923.4
30°	913.0	912.4	911.8	911.2	910.6	908.8	905.9	902.8	899.8	896.9	896.5
32.5°	885.8	884.8	884.0	883.0	882.2	880.4	877.7	875.0	872.4	869.7	869.0
35°	843.3	842.4	841.6	840.9	840.1	838.3	835.5	832.7	829.9	827.2	826.1
37.5°	799.1	798.1	797.0	796.1	795.0	793.2	790.7	788.0	785.4	782.8	781.3
40°	769.0	768.0	767.1	766.0	765.0	763.2	760.3	757.6	754.8	752.0	750.3
42.5°	736.8	736.0	735.1	734.3	733.5	731.7	728.9	726.1	723.3	720.6	718.9
45°	690.3	689.5	688.7	687.9	687.2	685.5	683.2	680.8	678.4	676.1	673.6
47.5°	640.2	640.3	640.3	640.3	640.4	639.0	636.1	633.3	630.4	627.6	625.1
50°	608.0	607.4	606.8	606.2	605.7	604.2	601.8	599.4	597.0	594.6	592.0
52.5°	575.1	574.7	574.3	573.9	573.4	571.9	569.4	566.8	564.3	561.7	559.5
55°	525.8	525.2	524.6	524.0	523.4	521.7	518.9	516.2	513.3	510.6	508.8
57.5°	473.7	473.5	473.1	472.8	472.5	471.1	468.8	466.5	464.1	461.8	459.4
60°	440.8	440.1	439.3	438.4	437.6	436.2	433.9	431.8	429.6	427.4	425.4
62.5°	406.5	405.9	405.3	404.6	404.0	402.7	400.9	399.0	397.1	395.2	393.1
65°	355.0	354.6	354.2	353.8	353.4	352.1	349.9	347.8	345.5	343.4	341.6
67.5°	305.1	304.3	303.4	302.6	301.8	300.5	298.9	297.3	295.7	294.0	292.5
70°	273.6	272.6	271.6	270.6	269.7	268.3	266.5	264.7	262.9	261.1	259.9
72.5°	239.3	238.6	237.9	237.3	236.6	235.7	234.5	233.3	232.2	231.1	229.7
75°	188.6	188.3	187.9	187.5	187.1	186.4	185.4	184.4	183.4	182.4	181.8
77.5°	142.0	141.8	141.7	141.5	141.4	141.0	140.4	139.9	139.3	138.8	138.4
80°	112.7	112.7	112.7	112.7	112.7	112.4	112.1	111.7	111.2	110.9	110.7
82.5°	86.9	86.6	86.3	85.9	85.7	85.4	85.3	85.3	85.2	85.2	84.8
85°	49.2	49.4	49.6	49.8	49.9	50.1	50.1	50.1	50.1	50.1	49.9
87.5°	19.5	19.9	20.2	20.6	20.9	21.2	21.4	21.5	21.6	21.8	22.0
90°	1.0	2.8	4.6	6.4	8.1	9.8	11.4	12.9	14.5	16.0	17.1
92.5°	24.2	25.5	26.7	28.0	29.2	30.7	32.7	34.6	36.5	38.4	39.9
95°	65.0	65.4	66.0	66.4	66.8	68.1	70.3	72.6	74.8	77.1	78.6
97.5°	108.1	108.2	108.4	108.6	108.7	110.4	113.5	116.5	119.6	122.7	124.2
100°	140.1	140.1	140.1	140.1	140.1	141.5	144.4	147.3	150.2	153.1	155.1
102.5°	174.5	175.4	176.2	177.2	178.1	179.3	180.7	182.2	183.7	185.1	187.3
105°	228.1	229.2	230.3	231.4	232.6	233.8	235.1	236.4	237.8	239.1	240.5
107.5°	287.3	288.4	289.6	290.7	291.8	292.8	293.9	294.9	295.9	297.0	297.6
110°	328.2	329.2	330.4	331.5	332.6	333.5	334.2	334.8	335.5	336.1	336.8



TEST NUMBER: P333248-935

CATALOG NUMBER: S125DIP-S850D1205U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	369.8	370.4	370.9	371.5	372.1	372.8	373.7	374.5	375.3	376.2	376.5
115°	431.2	432.1	433.0	433.9	434.8	435.4	435.9	436.4	436.8	437.2	437.0
117.5°	492.8	493.3	493.7	494.0	494.5	494.8	495.2	495.7	496.0	496.5	496.6
120°	531.2	532.4	533.5	534.6	535.7	536.4	536.6	536.8	537.1	537.3	537.3
122.5°	572.9	573.3	573.7	574.1	574.5	575.0	575.6	576.2	576.7	577.3	577.1
125°	629.3	630.7	632.0	633.4	634.6	635.4	635.7	635.8	636.1	636.4	635.8
127.5°	689.4	690.1	690.9	691.6	692.4	692.9	693.2	693.4	693.7	694.0	693.7
130°	725.4	726.5	727.6	728.8	729.8	730.6	731.1	731.5	731.9	732.4	732.2
132.5°	761.4	763.2	765.1	766.9	768.7	769.6	769.5	769.4	769.3	769.2	769.0
135°	818.5	819.8	821.1	822.4	823.8	824.6	824.8	825.0	825.2	825.4	825.4
137.5°	872.0	873.3	874.6	875.9	877.2	878.1	878.6	879.1	879.6	880.0	880.3
140°	906.5	907.6	908.7	909.8	910.9	911.8	912.5	913.2	913.8	914.5	914.9
142.5°	940.9	941.8	942.8	943.7	944.6	945.6	946.3	947.2	948.0	948.9	949.2
145°	991.5	992.4	993.3	994.2	995.1	995.8	996.5	997.2	997.8	998.5	998.5
147.5°	1038.4	1038.8	1039.3	1039.8	1040.3	1040.8	1041.4	1041.9	1042.4	1042.9	1043.4
150°	1069.5	1069.4	1069.1	1068.9	1068.7	1069.0	1069.9	1070.7	1071.7	1072.5	1072.5
152.5°	1095.2	1095.5	1095.8	1096.1	1096.4	1096.7	1097.1	1097.4	1097.9	1098.2	1098.7
155°	1134.6	1134.6	1134.6	1134.6	1134.6	1134.7	1135.0	1135.1	1135.4	1135.6	1136.5
157.5°	1169.8	1169.3	1168.8	1168.4	1167.9	1167.7	1167.9	1168.2	1168.4	1168.6	1169.5
160°	1190.6	1190.0	1189.3	1188.6	1187.9	1187.7	1187.9	1188.2	1188.4	1188.6	1189.5
162.5°	1209.0	1208.6	1208.1	1207.6	1207.0	1206.9	1206.9	1206.9	1206.9	1207.0	1208.1
165°	1233.6	1233.2	1232.8	1232.3	1231.8	1231.7	1232.0	1232.2	1232.4	1232.6	1233.6
167.5°	1254.5	1253.5	1252.7	1251.8	1250.9	1250.4	1250.4	1250.4	1250.4	1250.4	1251.8
170°	1265.7	1264.8	1263.9	1263.0	1262.1	1261.6	1261.6	1261.6	1261.6	1261.6	1263.0
172.5°	1273.7	1272.8	1271.9	1271.0	1270.1	1269.6	1269.6	1269.6	1269.6	1269.6	1271.0
175°	1282.6	1281.8	1280.9	1280.0	1279.1	1278.7	1278.7	1278.7	1278.7	1278.7	1280.0
177.5°	1287.3	1286.6	1285.8	1285.1	1284.4	1284.0	1283.8	1283.7	1283.4	1283.2	1284.4
180°	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6



TEST NUMBER: P333248-935

CATALOG NUMBER: S125DIP-S850D1205U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2
2.5°	1127.0	1128.6	1130.1	1130.9	1130.8	1130.6	1130.4	1130.2
5°	1121.4	1123.1	1124.9	1125.7	1125.5	1125.3	1125.1	1124.9
7.5°	1110.0	1111.7	1113.4	1114.2	1114.0	1113.9	1113.6	1113.4
10°	1100.4	1102.0	1103.5	1104.2	1104.1	1103.8	1103.6	1103.5
12.5°	1087.5	1088.8	1090.1	1090.7	1090.7	1090.6	1090.6	1090.5
15°	1065.2	1066.2	1067.2	1067.6	1067.6	1067.6	1067.6	1067.6
17.5°	1039.2	1040.4	1041.6	1041.8	1040.8	1039.8	1038.8	1037.8
20°	1019.5	1020.9	1022.3	1022.4	1021.5	1020.5	1019.5	1018.5
22.5°	997.0	998.0	998.9	999.0	998.3	997.6	997.0	996.3
25°	961.1	961.6	962.0	961.8	961.3	960.7	960.1	959.5
27.5°	923.5	923.6	923.7	923.4	922.8	922.2	921.6	921.0
30°	896.1	895.7	895.3	894.8	894.2	893.6	893.0	892.4
32.5°	868.2	867.5	866.9	865.9	864.9	863.8	862.7	861.7
35°	825.2	824.1	823.2	821.9	820.3	818.7	817.1	815.5
37.5°	779.8	778.3	776.9	775.7	774.8	773.9	773.0	772.1
40°	748.5	746.7	744.9	743.6	743.0	742.5	741.9	741.3
42.5°	717.3	715.7	714.0	712.7	711.9	710.9	710.0	709.1
45°	671.2	668.8	666.5	665.0	664.4	663.8	663.2	662.6
47.5°	622.7	620.3	617.9	616.0	614.6	613.2	611.7	610.4
50°	589.4	586.9	584.3	582.3	580.9	579.5	578.2	576.8
52.5°	557.2	554.9	552.7	550.8	549.2	547.7	546.1	544.6
55°	507.0	505.2	503.4	501.9	500.4	499.0	497.7	496.3
57.5°	457.2	454.9	452.5	451.0	450.2	449.5	448.8	448.0
60°	423.4	421.5	419.5	417.8	416.4	415.0	413.6	412.2
62.5°	391.0	388.8	386.7	385.0	384.0	382.9	381.9	380.7
65°	339.8	338.0	336.2	334.9	334.2	333.4	332.5	331.7
67.5°	291.0	289.5	288.0	287.0	286.5	286.0	285.5	285.1
70°	258.7	257.5	256.3	255.4	254.5	253.7	253.0	252.2
72.5°	228.3	227.0	225.7	224.5	223.8	223.0	222.2	221.4
75°	181.2	180.6	180.0	179.3	178.6	177.7	176.9	176.2
77.5°	138.1	137.7	137.3	136.9	136.3	135.8	135.3	134.7
80°	110.5	110.3	110.1	109.8	109.4	109.0	108.6	108.2
82.5°	84.4	84.0	83.7	83.5	83.4	83.3	83.3	83.2
85°	49.7	49.5	49.2	49.0	48.6	48.2	47.8	47.4
87.5°	22.2	22.5	22.7	22.7	22.6	22.3	22.1	22.0
90°	18.3	19.4	20.5	21.4	22.0	22.6	23.3	24.0
92.5°	41.3	42.8	44.3	45.3	45.7	46.2	46.8	47.2
95°	80.2	81.7	83.3	84.3	84.7	85.2	85.6	86.0
97.5°	125.6	127.1	128.5	129.4	129.7	129.9	130.2	130.4
100°	157.0	159.1	161.1	162.3	162.7	163.2	163.7	164.1
102.5°	189.4	191.7	193.8	195.2	195.9	196.5	197.1	197.7
105°	241.8	243.1	244.4	245.5	246.2	246.8	247.5	248.1
107.5°	298.3	298.9	299.6	300.0	299.9	299.9	299.8	299.7
110°	337.5	338.2	338.8	339.1	338.8	338.6	338.4	338.2





TEST NUMBER: P333248-935

CATALOG NUMBER: S125DIP-S850D1205U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	376.9	377.1	377.5	377.4	377.0	376.6	376.2	375.8
115°	436.8	436.5	436.4	436.1	435.9	435.7	435.4	435.2
117.5°	496.8	497.0	497.1	496.8	495.9	495.1	494.1	493.3
120°	537.3	537.3	537.3	536.8	536.0	535.0	534.2	533.3
122.5°	577.0	576.8	576.6	576.2	575.4	574.7	574.0	573.3
125°	635.4	635.0	634.6	634.2	634.0	633.8	633.5	633.4
127.5°	693.5	693.3	693.1	692.8	692.3	691.8	691.4	691.0
130°	731.9	731.7	731.5	731.2	730.7	730.3	729.8	729.4
132.5°	768.8	768.5	768.3	767.9	767.2	766.6	766.0	765.4
135°	825.4	825.4	825.4	825.0	824.1	823.2	822.3	821.4
137.5°	880.6	880.9	881.1	880.7	879.6	878.5	877.4	876.2
140°	915.3	915.8	916.3	915.9	914.8	913.7	912.6	911.5
142.5°	949.4	949.7	949.9	949.5	948.4	947.4	946.2	945.1
145°	998.5	998.5	998.5	998.2	997.6	996.9	996.2	995.5
147.5°	1044.0	1044.6	1045.1	1044.6	1043.1	1041.6	1040.1	1038.5
150°	1072.5	1072.5	1072.5	1072.4	1071.9	1071.4	1071.0	1070.6
152.5°	1099.2	1099.8	1100.3	1100.2	1099.4	1098.5	1097.8	1097.0
155°	1137.4	1138.2	1139.2	1139.0	1137.9	1136.8	1135.7	1134.6
157.5°	1170.4	1171.3	1172.2	1171.9	1170.4	1169.0	1167.5	1166.1
160°	1190.4	1191.3	1192.1	1192.1	1190.9	1189.8	1188.7	1187.7
162.5°	1209.2	1210.2	1211.3	1211.2	1209.9	1208.6	1207.3	1206.0
165°	1234.4	1235.3	1236.2	1236.0	1234.7	1233.3	1232.0	1230.6
167.5°	1253.1	1254.5	1255.8	1255.8	1254.4	1253.0	1251.6	1250.3
170°	1264.3	1265.7	1267.0	1266.9	1265.3	1263.8	1262.2	1260.7
172.5°	1272.3	1273.7	1275.0	1275.0	1273.6	1272.2	1270.8	1269.5
175°	1281.3	1282.6	1284.0	1283.9	1282.4	1280.8	1279.2	1277.6
177.5°	1285.4	1286.5	1287.5	1287.5	1286.2	1285.0	1283.8	1282.5
180°	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6

(END OF REPORT)