

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333213-935

Luminaire Tested: **S125DIP-S850D365U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333213-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125DIP-S850D365U935-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4073.8 lumens
Efficiency: N/A
Efficacy: 116.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 35
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333213-935

CATALOG NUMBER: S125DIP-S850D365U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

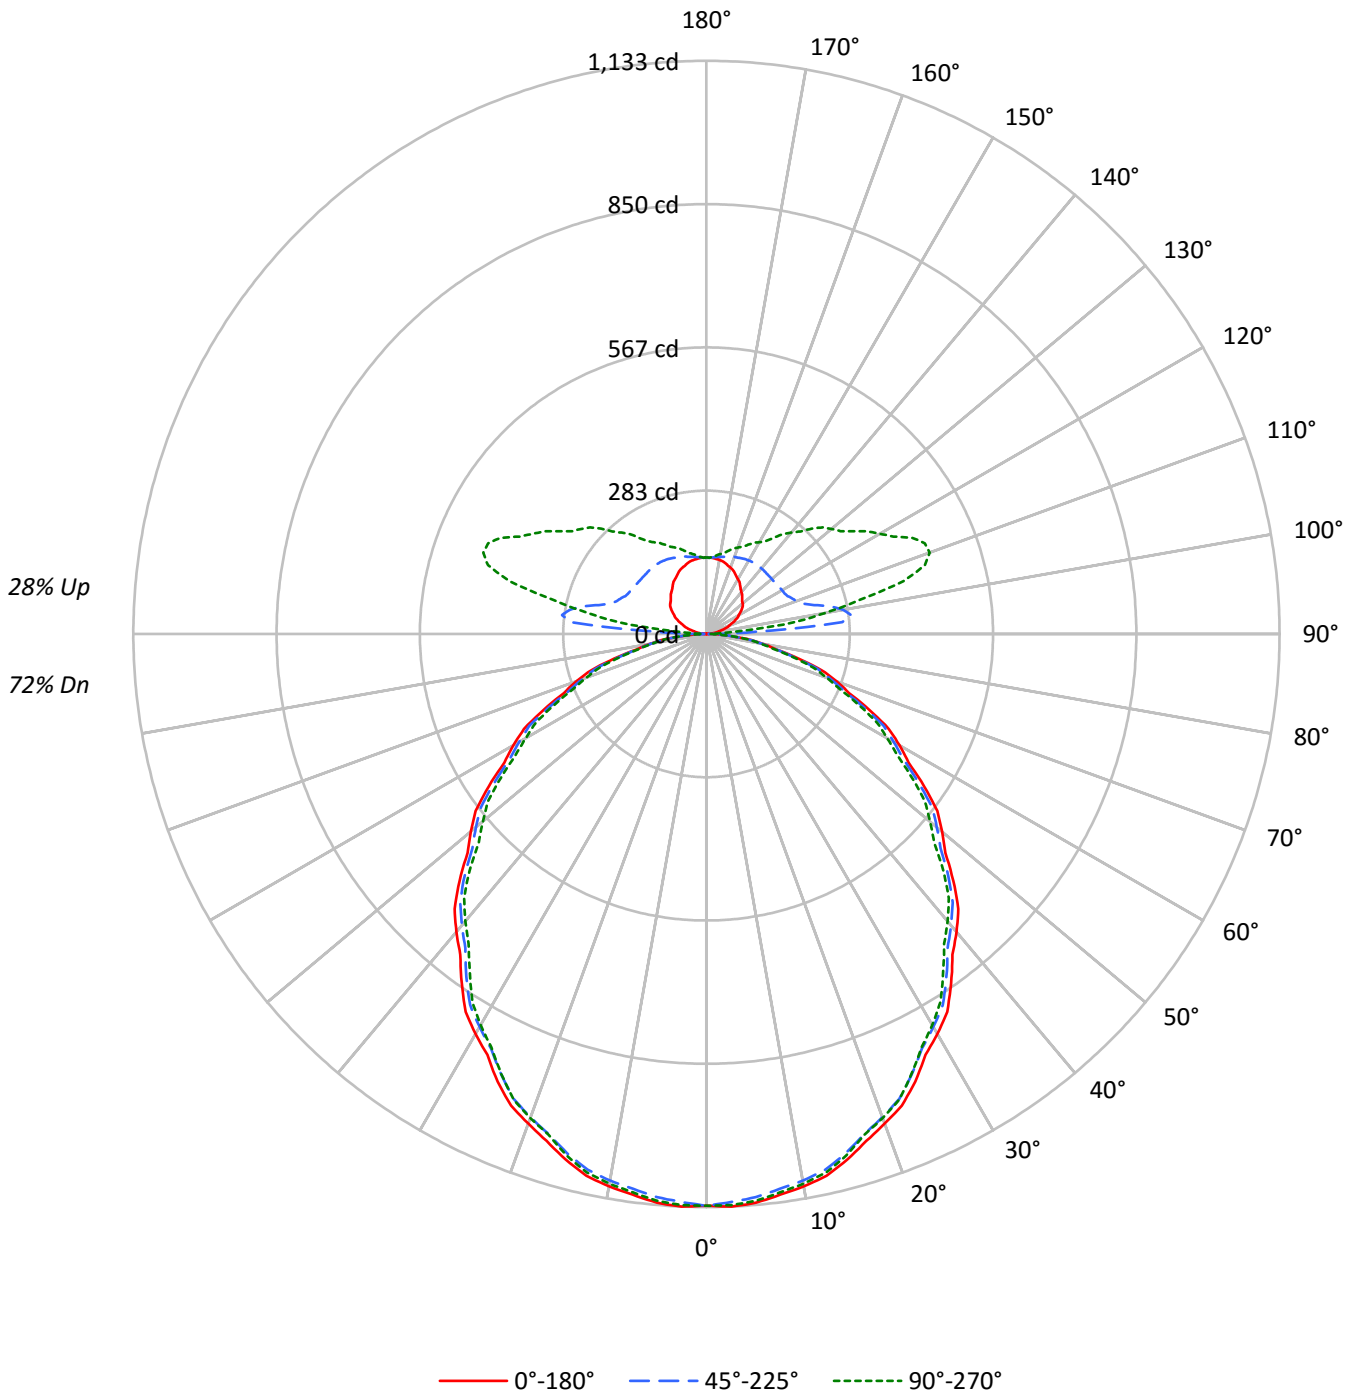



TEST NUMBER: P333213-935

CATALOG NUMBER: S125DIP-S850D365U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	107	107	107	107	96	96	96	86	86	86	77	77	77	72
1	103	98	94	90	97	93	90	86	84	81	79	75	73	71	68	66	65	61
2	93	86	79	74	88	81	76	71	74	69	65	66	63	60	59	57	54	51
3	85	75	68	62	81	72	65	59	65	59	55	59	54	50	53	49	46	43
4	78	67	59	52	74	64	56	50	58	52	47	52	47	43	47	43	40	37
5	72	60	51	45	68	57	49	43	52	45	40	47	42	38	42	38	35	32
6	66	54	45	39	63	51	43	38	47	40	35	42	37	33	38	34	31	28
7	61	49	40	34	58	46	39	33	42	36	31	39	33	29	35	31	27	25
8	57	44	36	31	54	42	35	30	39	32	28	35	30	26	32	28	24	22
9	53	40	33	27	50	39	32	27	36	29	25	33	27	24	30	25	22	20
10	50	37	30	25	47	36	29	24	33	27	23	30	25	21	28	23	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7299	7299	7299
5°	7316	7247	7293
10°	7271	7195	7237
15°	7192	7109	7138
20°	7080	6988	7000
25°	6959	6844	6837
30°	6809	6689	6655
35°	6649	6522	6430
40°	6483	6340	6250
45°	6305	6175	6052
50°	6109	5974	5795
55°	5920	5749	5588
60°	5694	5521	5324
65°	5425	5248	5069
70°	5166	4930	4762
75°	4706	4551	4397
80°	4192	4125	4024
85°	3646	3712	3512



TEST NUMBER: P333213-935

CATALOG NUMBER: S125DIP-S850D365U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	106.6	2.6
10°-20°	301.0	7.4
20°-30°	444.5	10.9
30°-40°	518.7	12.7
40°-50°	520.9	12.8
50°-60°	457.3	11.2
60°-70°	340.7	8.4
70°-80°	194.8	4.8
80°-90°	57.5	1.4
90°-100°	109.4	2.7
100°-110°	235.2	5.8
110°-120°	220.7	5.4
120°-130°	178.9	4.4
130°-140°	143.5	3.5
140°-150°	108.3	2.7
150°-160°	76.2	1.9
160°-170°	44.9	1.1
170°-180°	14.6	0.4
0°-30°	852.1	20.9
0°-40°	1370.8	33.6
0°-60°	2348.9	57.7
0°-90°	2942.0	72.2
90°-120°	565.3	13.9
90°-150°	996.0	24.4
90°-180°	1132.0	27.8
0°-180°	4073.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1130	1130	1130	1130	1130	
5°	1128	1126	1118	1125	1125	107
15°	1076	1073	1063	1067	1068	303
25°	976	972	960	962	960	449
35°	843	839	827	823	816	527
45°	690	686	676	666	663	532
55°	526	523	511	503	496	469
65°	355	353	343	336	332	352
75°	189	187	182	180	176	201
85°	49	50	50	49	47	55
90°	0	3	5	6	7	3
95°	10	30	270	122	72	11
105°	34	48	221	434	403	36
115°	62	74	177	382	449	60
125°	85	100	170	304	354	76
135°	100	120	169	255	294	77
145°	116	133	169	211	232	73
155°	133	143	165	186	194	61
165°	145	149	158	168	170	41
175°	151	151	152	154	153	14
180°	151	151	151	151	151	



TEST NUMBER: P333213-935

CATALOG NUMBER: S125DIP-S850D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2
2.5°	1133.2	1132.6	1132.2	1131.7	1131.2	1130.1	1128.6	1127.0	1125.4	1123.9	1125.4
5°	1128.5	1128.1	1127.7	1127.3	1126.9	1125.7	1123.7	1121.7	1119.7	1117.8	1119.6
7.5°	1118.1	1117.8	1117.3	1116.9	1116.5	1115.3	1113.0	1110.9	1108.7	1106.5	1108.2
10°	1108.8	1108.5	1108.0	1107.6	1107.2	1106.0	1103.7	1101.6	1099.4	1097.2	1098.8
12.5°	1097.3	1096.7	1096.0	1095.2	1094.5	1093.1	1091.1	1089.1	1087.0	1085.0	1086.3
15°	1075.7	1075.1	1074.5	1073.9	1073.3	1071.9	1069.8	1067.6	1065.4	1063.2	1064.2
17.5°	1050.9	1050.0	1049.1	1048.3	1047.4	1045.8	1043.5	1041.3	1039.0	1036.7	1037.9
20°	1030.1	1029.8	1029.3	1028.9	1028.6	1027.0	1024.4	1021.8	1019.3	1016.7	1018.1
22.5°	1009.4	1008.7	1008.0	1007.2	1006.5	1005.0	1002.5	1000.1	997.6	995.2	996.2
25°	976.5	975.5	974.5	973.4	972.5	970.7	968.1	965.5	962.9	960.4	960.8
27.5°	938.0	937.5	936.9	936.3	935.6	934.0	931.3	928.7	926.0	923.3	923.4
30°	913.0	912.4	911.8	911.2	910.6	908.8	905.9	902.8	899.8	896.9	896.5
32.5°	885.8	884.8	884.0	883.0	882.2	880.4	877.7	875.0	872.4	869.7	869.0
35°	843.3	842.4	841.6	840.9	840.1	838.3	835.5	832.7	829.9	827.2	826.1
37.5°	799.1	798.1	797.0	796.1	795.0	793.2	790.7	788.0	785.4	782.8	781.3
40°	769.0	768.0	767.1	766.0	765.0	763.2	760.3	757.6	754.8	752.0	750.3
42.5°	736.8	736.0	735.1	734.3	733.5	731.7	728.9	726.1	723.3	720.6	718.9
45°	690.3	689.5	688.7	687.9	687.2	685.5	683.2	680.8	678.4	676.1	673.6
47.5°	640.2	640.3	640.3	640.3	640.4	639.0	636.1	633.3	630.4	627.6	625.1
50°	608.0	607.4	606.8	606.2	605.7	604.2	601.8	599.4	597.0	594.6	592.0
52.5°	575.1	574.7	574.3	573.9	573.4	571.9	569.4	566.8	564.3	561.7	559.5
55°	525.8	525.2	524.6	524.0	523.4	521.7	518.9	516.2	513.3	510.6	508.8
57.5°	473.7	473.5	473.1	472.8	472.5	471.1	468.8	466.5	464.1	461.8	459.4
60°	440.8	440.1	439.3	438.4	437.6	436.2	433.9	431.8	429.6	427.4	425.4
62.5°	406.5	405.9	405.3	404.6	404.0	402.7	400.9	399.0	397.1	395.2	393.1
65°	355.0	354.6	354.2	353.8	353.4	352.1	349.9	347.8	345.5	343.4	341.6
67.5°	305.1	304.3	303.4	302.6	301.8	300.5	298.9	297.3	295.7	294.0	292.5
70°	273.6	272.6	271.6	270.6	269.7	268.3	266.5	264.7	262.9	261.1	259.9
72.5°	239.3	238.6	237.9	237.3	236.6	235.7	234.5	233.3	232.2	231.1	229.7
75°	188.6	188.3	187.9	187.5	187.1	186.4	185.4	184.4	183.4	182.4	181.8
77.5°	142.0	141.8	141.7	141.5	141.4	141.0	140.4	139.9	139.3	138.8	138.4
80°	112.7	112.7	112.7	112.7	112.7	112.4	112.1	111.7	111.2	110.9	110.7
82.5°	86.9	86.6	86.3	85.9	85.7	85.4	85.3	85.3	85.2	85.2	84.8
85°	49.2	49.4	49.6	49.8	49.9	50.1	50.1	50.1	50.1	50.1	49.9
87.5°	19.4	19.5	19.5	19.7	19.8	19.8	19.7	19.7	19.6	19.5	19.6
90°	0.3	0.6	1.2	1.8	2.4	3.0	3.4	4.0	4.2	4.9	5.2
92.5°	3.7	4.5	7.1	10.8	16.1	25.0	41.6	69.4	99.7	98.1	79.4
95°	10.1	10.3	12.7	16.1	22.8	36.5	69.1	136.0	220.0	269.6	263.8
97.5°	16.7	17.0	18.8	22.1	28.2	38.0	59.5	108.6	196.5	287.9	333.8
100°	21.3	21.9	23.2	26.4	32.3	41.4	59.1	98.6	175.3	274.7	350.9
102.5°	26.4	26.8	27.7	31.3	36.7	45.5	61.2	94.5	159.2	251.7	340.6
105°	34.4	34.4	35.9	38.9	43.8	52.3	65.7	92.8	143.6	220.6	308.0
107.5°	42.2	42.8	44.3	46.8	51.8	59.5	72.4	95.6	137.1	199.2	274.6
110°	47.8	48.4	49.6	52.3	56.9	64.8	77.3	98.3	135.1	189.2	255.6



TEST NUMBER: P333213-935

CATALOG NUMBER: S125DIP-S850D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	53.4	54.0	54.9	57.7	62.3	69.9	81.9	101.7	135.1	183.4	241.5
115°	61.5	62.1	63.0	65.7	70.3	77.9	89.2	106.8	136.0	177.1	226.1
117.5°	68.8	69.7	70.7	73.4	78.6	85.9	96.6	112.6	138.0	174.0	216.9
120°	73.6	74.6	75.8	78.5	83.7	91.3	101.9	116.6	140.0	172.5	211.8
122.5°	78.8	79.4	80.4	83.2	88.8	96.4	107.0	120.9	141.6	171.3	207.4
125°	85.2	85.8	87.3	90.1	95.8	103.8	113.8	126.9	144.6	169.8	201.5
127.5°	90.2	91.2	93.1	96.6	102.7	110.6	120.3	132.3	147.7	169.1	196.0
130°	93.4	94.4	96.8	100.7	107.1	115.0	124.4	136.0	149.7	168.6	192.3
132.5°	95.8	97.0	100.0	104.4	111.0	118.9	128.4	139.2	151.9	168.6	189.4
135°	99.8	101.0	104.7	109.5	116.0	124.2	133.5	143.6	154.9	168.6	185.9
137.5°	104.8	105.7	109.1	114.0	120.3	128.7	137.3	146.9	157.6	168.9	182.8
140°	107.7	108.7	112.3	117.2	123.0	131.1	140.0	149.1	158.9	169.2	181.3
142.5°	111.2	111.8	115.2	120.1	125.6	133.4	141.6	150.3	159.5	169.4	180.1
145°	116.2	116.8	119.9	124.2	129.7	136.6	144.6	152.1	160.3	169.2	178.3
147.5°	121.6	121.9	124.6	128.5	133.3	139.4	146.4	153.3	160.7	168.4	176.4
150°	124.8	125.4	127.5	131.5	135.7	140.9	147.6	153.9	160.7	167.6	175.0
152.5°	128.2	128.5	130.4	133.9	137.9	142.6	148.8	154.5	160.4	166.7	173.2
155°	132.7	132.7	134.5	137.5	140.6	144.8	150.0	154.9	159.7	165.0	170.4
157.5°	136.7	136.6	138.1	140.7	143.4	146.6	151.0	155.2	158.9	163.1	167.7
160°	139.4	139.1	140.3	142.4	144.8	147.6	151.5	155.2	158.3	161.9	165.6
162.5°	141.5	141.3	142.5	144.4	146.3	148.5	152.1	155.0	157.5	160.4	163.6
165°	144.8	144.2	145.2	146.6	147.9	149.7	152.1	154.5	156.4	158.3	160.7
167.5°	147.1	146.7	147.3	148.1	149.0	150.2	152.1	153.9	154.7	156.1	157.8
170°	148.5	148.2	148.5	149.1	149.7	150.6	152.1	153.3	153.9	154.9	156.1
172.5°	149.5	149.0	149.2	149.8	150.2	150.6	151.9	152.9	153.0	153.4	154.4
175°	150.6	150.0	150.3	150.6	150.6	150.6	151.5	152.1	151.9	151.9	152.1
177.5°	151.2	150.7	150.7	150.9	150.7	150.7	151.2	151.4	150.9	150.9	151.2
180°	150.9	150.9	150.9	150.9	150.9	150.9	150.9	150.9	150.9	150.9	150.9



TEST NUMBER: P333213-935

CATALOG NUMBER: S125DIP-S850D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2	1130.2
2.5°	1127.0	1128.6	1130.1	1130.9	1130.8	1130.6	1130.4	1130.2
5°	1121.4	1123.1	1124.9	1125.7	1125.5	1125.3	1125.1	1124.9
7.5°	1110.0	1111.7	1113.4	1114.2	1114.0	1113.9	1113.6	1113.4
10°	1100.4	1102.0	1103.5	1104.2	1104.1	1103.8	1103.6	1103.5
12.5°	1087.5	1088.8	1090.1	1090.7	1090.7	1090.6	1090.6	1090.5
15°	1065.2	1066.2	1067.2	1067.6	1067.6	1067.6	1067.6	1067.6
17.5°	1039.2	1040.4	1041.6	1041.8	1040.8	1039.8	1038.8	1037.8
20°	1019.5	1020.9	1022.3	1022.4	1021.5	1020.5	1019.5	1018.5
22.5°	997.0	998.0	998.9	999.0	998.3	997.6	997.0	996.3
25°	961.1	961.6	962.0	961.8	961.3	960.7	960.1	959.5
27.5°	923.5	923.6	923.7	923.4	922.8	922.2	921.6	921.0
30°	896.1	895.7	895.3	894.8	894.2	893.6	893.0	892.4
32.5°	868.2	867.5	866.9	865.9	864.9	863.8	862.7	861.7
35°	825.2	824.1	823.2	821.9	820.3	818.7	817.1	815.5
37.5°	779.8	778.3	776.9	775.7	774.8	773.9	773.0	772.1
40°	748.5	746.7	744.9	743.6	743.0	742.5	741.9	741.3
42.5°	717.3	715.7	714.0	712.7	711.9	710.9	710.0	709.1
45°	671.2	668.8	666.5	665.0	664.4	663.8	663.2	662.6
47.5°	622.7	620.3	617.9	616.0	614.6	613.2	611.7	610.4
50°	589.4	586.9	584.3	582.3	580.9	579.5	578.2	576.8
52.5°	557.2	554.9	552.7	550.8	549.2	547.7	546.1	544.6
55°	507.0	505.2	503.4	501.9	500.4	499.0	497.7	496.3
57.5°	457.2	454.9	452.5	451.0	450.2	449.5	448.8	448.0
60°	423.4	421.5	419.5	417.8	416.4	415.0	413.6	412.2
62.5°	391.0	388.8	386.7	385.0	384.0	382.9	381.9	380.7
65°	339.8	338.0	336.2	334.9	334.2	333.4	332.5	331.7
67.5°	291.0	289.5	288.0	287.0	286.5	286.0	285.5	285.1
70°	258.7	257.5	256.3	255.4	254.5	253.7	253.0	252.2
72.5°	228.3	227.0	225.7	224.5	223.8	223.0	222.2	221.4
75°	181.2	180.6	180.0	179.3	178.6	177.7	176.9	176.2
77.5°	138.1	137.7	137.3	136.9	136.3	135.8	135.3	134.7
80°	110.5	110.3	110.1	109.8	109.4	109.0	108.6	108.2
82.5°	84.4	84.0	83.7	83.5	83.4	83.3	83.3	83.2
85°	49.7	49.5	49.2	49.0	48.6	48.2	47.8	47.4
87.5°	19.7	19.7	19.8	19.8	19.5	19.1	18.9	18.6
90°	5.5	5.8	6.1	6.7	6.7	6.7	7.0	7.0
92.5°	53.9	39.1	29.4	25.0	21.1	20.3	19.9	19.4
95°	218.8	172.5	135.1	109.5	87.9	78.8	76.4	71.5
97.5°	325.8	293.4	256.9	221.4	202.6	185.5	176.8	172.8
100°	374.3	359.4	328.0	296.4	275.3	253.5	242.2	237.4
102.5°	390.5	399.8	384.8	363.3	340.9	325.3	313.1	309.4
105°	381.0	422.7	436.0	432.7	422.9	412.9	406.8	403.2
107.5°	346.6	402.3	436.6	452.5	457.4	457.4	455.4	453.0
110°	321.3	379.2	422.1	447.9	461.6	467.4	469.5	469.5



TEST NUMBER: P333213-935

CATALOG NUMBER: S125DIP-S850D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	301.4	356.3	399.7	430.2	450.1	460.1	465.4	467.6
115°	276.3	323.5	365.2	398.3	422.1	436.6	445.1	449.1
117.5°	260.1	300.7	336.7	367.1	390.8	406.0	414.4	416.8
120°	251.3	287.8	321.3	348.1	370.7	385.2	393.5	395.9
122.5°	244.8	278.6	308.4	333.5	353.6	367.0	375.2	377.4
125°	235.2	266.2	292.7	314.6	331.7	344.1	350.9	353.9
127.5°	225.5	254.4	279.1	299.6	315.1	326.1	332.4	333.8
130°	219.4	246.2	269.9	289.7	304.9	315.0	321.1	322.9
132.5°	213.3	238.4	259.9	279.0	294.2	304.2	309.8	311.9
135°	205.4	226.4	245.9	263.2	276.6	286.6	292.1	293.9
137.5°	198.7	215.7	231.9	246.6	258.6	267.7	272.8	274.7
140°	195.0	209.3	223.3	236.1	247.4	255.3	259.8	261.4
142.5°	191.9	204.0	216.0	227.1	236.7	243.4	247.7	249.0
145°	187.8	197.2	206.6	214.8	222.1	227.3	230.7	231.9
147.5°	183.8	191.5	198.8	205.0	210.8	214.9	216.8	217.4
150°	181.7	188.4	194.2	199.6	204.1	207.8	209.1	209.3
152.5°	179.3	185.2	190.5	194.8	198.5	201.5	202.7	203.0
155°	175.6	180.5	184.7	188.0	191.1	193.2	194.2	194.4
157.5°	171.9	175.9	179.3	181.8	184.3	186.0	186.8	186.8
160°	169.5	172.5	175.6	177.7	179.9	181.3	181.9	181.7
162.5°	166.8	169.6	172.2	174.1	175.7	176.9	177.1	177.0
165°	163.1	165.2	167.0	168.6	169.8	170.4	170.4	170.4
167.5°	159.5	161.0	162.4	163.5	164.1	164.6	164.4	164.3
170°	157.6	158.5	159.5	160.1	160.7	161.0	161.0	160.7
172.5°	155.4	156.4	157.0	157.4	157.5	158.1	157.6	157.2
175°	153.1	153.1	153.7	153.7	153.7	153.9	153.3	153.1
177.5°	151.4	151.6	151.6	151.6	151.4	151.6	150.9	150.9
180°	150.9	150.9	150.9	150.9	150.9	150.9	150.9	150.9

(END OF REPORT)