

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333585-935

Luminaire Tested: **S125RDIP-S1090D365U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333585-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S1090D365U935-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 365 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4768.3 lumens
Efficiency: N/A
Efficacy: 109.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 43.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333585-935

CATALOG NUMBER: S125RDIP-S1090D365U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

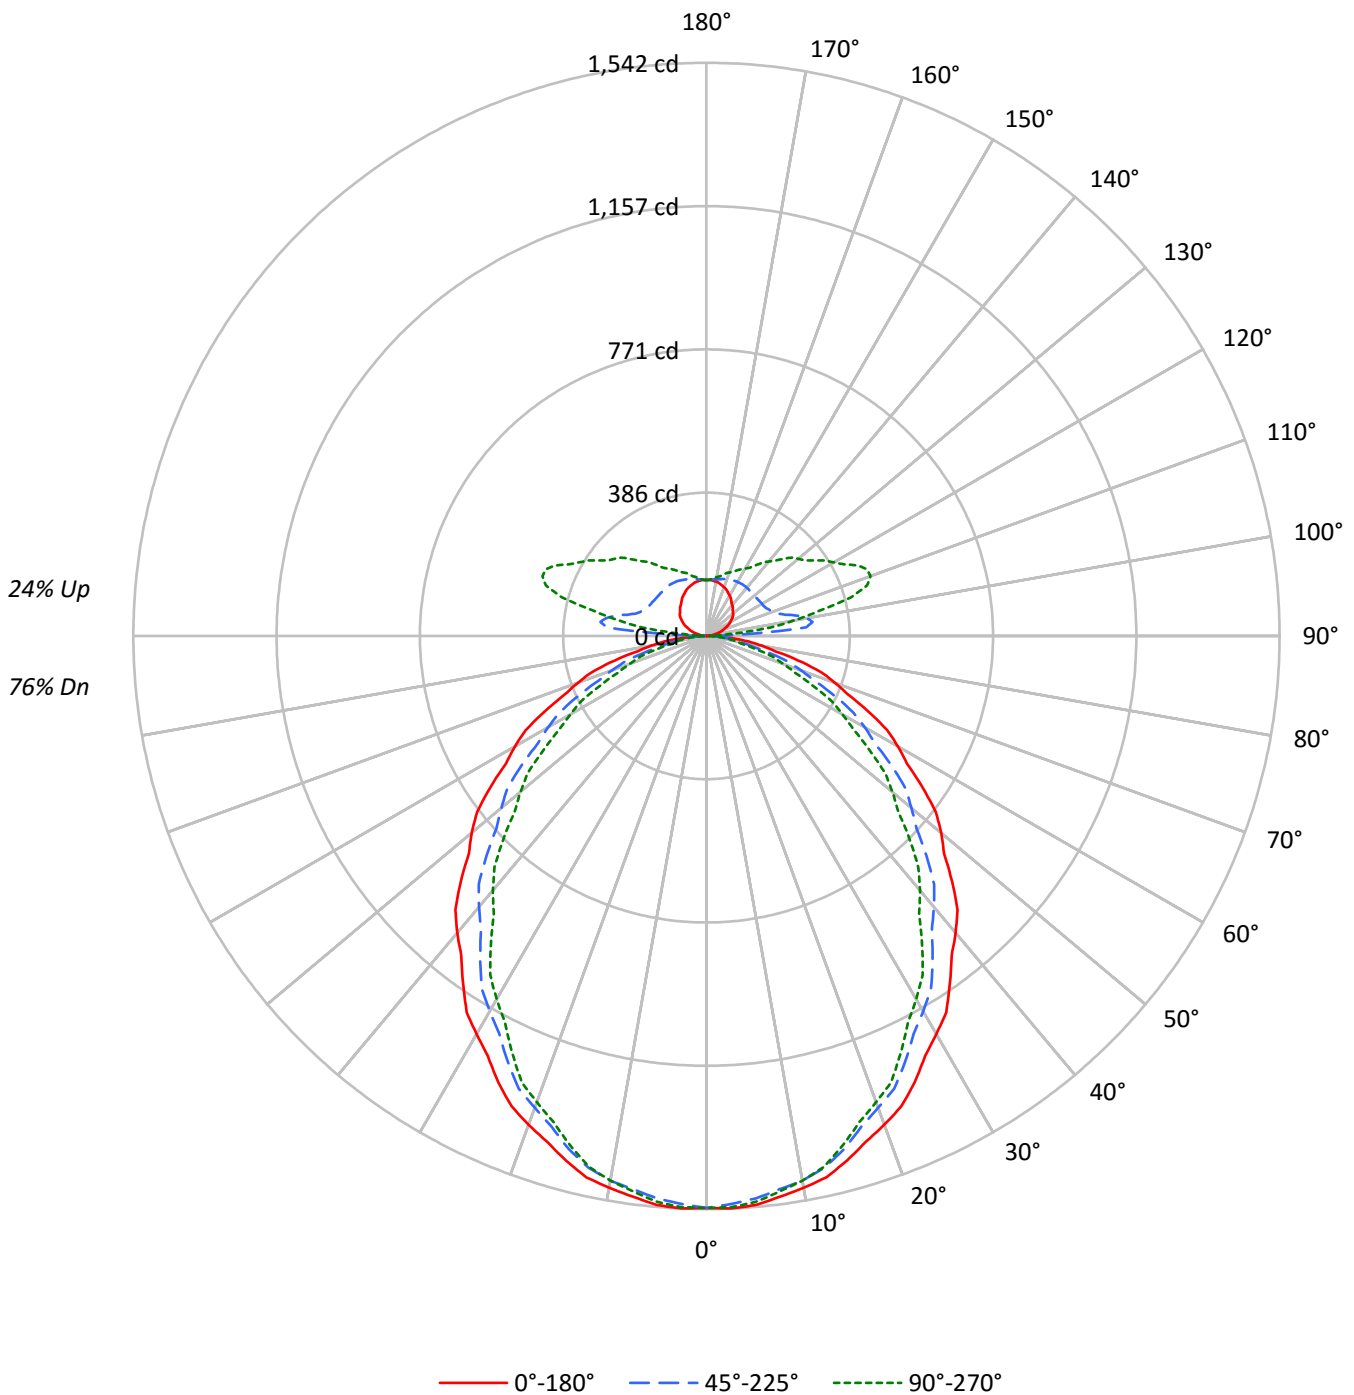



TEST NUMBER: P333585-935

CATALOG NUMBER: S125RDIP-S1090D365U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	113	113	113	113	108	108	108	108	98	98	98	89	89	89	80	80	80	76
1	104	100	96	92	99	95	92	88	87	84	81	79	77	75	72	70	69	65
2	95	87	81	76	90	84	78	73	76	72	68	70	66	63	63	61	58	55
3	87	77	70	64	83	74	67	62	68	62	58	62	57	54	56	53	50	47
4	80	69	61	54	76	66	58	53	60	54	49	55	50	46	51	47	43	40
5	73	61	53	47	70	59	51	46	54	48	43	50	45	40	46	41	38	35
6	68	55	47	41	64	53	46	40	49	43	38	45	40	36	42	37	34	31
7	63	50	42	36	60	48	41	35	45	38	34	41	36	32	38	33	30	28
8	59	46	38	32	56	44	37	32	41	35	30	38	32	28	35	30	27	25
9	55	42	34	29	52	41	33	28	38	31	27	35	30	26	32	28	24	22
10	51	39	31	26	49	37	30	26	35	29	25	32	27	23	30	26	22	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9939	9939	9939
5°	9962	9848	9909
10°	9886	9757	9757
15°	9768	9559	9482
20°	9619	9283	9171
25°	9443	9012	8813
30°	9223	8694	8416
35°	8999	8367	7972
40°	8790	8025	7535
45°	8535	7644	7059
50°	8280	7229	6563
55°	7983	6831	6033
60°	7687	6350	5465
65°	7335	5790	4814
70°	6936	5093	4147
75°	6381	4292	3451
80°	5620	3373	2894
85°	4735	2757	2586



TEST NUMBER: P333585-935

CATALOG NUMBER: S125RDIP-S1090D365U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.7	3.0
10°-20°	404.4	8.5
20°-30°	586.4	12.3
30°-40°	668.3	14.0
40°-50°	651.5	13.7
50°-60°	548.4	11.5
60°-70°	384.4	8.1
70°-80°	197.6	4.1
80°-90°	50.7	1.1
90°-100°	109.4	2.3
100°-110°	235.2	4.9
110°-120°	220.7	4.6
120°-130°	178.9	3.8
130°-140°	143.5	3.0
140°-150°	108.3	2.3
150°-160°	76.2	1.6
160°-170°	44.9	0.9
170°-180°	14.6	0.3
0°-30°	1135.5	23.8
0°-40°	1803.9	37.8
0°-60°	3003.7	63.0
0°-90°	3636.5	76.3
90°-120°	565.3	11.9
90°-150°	996.0	20.9
90°-180°	1132.0	23.7
0°-180°	4768.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1539	1539	1539	1539	1539	
5°	1537	1532	1519	1530	1528	146
15°	1461	1453	1430	1428	1418	412
25°	1325	1306	1265	1250	1237	609
35°	1141	1112	1061	1028	1011	714
45°	934	899	837	792	773	721
55°	709	670	607	556	536	634
65°	480	439	379	334	315	475
75°	256	220	172	147	138	271
85°	64	44	37	36	35	72
90°	0	3	5	6	7	4
95°	10	30	270	122	72	11
105°	34	48	221	434	403	36
115°	62	74	177	382	449	60
125°	85	100	170	304	354	76
135°	100	120	169	255	294	77
145°	116	133	169	211	232	73
155°	133	143	165	186	194	61
165°	145	149	158	168	170	41
175°	151	151	152	154	153	14
180°	151	151	151	151	151	



TEST NUMBER: P333585-935

CATALOG NUMBER: S125RDIP-S1090D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0
2.5°	1541.7	1541.1	1540.5	1539.8	1539.2	1537.9	1535.9	1533.8	1531.7	1529.7	1531.7
5°	1536.6	1535.6	1534.6	1533.5	1532.5	1530.5	1527.7	1524.8	1522.0	1519.1	1521.7
7.5°	1521.5	1520.5	1519.5	1518.5	1517.5	1515.4	1511.9	1508.6	1505.1	1501.8	1503.6
10°	1507.5	1506.8	1506.0	1505.2	1504.4	1502.3	1498.7	1495.0	1491.4	1487.8	1488.6
12.5°	1491.7	1490.7	1489.8	1488.8	1487.8	1484.9	1480.1	1475.2	1470.3	1465.4	1466.0
15°	1461.0	1459.5	1457.9	1456.4	1454.8	1451.4	1446.0	1440.5	1435.1	1429.7	1429.4
17.5°	1426.4	1424.0	1421.7	1419.3	1416.9	1412.3	1405.5	1398.7	1391.8	1385.0	1383.7
20°	1399.5	1396.9	1394.3	1391.7	1389.1	1383.7	1375.4	1367.2	1358.9	1350.7	1349.4
22.5°	1369.7	1367.1	1364.5	1361.9	1359.3	1353.8	1345.1	1336.4	1327.7	1319.0	1316.5
25°	1325.1	1321.2	1317.3	1313.5	1309.6	1302.9	1293.3	1283.8	1274.2	1264.6	1261.3
27.5°	1273.9	1269.2	1264.5	1259.8	1255.1	1247.7	1237.4	1227.2	1216.9	1206.7	1202.0
30°	1236.7	1231.8	1226.9	1222.0	1217.1	1209.2	1198.3	1187.5	1176.6	1165.8	1159.9
32.5°	1200.4	1194.7	1189.0	1183.3	1177.5	1169.2	1158.0	1147.0	1135.9	1124.9	1118.4
35°	1141.4	1135.2	1129.0	1122.8	1116.6	1107.7	1096.1	1084.4	1072.8	1061.2	1053.7
37.5°	1083.5	1076.0	1068.4	1060.9	1053.3	1043.6	1031.6	1019.6	1007.6	995.7	986.6
40°	1042.6	1034.8	1027.1	1019.3	1011.6	1001.5	989.1	976.7	964.3	951.9	942.1
42.5°	999.8	991.9	984.0	975.9	968.0	957.6	944.8	932.0	919.2	906.4	897.0
45°	934.5	927.0	919.5	912.1	904.6	893.7	879.5	865.3	851.1	836.9	826.6
47.5°	866.9	858.9	851.0	843.2	835.3	824.1	809.9	795.5	781.2	766.9	756.2
50°	824.1	815.5	807.0	798.5	790.0	778.3	763.6	748.9	734.2	719.5	708.6
52.5°	777.6	768.9	760.1	751.4	742.7	731.3	717.5	703.5	689.7	675.8	664.1
55°	709.0	700.8	692.5	684.2	676.0	664.6	650.1	635.7	621.2	606.7	595.1
57.5°	639.7	630.9	622.1	613.2	604.4	593.1	579.1	565.2	551.2	537.3	525.9
60°	595.1	586.1	577.0	568.0	559.0	547.4	533.5	519.5	505.6	491.6	480.3
62.5°	547.7	539.1	530.5	521.8	513.2	501.8	487.7	473.5	459.3	445.1	434.6
65°	480.0	471.2	462.4	453.7	444.9	433.7	420.0	406.3	392.6	378.9	368.6
67.5°	412.8	404.1	395.3	386.5	377.7	366.8	353.6	340.5	327.4	314.3	304.9
70°	367.3	358.5	349.7	341.0	332.2	321.3	308.4	295.5	282.6	269.7	261.7
72.5°	322.7	314.1	305.5	297.0	288.3	278.0	266.0	253.8	241.8	229.7	222.3
75°	255.7	248.0	240.2	232.5	224.7	215.4	204.6	193.7	182.9	172.0	166.3
77.5°	189.2	183.0	176.8	170.7	164.5	157.0	148.4	139.7	131.0	122.3	118.3
80°	151.1	144.9	138.7	132.5	126.3	119.6	112.4	105.1	97.9	90.7	88.3
82.5°	113.9	108.3	102.7	97.2	91.6	86.4	81.4	76.4	71.5	66.5	65.4
85°	63.9	59.2	54.6	49.9	45.3	42.4	41.1	39.8	38.5	37.2	36.9
87.5°	21.4	20.1	18.8	17.4	16.1	15.4	15.2	15.2	15.0	14.9	15.0
90°	0.3	0.6	1.2	1.8	2.4	3.0	3.4	4.0	4.2	4.9	5.2
92.5°	3.7	4.5	7.1	10.8	16.1	25.0	41.6	69.4	99.7	98.1	79.4
95°	10.1	10.3	12.7	16.1	22.8	36.5	69.1	136.0	220.0	269.6	263.8
97.5°	16.7	17.0	18.8	22.1	28.2	38.0	59.5	108.6	196.5	287.9	333.8
100°	21.3	21.9	23.2	26.4	32.3	41.4	59.1	98.6	175.3	274.7	350.9
102.5°	26.4	26.8	27.7	31.3	36.7	45.5	61.2	94.5	159.2	251.7	340.6
105°	34.4	34.4	35.9	38.9	43.8	52.3	65.7	92.8	143.6	220.6	308.0
107.5°	42.2	42.8	44.3	46.8	51.8	59.5	72.4	95.6	137.1	199.2	274.6
110°	47.8	48.4	49.6	52.3	56.9	64.8	77.3	98.3	135.1	189.2	255.6



TEST NUMBER: P333585-935

CATALOG NUMBER: S125RDIP-S1090D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	53.4	54.0	54.9	57.7	62.3	69.9	81.9	101.7	135.1	183.4	241.5
115°	61.5	62.1	63.0	65.7	70.3	77.9	89.2	106.8	136.0	177.1	226.1
117.5°	68.8	69.7	70.7	73.4	78.6	85.9	96.6	112.6	138.0	174.0	216.9
120°	73.6	74.6	75.8	78.5	83.7	91.3	101.9	116.6	140.0	172.5	211.8
122.5°	78.8	79.4	80.4	83.2	88.8	96.4	107.0	120.9	141.6	171.3	207.4
125°	85.2	85.8	87.3	90.1	95.8	103.8	113.8	126.9	144.6	169.8	201.5
127.5°	90.2	91.2	93.1	96.6	102.7	110.6	120.3	132.3	147.7	169.1	196.0
130°	93.4	94.4	96.8	100.7	107.1	115.0	124.4	136.0	149.7	168.6	192.3
132.5°	95.8	97.0	100.0	104.4	111.0	118.9	128.4	139.2	151.9	168.6	189.4
135°	99.8	101.0	104.7	109.5	116.0	124.2	133.5	143.6	154.9	168.6	185.9
137.5°	104.8	105.7	109.1	114.0	120.3	128.7	137.3	146.9	157.6	168.9	182.8
140°	107.7	108.7	112.3	117.2	123.0	131.1	140.0	149.1	158.9	169.2	181.3
142.5°	111.2	111.8	115.2	120.1	125.6	133.4	141.6	150.3	159.5	169.4	180.1
145°	116.2	116.8	119.9	124.2	129.7	136.6	144.6	152.1	160.3	169.2	178.3
147.5°	121.6	121.9	124.6	128.5	133.3	139.4	146.4	153.3	160.7	168.4	176.4
150°	124.8	125.4	127.5	131.5	135.7	140.9	147.6	153.9	160.7	167.6	175.0
152.5°	128.2	128.5	130.4	133.9	137.9	142.6	148.8	154.5	160.4	166.7	173.2
155°	132.7	132.7	134.5	137.5	140.6	144.8	150.0	154.9	159.7	165.0	170.4
157.5°	136.7	136.6	138.1	140.7	143.4	146.6	151.0	155.2	158.9	163.1	167.7
160°	139.4	139.1	140.3	142.4	144.8	147.6	151.5	155.2	158.3	161.9	165.6
162.5°	141.5	141.3	142.5	144.4	146.3	148.5	152.1	155.0	157.5	160.4	163.6
165°	144.8	144.2	145.2	146.6	147.9	149.7	152.1	154.5	156.4	158.3	160.7
167.5°	147.1	146.7	147.3	148.1	149.0	150.2	152.1	153.9	154.7	156.1	157.8
170°	148.5	148.2	148.5	149.1	149.7	150.6	152.1	153.3	153.9	154.9	156.1
172.5°	149.5	149.0	149.2	149.8	150.2	150.6	151.9	152.9	153.0	153.4	154.4
175°	150.6	150.0	150.3	150.6	150.6	150.6	151.5	152.1	151.9	151.9	152.1
177.5°	151.2	150.7	150.7	150.9	150.7	150.7	151.2	151.4	150.9	150.9	151.2
180°	150.9	150.9	150.9	150.9	150.9	150.9	150.9	150.9	150.9	150.9	150.9



TEST NUMBER: P333585-935

CATALOG NUMBER: S125RDIP-S1090D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0
2.5°	1533.8	1535.9	1537.9	1538.8	1538.6	1538.4	1538.2	1538.0
5°	1524.3	1526.9	1529.5	1530.5	1530.0	1529.5	1529.0	1528.4
7.5°	1505.4	1507.2	1509.0	1509.6	1509.0	1508.5	1507.9	1507.3
10°	1489.4	1490.1	1490.9	1490.9	1490.1	1489.4	1488.6	1487.8
12.5°	1466.6	1467.1	1467.7	1467.4	1466.2	1465.1	1463.9	1462.7
15°	1429.2	1428.9	1428.7	1427.4	1425.0	1422.7	1420.4	1418.1
17.5°	1382.4	1381.1	1379.8	1378.3	1376.3	1374.4	1372.5	1370.6
20°	1348.1	1346.8	1345.5	1343.7	1341.4	1339.0	1336.7	1334.4
22.5°	1314.0	1311.4	1308.9	1306.7	1304.8	1302.9	1300.9	1299.0
25°	1257.9	1254.6	1251.2	1248.1	1245.3	1242.4	1239.6	1236.7
27.5°	1197.3	1192.7	1187.9	1184.2	1181.5	1178.7	1176.0	1173.3
30°	1153.9	1148.0	1142.0	1137.9	1135.6	1133.2	1130.9	1128.6
32.5°	1111.8	1105.2	1098.6	1093.9	1091.0	1088.0	1085.0	1082.1
35°	1046.2	1038.7	1031.2	1025.7	1022.1	1018.5	1014.9	1011.2
37.5°	977.7	968.7	959.7	953.5	949.9	946.4	942.9	939.4
40°	932.3	922.5	912.7	906.2	903.1	900.0	896.9	893.8
42.5°	887.6	878.1	868.7	861.8	857.2	852.7	848.2	843.6
45°	816.2	805.9	795.6	788.4	784.5	780.7	776.8	772.9
47.5°	745.6	734.9	724.4	716.9	712.6	708.3	704.0	699.7
50°	697.8	686.9	676.1	668.7	664.9	661.0	657.1	653.2
52.5°	652.5	640.8	629.0	621.3	617.4	613.5	609.7	605.8
55°	583.5	571.9	560.3	552.3	548.2	544.1	539.9	535.8
57.5°	514.5	503.2	491.8	484.2	480.6	476.9	473.2	469.6
60°	468.9	457.5	446.2	438.6	434.7	430.8	427.0	423.1
62.5°	424.1	413.5	403.0	395.8	391.9	388.1	384.2	380.3
65°	358.3	347.9	337.6	330.5	326.6	322.7	318.8	315.0
67.5°	295.4	285.9	276.5	270.2	267.1	264.0	260.9	257.8
70°	253.7	245.6	237.6	232.0	228.9	225.8	222.7	219.6
72.5°	214.9	207.5	200.1	195.4	193.3	191.2	189.2	187.1
75°	160.7	155.0	149.3	145.5	143.7	141.9	140.1	138.3
77.5°	114.3	110.4	106.3	103.7	102.4	101.0	99.7	98.3
80°	86.0	83.7	81.4	79.9	79.4	78.9	78.4	77.8
82.5°	64.3	63.2	62.2	61.5	61.1	60.8	60.5	60.2
85°	36.7	36.4	36.2	35.9	35.6	35.4	35.1	34.9
87.5°	15.1	15.1	15.2	15.2	15.0	14.8	14.6	14.4
90°	5.5	5.8	6.1	6.7	6.7	6.7	7.0	7.0
92.5°	53.9	39.1	29.4	25.0	21.1	20.3	19.9	19.4
95°	218.8	172.5	135.1	109.5	87.9	78.8	76.4	71.5
97.5°	325.8	293.4	256.9	221.4	202.6	185.5	176.8	172.8
100°	374.3	359.4	328.0	296.4	275.3	253.5	242.2	237.4
102.5°	390.5	399.8	384.8	363.3	340.9	325.3	313.1	309.4
105°	381.0	422.7	436.0	432.7	422.9	412.9	406.8	403.2
107.5°	346.6	402.3	436.6	452.5	457.4	457.4	455.4	453.0
110°	321.3	379.2	422.1	447.9	461.6	467.4	469.5	469.5



TEST NUMBER: P333585-935

CATALOG NUMBER: S125RDIP-S1090D365U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	301.4	356.3	399.7	430.2	450.1	460.1	465.4	467.6
115°	276.3	323.5	365.2	398.3	422.1	436.6	445.1	449.1
117.5°	260.1	300.7	336.7	367.1	390.8	406.0	414.4	416.8
120°	251.3	287.8	321.3	348.1	370.7	385.2	393.5	395.9
122.5°	244.8	278.6	308.4	333.5	353.6	367.0	375.2	377.4
125°	235.2	266.2	292.7	314.6	331.7	344.1	350.9	353.9
127.5°	225.5	254.4	279.1	299.6	315.1	326.1	332.4	333.8
130°	219.4	246.2	269.9	289.7	304.9	315.0	321.1	322.9
132.5°	213.3	238.4	259.9	279.0	294.2	304.2	309.8	311.9
135°	205.4	226.4	245.9	263.2	276.6	286.6	292.1	293.9
137.5°	198.7	215.7	231.9	246.6	258.6	267.7	272.8	274.7
140°	195.0	209.3	223.3	236.1	247.4	255.3	259.8	261.4
142.5°	191.9	204.0	216.0	227.1	236.7	243.4	247.7	249.0
145°	187.8	197.2	206.6	214.8	222.1	227.3	230.7	231.9
147.5°	183.8	191.5	198.8	205.0	210.8	214.9	216.8	217.4
150°	181.7	188.4	194.2	199.6	204.1	207.8	209.1	209.3
152.5°	179.3	185.2	190.5	194.8	198.5	201.5	202.7	203.0
155°	175.6	180.5	184.7	188.0	191.1	193.2	194.2	194.4
157.5°	171.9	175.9	179.3	181.8	184.3	186.0	186.8	186.8
160°	169.5	172.5	175.6	177.7	179.9	181.3	181.9	181.7
162.5°	166.8	169.6	172.2	174.1	175.7	176.9	177.1	177.0
165°	163.1	165.2	167.0	168.6	169.8	170.4	170.4	170.4
167.5°	159.5	161.0	162.4	163.5	164.1	164.6	164.4	164.3
170°	157.6	158.5	159.5	160.1	160.7	161.0	161.0	160.7
172.5°	155.4	156.4	157.0	157.4	157.5	158.1	157.6	157.2
175°	153.1	153.1	153.7	153.7	153.7	153.9	153.3	153.1
177.5°	151.4	151.6	151.6	151.6	151.4	151.6	150.9	150.9
180°	150.9	150.9	150.9	150.9	150.9	150.9	150.9	150.9

(END OF REPORT)