

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333597-935

Luminaire Tested: **S125RDIP-S1090D810U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333597-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S1090D810U935-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 810 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6141.5 lumens
Efficiency: N/A
Efficacy: 112.9 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333597-935

CATALOG NUMBER: S125RDIP-S1090D810U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

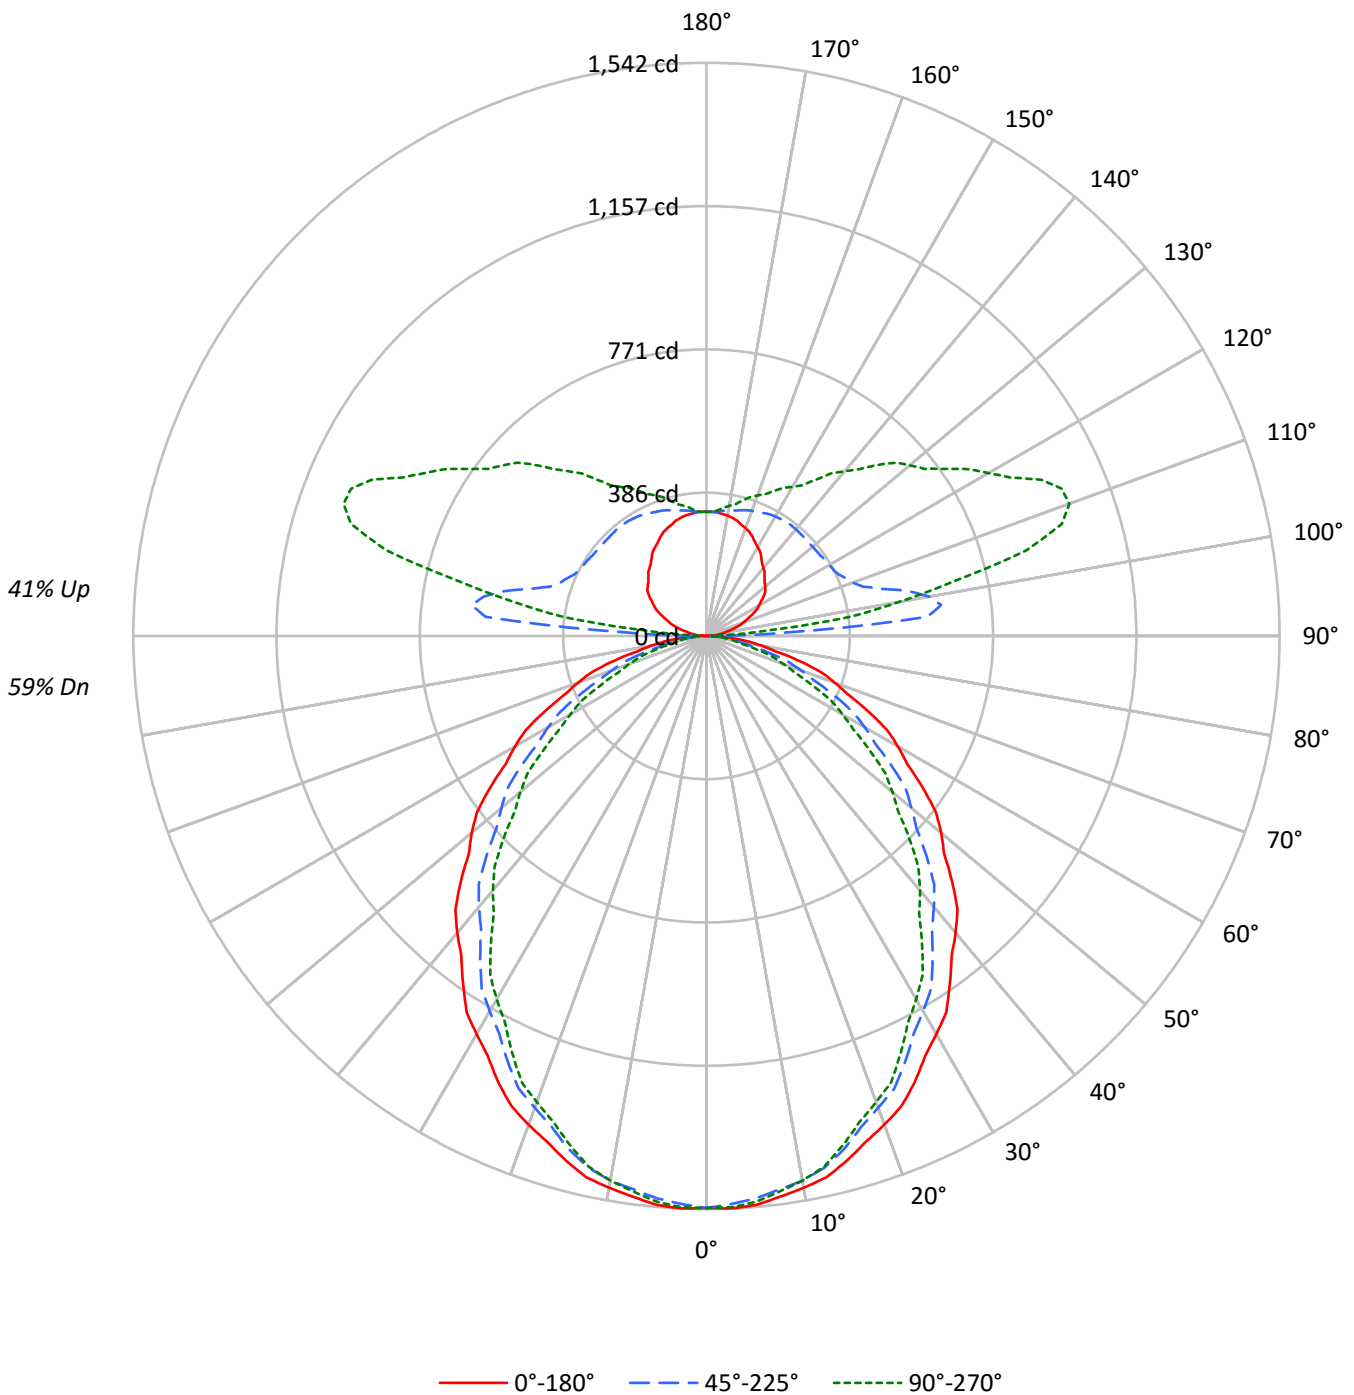



TEST NUMBER: P333597-935

CATALOG NUMBER: S125RDIP-S1090D810U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	65	65	65	59
1	100	96	92	89	93	90	86	83	78	76	73	67	66	64	58	56	55	50
2	91	84	78	73	85	79	73	69	69	65	61	59	56	54	51	49	47	43
3	84	74	67	61	78	69	63	58	61	56	52	53	49	46	45	43	40	36
4	77	66	58	52	71	62	55	49	54	49	44	47	43	39	41	37	35	31
5	70	59	51	45	65	55	48	42	49	43	38	42	38	34	37	33	30	27
6	65	53	45	39	60	50	42	37	44	38	34	38	34	30	33	30	27	24
7	60	48	40	34	56	45	38	33	40	34	30	35	30	27	31	27	24	22
8	56	43	36	30	52	41	34	29	36	31	27	32	27	24	28	24	22	19
9	52	40	32	27	49	38	31	26	34	28	24	30	25	22	26	22	20	17
10	49	37	29	24	46	35	28	24	31	25	22	27	23	20	24	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9939	9939	9939
5°	9962	9848	9909
10°	9886	9757	9757
15°	9768	9559	9482
20°	9619	9283	9171
25°	9443	9012	8813
30°	9223	8694	8416
35°	8999	8367	7972
40°	8790	8025	7535
45°	8535	7644	7059
50°	8280	7229	6563
55°	7983	6831	6033
60°	7687	6350	5465
65°	7335	5790	4814
70°	6936	5093	4147
75°	6381	4292	3451
80°	5620	3373	2894
85°	4735	2757	2586



TEST NUMBER: P333597-935

CATALOG NUMBER: S125RDIP-S1090D810U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	144.7	2.4
10°-20°	404.4	6.6
20°-30°	586.4	9.5
30°-40°	668.3	10.9
40°-50°	651.5	10.6
50°-60°	548.4	8.9
60°-70°	384.4	6.3
70°-80°	197.6	3.2
80°-90°	51.8	0.8
90°-100°	242.0	3.9
100°-110°	520.3	8.5
110°-120°	488.3	8.0
120°-130°	395.7	6.4
130°-140°	317.6	5.2
140°-150°	239.7	3.9
150°-160°	168.7	2.7
160°-170°	99.4	1.6
170°-180°	32.3	0.5
0°-30°	1135.5	18.5
0°-40°	1803.9	29.4
0°-60°	3003.7	48.9
0°-90°	3637.5	59.2
90°-120°	1250.6	20.4
90°-150°	2203.6	35.9
90°-180°	2504.0	40.8
0°-180°	6141.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1539	1539	1539	1539	1539	
5°	1537	1532	1519	1530	1528	146
15°	1461	1453	1430	1428	1418	412
25°	1325	1306	1265	1250	1237	609
35°	1141	1112	1061	1028	1011	714
45°	934	899	837	792	773	721
55°	709	670	607	556	536	634
65°	480	439	379	334	315	475
75°	256	220	172	147	138	271
85°	64	44	37	36	35	72
90°	1	6	11	14	16	4
95°	22	66	596	271	158	24
105°	76	106	488	961	892	80
115°	136	164	392	845	994	134
125°	188	221	376	672	783	167
135°	221	266	373	563	650	171
145°	257	295	374	466	513	161
155°	294	316	365	412	430	135
165°	320	329	350	371	377	90
175°	333	333	336	340	339	32
180°	334	334	334	334	334	



TEST NUMBER: P333597-935

CATALOG NUMBER: S125RDIP-S1090D810U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0
2.5°	1541.7	1541.1	1540.5	1539.8	1539.2	1537.9	1535.9	1533.8	1531.7	1529.7	1531.7
5°	1536.6	1535.6	1534.6	1533.5	1532.5	1530.5	1527.7	1524.8	1522.0	1519.1	1521.7
7.5°	1521.5	1520.5	1519.5	1518.5	1517.5	1515.4	1511.9	1508.6	1505.1	1501.8	1503.6
10°	1507.5	1506.8	1506.0	1505.2	1504.4	1502.3	1498.7	1495.0	1491.4	1487.8	1488.6
12.5°	1491.7	1490.7	1489.8	1488.8	1487.8	1484.9	1480.1	1475.2	1470.3	1465.4	1466.0
15°	1461.0	1459.5	1457.9	1456.4	1454.8	1451.4	1446.0	1440.5	1435.1	1429.7	1429.4
17.5°	1426.4	1424.0	1421.7	1419.3	1416.9	1412.3	1405.5	1398.7	1391.8	1385.0	1383.7
20°	1399.5	1396.9	1394.3	1391.7	1389.1	1383.7	1375.4	1367.2	1358.9	1350.7	1349.4
22.5°	1369.7	1367.1	1364.5	1361.9	1359.3	1353.8	1345.1	1336.4	1327.7	1319.0	1316.5
25°	1325.1	1321.2	1317.3	1313.5	1309.6	1302.9	1293.3	1283.8	1274.2	1264.6	1261.3
27.5°	1273.9	1269.2	1264.5	1259.8	1255.1	1247.7	1237.4	1227.2	1216.9	1206.7	1202.0
30°	1236.7	1231.8	1226.9	1222.0	1217.1	1209.2	1198.3	1187.5	1176.6	1165.8	1159.9
32.5°	1200.4	1194.7	1189.0	1183.3	1177.5	1169.2	1158.0	1147.0	1135.9	1124.9	1118.4
35°	1141.4	1135.2	1129.0	1122.8	1116.6	1107.7	1096.1	1084.4	1072.8	1061.2	1053.7
37.5°	1083.5	1076.0	1068.4	1060.9	1053.3	1043.6	1031.6	1019.6	1007.6	995.7	986.6
40°	1042.6	1034.8	1027.1	1019.3	1011.6	1001.5	989.1	976.7	964.3	951.9	942.1
42.5°	999.8	991.9	984.0	975.9	968.0	957.6	944.8	932.0	919.2	906.4	897.0
45°	934.5	927.0	919.5	912.1	904.6	893.7	879.5	865.3	851.1	836.9	826.6
47.5°	866.9	858.9	851.0	843.2	835.3	824.1	809.9	795.5	781.2	766.9	756.2
50°	824.1	815.5	807.0	798.5	790.0	778.3	763.6	748.9	734.2	719.5	708.6
52.5°	777.6	768.9	760.1	751.4	742.7	731.3	717.5	703.5	689.7	675.8	664.1
55°	709.0	700.8	692.5	684.2	676.0	664.6	650.1	635.7	621.2	606.7	595.1
57.5°	639.7	630.9	622.1	613.2	604.4	593.1	579.1	565.2	551.2	537.3	525.9
60°	595.1	586.1	577.0	568.0	559.0	547.4	533.5	519.5	505.6	491.6	480.3
62.5°	547.7	539.1	530.5	521.8	513.2	501.8	487.7	473.5	459.3	445.1	434.6
65°	480.0	471.2	462.4	453.7	444.9	433.7	420.0	406.3	392.6	378.9	368.6
67.5°	412.8	404.1	395.3	386.5	377.7	366.8	353.6	340.5	327.4	314.3	304.9
70°	367.3	358.5	349.7	341.0	332.2	321.3	308.4	295.5	282.6	269.7	261.7
72.5°	322.7	314.1	305.5	297.0	288.3	278.0	266.0	253.8	241.8	229.7	222.3
75°	255.7	248.0	240.2	232.5	224.7	215.4	204.6	193.7	182.9	172.0	166.3
77.5°	189.2	183.0	176.8	170.7	164.5	157.0	148.4	139.7	131.0	122.3	118.3
80°	151.1	144.9	138.7	132.5	126.3	119.6	112.4	105.1	97.9	90.7	88.3
82.5°	113.9	108.3	102.7	97.2	91.6	86.4	81.4	76.4	71.5	66.5	65.4
85°	63.9	59.2	54.6	49.9	45.3	42.4	41.1	39.8	38.5	37.2	36.9
87.5°	21.5	20.2	19.0	17.8	16.7	16.1	16.0	16.1	16.0	16.1	16.3
90°	0.7	1.4	2.7	4.0	5.4	6.7	7.4	8.8	9.4	10.8	11.5
92.5°	8.2	10.0	15.6	23.9	35.6	55.2	92.0	153.6	220.5	217.1	175.7
95°	22.2	22.9	28.2	35.6	50.5	80.8	152.8	300.9	486.7	596.5	583.7
97.5°	36.9	37.7	41.5	48.9	62.2	84.0	131.6	240.2	434.6	637.0	738.5
100°	47.1	48.5	51.1	58.5	71.4	91.5	130.6	218.1	387.8	608.0	776.2
102.5°	58.5	59.2	61.4	69.3	81.0	100.7	135.4	209.0	352.2	556.7	753.6
105°	76.1	76.1	79.5	86.2	96.9	115.8	145.4	205.3	317.8	488.1	681.3
107.5°	93.3	94.6	97.9	103.4	114.6	131.6	160.2	211.5	303.2	440.8	607.5
110°	105.7	107.0	109.7	115.8	125.9	143.4	171.0	217.5	298.9	418.7	565.5



TEST NUMBER: P333597-935

CATALOG NUMBER: S125RDIP-S1090D810U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	118.0	119.4	121.6	127.6	137.8	154.7	181.2	225.0	298.9	405.8	534.3
115°	136.0	137.3	139.4	145.4	155.5	172.4	197.3	236.3	300.9	391.8	500.2
117.5°	152.1	154.2	156.4	162.4	173.8	190.1	213.7	249.3	305.4	385.0	479.8
120°	162.9	165.0	167.6	173.7	185.1	202.0	225.5	257.9	309.7	381.7	468.6
122.5°	174.3	175.7	177.9	183.9	196.5	213.3	236.9	267.5	313.4	379.0	458.8
125°	188.5	189.9	193.2	199.2	212.1	229.5	251.8	280.7	319.8	375.7	445.7
127.5°	199.7	201.7	206.0	213.7	227.3	244.8	266.2	292.8	326.9	374.0	433.5
130°	206.6	208.7	214.0	222.8	236.9	254.5	275.3	300.9	331.2	373.0	425.5
132.5°	212.1	214.6	221.1	230.9	245.6	263.1	284.0	307.9	336.0	373.0	419.0
135°	220.8	223.5	231.6	242.4	256.5	274.7	295.6	317.8	342.7	373.0	411.3
137.5°	231.9	233.8	241.4	252.2	266.0	284.7	303.8	325.0	348.7	373.8	404.5
140°	238.3	240.3	248.4	259.2	272.0	290.2	309.7	329.8	351.4	374.3	401.2
142.5°	245.8	247.4	254.9	265.6	277.9	295.0	313.4	332.6	353.0	374.9	398.6
145°	257.2	258.5	265.3	274.7	286.8	302.3	319.8	336.6	354.8	374.3	394.5
147.5°	269.0	269.8	275.6	284.4	294.9	308.5	323.8	339.1	355.4	372.6	390.3
150°	276.0	277.3	282.1	290.8	300.2	311.7	326.5	340.6	355.4	370.9	387.1
152.5°	283.5	284.4	288.5	296.2	305.1	315.5	329.2	341.7	354.9	368.8	383.3
155°	293.5	293.5	297.6	304.3	311.0	320.5	331.9	342.7	353.4	364.9	377.0
157.5°	302.4	302.3	305.5	311.3	317.2	324.3	334.2	343.4	351.7	360.8	371.1
160°	308.3	307.6	310.4	315.0	320.5	326.5	335.3	343.4	350.1	358.2	366.3
162.5°	313.1	312.5	315.2	319.3	323.6	328.6	336.3	342.8	348.4	354.9	361.9
165°	320.5	319.1	321.2	324.5	327.2	331.2	336.6	342.0	346.0	350.1	355.4
167.5°	325.3	324.6	325.8	327.7	329.6	332.2	336.6	340.4	342.2	345.3	349.1
170°	328.6	327.9	328.6	329.8	331.2	333.2	336.6	339.3	340.6	342.7	345.3
172.5°	330.7	329.5	330.1	331.5	332.3	333.2	336.0	338.2	338.5	339.4	341.6
175°	333.2	331.9	332.6	333.2	333.2	333.2	335.3	336.6	336.0	336.0	336.6
177.5°	334.4	333.4	333.4	333.9	333.4	333.4	334.4	335.0	333.9	333.9	334.4
180°	333.9	333.9	333.9	333.9	333.9	333.9	333.9	333.9	333.9	333.9	333.9



TEST NUMBER: P333597-935

CATALOG NUMBER: S125RDIP-S1090D810U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0	1539.0
2.5°	1533.8	1535.9	1537.9	1538.8	1538.6	1538.4	1538.2	1538.0
5°	1524.3	1526.9	1529.5	1530.5	1530.0	1529.5	1529.0	1528.4
7.5°	1505.4	1507.2	1509.0	1509.6	1509.0	1508.5	1507.9	1507.3
10°	1489.4	1490.1	1490.9	1490.9	1490.1	1489.4	1488.6	1487.8
12.5°	1466.6	1467.1	1467.7	1467.4	1466.2	1465.1	1463.9	1462.7
15°	1429.2	1428.9	1428.7	1427.4	1425.0	1422.7	1420.4	1418.1
17.5°	1382.4	1381.1	1379.8	1378.3	1376.3	1374.4	1372.5	1370.6
20°	1348.1	1346.8	1345.5	1343.7	1341.4	1339.0	1336.7	1334.4
22.5°	1314.0	1311.4	1308.9	1306.7	1304.8	1302.9	1300.9	1299.0
25°	1257.9	1254.6	1251.2	1248.1	1245.3	1242.4	1239.6	1236.7
27.5°	1197.3	1192.7	1187.9	1184.2	1181.5	1178.7	1176.0	1173.3
30°	1153.9	1148.0	1142.0	1137.9	1135.6	1133.2	1130.9	1128.6
32.5°	1111.8	1105.2	1098.6	1093.9	1091.0	1088.0	1085.0	1082.1
35°	1046.2	1038.7	1031.2	1025.7	1022.1	1018.5	1014.9	1011.2
37.5°	977.7	968.7	959.7	953.5	949.9	946.4	942.9	939.4
40°	932.3	922.5	912.7	906.2	903.1	900.0	896.9	893.8
42.5°	887.6	878.1	868.7	861.8	857.2	852.7	848.2	843.6
45°	816.2	805.9	795.6	788.4	784.5	780.7	776.8	772.9
47.5°	745.6	734.9	724.4	716.9	712.6	708.3	704.0	699.7
50°	697.8	686.9	676.1	668.7	664.9	661.0	657.1	653.2
52.5°	652.5	640.8	629.0	621.3	617.4	613.5	609.7	605.8
55°	583.5	571.9	560.3	552.3	548.2	544.1	539.9	535.8
57.5°	514.5	503.2	491.8	484.2	480.6	476.9	473.2	469.6
60°	468.9	457.5	446.2	438.6	434.7	430.8	427.0	423.1
62.5°	424.1	413.5	403.0	395.8	391.9	388.1	384.2	380.3
65°	358.3	347.9	337.6	330.5	326.6	322.7	318.8	315.0
67.5°	295.4	285.9	276.5	270.2	267.1	264.0	260.9	257.8
70°	253.7	245.6	237.6	232.0	228.9	225.8	222.7	219.6
72.5°	214.9	207.5	200.1	195.4	193.3	191.2	189.2	187.1
75°	160.7	155.0	149.3	145.5	143.7	141.9	140.1	138.3
77.5°	114.3	110.4	106.3	103.7	102.4	101.0	99.7	98.3
80°	86.0	83.7	81.4	79.9	79.4	78.9	78.4	77.8
82.5°	64.3	63.2	62.2	61.5	61.1	60.8	60.5	60.2
85°	36.7	36.4	36.2	35.9	35.6	35.4	35.1	34.9
87.5°	16.4	16.5	16.6	16.8	16.6	16.4	16.4	16.1
90°	12.1	12.8	13.4	14.8	14.8	14.8	15.5	15.5
92.5°	119.3	86.6	65.2	55.2	46.6	44.9	44.0	43.0
95°	484.1	381.7	298.9	242.4	194.6	174.4	169.0	158.2
97.5°	720.9	649.1	568.4	489.8	448.2	410.5	391.0	382.4
100°	828.0	795.0	725.7	655.7	609.2	560.8	535.9	525.1
102.5°	864.1	884.5	851.2	803.8	754.1	719.6	692.6	684.5
105°	842.8	935.1	964.8	957.3	935.7	913.5	900.1	892.0
107.5°	766.9	890.0	966.0	1001.2	1012.1	1011.9	1007.5	1002.1
110°	710.9	838.8	933.8	990.9	1021.2	1034.1	1038.8	1038.8



TEST NUMBER: P333597-935

CATALOG NUMBER: S125RDIP-S1090D810U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	666.8	788.2	884.2	951.7	995.9	1017.9	1029.6	1034.5
115°	611.3	715.7	807.9	881.2	933.8	966.0	984.9	993.7
117.5°	575.5	665.4	744.9	812.2	864.7	898.0	916.8	922.1
120°	556.0	636.9	710.9	770.2	819.9	852.3	870.5	875.8
122.5°	541.6	616.4	682.3	737.9	782.3	811.9	830.1	834.9
125°	520.4	589.1	647.6	696.1	733.8	761.4	776.2	782.9
127.5°	498.9	562.9	617.6	663.0	697.2	721.5	735.6	738.5
130°	485.3	544.7	597.1	640.9	674.6	696.8	710.2	714.3
132.5°	471.9	527.4	575.1	617.2	650.8	673.0	685.4	690.0
135°	454.4	500.8	544.0	582.3	611.9	634.1	646.3	650.3
137.5°	439.6	477.2	513.0	545.5	572.1	592.3	603.5	608.0
140°	431.5	463.1	494.1	522.4	547.3	564.8	574.9	578.2
142.5°	424.6	451.3	477.9	502.5	523.7	538.5	548.0	550.8
145°	415.3	436.3	457.1	475.3	491.5	502.9	510.3	513.0
147.5°	406.7	423.7	439.7	453.5	466.2	475.4	479.7	481.0
150°	401.9	416.7	429.5	441.6	451.8	459.8	462.5	463.1
152.5°	396.5	409.7	421.5	430.8	439.4	445.8	448.5	449.2
155°	388.5	399.2	408.6	416.0	422.8	427.5	429.5	430.2
157.5°	380.4	389.3	396.5	402.3	407.6	411.5	413.4	413.2
160°	375.0	381.7	388.5	393.1	397.9	401.2	402.6	401.9
162.5°	369.0	375.2	380.9	385.0	388.7	391.5	391.8	391.7
165°	360.8	365.6	369.6	373.0	375.7	377.0	377.0	377.0
167.5°	353.0	356.1	359.2	361.6	363.0	364.2	363.7	363.5
170°	348.7	350.8	352.8	354.1	355.4	356.1	356.1	355.4
172.5°	343.9	345.9	347.4	348.2	348.4	349.7	348.6	347.9
175°	338.6	338.6	340.0	340.0	340.0	340.6	339.3	338.6
177.5°	335.0	335.5	335.5	335.5	335.0	335.5	333.9	333.9
180°	333.9	333.9	333.9	333.9	333.9	333.9	333.9	333.9

(END OF REPORT)