

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for
Cooper Lighting Solutions
(formerly Eaton)

Brand: NEO-RAY

Report Number: P333531-935

Luminaire Tested: **S125RDIP-S610D590U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333531-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-19,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S610D590U935-4F0-1E-UDD-F4
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 590 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3874.4 lumens
Efficiency: N/A
Efficacy: 118.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 32.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333531-935

CATALOG NUMBER: S125RDIP-S610D590U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

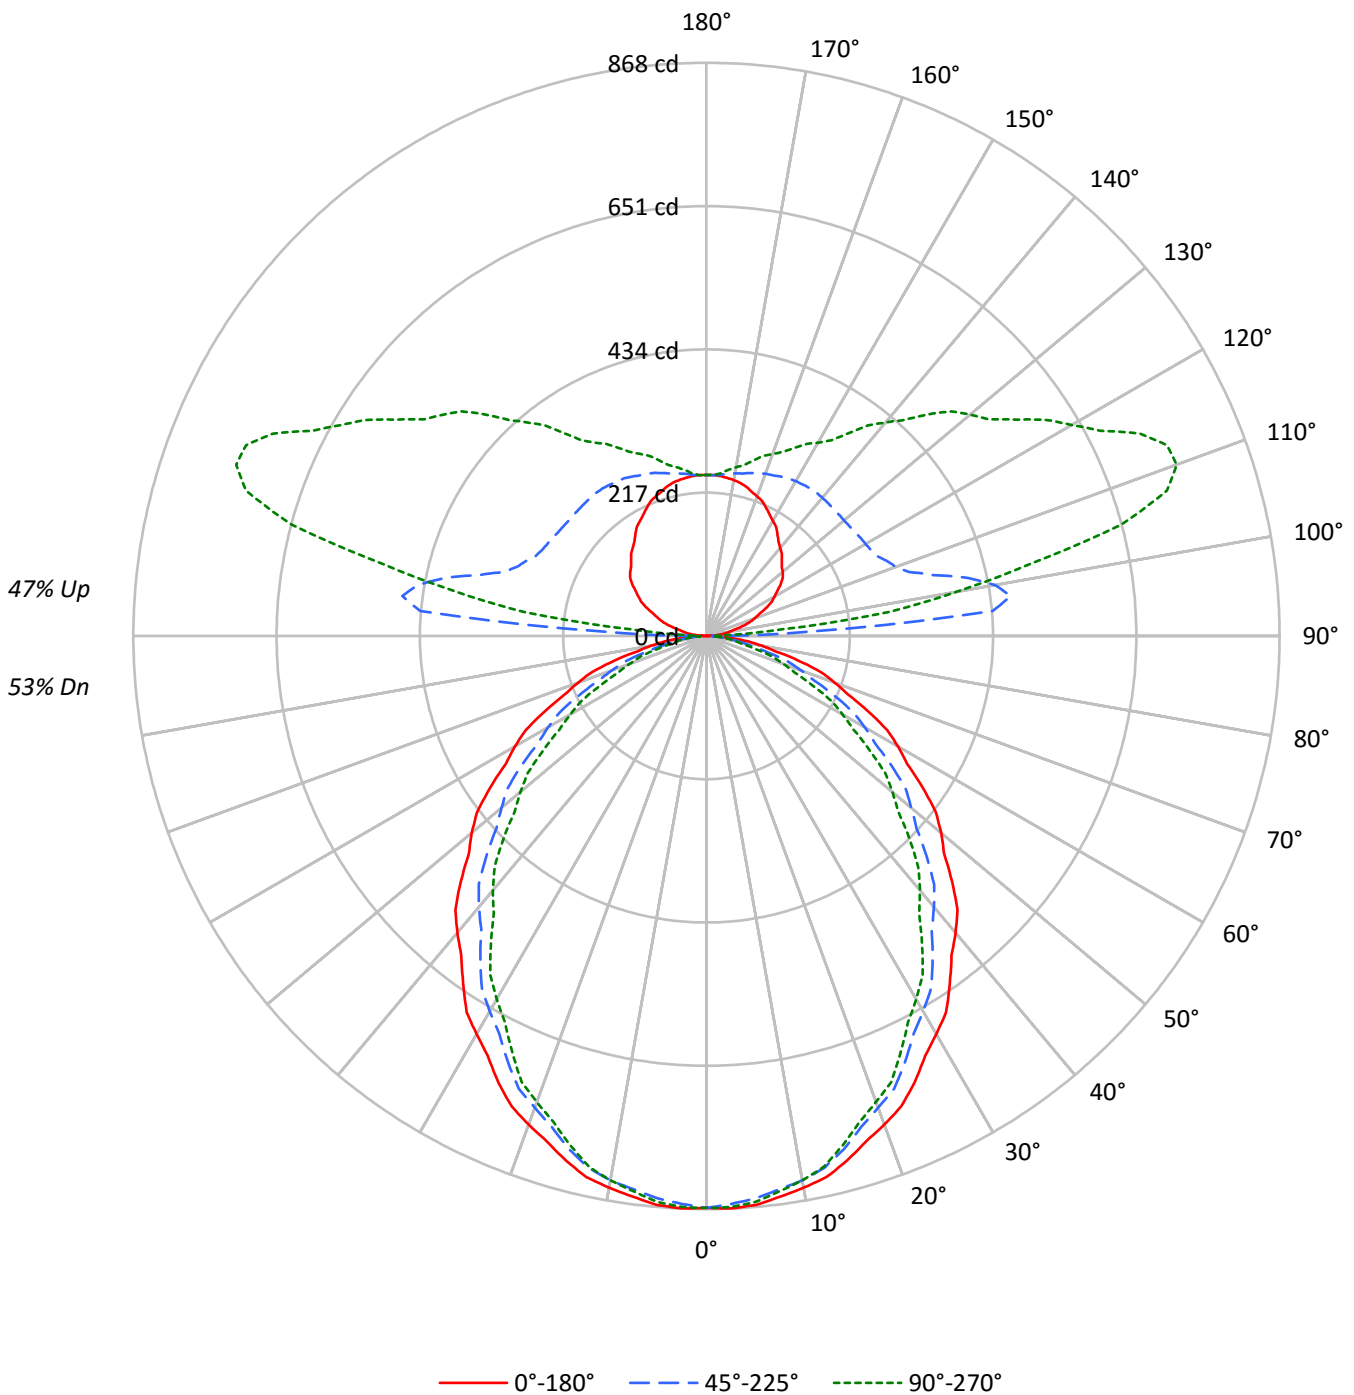



TEST NUMBER: P333531-935

CATALOG NUMBER: S125RDIP-S610D590U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	53
1	99	94	91	87	91	88	84	81	75	72	70	63	61	60	52	51	50	45
2	90	83	77	72	83	77	72	67	66	62	59	56	53	50	46	44	43	38
3	82	73	66	60	76	68	61	56	58	53	49	49	46	43	41	39	36	32
4	75	65	57	51	70	60	53	48	52	47	42	44	40	37	37	34	32	28
5	69	58	50	44	64	54	47	41	47	41	37	40	35	32	33	30	28	24
6	64	52	44	38	59	48	41	36	42	36	32	36	32	28	30	27	24	22
7	59	47	39	33	55	44	37	32	38	32	28	33	28	25	28	24	22	19
8	55	43	35	30	51	40	33	28	35	29	25	30	26	22	26	22	20	17
9	51	39	31	26	47	37	30	25	32	26	23	28	23	20	24	20	18	16
10	48	36	29	24	44	34	27	23	29	24	20	26	21	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5594	5594	5594
5°	5607	5543	5577
10°	5564	5491	5491
15°	5498	5380	5336
20°	5413	5225	5161
25°	5315	5072	4960
30°	5190	4894	4737
35°	5065	4709	4487
40°	4947	4517	4242
45°	4804	4302	3974
50°	4660	4068	3693
55°	4494	3845	3396
60°	4326	3574	3077
65°	4129	3260	2709
70°	3903	2866	2334
75°	3593	2415	1941
80°	3165	1901	1629
85°	2668	1549	1452



TEST NUMBER: P333531-935

CATALOG NUMBER: S125RDIP-S610D590U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	81.4	2.1
10°-20°	227.6	5.9
20°-30°	330.1	8.5
30°-40°	376.2	9.7
40°-50°	366.7	9.5
50°-60°	308.6	8.0
60°-70°	216.4	5.6
70°-80°	111.2	2.9
80°-90°	29.5	0.8
90°-100°	176.6	4.6
100°-110°	379.6	9.8
110°-120°	356.2	9.2
120°-130°	288.7	7.5
130°-140°	231.7	6.0
140°-150°	174.8	4.5
150°-160°	123.1	3.2
160°-170°	72.5	1.9
170°-180°	23.6	0.6
0°-30°	639.1	16.5
0°-40°	1015.3	26.2
0°-60°	1690.5	43.6
0°-90°	2047.6	52.8
90°-120°	912.4	23.5
90°-150°	1607.6	41.5
90°-180°	1827.0	47.2
0°-180°	3874.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	866	866	866	866	866	
5°	865	862	855	861	860	82
15°	822	818	805	804	798	232
25°	746	735	712	703	696	343
35°	642	626	597	579	569	402
45°	526	506	471	446	435	406
55°	399	377	342	313	302	357
65°	270	247	213	188	177	268
75°	144	124	97	83	78	152
85°	36	25	21	20	20	40
90°	0	4	8	10	11	3
95°	16	48	435	197	116	17
105°	56	78	356	701	651	59
115°	99	120	286	616	725	98
125°	138	161	274	490	571	122
135°	161	194	272	411	474	125
145°	188	215	273	340	374	118
155°	214	230	266	301	314	99
165°	234	240	255	271	275	66
175°	243	243	245	248	247	23
180°	244	244	244	244	244	



TEST NUMBER: P333531-935

CATALOG NUMBER: S125RDIP-S610D590U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2
2.5°	867.7	867.4	867.0	866.7	866.3	865.6	864.4	863.2	862.0	860.9	862.0
5°	864.8	864.3	863.7	863.1	862.5	861.4	859.8	858.2	856.6	855.0	856.4
7.5°	856.4	855.7	855.2	854.6	854.1	852.9	850.9	849.0	847.1	845.2	846.2
10°	848.4	848.0	847.6	847.1	846.7	845.5	843.4	841.5	839.4	837.3	837.8
12.5°	839.6	839.0	838.4	837.9	837.3	835.7	833.0	830.3	827.5	824.8	825.1
15°	822.3	821.4	820.5	819.7	818.8	816.8	813.8	810.7	807.7	804.6	804.5
17.5°	802.8	801.5	800.1	798.8	797.5	794.9	791.0	787.2	783.3	779.5	778.8
20°	787.6	786.2	784.7	783.3	781.8	778.8	774.1	769.5	764.8	760.2	759.4
22.5°	770.9	769.4	768.0	766.5	765.1	761.9	757.0	752.2	747.3	742.4	741.0
25°	745.8	743.6	741.4	739.3	737.0	733.2	727.9	722.5	717.1	711.7	709.9
27.5°	717.0	714.4	711.7	709.0	706.4	702.2	696.5	690.7	684.9	679.2	676.5
30°	696.0	693.3	690.5	687.8	685.0	680.5	674.4	668.4	662.3	656.2	652.8
32.5°	675.6	672.4	669.2	666.0	662.7	658.0	651.8	645.6	639.3	633.1	629.4
35°	642.4	638.9	635.4	632.0	628.4	623.5	616.9	610.4	603.8	597.3	593.1
37.5°	609.8	605.5	601.3	597.1	592.9	587.4	580.6	573.9	567.1	560.3	555.3
40°	586.8	582.5	578.1	573.7	569.4	563.7	556.7	549.7	542.8	535.8	530.3
42.5°	562.7	558.3	553.8	549.3	544.8	539.0	531.8	524.5	517.4	510.1	504.8
45°	526.0	521.8	517.5	513.3	509.1	503.0	495.0	487.0	479.0	471.0	465.2
47.5°	487.9	483.5	479.0	474.6	470.1	463.8	455.8	447.7	439.7	431.6	425.7
50°	463.8	459.0	454.2	449.4	444.6	438.1	429.8	421.5	413.2	404.9	398.8
52.5°	437.6	432.7	427.8	422.9	418.0	411.6	403.8	396.0	388.1	380.3	373.8
55°	399.1	394.4	389.8	385.1	380.5	374.0	365.9	357.7	349.7	341.5	334.9
57.5°	360.1	355.1	350.1	345.2	340.2	333.7	325.9	318.1	310.2	302.4	295.9
60°	334.9	329.8	324.8	319.7	314.6	308.2	300.2	292.4	284.6	276.7	270.4
62.5°	308.2	303.4	298.5	293.7	288.9	282.4	274.5	266.5	258.6	250.6	244.6
65°	270.2	265.3	260.3	255.4	250.4	244.1	236.3	228.7	220.9	213.3	207.4
67.5°	232.4	227.4	222.5	217.6	212.6	206.5	199.1	191.7	184.3	176.8	171.6
70°	206.7	201.8	196.8	191.9	186.9	180.8	173.6	166.3	159.0	151.8	147.2
72.5°	181.6	176.8	171.9	167.1	162.3	156.4	149.6	142.8	136.0	129.2	125.1
75°	144.0	139.6	135.2	130.9	126.5	121.2	115.1	109.0	102.9	96.8	93.6
77.5°	106.5	103.0	99.5	96.0	92.6	88.3	83.4	78.6	73.7	68.8	66.6
80°	85.1	81.5	78.1	74.6	71.1	67.3	63.2	59.2	55.1	51.1	49.7
82.5°	64.1	61.0	57.9	54.7	51.6	48.6	45.8	43.0	40.2	37.5	36.9
85°	36.0	33.3	30.7	28.2	25.5	23.8	23.1	22.4	21.7	20.9	20.8
87.5°	12.1	11.5	10.8	10.2	9.6	9.3	9.3	9.4	9.3	9.4	9.6
90°	0.5	0.9	2.0	2.9	4.0	4.9	5.4	6.4	6.9	7.8	8.4
92.5°	6.0	7.2	11.4	17.5	25.9	40.3	67.1	112.1	160.9	158.3	128.2
95°	16.2	16.7	20.7	26.0	36.9	59.0	111.5	219.6	355.1	435.1	425.9
97.5°	26.9	27.5	30.2	35.6	45.4	61.3	96.1	175.2	317.1	464.7	538.8
100°	34.4	35.4	37.4	42.7	52.1	66.8	95.3	159.1	282.9	443.5	566.3
102.5°	42.6	43.2	44.8	50.6	59.2	73.4	98.8	152.5	256.9	406.1	549.7
105°	55.5	55.5	57.9	62.9	70.7	84.5	106.1	149.8	231.8	356.1	497.1
107.5°	68.1	69.1	71.4	75.4	83.6	96.0	116.9	154.3	221.2	321.6	443.2
110°	77.1	78.1	80.1	84.5	91.9	104.6	124.8	158.6	218.1	305.5	412.6



TEST NUMBER: P333531-935

CATALOG NUMBER: S125RDIP-S610D590U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	86.2	87.1	88.7	93.2	100.5	112.9	132.2	164.1	218.1	296.1	389.8
115°	99.2	100.2	101.7	106.1	113.5	125.7	143.9	172.4	219.6	285.9	364.9
117.5°	111.0	112.4	114.1	118.5	126.8	138.7	155.9	181.8	222.7	280.9	350.1
120°	118.8	120.4	122.3	126.7	135.1	147.3	164.5	188.1	225.9	278.4	341.8
122.5°	127.1	128.2	129.8	134.1	143.4	155.6	172.8	195.2	228.7	276.6	334.8
125°	137.5	138.5	140.9	145.3	154.7	167.5	183.7	204.8	233.3	274.1	325.1
127.5°	145.7	147.1	150.3	155.9	165.8	178.6	194.2	213.6	238.5	272.9	316.3
130°	150.8	152.2	156.2	162.6	172.9	185.6	200.9	219.6	241.7	272.1	310.4
132.5°	154.7	156.6	161.3	168.5	179.2	191.9	207.2	224.6	245.2	272.1	305.7
135°	161.1	163.1	168.9	176.8	187.1	200.4	215.6	231.8	249.9	272.1	300.1
137.5°	169.2	170.7	176.2	184.0	194.1	207.8	221.6	237.1	254.4	272.7	295.1
140°	173.8	175.3	181.2	189.1	198.5	211.7	225.9	240.6	256.4	273.1	292.7
142.5°	179.3	180.5	186.0	193.8	202.8	215.2	228.7	242.6	257.5	273.5	290.8
145°	187.6	188.6	193.5	200.4	209.2	220.5	233.3	245.6	258.8	273.1	287.8
147.5°	196.2	196.8	201.0	207.4	215.1	225.1	236.3	247.4	259.3	271.8	284.7
150°	201.4	202.3	205.8	212.2	219.0	227.4	238.2	248.5	259.3	270.6	282.4
152.5°	206.9	207.4	210.5	216.1	222.6	230.1	240.1	249.3	258.9	269.1	279.7
155°	214.1	214.1	217.1	222.0	226.9	233.8	242.1	249.9	257.9	266.2	275.0
157.5°	220.6	220.5	222.9	227.1	231.4	236.6	243.8	250.5	256.6	263.2	270.7
160°	225.0	224.5	226.4	229.9	233.8	238.2	244.6	250.5	255.4	261.3	267.2
162.5°	228.5	228.0	230.0	233.0	236.2	239.8	245.4	250.1	254.3	258.9	264.1
165°	233.8	232.8	234.3	236.7	238.7	241.7	245.6	249.5	252.4	255.4	259.3
167.5°	237.3	236.9	237.7	239.1	240.5	242.3	245.6	248.3	249.7	251.9	254.7
170°	239.7	239.2	239.7	240.6	241.7	243.1	245.6	247.5	248.5	249.9	251.9
172.5°	241.3	240.4	240.8	241.9	242.5	243.1	245.2	246.8	246.9	247.6	249.2
175°	243.1	242.1	242.6	243.1	243.1	243.1	244.6	245.6	245.0	245.0	245.6
177.5°	244.0	243.2	243.2	243.6	243.2	243.2	244.0	244.4	243.6	243.6	244.0
180°	243.6	243.6	243.6	243.6	243.6	243.6	243.6	243.6	243.6	243.6	243.6



TEST NUMBER: P333531-935

CATALOG NUMBER: S125RDIP-S610D590U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2
2.5°	863.2	864.4	865.6	866.1	866.0	865.8	865.7	865.6
5°	857.9	859.4	860.8	861.4	861.1	860.8	860.6	860.2
7.5°	847.2	848.3	849.3	849.6	849.3	848.9	848.7	848.3
10°	838.2	838.6	839.1	839.1	838.6	838.2	837.8	837.3
12.5°	825.4	825.8	826.0	825.9	825.2	824.6	823.9	823.2
15°	804.3	804.2	804.1	803.3	802.0	800.7	799.4	798.1
17.5°	778.1	777.3	776.6	775.7	774.6	773.5	772.5	771.4
20°	758.7	757.9	757.2	756.2	754.9	753.6	752.3	751.0
22.5°	739.5	738.0	736.7	735.4	734.3	733.2	732.2	731.1
25°	708.0	706.1	704.2	702.4	700.9	699.2	697.7	696.0
27.5°	673.9	671.2	668.6	666.5	665.0	663.4	661.9	660.3
30°	649.5	646.1	642.7	640.4	639.1	637.8	636.5	635.2
32.5°	625.7	622.1	618.4	615.7	614.0	612.3	610.7	609.1
35°	588.8	584.6	580.4	577.3	575.2	573.2	571.2	569.1
37.5°	550.3	545.2	540.1	536.6	534.6	532.7	530.7	528.7
40°	524.7	519.2	513.7	510.1	508.3	506.5	504.8	503.1
42.5°	499.6	494.2	489.0	485.0	482.5	479.9	477.3	474.8
45°	459.3	453.6	447.7	443.8	441.6	439.4	437.2	435.1
47.5°	419.7	413.6	407.7	403.5	401.1	398.6	396.2	393.8
50°	392.7	386.6	380.5	376.3	374.2	372.0	369.8	367.6
52.5°	367.2	360.6	354.0	349.7	347.5	345.3	343.1	341.0
55°	328.4	321.8	315.3	310.9	308.6	306.3	303.9	301.6
57.5°	289.6	283.2	276.8	272.5	270.4	268.4	266.4	264.3
60°	263.9	257.5	251.2	246.8	244.7	242.5	240.3	238.2
62.5°	238.7	232.7	226.8	222.7	220.6	218.4	216.2	214.0
65°	201.6	195.8	190.0	186.0	183.8	181.7	179.4	177.3
67.5°	166.3	160.9	155.6	152.1	150.3	148.6	146.8	145.1
70°	142.8	138.3	133.7	130.6	128.9	127.2	125.4	123.6
72.5°	121.0	116.8	112.6	109.9	108.8	107.6	106.5	105.3
75°	90.4	87.2	84.0	81.9	80.9	79.9	78.9	77.8
77.5°	64.3	62.1	59.8	58.4	57.6	56.8	56.1	55.4
80°	48.4	47.1	45.8	45.0	44.7	44.4	44.1	43.8
82.5°	36.2	35.6	35.0	34.6	34.4	34.3	34.1	33.9
85°	20.7	20.5	20.3	20.2	20.1	19.9	19.8	19.6
87.5°	9.6	9.7	9.8	10.0	9.8	9.7	9.7	9.6
90°	8.9	9.3	9.8	10.8	10.8	10.8	11.3	11.3
92.5°	87.0	63.2	47.5	40.3	34.0	32.8	32.1	31.3
95°	353.1	278.4	218.1	176.8	142.0	127.2	123.3	115.5
97.5°	525.9	473.6	414.7	357.3	327.0	299.5	285.2	279.0
100°	604.1	580.1	529.4	478.4	444.4	409.1	391.0	383.1
102.5°	630.4	645.2	621.0	586.4	550.2	525.0	505.3	499.4
105°	614.9	682.2	703.8	698.4	682.7	666.5	656.7	650.7
107.5°	559.5	649.3	704.8	730.4	738.4	738.3	735.0	731.1
110°	518.7	612.0	681.2	723.0	745.0	754.4	757.9	757.9



TEST NUMBER: P333531-935

CATALOG NUMBER: S125RDIP-S610D590U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	486.5	575.1	645.1	694.3	726.6	742.6	751.1	754.7
115°	445.9	522.1	589.4	642.9	681.2	704.8	718.5	725.0
117.5°	419.8	485.4	543.4	592.5	630.9	655.2	668.8	672.8
120°	405.7	464.6	518.7	561.9	598.2	621.8	635.1	638.9
122.5°	395.1	449.7	497.8	538.3	570.7	592.3	605.5	609.1
125°	379.6	429.7	472.5	507.8	535.4	555.5	566.3	571.2
127.5°	363.9	410.7	450.6	483.7	508.6	526.4	536.6	538.8
130°	354.1	397.4	435.7	467.5	492.1	508.3	518.1	521.1
132.5°	344.3	384.8	419.6	450.3	474.8	491.0	500.1	503.4
135°	331.5	365.4	396.8	424.8	446.4	462.6	471.5	474.4
137.5°	320.7	348.1	374.3	398.0	417.3	432.1	440.2	443.5
140°	314.8	337.9	360.5	381.2	399.3	412.1	419.4	421.9
142.5°	309.7	329.2	348.7	366.6	382.0	392.8	399.8	401.8
145°	303.1	318.2	333.5	346.7	358.5	366.9	372.3	374.3
147.5°	296.8	309.1	320.8	330.8	340.2	346.8	350.0	350.9
150°	293.2	304.0	313.3	322.2	329.6	335.4	337.4	337.9
152.5°	289.3	298.9	307.5	314.4	320.6	325.2	327.2	327.7
155°	283.4	291.3	298.1	303.5	308.4	311.9	313.3	313.8
157.5°	277.5	284.0	289.3	293.5	297.3	300.1	301.5	301.4
160°	273.5	278.4	283.4	286.8	290.2	292.7	293.7	293.2
162.5°	269.2	273.8	277.8	280.9	283.6	285.7	285.9	285.8
165°	263.2	266.7	269.7	272.1	274.1	275.0	275.0	275.0
167.5°	257.5	259.8	262.1	263.8	264.8	265.7	265.3	265.2
170°	254.4	255.9	257.4	258.3	259.3	259.8	259.8	259.3
172.5°	250.9	252.4	253.4	254.0	254.3	255.1	254.3	253.8
175°	247.0	247.0	248.1	248.1	248.1	248.5	247.5	247.0
177.5°	244.4	244.8	244.8	244.8	244.4	244.8	243.6	243.6
180°	243.6	243.6	243.6	243.6	243.6	243.6	243.6	243.6

(END OF REPORT)