

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333536-935

Luminaire Tested: **S125RDIP-S610D810U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333536-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125RDIP-S610D810U935-4F0-1E-UDD-F1  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 610 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 810 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4462.2 lumens  
Efficiency: N/A  
Efficacy: 116.2 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 38.4  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333536-935

CATALOG NUMBER: S125RDIP-S610D810U935-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

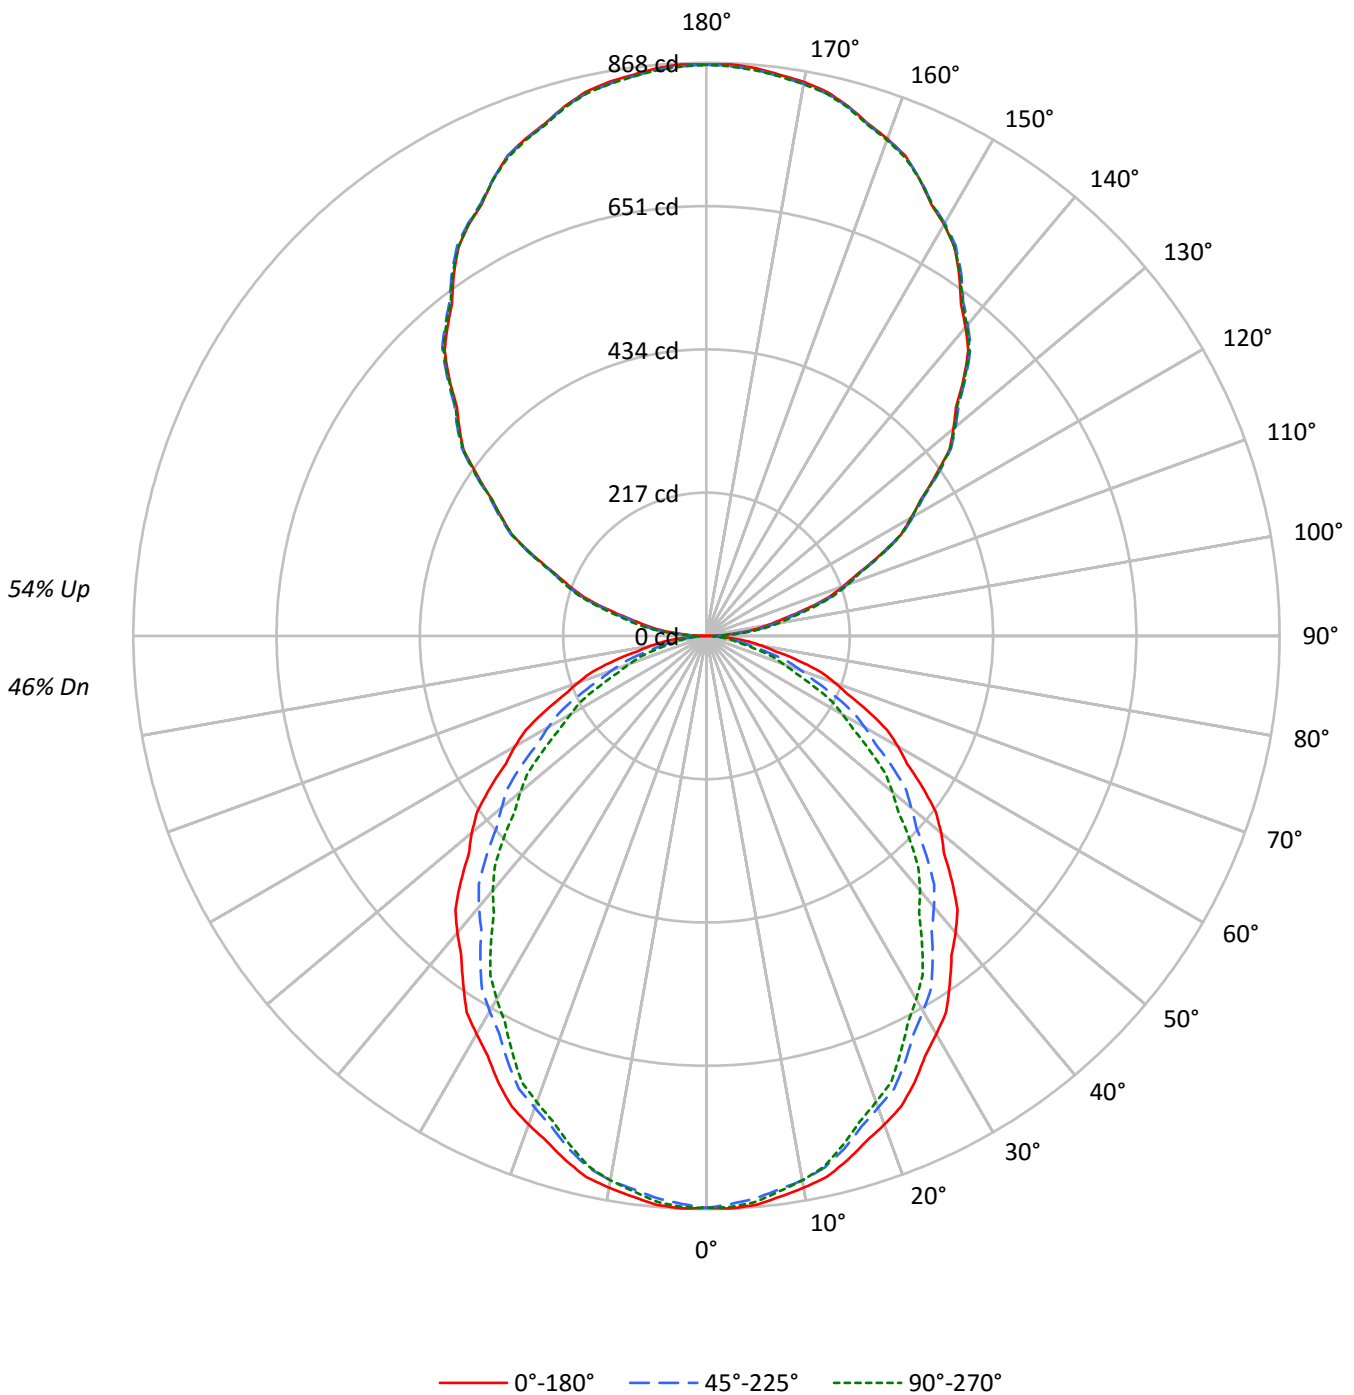



TEST NUMBER: P333536-935

CATALOG NUMBER: S125RDIP-S610D810U935-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	46
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	47	46	45	39
2	89	81	75	70	81	75	70	65	63	59	56	52	49	47	41	39	38	33
3	81	72	64	59	74	66	60	55	55	51	47	46	42	40	37	34	32	28
4	74	63	56	50	68	59	52	47	49	44	40	41	37	34	33	30	28	24
5	68	57	49	43	62	52	45	40	44	39	35	37	33	30	30	27	25	21
6	63	51	43	37	57	47	40	35	40	34	30	33	29	26	27	24	22	19
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	25	22	19	17
8	54	42	34	29	49	39	32	27	33	28	24	28	24	21	23	20	17	15
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	21	18	16	14
10	47	35	28	23	43	32	26	22	28	23	19	24	20	17	19	16	14	12

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5594	5594	5594
5°	5607	5543	5577
10°	5564	5491	5491
15°	5498	5380	5336
20°	5413	5225	5161
25°	5315	5072	4960
30°	5190	4894	4737
35°	5065	4709	4487
40°	4947	4517	4242
45°	4804	4302	3974
50°	4660	4068	3693
55°	4494	3845	3396
60°	4326	3574	3077
65°	4129	3260	2709
70°	3903	2866	2334
75°	3593	2415	1941
80°	3165	1901	1629
85°	2668	1549	1452



TEST NUMBER: P333536-935

CATALOG NUMBER: S125RDIP-S610D810U935-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	81.4	1.8
10°-20°	227.6	5.1
20°-30°	330.1	7.4
30°-40°	376.2	8.4
40°-50°	366.7	8.2
50°-60°	308.6	6.9
60°-70°	216.4	4.8
70°-80°	111.2	2.5
80°-90°	30.0	0.7
90°-100°	57.9	1.3
100°-110°	171.1	3.8
110°-120°	289.8	6.5
120°-130°	381.4	8.5
130°-140°	427.4	9.6
140°-150°	418.9	9.4
150°-160°	351.8	7.9
160°-170°	233.9	5.2
170°-180°	81.8	1.8
0°-30°	639.1	14.3
0°-40°	1015.3	22.8
0°-60°	1690.5	37.9
0°-90°	2048.1	45.9
90°-120°	518.9	11.6
90°-150°	1746.6	39.1
90°-180°	2414.0	54.1
0°-180°	4462.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	866	866	866	866	866	
5°	865	862	855	861	860	82
15°	822	818	805	804	798	232
25°	746	735	712	703	696	343
35°	642	626	597	579	569	402
45°	526	506	471	446	435	406
55°	399	377	342	313	302	357
65°	270	247	213	188	177	268
75°	144	124	97	83	78	152
85°	36	25	21	20	20	40
90°	1	6	11	14	16	4
95°	44	45	52	56	58	47
105°	154	157	161	165	167	164
115°	290	293	294	294	293	287
125°	423	427	428	427	426	379
135°	551	555	555	555	553	424
145°	667	670	672	672	670	417
155°	763	763	764	766	763	351
165°	830	829	830	832	828	234
175°	863	861	860	864	860	82
180°	865	865	865	865	865	



TEST NUMBER: P333536-935

CATALOG NUMBER: S125RDIP-S610D810U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2
2.5°	867.7	867.4	867.0	866.7	866.3	865.6	864.4	863.2	862.0	860.9	862.0
5°	864.8	864.3	863.7	863.1	862.5	861.4	859.8	858.2	856.6	855.0	856.4
7.5°	856.4	855.7	855.2	854.6	854.1	852.9	850.9	849.0	847.1	845.2	846.2
10°	848.4	848.0	847.6	847.1	846.7	845.5	843.4	841.5	839.4	837.3	837.8
12.5°	839.6	839.0	838.4	837.9	837.3	835.7	833.0	830.3	827.5	824.8	825.1
15°	822.3	821.4	820.5	819.7	818.8	816.8	813.8	810.7	807.7	804.6	804.5
17.5°	802.8	801.5	800.1	798.8	797.5	794.9	791.0	787.2	783.3	779.5	778.8
20°	787.6	786.2	784.7	783.3	781.8	778.8	774.1	769.5	764.8	760.2	759.4
22.5°	770.9	769.4	768.0	766.5	765.1	761.9	757.0	752.2	747.3	742.4	741.0
25°	745.8	743.6	741.4	739.3	737.0	733.2	727.9	722.5	717.1	711.7	709.9
27.5°	717.0	714.4	711.7	709.0	706.4	702.2	696.5	690.7	684.9	679.2	676.5
30°	696.0	693.3	690.5	687.8	685.0	680.5	674.4	668.4	662.3	656.2	652.8
32.5°	675.6	672.4	669.2	666.0	662.7	658.0	651.8	645.6	639.3	633.1	629.4
35°	642.4	638.9	635.4	632.0	628.4	623.5	616.9	610.4	603.8	597.3	593.1
37.5°	609.8	605.5	601.3	597.1	592.9	587.4	580.6	573.9	567.1	560.3	555.3
40°	586.8	582.5	578.1	573.7	569.4	563.7	556.7	549.7	542.8	535.8	530.3
42.5°	562.7	558.3	553.8	549.3	544.8	539.0	531.8	524.5	517.4	510.1	504.8
45°	526.0	521.8	517.5	513.3	509.1	503.0	495.0	487.0	479.0	471.0	465.2
47.5°	487.9	483.5	479.0	474.6	470.1	463.8	455.8	447.7	439.7	431.6	425.7
50°	463.8	459.0	454.2	449.4	444.6	438.1	429.8	421.5	413.2	404.9	398.8
52.5°	437.6	432.7	427.8	422.9	418.0	411.6	403.8	396.0	388.1	380.3	373.8
55°	399.1	394.4	389.8	385.1	380.5	374.0	365.9	357.7	349.7	341.5	334.9
57.5°	360.1	355.1	350.1	345.2	340.2	333.7	325.9	318.1	310.2	302.4	295.9
60°	334.9	329.8	324.8	319.7	314.6	308.2	300.2	292.4	284.6	276.7	270.4
62.5°	308.2	303.4	298.5	293.7	288.9	282.4	274.5	266.5	258.6	250.6	244.6
65°	270.2	265.3	260.3	255.4	250.4	244.1	236.3	228.7	220.9	213.3	207.4
67.5°	232.4	227.4	222.5	217.6	212.6	206.5	199.1	191.7	184.3	176.8	171.6
70°	206.7	201.8	196.8	191.9	186.9	180.8	173.6	166.3	159.0	151.8	147.2
72.5°	181.6	176.8	171.9	167.1	162.3	156.4	149.6	142.8	136.0	129.2	125.1
75°	144.0	139.6	135.2	130.9	126.5	121.2	115.1	109.0	102.9	96.8	93.6
77.5°	106.5	103.0	99.5	96.0	92.6	88.3	83.4	78.6	73.7	68.8	66.6
80°	85.1	81.5	78.1	74.6	71.1	67.3	63.2	59.2	55.1	51.1	49.7
82.5°	64.1	61.0	57.9	54.7	51.6	48.6	45.8	43.0	40.2	37.5	36.9
85°	36.0	33.3	30.7	28.2	25.5	23.8	23.1	22.4	21.7	20.9	20.8
87.5°	12.1	11.6	11.0	10.4	9.9	9.6	9.7	9.8	9.9	10.0	10.2
90°	0.7	1.9	3.1	4.3	5.4	6.5	7.7	8.7	9.7	10.8	11.5
92.5°	16.3	17.1	18.0	18.8	19.6	20.7	22.0	23.2	24.5	25.8	26.9
95°	43.7	44.1	44.3	44.7	44.9	45.9	47.4	48.8	50.4	51.8	52.9
97.5°	72.8	72.8	72.9	73.1	73.2	74.3	76.4	78.4	80.5	82.6	83.5
100°	94.3	94.3	94.3	94.3	94.3	95.2	97.2	99.1	101.1	103.0	104.4
102.5°	117.4	118.0	118.6	119.2	119.9	120.6	121.6	122.6	123.6	124.6	126.1
105°	153.5	154.3	155.0	155.8	156.5	157.3	158.3	159.1	160.0	160.9	161.8
107.5°	193.4	194.1	194.8	195.6	196.4	197.1	197.8	198.5	199.1	199.8	200.3
110°	220.8	221.6	222.3	223.1	223.9	224.5	224.9	225.3	225.8	226.2	226.7



TEST NUMBER: P333536-935

CATALOG NUMBER: S125RDIP-S610D810U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	248.8	249.3	249.6	250.0	250.4	250.9	251.4	252.0	252.6	253.1	253.4
115°	290.2	290.8	291.4	292.0	292.6	293.0	293.3	293.6	293.9	294.2	294.0
117.5°	331.7	331.9	332.2	332.4	332.7	333.0	333.3	333.6	333.8	334.1	334.2
120°	357.5	358.3	359.0	359.7	360.5	360.9	361.1	361.3	361.4	361.5	361.5
122.5°	385.5	385.8	386.1	386.3	386.6	386.9	387.3	387.7	388.1	388.5	388.3
125°	423.4	424.4	425.2	426.2	427.1	427.6	427.7	427.9	428.0	428.2	427.9
127.5°	463.9	464.4	464.9	465.4	465.9	466.2	466.4	466.6	466.8	467.0	466.8
130°	488.1	488.9	489.7	490.3	491.1	491.6	491.9	492.2	492.5	492.8	492.7
132.5°	512.4	513.6	514.8	516.0	517.3	517.8	517.8	517.7	517.6	517.6	517.5
135°	550.7	551.6	552.5	553.5	554.3	554.8	555.0	555.2	555.3	555.4	555.4
137.5°	586.9	587.7	588.6	589.4	590.3	590.9	591.2	591.5	591.9	592.2	592.4
140°	610.0	610.7	611.5	612.3	612.9	613.5	614.0	614.5	614.9	615.4	615.7
142.5°	633.2	633.8	634.4	635.0	635.7	636.3	636.8	637.4	637.9	638.5	638.7
145°	667.2	667.8	668.4	669.0	669.6	670.1	670.5	671.0	671.5	671.9	671.9
147.5°	698.7	699.0	699.4	699.7	700.0	700.3	700.8	701.1	701.5	701.8	702.1
150°	719.7	719.5	719.5	719.3	719.1	719.4	720.0	720.6	721.2	721.8	721.8
152.5°	736.9	737.2	737.4	737.6	737.8	738.0	738.2	738.5	738.7	739.0	739.3
155°	763.4	763.4	763.4	763.4	763.4	763.5	763.7	763.9	764.0	764.1	764.7
157.5°	787.2	786.9	786.5	786.2	785.8	785.7	785.9	786.1	786.2	786.4	787.0
160°	801.2	800.7	800.3	799.9	799.4	799.3	799.4	799.5	799.7	799.9	800.5
162.5°	813.6	813.2	812.9	812.6	812.3	812.1	812.1	812.2	812.2	812.3	813.0
165°	830.2	829.8	829.6	829.2	829.0	828.9	829.0	829.1	829.3	829.5	830.1
167.5°	844.1	843.5	842.9	842.3	841.7	841.5	841.5	841.5	841.5	841.5	842.3
170°	851.7	851.1	850.5	849.9	849.3	848.9	848.9	848.9	848.9	848.9	849.9
172.5°	857.0	856.4	855.8	855.2	854.6	854.4	854.4	854.4	854.4	854.4	855.2
175°	863.2	862.5	861.9	861.3	860.7	860.4	860.4	860.4	860.4	860.4	861.3
177.5°	866.3	865.7	865.3	864.8	864.3	864.0	863.9	863.8	863.7	863.5	864.3
180°	865.1	865.1	865.1	865.1	865.1	865.1	865.1	865.1	865.1	865.1	865.1



TEST NUMBER: P333536-935

CATALOG NUMBER: S125RDIP-S610D810U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	866.2	866.2	866.2	866.2	866.2	866.2	866.2	866.2
2.5°	863.2	864.4	865.6	866.1	866.0	865.8	865.7	865.6
5°	857.9	859.4	860.8	861.4	861.1	860.8	860.6	860.2
7.5°	847.2	848.3	849.3	849.6	849.3	848.9	848.7	848.3
10°	838.2	838.6	839.1	839.1	838.6	838.2	837.8	837.3
12.5°	825.4	825.8	826.0	825.9	825.2	824.6	823.9	823.2
15°	804.3	804.2	804.1	803.3	802.0	800.7	799.4	798.1
17.5°	778.1	777.3	776.6	775.7	774.6	773.5	772.5	771.4
20°	758.7	757.9	757.2	756.2	754.9	753.6	752.3	751.0
22.5°	739.5	738.0	736.7	735.4	734.3	733.2	732.2	731.1
25°	708.0	706.1	704.2	702.4	700.9	699.2	697.7	696.0
27.5°	673.9	671.2	668.6	666.5	665.0	663.4	661.9	660.3
30°	649.5	646.1	642.7	640.4	639.1	637.8	636.5	635.2
32.5°	625.7	622.1	618.4	615.7	614.0	612.3	610.7	609.1
35°	588.8	584.6	580.4	577.3	575.2	573.2	571.2	569.1
37.5°	550.3	545.2	540.1	536.6	534.6	532.7	530.7	528.7
40°	524.7	519.2	513.7	510.1	508.3	506.5	504.8	503.1
42.5°	499.6	494.2	489.0	485.0	482.5	479.9	477.3	474.8
45°	459.3	453.6	447.7	443.8	441.6	439.4	437.2	435.1
47.5°	419.7	413.6	407.7	403.5	401.1	398.6	396.2	393.8
50°	392.7	386.6	380.5	376.3	374.2	372.0	369.8	367.6
52.5°	367.2	360.6	354.0	349.7	347.5	345.3	343.1	341.0
55°	328.4	321.8	315.3	310.9	308.6	306.3	303.9	301.6
57.5°	289.6	283.2	276.8	272.5	270.4	268.4	266.4	264.3
60°	263.9	257.5	251.2	246.8	244.7	242.5	240.3	238.2
62.5°	238.7	232.7	226.8	222.7	220.6	218.4	216.2	214.0
65°	201.6	195.8	190.0	186.0	183.8	181.7	179.4	177.3
67.5°	166.3	160.9	155.6	152.1	150.3	148.6	146.8	145.1
70°	142.8	138.3	133.7	130.6	128.9	127.2	125.4	123.6
72.5°	121.0	116.8	112.6	109.9	108.8	107.6	106.5	105.3
75°	90.4	87.2	84.0	81.9	80.9	79.9	78.9	77.8
77.5°	64.3	62.1	59.8	58.4	57.6	56.8	56.1	55.4
80°	48.4	47.1	45.8	45.0	44.7	44.4	44.1	43.8
82.5°	36.2	35.6	35.0	34.6	34.4	34.3	34.1	33.9
85°	20.7	20.5	20.3	20.2	20.1	19.9	19.8	19.6
87.5°	10.3	10.4	10.6	10.7	10.7	10.6	10.6	10.6
90°	12.2	13.0	13.8	14.4	14.8	15.2	15.7	16.2
92.5°	27.8	28.8	29.8	30.5	30.8	31.1	31.4	31.8
95°	53.9	55.0	56.1	56.7	57.0	57.3	57.6	57.9
97.5°	84.6	85.5	86.5	87.0	87.2	87.4	87.6	87.8
100°	105.7	107.0	108.4	109.3	109.5	109.8	110.1	110.4
102.5°	127.5	129.0	130.4	131.4	131.8	132.2	132.6	133.0
105°	162.7	163.6	164.5	165.1	165.7	166.1	166.5	166.9
107.5°	200.7	201.1	201.6	201.8	201.8	201.7	201.7	201.7
110°	227.1	227.6	228.0	228.2	228.0	227.8	227.7	227.6





TEST NUMBER: P333536-935

CATALOG NUMBER: S125RDIP-S610D810U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	253.6	253.7	254.0	254.0	253.7	253.4	253.1	252.9
115°	293.9	293.8	293.6	293.4	293.3	293.2	293.0	292.9
117.5°	334.3	334.4	334.6	334.3	333.7	333.1	332.5	331.9
120°	361.5	361.5	361.5	361.3	360.7	360.1	359.5	358.9
122.5°	388.2	388.1	388.0	387.7	387.2	386.8	386.2	385.8
125°	427.6	427.3	427.0	426.8	426.6	426.5	426.4	426.2
127.5°	466.7	466.5	466.4	466.1	465.9	465.5	465.3	464.9
130°	492.5	492.4	492.2	492.0	491.7	491.4	491.1	490.8
132.5°	517.3	517.1	517.0	516.7	516.3	515.9	515.5	515.1
135°	555.4	555.4	555.4	555.2	554.6	554.0	553.4	552.8
137.5°	592.5	592.7	592.9	592.6	591.9	591.2	590.4	589.6
140°	616.0	616.2	616.6	616.3	615.6	614.8	614.1	613.4
142.5°	638.9	639.0	639.2	638.9	638.2	637.5	636.7	635.9
145°	671.9	671.9	671.9	671.7	671.2	670.8	670.4	669.9
147.5°	702.5	702.9	703.3	702.9	701.9	700.9	699.9	698.9
150°	721.8	721.8	721.8	721.6	721.3	721.0	720.7	720.4
152.5°	739.7	740.0	740.4	740.3	739.8	739.3	738.7	738.1
155°	765.3	765.9	766.5	766.5	765.7	765.0	764.2	763.4
157.5°	787.6	788.2	788.8	788.6	787.6	786.6	785.6	784.6
160°	801.1	801.6	802.2	802.2	801.4	800.6	799.9	799.2
162.5°	813.6	814.4	815.1	815.0	814.2	813.3	812.4	811.6
165°	830.7	831.3	831.8	831.7	830.8	829.9	829.0	828.1
167.5°	843.3	844.1	845.1	845.0	844.1	843.2	842.2	841.3
170°	850.8	851.7	852.6	852.5	851.4	850.4	849.4	848.3
172.5°	856.2	857.0	858.0	858.0	857.0	856.1	855.1	854.2
175°	862.2	863.2	864.0	863.9	862.9	861.9	860.8	859.8
177.5°	865.0	865.6	866.4	866.3	865.5	864.7	863.8	863.0
180°	865.1	865.1	865.1	865.1	865.1	865.1	865.1	865.1

(END OF REPORT)