

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333578-935

Luminaire Tested: **S125RDIP-S850D1205U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P333578-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-11,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S125RDIP-S850D1205U935-4F0-1E-UDD-F1
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 850 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1205 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6387.3 lumens
Efficiency: N/A
Efficacy: 112.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.11 / 1.25
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P333578-935

CATALOG NUMBER: S125RDIP-S850D1205U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

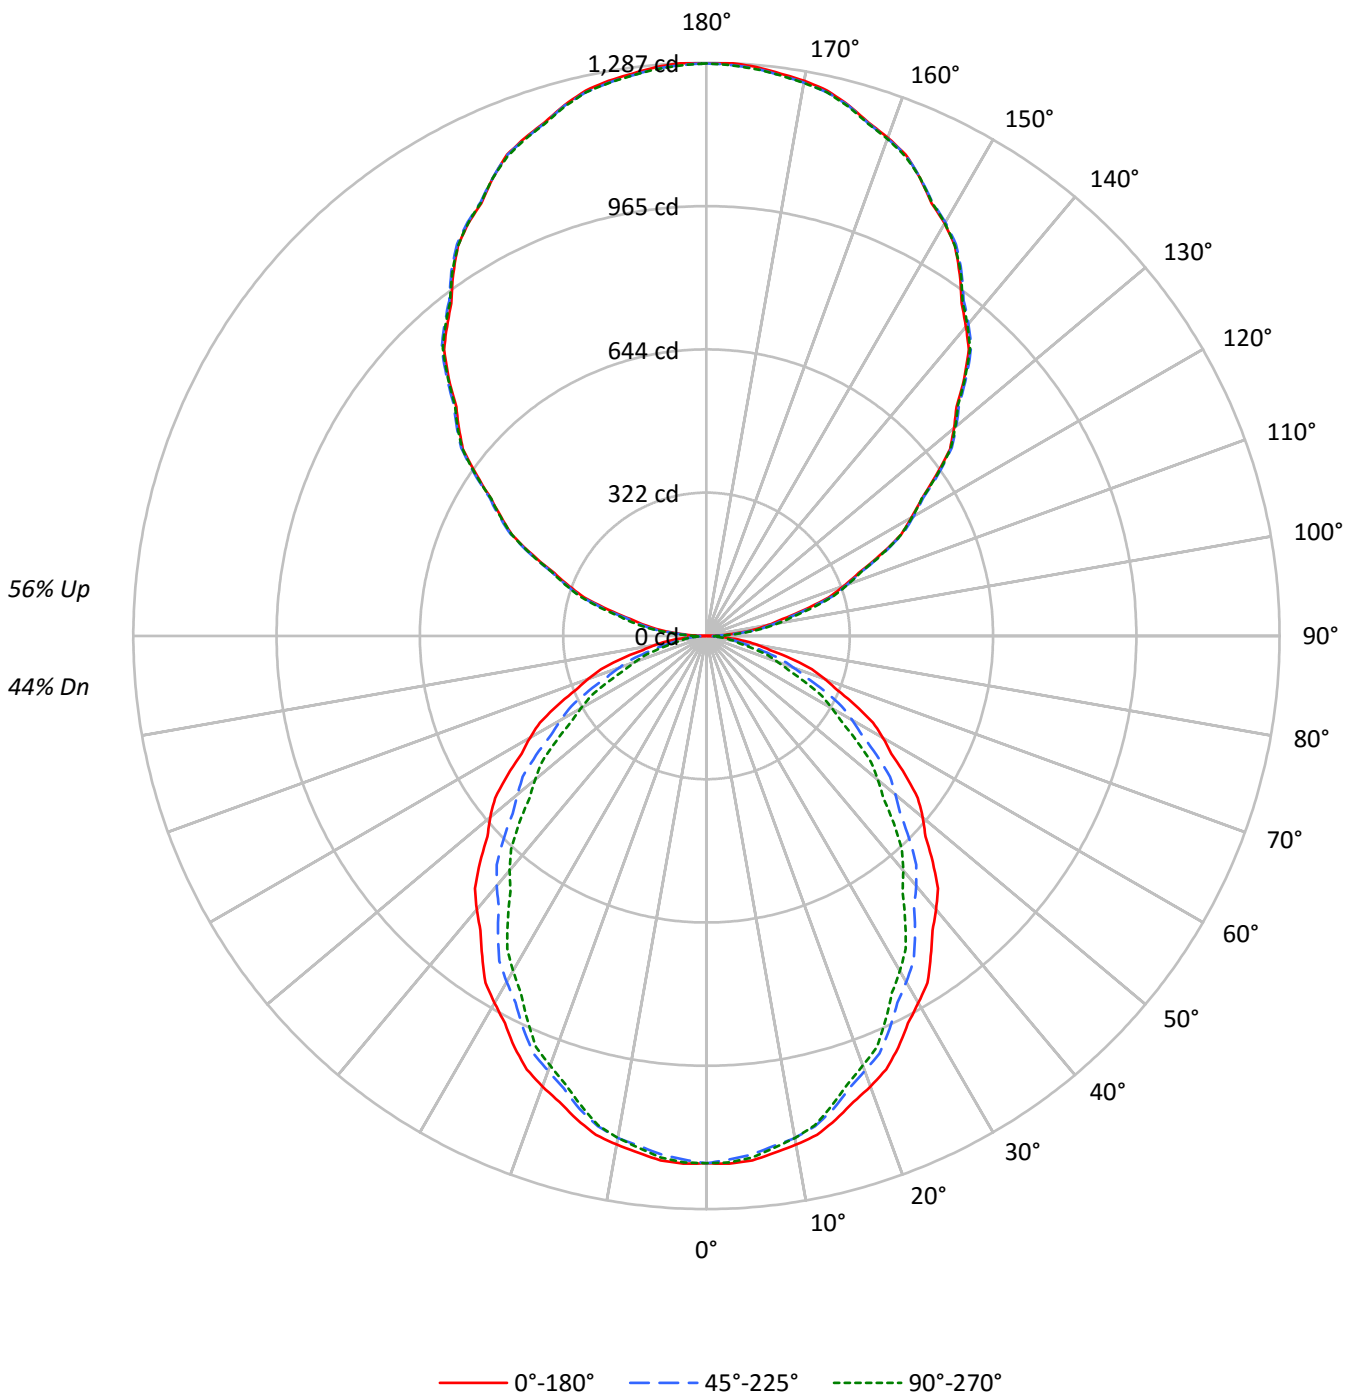



TEST NUMBER: P333578-935

CATALOG NUMBER: S125RDIP-S850D1205U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	50	50	50	44
1	97	92	89	85	88	85	81	79	70	68	66	57	56	54	45	44	43	37
2	88	81	75	70	80	74	69	65	62	58	55	50	48	45	40	38	36	32
3	80	71	64	58	73	65	59	54	55	50	46	45	41	39	35	33	31	27
4	74	63	55	49	67	58	51	46	49	44	40	40	36	33	32	29	27	23
5	68	56	48	42	62	52	45	40	44	38	34	36	32	29	29	26	24	20
6	62	50	43	37	57	47	40	34	39	34	30	32	28	25	26	23	21	18
7	58	46	38	32	53	42	35	30	36	30	26	29	25	22	24	21	19	16
8	53	41	34	29	49	38	32	27	32	27	23	27	23	20	22	19	17	14
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	20	17	15	13
10	46	35	28	23	43	32	26	21	27	22	19	23	19	16	19	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	7647	7647	7647
5°	7664	7577	7623
10°	7606	7506	7506
15°	7515	7353	7294
20°	7399	7142	7056
25°	7264	6933	6780
30°	7095	6689	6475
35°	6923	6437	6133
40°	6762	6175	5798
45°	6566	5881	5431
50°	6370	5561	5050
55°	6141	5255	4641
60°	5913	4885	4204
65°	5644	4455	3703
70°	5336	3916	3191
75°	4908	3301	2655
80°	4322	2592	2228
85°	3646	2119	1993



TEST NUMBER: P333578-935

CATALOG NUMBER: S125RDIP-S850D1205U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	111.3	1.7
10°-20°	311.1	4.9
20°-30°	451.2	7.1
30°-40°	514.2	8.0
40°-50°	501.2	7.8
50°-60°	421.9	6.6
60°-70°	295.7	4.6
70°-80°	152.0	2.4
80°-90°	41.2	0.6
90°-100°	86.1	1.3
100°-110°	254.3	4.0
110°-120°	430.7	6.7
120°-130°	566.8	8.9
130°-140°	635.1	9.9
140°-150°	622.5	9.7
150°-160°	522.8	8.2
160°-170°	347.5	5.4
170°-180°	121.6	1.9
0°-30°	873.6	13.7
0°-40°	1387.8	21.7
0°-60°	2310.8	36.2
0°-90°	2799.7	43.8
90°-120°	771.1	12.1
90°-150°	2595.6	40.6
90°-180°	3588.0	56.2
0°-180°	6387.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1184	1184	1184	1184	1184	
5°	1182	1178	1169	1177	1176	112
15°	1124	1118	1100	1099	1091	317
25°	1019	1005	973	961	951	469
35°	878	856	816	791	778	550
45°	719	692	644	609	595	554
55°	545	516	467	428	412	488
65°	369	338	292	257	242	366
75°	197	169	132	113	106	208
85°	49	34	29	28	27	55
90°	1	9	16	21	24	6
95°	65	67	77	84	86	69
105°	228	233	239	245	248	244
115°	431	435	437	436	435	426
125°	629	635	636	634	633	563
135°	818	824	825	825	821	631
145°	992	995	998	998	996	620
155°	1135	1135	1136	1139	1135	522
165°	1234	1232	1233	1236	1231	348
175°	1283	1279	1279	1284	1278	122
180°	1286	1286	1286	1286	1286	



TEST NUMBER: P333578-935

CATALOG NUMBER: S125RDIP-S850D1205U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0
2.5°	1186.0	1185.6	1185.1	1184.6	1184.1	1183.1	1181.6	1179.9	1178.4	1176.7	1178.4
5°	1182.2	1181.4	1180.5	1179.7	1179.0	1177.5	1175.3	1173.1	1170.9	1168.7	1170.7
7.5°	1170.5	1169.8	1169.0	1168.2	1167.5	1165.8	1163.2	1160.5	1158.0	1155.3	1156.7
10°	1159.8	1159.2	1158.6	1158.0	1157.4	1155.7	1153.0	1150.1	1147.4	1144.6	1145.1
12.5°	1147.6	1146.9	1146.1	1145.4	1144.6	1142.4	1138.6	1134.9	1131.2	1127.4	1127.8
15°	1124.0	1122.8	1121.6	1120.4	1119.2	1116.5	1112.4	1108.2	1104.1	1099.8	1099.7
17.5°	1097.3	1095.5	1093.7	1091.9	1090.0	1086.5	1081.2	1076.0	1070.7	1065.5	1064.5
20°	1076.6	1074.6	1072.6	1070.7	1068.7	1064.5	1058.2	1051.8	1045.4	1039.1	1038.1
22.5°	1053.7	1051.7	1049.7	1047.8	1045.8	1041.5	1034.7	1028.1	1021.4	1014.8	1012.8
25°	1019.4	1016.4	1013.4	1010.5	1007.5	1002.3	995.0	987.6	980.2	972.9	970.3
27.5°	980.1	976.5	972.8	969.2	965.6	959.8	952.0	944.1	936.3	928.3	924.7
30°	951.4	947.6	943.9	940.1	936.3	930.2	922.0	913.6	905.3	896.9	892.3
32.5°	923.5	919.1	914.7	910.3	905.9	899.4	891.0	882.4	873.9	865.4	860.4
35°	878.1	873.3	868.6	863.8	859.0	852.1	843.3	834.3	825.4	816.4	810.6
37.5°	833.5	827.8	822.0	816.1	810.4	802.9	793.7	784.4	775.2	765.9	759.1
40°	802.1	796.2	790.1	784.2	778.3	770.5	761.0	751.4	741.9	732.4	724.8
42.5°	769.2	763.1	757.0	750.8	744.7	736.8	726.9	717.0	707.1	697.3	690.1
45°	718.9	713.2	707.4	701.6	695.9	687.5	676.6	665.7	654.8	643.9	635.8
47.5°	666.9	660.8	654.7	648.7	642.6	634.0	623.0	612.0	601.0	590.0	581.8
50°	634.0	627.4	620.9	614.3	607.8	598.8	587.5	576.2	564.8	553.5	545.2
52.5°	598.2	591.5	584.8	578.1	571.4	562.7	552.0	541.3	530.5	519.9	510.9
55°	545.4	539.1	532.8	526.4	520.0	511.3	500.2	489.0	477.9	466.7	457.8
57.5°	492.1	485.3	478.5	471.7	465.0	456.2	445.5	434.7	424.0	413.3	404.6
60°	457.8	450.9	443.9	437.0	430.0	421.2	410.4	399.7	389.0	378.2	369.5
62.5°	421.4	414.7	408.1	401.4	394.8	386.1	375.1	364.3	353.4	342.5	334.4
65°	369.3	362.6	355.8	349.0	342.2	333.6	323.1	312.5	302.0	291.5	283.5
67.5°	317.6	310.8	304.1	297.4	290.6	282.1	272.1	262.0	251.9	241.8	234.5
70°	282.6	275.8	269.1	262.3	255.5	247.2	237.3	227.3	217.4	207.4	201.3
72.5°	248.2	241.6	235.1	228.4	221.9	213.9	204.6	195.3	186.0	176.7	171.0
75°	196.7	190.8	184.8	178.8	172.9	165.7	157.4	149.0	140.7	132.3	127.9
77.5°	145.6	140.8	136.0	131.3	126.5	120.8	114.1	107.5	100.7	94.1	91.0
80°	116.2	111.5	106.7	101.9	97.2	92.0	86.4	80.8	75.3	69.7	67.9
82.5°	87.6	83.3	79.0	74.7	70.4	66.4	62.6	58.8	54.9	51.1	50.3
85°	49.2	45.6	42.0	38.5	34.9	32.5	31.6	30.6	29.6	28.6	28.4
87.5°	16.6	15.9	15.2	14.4	13.6	13.3	13.5	13.6	13.8	13.9	14.1
90°	1.0	2.8	4.6	6.4	8.1	9.8	11.4	12.9	14.5	16.0	17.1
92.5°	24.2	25.5	26.7	28.0	29.2	30.7	32.7	34.6	36.5	38.4	39.9
95°	65.0	65.4	66.0	66.4	66.8	68.1	70.3	72.6	74.8	77.1	78.6
97.5°	108.1	108.2	108.4	108.6	108.7	110.4	113.5	116.5	119.6	122.7	124.2
100°	140.1	140.1	140.1	140.1	140.1	141.5	144.4	147.3	150.2	153.1	155.1
102.5°	174.5	175.4	176.2	177.2	178.1	179.3	180.7	182.2	183.7	185.1	187.3
105°	228.1	229.2	230.3	231.4	232.6	233.8	235.1	236.4	237.8	239.1	240.5
107.5°	287.3	288.4	289.6	290.7	291.8	292.8	293.9	294.9	295.9	297.0	297.6
110°	328.2	329.2	330.4	331.5	332.6	333.5	334.2	334.8	335.5	336.1	336.8



TEST NUMBER: P333578-935

CATALOG NUMBER: S125RDIP-S850D1205U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	369.8	370.4	370.9	371.5	372.1	372.8	373.7	374.5	375.3	376.2	376.5
115°	431.2	432.1	433.0	433.9	434.8	435.4	435.9	436.4	436.8	437.2	437.0
117.5°	492.8	493.3	493.7	494.0	494.5	494.8	495.2	495.7	496.0	496.5	496.6
120°	531.2	532.4	533.5	534.6	535.7	536.4	536.6	536.8	537.1	537.3	537.3
122.5°	572.9	573.3	573.7	574.1	574.5	575.0	575.6	576.2	576.7	577.3	577.1
125°	629.3	630.7	632.0	633.4	634.6	635.4	635.7	635.8	636.1	636.4	635.8
127.5°	689.4	690.1	690.9	691.6	692.4	692.9	693.2	693.4	693.7	694.0	693.7
130°	725.4	726.5	727.6	728.8	729.8	730.6	731.1	731.5	731.9	732.4	732.2
132.5°	761.4	763.2	765.1	766.9	768.7	769.6	769.5	769.4	769.3	769.2	769.0
135°	818.5	819.8	821.1	822.4	823.8	824.6	824.8	825.0	825.2	825.4	825.4
137.5°	872.0	873.3	874.6	875.9	877.2	878.1	878.6	879.1	879.6	880.0	880.3
140°	906.5	907.6	908.7	909.8	910.9	911.8	912.5	913.2	913.8	914.5	914.9
142.5°	940.9	941.8	942.8	943.7	944.6	945.6	946.3	947.2	948.0	948.9	949.2
145°	991.5	992.4	993.3	994.2	995.1	995.8	996.5	997.2	997.8	998.5	998.5
147.5°	1038.4	1038.8	1039.3	1039.8	1040.3	1040.8	1041.4	1041.9	1042.4	1042.9	1043.4
150°	1069.5	1069.4	1069.1	1068.9	1068.7	1069.0	1069.9	1070.7	1071.7	1072.5	1072.5
152.5°	1095.2	1095.5	1095.8	1096.1	1096.4	1096.7	1097.1	1097.4	1097.9	1098.2	1098.7
155°	1134.6	1134.6	1134.6	1134.6	1134.6	1134.7	1135.0	1135.1	1135.4	1135.6	1136.5
157.5°	1169.8	1169.3	1168.8	1168.4	1167.9	1167.7	1167.9	1168.2	1168.4	1168.6	1169.5
160°	1190.6	1190.0	1189.3	1188.6	1187.9	1187.7	1187.9	1188.2	1188.4	1188.6	1189.5
162.5°	1209.0	1208.6	1208.1	1207.6	1207.0	1206.9	1206.9	1206.9	1206.9	1207.0	1208.1
165°	1233.6	1233.2	1232.8	1232.3	1231.8	1231.7	1232.0	1232.2	1232.4	1232.6	1233.6
167.5°	1254.5	1253.5	1252.7	1251.8	1250.9	1250.4	1250.4	1250.4	1250.4	1250.4	1251.8
170°	1265.7	1264.8	1263.9	1263.0	1262.1	1261.6	1261.6	1261.6	1261.6	1261.6	1263.0
172.5°	1273.7	1272.8	1271.9	1271.0	1270.1	1269.6	1269.6	1269.6	1269.6	1269.6	1271.0
175°	1282.6	1281.8	1280.9	1280.0	1279.1	1278.7	1278.7	1278.7	1278.7	1278.7	1280.0
177.5°	1287.3	1286.6	1285.8	1285.1	1284.4	1284.0	1283.8	1283.7	1283.4	1283.2	1284.4
180°	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6



TEST NUMBER: P333578-935

CATALOG NUMBER: S125RDIP-S850D1205U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0	1184.0
2.5°	1179.9	1181.6	1183.1	1183.9	1183.7	1183.5	1183.4	1183.2
5°	1172.7	1174.7	1176.6	1177.5	1177.1	1176.6	1176.3	1175.9
7.5°	1158.1	1159.5	1160.9	1161.3	1160.9	1160.5	1160.0	1159.6
10°	1145.7	1146.3	1146.9	1146.9	1146.3	1145.7	1145.1	1144.6
12.5°	1128.3	1128.7	1129.1	1128.9	1128.0	1127.0	1126.2	1125.2
15°	1099.5	1099.2	1099.1	1098.1	1096.3	1094.5	1092.7	1090.9
17.5°	1063.5	1062.6	1061.5	1060.3	1058.9	1057.4	1055.9	1054.5
20°	1037.1	1036.0	1035.1	1033.7	1031.9	1030.1	1028.3	1026.6
22.5°	1010.8	1008.9	1006.9	1005.2	1003.8	1002.3	1000.8	999.4
25°	967.8	965.2	962.6	960.2	957.9	955.8	953.6	951.4
27.5°	921.1	917.5	913.9	911.0	909.0	906.8	904.7	902.6
30°	887.8	883.2	878.6	875.5	873.7	871.8	870.0	868.2
32.5°	855.3	850.2	845.2	841.5	839.3	837.1	834.7	832.5
35°	804.9	799.1	793.3	789.1	786.3	783.5	780.8	777.9
37.5°	752.2	745.2	738.3	733.5	730.8	728.1	725.4	722.7
40°	717.2	709.7	702.1	697.2	694.8	692.4	690.0	687.7
42.5°	682.9	675.6	668.4	663.0	659.5	656.0	652.5	649.0
45°	627.9	620.0	612.0	606.6	603.6	600.6	597.6	594.6
47.5°	573.6	565.4	557.2	551.5	548.2	544.9	541.6	538.3
50°	536.8	528.5	520.1	514.4	511.5	508.5	505.5	502.6
52.5°	502.0	492.9	484.0	477.9	475.0	472.0	469.1	466.1
55°	448.9	440.0	431.0	424.9	421.8	418.6	415.4	412.2
57.5°	395.8	387.1	378.3	372.6	369.7	366.9	364.1	361.3
60°	360.8	352.0	343.3	337.4	334.4	331.5	328.5	325.5
62.5°	326.2	318.1	310.0	304.5	301.5	298.5	295.6	292.6
65°	275.6	267.7	259.7	254.3	251.2	248.3	245.3	242.3
67.5°	227.2	220.0	212.7	207.8	205.5	203.1	200.7	198.4
70°	195.1	189.0	182.8	178.6	176.2	173.7	171.4	169.0
72.5°	165.3	159.6	153.9	150.3	148.7	147.1	145.6	144.0
75°	123.6	119.2	114.9	112.0	110.6	109.2	107.8	106.4
77.5°	87.9	84.9	81.8	79.8	78.8	77.7	76.7	75.7
80°	66.2	64.4	62.6	61.5	61.1	60.7	60.3	59.9
82.5°	49.5	48.6	47.8	47.3	47.0	46.8	46.6	46.3
85°	28.2	28.0	27.8	27.6	27.4	27.2	27.0	26.9
87.5°	14.4	14.6	14.8	14.9	14.9	14.9	14.8	14.8
90°	18.3	19.4	20.5	21.4	22.0	22.6	23.3	24.0
92.5°	41.3	42.8	44.3	45.3	45.7	46.2	46.8	47.2
95°	80.2	81.7	83.3	84.3	84.7	85.2	85.6	86.0
97.5°	125.6	127.1	128.5	129.4	129.7	129.9	130.2	130.4
100°	157.0	159.1	161.1	162.3	162.7	163.2	163.7	164.1
102.5°	189.4	191.7	193.8	195.2	195.9	196.5	197.1	197.7
105°	241.8	243.1	244.4	245.5	246.2	246.8	247.5	248.1
107.5°	298.3	298.9	299.6	300.0	299.9	299.9	299.8	299.7
110°	337.5	338.2	338.8	339.1	338.8	338.6	338.4	338.2



TEST NUMBER: P333578-935

CATALOG NUMBER: S125RDIP-S850D1205U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	376.9	377.1	377.5	377.4	377.0	376.6	376.2	375.8
115°	436.8	436.5	436.4	436.1	435.9	435.7	435.4	435.2
117.5°	496.8	497.0	497.1	496.8	495.9	495.1	494.1	493.3
120°	537.3	537.3	537.3	536.8	536.0	535.0	534.2	533.3
122.5°	577.0	576.8	576.6	576.2	575.4	574.7	574.0	573.3
125°	635.4	635.0	634.6	634.2	634.0	633.8	633.5	633.4
127.5°	693.5	693.3	693.1	692.8	692.3	691.8	691.4	691.0
130°	731.9	731.7	731.5	731.2	730.7	730.3	729.8	729.4
132.5°	768.8	768.5	768.3	767.9	767.2	766.6	766.0	765.4
135°	825.4	825.4	825.4	825.0	824.1	823.2	822.3	821.4
137.5°	880.6	880.9	881.1	880.7	879.6	878.5	877.4	876.2
140°	915.3	915.8	916.3	915.9	914.8	913.7	912.6	911.5
142.5°	949.4	949.7	949.9	949.5	948.4	947.4	946.2	945.1
145°	998.5	998.5	998.5	998.2	997.6	996.9	996.2	995.5
147.5°	1044.0	1044.6	1045.1	1044.6	1043.1	1041.6	1040.1	1038.5
150°	1072.5	1072.5	1072.5	1072.4	1071.9	1071.4	1071.0	1070.6
152.5°	1099.2	1099.8	1100.3	1100.2	1099.4	1098.5	1097.8	1097.0
155°	1137.4	1138.2	1139.2	1139.0	1137.9	1136.8	1135.7	1134.6
157.5°	1170.4	1171.3	1172.2	1171.9	1170.4	1169.0	1167.5	1166.1
160°	1190.4	1191.3	1192.1	1192.1	1190.9	1189.8	1188.7	1187.7
162.5°	1209.2	1210.2	1211.3	1211.2	1209.9	1208.6	1207.3	1206.0
165°	1234.4	1235.3	1236.2	1236.0	1234.7	1233.3	1232.0	1230.6
167.5°	1253.1	1254.5	1255.8	1255.8	1254.4	1253.0	1251.6	1250.3
170°	1264.3	1265.7	1267.0	1266.9	1265.3	1263.8	1262.2	1260.7
172.5°	1272.3	1273.7	1275.0	1275.0	1273.6	1272.2	1270.8	1269.5
175°	1281.3	1282.6	1284.0	1283.9	1282.4	1280.8	1279.2	1277.6
177.5°	1285.4	1286.5	1287.5	1287.5	1286.2	1285.0	1283.8	1282.5
180°	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6	1285.6

(END OF REPORT)