

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P333292-840

Luminaire Tested: **S125DIP-S1090D1205U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P333292-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-7,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S125DIP-S1090D1205U840-4F0-1E-UDD-F  
Description: DEFINE 5 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1090 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1205 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9349.2 lumens  
Efficiency: N/A  
Efficacy: 143.0 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.42' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 65.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P333292-840

CATALOG NUMBER: S125DIP-S1090D1205U840-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

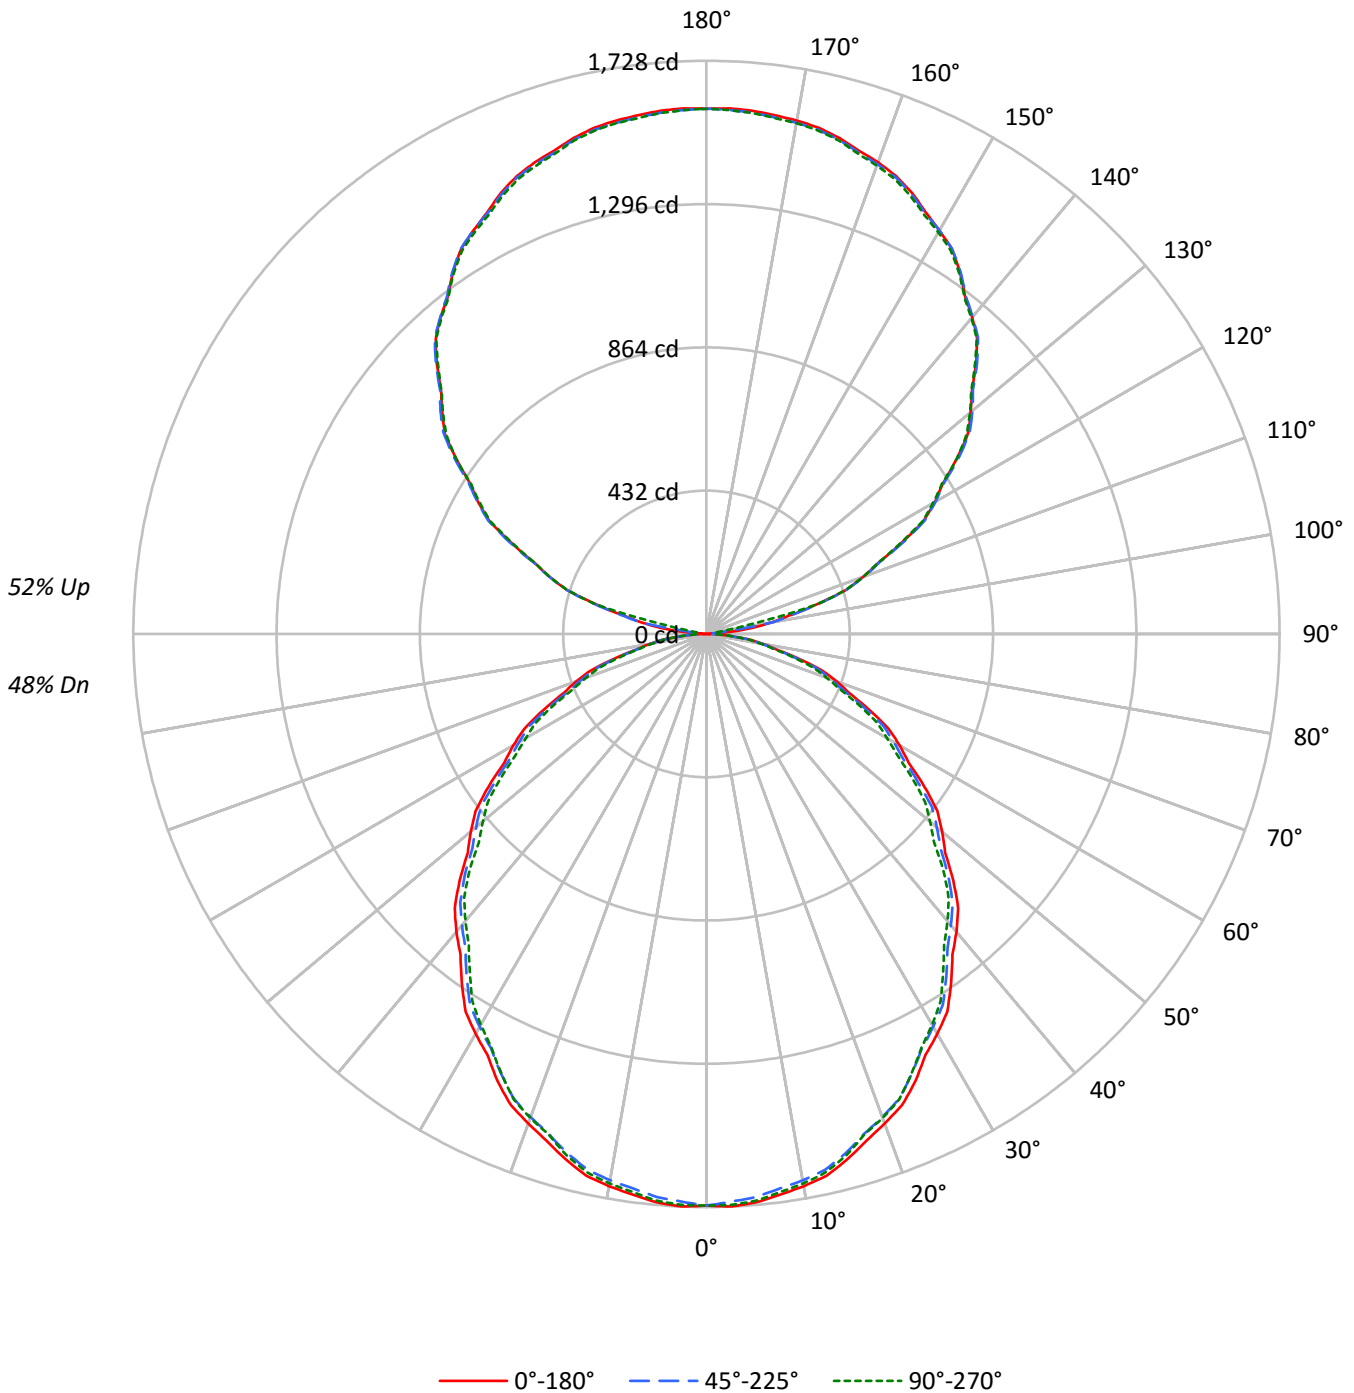



TEST NUMBER: P333292-840

CATALOG NUMBER: S125DIP-S1090D1205U840-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	54	54	54	48	48	48	48	
1	97	93	89	86	89	86	82	79	72	70	67	59	58	56	48	47	46	40	40	40	40	
2	89	81	75	70	81	75	69	65	63	59	56	52	49	47	42	40	38	34	34	34	34	
3	81	71	64	58	74	66	59	54	56	51	47	46	43	40	37	35	33	29	29	29	29	
4	74	63	55	49	68	58	51	46	49	44	40	41	37	34	33	30	28	24	24	24	24	
5	68	56	48	42	62	52	45	39	44	39	34	37	33	29	30	27	25	21	21	21	21	
6	62	50	42	36	57	47	39	34	40	34	30	33	29	26	27	24	22	19	19	19	19	
7	58	45	37	32	53	42	35	30	36	30	26	30	26	23	25	22	19	17	17	17	17	
8	54	41	33	28	49	38	31	27	33	27	23	28	23	20	23	20	17	15	15	15	15	
9	50	38	30	25	46	35	28	24	30	25	21	25	21	18	21	18	15	13	13	13	13	
10	47	34	27	22	43	32	26	21	28	22	19	23	19	16	20	16	14	12	12	12	12	

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	11129	11129	11129
5°	11154	11048	11119
10°	11086	10970	11032
15°	10965	10838	10884
20°	10794	10653	10672
25°	10608	10434	10424
30°	10380	10197	10147
35°	10136	9942	9802
40°	9885	9666	9528
45°	9613	9414	9227
50°	9315	9109	8835
55°	9026	8765	8519
60°	8681	8418	8117
65°	8270	8000	7728
70°	7878	7517	7260
75°	7177	6939	6700
80°	6390	6289	6133
85°	5550	5654	5350



TEST NUMBER: P333292-840

CATALOG NUMBER: S125DIP-S1090D1205U840-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	162.5	1.7
10°-20°	459.0	4.9
20°-30°	677.7	7.2
30°-40°	790.7	8.5
40°-50°	794.2	8.5
50°-60°	697.1	7.5
60°-70°	519.5	5.6
70°-80°	297.0	3.2
80°-90°	89.7	1.0
90°-100°	57.5	0.6
100°-110°	354.6	3.8
110°-120°	643.1	6.9
120°-130°	825.3	8.8
130°-140°	887.7	9.5
140°-150°	833.2	8.9
150°-160°	674.0	7.2
160°-170°	435.9	4.7
170°-180°	150.4	1.6
0°-30°	1299.1	13.9
0°-40°	2089.8	22.4
0°-60°	3581.2	38.3
0°-90°	4487.3	48.0
90°-120°	1055.2	11.3
90°-150°	3601.6	38.5
90°-180°	4862.0	52.0
0°-180°	9349.2	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1723	1723	1723	1723	1723	
5°	1720	1717	1704	1716	1715	163
15°	1640	1635	1621	1627	1628	462
25°	1489	1481	1464	1466	1463	685
35°	1286	1279	1261	1254	1243	804
45°	1052	1046	1031	1015	1010	811
55°	802	797	778	766	757	715
65°	541	538	524	512	506	537
75°	288	285	278	274	268	307
85°	75	76	76	75	72	84
90°	1	10	19	24	28	7
95°	67	61	19	24	25	85
105°	345	349	350	350	349	366
115°	648	654	655	650	643	642
125°	921	929	930	925	921	823
135°	1149	1156	1154	1151	1144	885
145°	1332	1334	1334	1335	1329	833
155°	1467	1461	1462	1465	1456	676
165°	1548	1542	1542	1548	1540	437
175°	1583	1577	1577	1586	1576	151
180°	1583	1583	1583	1583	1583	



TEST NUMBER: P333292-840

CATALOG NUMBER: S125DIP-S1090D1205U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1723.2	1723.2	1723.2	1723.2	1723.2	1723.2	1723.2	1723.2	1723.2	1723.2	1723.2
2.5°	1727.6	1726.9	1726.1	1725.4	1724.6	1723.0	1720.6	1718.2	1715.8	1713.3	1715.8
5°	1720.5	1719.9	1719.3	1718.7	1718.1	1716.3	1713.2	1710.2	1707.2	1704.1	1706.9
7.5°	1704.7	1704.0	1703.4	1702.8	1702.2	1700.2	1696.9	1693.5	1690.2	1686.9	1689.6
10°	1690.5	1689.9	1689.3	1688.7	1688.1	1686.1	1682.7	1679.4	1676.1	1672.7	1675.2
12.5°	1673.0	1671.9	1670.8	1669.7	1668.7	1666.6	1663.4	1660.4	1657.3	1654.2	1656.2
15°	1640.0	1639.1	1638.2	1637.3	1636.4	1634.3	1630.9	1627.6	1624.3	1620.9	1622.4
17.5°	1602.2	1600.8	1599.4	1598.1	1596.8	1594.4	1590.9	1587.5	1584.1	1580.5	1582.5
20°	1570.5	1569.9	1569.3	1568.7	1568.1	1565.8	1561.9	1557.9	1554.0	1550.0	1552.2
22.5°	1538.8	1537.8	1536.7	1535.6	1534.5	1532.1	1528.4	1524.7	1521.1	1517.3	1518.7
25°	1488.7	1487.2	1485.7	1484.2	1482.7	1480.0	1476.0	1472.1	1468.1	1464.2	1464.8
27.5°	1430.1	1429.2	1428.3	1427.3	1426.4	1424.0	1419.9	1415.8	1411.8	1407.8	1407.9
30°	1391.9	1391.0	1390.1	1389.2	1388.3	1385.5	1381.0	1376.4	1371.9	1367.4	1366.8
32.5°	1350.5	1349.1	1347.7	1346.3	1344.9	1342.2	1338.1	1334.0	1330.0	1326.0	1324.8
35°	1285.6	1284.3	1283.1	1281.9	1280.7	1278.0	1273.7	1269.5	1265.3	1261.0	1259.5
37.5°	1218.2	1216.7	1215.2	1213.7	1212.1	1209.4	1205.4	1201.4	1197.4	1193.5	1191.1
40°	1172.5	1170.9	1169.4	1167.9	1166.4	1163.5	1159.2	1155.0	1150.7	1146.5	1143.8
42.5°	1123.4	1122.1	1120.8	1119.5	1118.2	1115.5	1111.3	1107.0	1102.8	1098.5	1096.0
45°	1052.5	1051.3	1050.1	1048.8	1047.6	1045.2	1041.6	1037.9	1034.3	1030.7	1027.0
47.5°	976.1	976.1	976.2	976.3	976.3	974.2	969.9	965.4	961.1	956.7	953.0
50°	927.1	926.1	925.2	924.3	923.4	921.1	917.5	913.8	910.2	906.6	902.6
52.5°	876.9	876.2	875.6	874.8	874.2	871.9	868.1	864.1	860.3	856.4	852.9
55°	801.6	800.7	799.8	798.9	798.0	795.4	791.1	786.9	782.6	778.4	775.7
57.5°	722.3	721.8	721.3	720.8	720.3	718.3	714.7	711.1	707.6	704.0	700.4
60°	672.1	670.9	669.6	668.4	667.2	665.0	661.7	658.3	655.0	651.7	648.6
62.5°	619.8	618.7	617.8	616.8	615.9	614.0	611.1	608.2	605.4	602.6	599.3
65°	541.2	540.6	540.0	539.4	538.8	536.8	533.5	530.2	526.8	523.5	520.8
67.5°	465.1	463.8	462.6	461.3	460.1	458.2	455.7	453.2	450.7	448.3	446.0
70°	417.2	415.7	414.1	412.6	411.1	409.0	406.3	403.5	400.8	398.1	396.3
72.5°	364.9	363.8	362.7	361.7	360.7	359.3	357.6	355.8	354.1	352.2	350.2
75°	287.6	287.0	286.4	285.8	285.2	284.2	282.7	281.1	279.6	278.1	277.2
77.5°	216.5	216.2	216.0	215.8	215.5	215.0	214.1	213.3	212.5	211.6	211.1
80°	171.8	171.8	171.8	171.8	171.8	171.5	170.9	170.3	169.7	169.1	168.7
82.5°	132.5	132.0	131.6	131.1	130.6	130.3	130.2	130.1	129.9	129.8	129.3
85°	74.9	75.2	75.5	75.8	76.1	76.3	76.3	76.3	76.3	76.3	76.0
87.5°	29.7	30.1	30.5	30.9	31.3	31.6	31.7	31.9	32.0	32.1	32.4
90°	1.2	3.2	5.4	7.5	9.5	11.5	13.3	15.1	17.0	18.8	20.1
92.5°	18.1	16.7	15.1	13.7	12.2	12.3	13.9	15.6	17.2	18.8	20.1
95°	66.9	66.1	65.3	64.5	63.7	58.5	48.5	38.6	28.7	18.8	20.1
97.5°	139.7	141.1	142.5	143.9	145.3	136.2	116.5	96.9	77.4	57.8	50.4
100°	196.0	196.8	197.5	198.3	199.1	200.1	201.1	202.2	203.2	204.2	165.3
102.5°	253.3	254.3	255.3	256.2	257.2	258.0	258.6	259.3	259.9	260.5	253.2
105°	345.1	346.1	347.1	348.2	349.2	349.7	349.7	349.7	349.7	349.7	349.7
107.5°	440.4	440.4	440.4	440.4	440.4	440.6	441.1	441.6	442.2	442.7	442.7
110°	502.3	502.3	502.3	502.3	502.3	502.6	503.1	503.6	504.1	504.6	503.9



TEST NUMBER: P333292-840

CATALOG NUMBER: S125DIP-S1090D1205U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	560.6	561.2	561.8	562.4	563.0	563.5	563.8	564.1	564.4	564.7	563.8
115°	647.8	649.1	650.5	651.8	653.1	653.9	654.1	654.4	654.6	654.9	653.9
117.5°	738.2	738.2	738.1	738.1	738.0	738.5	739.5	740.4	741.4	742.5	741.1
120°	794.6	794.3	794.1	793.8	793.6	793.8	794.6	795.4	796.1	796.9	796.4
122.5°	844.3	845.4	846.3	847.3	848.3	849.0	849.3	849.7	850.1	850.4	849.9
125°	921.3	923.1	924.9	926.8	928.6	929.5	929.5	929.5	929.5	929.5	928.5
127.5°	994.8	996.1	997.3	998.7	1000.0	1000.6	1000.4	1000.3	1000.1	1000.0	999.4
130°	1039.9	1041.2	1042.5	1043.8	1045.1	1045.8	1046.1	1046.4	1046.6	1046.9	1046.1
132.5°	1084.9	1086.4	1087.9	1089.4	1091.0	1091.5	1090.9	1090.3	1089.7	1089.1	1089.0
135°	1149.0	1150.5	1152.2	1153.7	1155.3	1155.8	1155.3	1154.8	1154.2	1153.7	1153.2
137.5°	1207.9	1209.3	1210.6	1211.9	1213.4	1213.8	1213.4	1212.8	1212.3	1211.9	1212.0
140°	1246.4	1247.0	1247.5	1248.0	1248.5	1248.6	1248.4	1248.1	1247.9	1247.6	1248.1
142.5°	1281.1	1281.4	1281.8	1282.1	1282.4	1282.7	1283.1	1283.4	1283.8	1284.2	1284.3
145°	1332.1	1332.6	1333.1	1333.6	1334.1	1334.4	1334.4	1334.4	1334.4	1334.4	1334.7
147.5°	1376.6	1376.5	1376.4	1376.3	1376.2	1376.3	1376.6	1377.0	1377.4	1377.7	1378.0
150°	1404.8	1404.3	1403.8	1403.3	1402.8	1402.8	1403.3	1403.8	1404.3	1404.8	1405.3
152.5°	1432.1	1431.0	1429.8	1428.7	1427.4	1427.1	1427.7	1428.3	1428.8	1429.3	1429.8
155°	1467.0	1465.5	1463.9	1462.4	1460.8	1460.3	1460.8	1461.3	1461.9	1462.4	1463.2
157.5°	1494.1	1493.1	1492.2	1491.3	1490.3	1489.9	1490.0	1490.0	1490.1	1490.1	1490.9
160°	1512.9	1511.3	1509.7	1508.1	1506.6	1505.9	1506.2	1506.4	1506.7	1506.9	1508.0
162.5°	1527.8	1526.3	1524.7	1523.2	1521.6	1521.0	1521.2	1521.5	1521.8	1522.0	1523.5
165°	1548.0	1546.5	1544.9	1543.4	1541.8	1541.2	1541.4	1541.7	1541.9	1542.2	1543.8
167.5°	1563.1	1561.5	1559.8	1558.2	1556.6	1555.9	1556.2	1556.4	1556.7	1557.0	1558.8
170°	1571.6	1569.7	1567.8	1566.0	1564.2	1563.5	1563.7	1564.0	1564.2	1564.5	1566.6
172.5°	1577.1	1575.3	1573.5	1571.7	1569.8	1569.1	1569.6	1570.1	1570.5	1571.0	1573.0
175°	1583.3	1581.7	1580.1	1578.5	1577.0	1576.3	1576.6	1576.9	1577.1	1577.4	1579.4
177.5°	1586.1	1584.8	1583.6	1582.4	1581.0	1580.5	1580.7	1580.9	1581.1	1581.3	1582.9
180°	1583.3	1583.3	1583.3	1583.3	1583.3	1583.3	1583.3	1583.3	1583.3	1583.3	1583.3



TEST NUMBER: P333292-840

CATALOG NUMBER: S125DIP-S1090D1205U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1723.2	1723.2	1723.2	1723.2	1723.2	1723.2	1723.2	1723.2
2.5°	1718.2	1720.6	1723.0	1724.1	1723.9	1723.6	1723.4	1723.2
5°	1709.6	1712.3	1715.1	1716.3	1716.0	1715.7	1715.4	1715.1
7.5°	1692.2	1695.0	1697.6	1698.8	1698.5	1698.2	1697.9	1697.6
10°	1677.6	1680.0	1682.4	1683.5	1683.2	1682.9	1682.6	1682.3
12.5°	1658.1	1660.0	1661.9	1662.9	1662.8	1662.7	1662.7	1662.6
15°	1624.0	1625.5	1627.0	1627.8	1627.8	1627.8	1627.8	1627.8
17.5°	1584.4	1586.2	1588.1	1588.3	1586.8	1585.3	1583.8	1582.3
20°	1554.3	1556.4	1558.5	1558.8	1557.3	1555.8	1554.3	1552.8
22.5°	1520.1	1521.6	1522.9	1523.1	1522.1	1521.1	1520.0	1518.9
25°	1465.4	1466.0	1466.6	1466.4	1465.5	1464.6	1463.7	1462.8
27.5°	1408.0	1408.1	1408.3	1407.9	1406.9	1406.0	1405.1	1404.2
30°	1366.1	1365.5	1364.9	1364.2	1363.3	1362.4	1361.5	1360.6
32.5°	1323.7	1322.6	1321.6	1320.2	1318.6	1317.0	1315.2	1313.6
35°	1258.0	1256.5	1255.0	1253.0	1250.6	1248.2	1245.8	1243.3
37.5°	1188.9	1186.7	1184.5	1182.7	1181.2	1179.8	1178.4	1177.1
40°	1141.0	1138.3	1135.6	1133.8	1132.9	1132.0	1131.0	1130.1
42.5°	1093.6	1091.1	1088.6	1086.6	1085.3	1083.9	1082.5	1081.1
45°	1023.4	1019.8	1016.1	1013.8	1012.9	1012.0	1011.1	1010.2
47.5°	949.4	945.6	942.0	939.1	937.0	934.8	932.7	930.6
50°	898.7	894.7	890.8	887.8	885.7	883.5	881.4	879.3
52.5°	849.5	846.1	842.6	839.7	837.3	835.0	832.6	830.2
55°	773.0	770.2	767.5	765.1	763.0	760.8	758.7	756.6
57.5°	697.0	693.5	689.9	687.6	686.5	685.3	684.2	683.0
60°	645.6	642.6	639.5	636.9	634.8	632.7	630.6	628.4
62.5°	596.0	592.8	589.5	587.0	585.4	583.8	582.1	580.5
65°	518.1	515.3	512.6	510.6	509.4	508.2	507.0	505.7
67.5°	443.6	441.3	439.0	437.5	436.8	436.1	435.4	434.6
70°	394.5	392.6	390.8	389.3	388.1	386.9	385.7	384.5
72.5°	348.2	346.1	344.1	342.4	341.2	340.0	338.8	337.6
75°	276.3	275.4	274.5	273.4	272.2	270.9	269.7	268.5
77.5°	210.5	210.0	209.4	208.7	207.8	207.0	206.1	205.3
80°	168.4	168.1	167.8	167.3	166.7	166.1	165.5	164.9
82.5°	128.7	128.2	127.6	127.2	127.1	127.0	126.9	126.7
85°	75.7	75.4	75.1	74.6	74.0	73.4	72.8	72.2
87.5°	32.6	32.9	33.1	33.1	32.8	32.4	32.1	31.8
90°	21.4	22.7	24.0	25.0	25.9	26.6	27.4	28.2
92.5°	21.4	22.7	24.0	24.8	25.1	25.5	26.0	26.3
95°	21.4	22.7	24.0	24.6	24.6	24.6	24.6	24.6
97.5°	43.0	35.6	28.3	24.6	24.6	24.6	24.6	24.6
100°	126.5	87.7	48.8	28.8	27.8	26.8	25.7	24.6
102.5°	245.8	238.5	231.2	218.6	200.9	183.1	165.4	147.6
105°	349.7	349.7	349.7	349.6	349.3	349.1	348.8	348.6
107.5°	442.8	442.8	442.9	442.5	441.7	441.0	440.2	439.4
110°	503.1	502.3	501.5	501.3	501.5	501.8	502.1	502.3





TEST NUMBER: P333292-840

CATALOG NUMBER: S125DIP-S1090D1205U840-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	562.8	561.8	560.8	560.1	559.8	559.4	559.1	558.7
115°	652.8	651.8	650.8	649.4	647.8	646.3	644.7	643.2
117.5°	739.7	738.4	737.0	736.0	735.3	734.7	734.0	733.3
120°	795.9	795.4	794.9	794.0	792.6	791.3	790.0	788.7
122.5°	849.4	848.9	848.4	847.3	845.8	844.2	842.8	841.3
125°	927.5	926.3	925.3	924.4	923.6	922.9	922.1	921.3
127.5°	998.8	998.3	997.6	996.4	994.5	992.5	990.6	988.7
130°	1045.3	1044.5	1043.8	1042.7	1041.4	1040.2	1038.8	1037.5
132.5°	1088.8	1088.6	1088.5	1087.8	1086.5	1085.2	1083.9	1082.6
135°	1152.7	1152.2	1151.7	1150.5	1149.0	1147.4	1145.9	1144.3
137.5°	1212.1	1212.2	1212.3	1211.7	1210.3	1209.0	1207.6	1206.3
140°	1248.6	1249.1	1249.7	1249.1	1247.6	1246.1	1244.5	1242.9
142.5°	1284.4	1284.5	1284.6	1283.9	1282.3	1280.8	1279.2	1277.7
145°	1334.9	1335.2	1335.4	1334.8	1333.2	1331.7	1330.1	1328.6
147.5°	1378.3	1378.6	1378.9	1378.1	1376.2	1374.3	1372.5	1370.6
150°	1405.9	1406.4	1406.9	1406.1	1404.1	1402.0	1399.9	1397.9
152.5°	1430.3	1430.9	1431.4	1430.7	1428.8	1426.9	1425.0	1423.2
155°	1463.9	1464.7	1465.5	1464.8	1462.8	1460.7	1458.5	1456.5
157.5°	1491.8	1492.6	1493.4	1492.8	1490.7	1488.6	1486.5	1484.4
160°	1509.0	1510.1	1511.2	1510.7	1508.5	1506.4	1504.4	1502.3
162.5°	1524.9	1526.4	1527.8	1527.4	1525.1	1522.8	1520.6	1518.2
165°	1545.3	1546.9	1548.4	1548.1	1546.1	1544.0	1541.9	1539.8
167.5°	1560.7	1562.6	1564.5	1564.3	1561.9	1559.5	1557.2	1554.9
170°	1568.6	1570.7	1572.9	1572.7	1570.3	1568.0	1565.7	1563.3
172.5°	1574.8	1576.7	1578.5	1578.3	1576.0	1573.7	1571.2	1568.9
175°	1581.5	1583.7	1585.7	1585.6	1583.3	1580.9	1578.5	1576.2
177.5°	1584.3	1585.8	1587.2	1587.1	1585.5	1583.8	1582.1	1580.4
180°	1583.3	1583.3	1583.3	1583.3	1583.3	1583.3	1583.3	1583.3

(END OF REPORT)